



Designation: E 2070 – 03

Standard Test Method for Kinetic Parameters by Differential Scanning Calorimetry Using Isothermal Methods¹

This standard is issued under the fixed designation E 2070; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 Test Method A determines kinetic parameters for activation energy, pre-exponential factor and reaction order using differential scanning calorimetry from a series of isothermal experiments over a small (~ 10 K) temperature range. This treatment is applicable to low n th order reactions and to autocatalyzed reactions such as thermoset curing or pyrotechnic reactions and crystallization transformations in the temperature range from 300 to 900 K (30 to 630 °C). This test method is applicable only to these types of exothermic reactions when the thermal curves do not exhibit shoulders, discontinuities or shifts in baseline.

1.2 Test Method B also determines the activation energy of a set of time-to-event and isothermal temperature data generated by this or other procedures.

1.3 Electronic instrumentation or automated data analysis systems or treatments equivalent to this test method may be used.

NOTE 1—Since all electronic data systems are not equivalent, the user must verify the applicability of the treatment to this method.

1.4 SI units are the standard.

1.5 This test method is similar but not equivalent to ISO 11357, Part 5, and provides more information than the ISO standard.

1.6 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.* Specific precautionary statements are given in Section 8.

2. Referenced Documents

2.1 ASTM Standards:

D 3350 Specification for Polyethylene Plastic Pipe²

D 3895 Test Method for Oxidative Induction Time of Polyolefins by Differential Scanning Calorimetry²

D 4565 Test Method for Physical and Environmental Performance Properties of Insulations and Jackets for Telecommunications Wire and Cable³

D 5483 Test Method for Oxidation Induction Time of Lubricating Greases by Pressure Differential Scanning Calorimetry⁴

D 6186 Test Method for Oxidation Induction Time of Lubricating Oils by Pressure Differential Scanning Calorimetry⁴

E 473 Terminology Relating to Thermal Analysis⁵

E 537 Test Method for Assessing the Thermal Stability of Chemicals by Method of Differential Thermal Analysis⁵

E 698 Test Method for Arrhenius Kinetic Constants for Thermally Unstable Materials⁵

E 967 Test Method for Temperature Calibration of Differential Thermal Analyzers and Differential Scanning Calorimeters⁵

E 968 Test Method for Heat Flow Calibration of Differential Scanning Calorimeters⁵

E 1142 Terminology Relating to Thermophysical Properties⁵

E 1445 Terminology Relating to Hazardous Properties of Materials⁵

E 1860 Test Method for Elapsed Time Calibration of Thermal Analyzers⁵

E 1958 Test Method for Oxidative Induction Time of Hydrocarbons by Differential Scanning Calorimetry⁵

E 1970 Practice for Statistical Treatment of Thermoanalytical Data⁵

E 2041 Test Method for Kinetic Parameters by the Borchardt and Daniels Method using Differential Scanning Calorimetry⁵

E 2046 Test Method for Reaction Induction Time by Thermal Analysis⁵

2.2 ISO Standard:

ISO DIS 11357 Part 5 Determination of Temperature and/or Time of Reaction and Reaction Kinetics⁶

¹ This test method is under the jurisdiction of ASTM Committee E37 on Thermal Measurements and is the direct responsibility of Subcommittee E37.01 on Thermal Analysis Test Methods.

Current edition approved Oct. 1, 2003. Published October 2003. Originally approved in 2000. Last previous edition approved in 2000 as E 2070 – 00.

² Annual Book of ASTM Standards, Vol 08.02.

³ Annual Book of ASTM Standards, Vol 10.02.

⁴ Annual Book of ASTM Standards, Vol 05.03.

⁵ Annual Book of ASTM Standards, Vol 14.02.

⁶ Available from American National Standards Institute, 11 W. 42nd St., 13th Floor, New York, NY 10036.

3. Terminology

3.1 Specific technical terms used in this test method are defined in Terminologies E 473, E 1142, and E 1445.

4. Summary of Test Method

4.1 A test specimen is held at a constant temperature in a differential scanning calorimeter throughout an exothermic reaction. The rate of heat evolution, developed by the reaction, is proportional to the rate of reaction. Integration of the heat flow as a function of time yields the total heat of reaction.

4.2 An autocatalytic or n th order data treatment^{7,8,9} is used to derive the kinetic parameters of activation energy, pre-exponential factor and reaction order from the heat flow and total heat of reaction information obtained in 4.1 (See Basis for Methodology, Section 5.)

5. Basis of Methodology

5.1 Reactions of practical consideration are exothermic in nature; that is, they give off heat as the reaction progresses. Furthermore, the rate of heat evolution is proportional to the rate of the reaction. Differential scanning calorimetry measures heat flow as a dependent experimental parameter. DSC is useful for the measurement of the total heat of a reaction and the rate of the reaction as a function of time and temperature.

5.2 Reactions may be modeled with a number of suitable equations of the form of:

$$d\alpha/dt = k(T)f(\alpha) \quad (1)$$

where:

$d\alpha/dt$ = reaction rate (min^{-1}),

α = fraction reaction or conversion (dimensionless),

$k(T)$ = specific rate constant at temperature T (min^{-1}),

$f(\alpha)$ = conversion function. Commonly used functions include:

$$f_1(\alpha) = (1 - \alpha)^n \quad (2)$$

$$f_2(\alpha) = \alpha^m (1 - \alpha)^n \quad (3)$$

where:

n and m = partial reaction order terms.

NOTE 2—There are a large number of conversion function expressions for $[f(\alpha)]^7$. Those described here are the more common but are not the only functions suitable for this method. Eq 2 is known as the general rate equation while Eq 3 is the autocatalytic (or Sestak-Berggren) equation^{8,9}. Eq 2 is used for n th order reactions while Eq 3 is used for thermoset cure and crystallization transformations.

5.3 For a reaction conducted at temperature (T), the autocatalytic rate equation of 5.2 may be cast in its logarithmic form.

$$d\alpha/dt = k(T) \alpha^m (1 - \alpha)^n \quad (4)$$

$$\ln[d\alpha/dt] = \ln[k(T)] + m \ln[\alpha] + n \ln[1 - \alpha] \quad (5)$$

This equation has the form $z = a + bx + cy$ and may be solved using multiple linear regression analysis.

NOTE 3—Subsequent discussions use the autocatalytic form of the rate equation (Eq 3). It reduces to the simpler general rate equation (Eq 2) when the value of reaction order parameter m equals zero thereby reducing the number of kinetic parameters to be determined.

5.4 The Arrhenius equation describes how the reaction rate changes as a function of temperature:

$$k(T) = Z e^{-E/RT} \quad (6)$$

where:

Z = pre-exponential factor (min^{-1}),

E = activation energy (J mol^{-1}),

T = absolute temperature (K),

R = gas constant = $8.314 \text{ J mol}^{-1} \text{ K}^{-1}$, and

e = natural logarithm base = 2.7182818.

5.5 Eq 6 cast in its logarithmic form is:

$$\ln[k(T)] = \ln[Z] - E/RT \quad (7)$$

Eq 7 has the form of a straight line, $y = mx + b$, where a plot of the logarithm of the reaction rate constant ($\ln[k(T)]$) versus the reciprocal of absolute temperature ($1/T$) is linear with the slope equal to $-E/R$ and an intercept equal to $\ln[Z]$.

5.6 As an alternative to 5.3 and 5.5, the rate and Arrhenius equations combined and cast in logarithmic form is:

$$\ln[d\alpha/dt] = \ln[Z] - E/RT + m \ln[\alpha] + n \ln[1 - \alpha] \quad (8)$$

Eq 8 has the form, $z = a + bw + cx + dy$, and may be solved using multiple linear regression analysis.

5.7 If activation energy values only are of interest, Eq 8 may be solved under conditions of constant conversion to yield:

$$\ln[\Delta t] = E/RT + c \quad (9)$$

where:

Δt = lapsed time at isothermal temperature, T , and

c = constant.

Eq 9 has the form of a straight line, $y = mx + b$, where a plot of the logarithm of the lapsed time under a series of differing isothermal conditions versus the reciprocal of absolute temperature ($1/T$) is linear with a slope equal to E/R .

5.8 A series of isothermal experiments by Test Method A described in Section 11 at four or more temperatures, determines the kinetic parameters of activation energy, pre-exponential factor and reaction order. Alternatively, the time to a condition of constant conversion for a series of experiments at four or more temperatures obtained by this or alternative Test Method B, described in Section 12, may be used to determine activation energy only.


5.9 A series of not less than four isothermal DSC experiments, covering a temperature range of approximately 10 K and a time less than 100 min (such as those shown in Fig. 1) provides values for $d\alpha/dt$, α , $(1 - \alpha)$ and T to solve Eq 5, Eq 7, and Eq 8.

5.10 A variety of time-to-event experiments such as oxidation induction time methods (Test Methods D 3350, D 3895, D 4565, D 5483, D 6186, and E 1958) and reaction induction time methods (E 2046) provide values for Δt and T to solve equation 5.7.

⁷ Sbirrazzuoli, N.; Brunel, D.; Elegant, L., *J. Therm. Anal.*, 38, 1509-1524, 1992.

⁸ Sestak, J.; Berggren, G.; *Thermochim. Acta*, 3, 1, 1971.

⁹ Gorbachiev, V.M., *J. Therm. Anal.*, 18, 193-197, 1980.

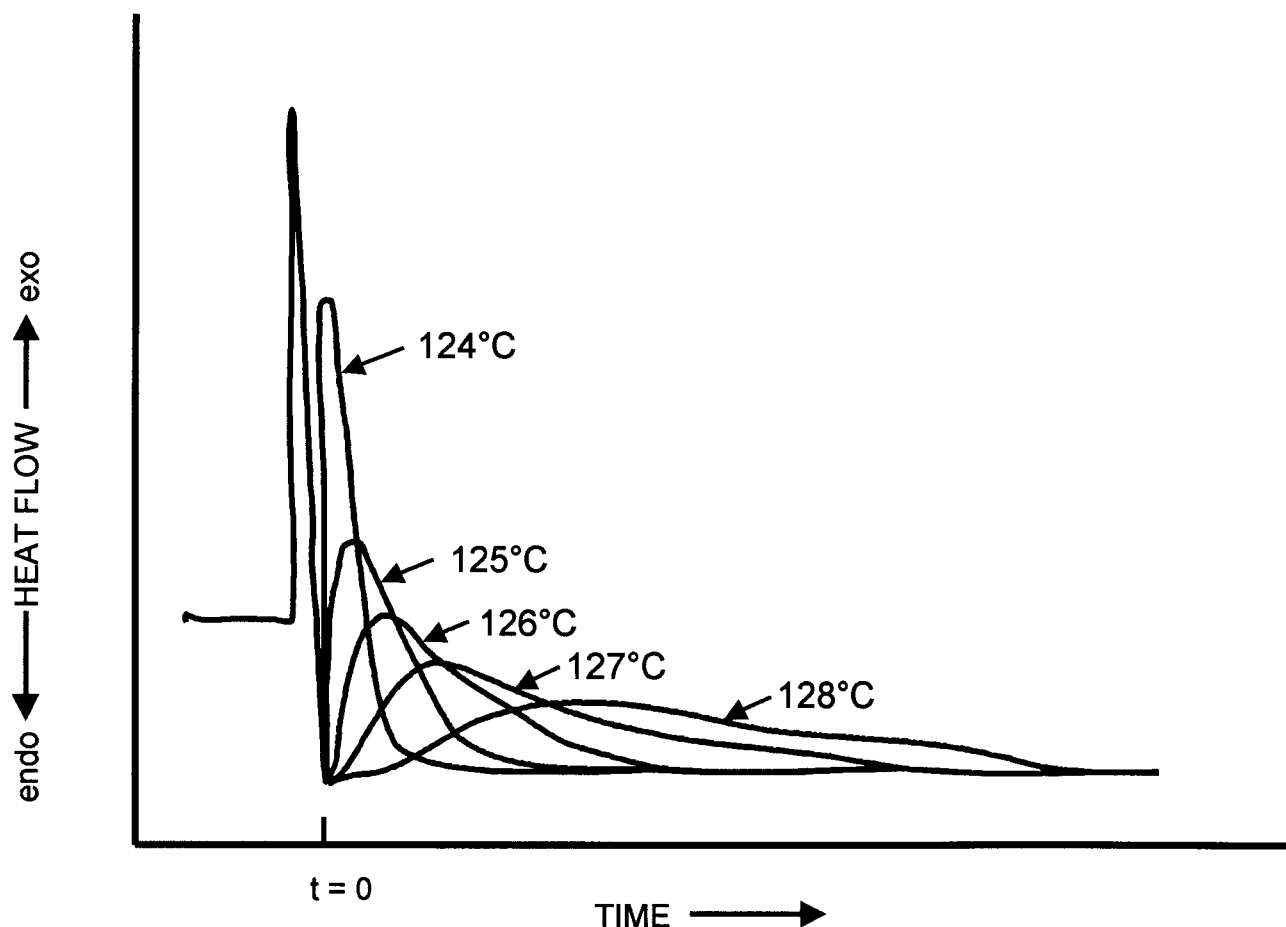

NOTE 1—This figure is for a crystallization application in which the reaction rate increases with decreasing temperature. Chemical reactions show an increase in reaction rate with increasing temperature.

FIG. 1 Heat Flow Curves at a Series of Isothermal Temperatures

6. Significance and Use

6.1 This test method is useful for research and development, quality assurance, regulatory compliance and specification acceptance purposes.

6.2 The determination of the order of a chemical reaction or transformation at specific temperatures or time conditions is beyond the scope of this test method.

6.3 The activation energy results obtained by this method may be compared with those obtained from Test Method E 698 for n th order and autocatalytic reactions. Activation energy, pre-exponential factor and reaction order results by this method may be compared to those for Test Method E 2041 for n th order reactions.

7. Interferences

7.1 The approach is applicable only to exothermic reactions.

NOTE 4—Endothermic reactions are controlled by the rate of the heat transfer of the apparatus and not by the kinetics of the reaction and may not be evaluated by this test method.

7.2 This test method is intended for a reaction mechanism that does not change during the transition. This method assumes a single reaction mechanism when the shape of the thermal curve is smooth (as in Fig. 2 and Fig. 3) and does not exhibit shoulders, multiple peaks or discontinuation steps.

7.3 Method precision is enhanced with the selection of the appropriate conversion function $[f(\alpha)]$ that minimizes the number of experimental parameters determined. The shape of the thermal curve, as described in Appendix X1, may confirm the selection of the n th order or autocatalytic models.

7.4 Typical n th order reactions include those in which all but one of the participating species are in excess.

7.5 Typical autocatalytic reactions include thermoset cure, crystallization and pyrotechnic reactions.

7.6 For n th order kinetic reactions, this test method anticipates that the value of n is small, non-zero integers, such as 1 or 2. This test method should be used carefully when values of n are greater than 2 or are not a simple fraction, such as $1/2 = 0.5$.

7.7 Autocatalytic kinetic reactions anticipate that m and n are fractions between 0 and 1 and that their sum ($m + n$) is less than 2.

7.8 Since this method uses milligram quantities it is essential that the test specimens are homogeneous and representative of the larger samples from which they are taken.

7.9 Test specimens may release toxic and corrosive effluents that may be harmful to personnel or apparatus. Operation with a venting or exhaust system is recommended.