

ANSI/AWWA

C303-24

(Revision of ANSI/AWWA C303-17)

AWWA Standard

Concrete Pressure Pipe, Bar-Wrapped Steel-Cylinder Type

Effective date: Aug. 1, 2024.

First edition approved by Board of Directors Jan. 26, 1970.

This edition approved Jan. 11, 2024.

Approved by American National Standards Institute Jan. 2, 2024.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or e-mailing info@ansi.org.

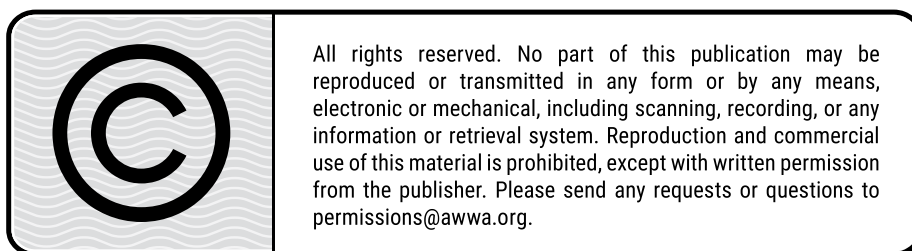

ISBN-13, print: 978-1-64717-180-3

ISBN-13, electronic: 978-1-61300-707-5

DOI: <http://dx.doi.org/10.12999/AWWA.C303.24>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2024 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Standards Subcommittee on ANSI/AWWA C303, which reviewed and approved this standard, had the following personnel at the time:

Sam A. Arnaout, *Chair*

S.A. Arnaout, Consultant, Plano, Tex.

K.R. Baas, American Concrete Pressure Pipe Association, Hattiesburg, Miss.

W.C. Duke, Bureau of Reclamation, Denver, Colo.

V.E. Fernandez-Cuervo, Miami-Dade County, Miami, Fla.

R.L. Gibson, Freese and Nichols Inc., Fort Worth, Tex.

B.D. Keil, Northwest Pipe Company, Salt Lake City, Utah

The AWWA Standards Committee on Concrete Pressure Pipe, which reviewed and approved this standard, had the following personnel at the time of approval:

Nathan D. Faber, *Chair*

Kevin M. Brown, *Secretary*

User Members

W.C. Duke, Bureau of Reclamation, Denver, Colo.

N.D. Faber, San Diego County Water Authority, San Diego, Calif.

J.K. Johnson, Tarrant Regional Water District, Fort Worth, Tex.

T. Peng, Metropolitan Water District of Southern California, Los Angeles, Calif.

F. Sy Su, Los Angeles Dept. of Water & Power, Los Angeles, Calif.

A.F. Williams, Louisville Water Company, Louisville, Ky.

General Interest Members

S.A. Arnaout, Consultant, Plano, Tex.

H.H. Bardakjian, Consulting Engineer, Glendale, Calif.

G. Bizien, Industry Consultant, Laval, Que.

W.R. Brunzell, Brunzell Associates Ltd., Wilmette, Ill.

B.C. Coltharp, Freese and Nichols Inc., Dallas, Tex.

D. Faber (*liaison, nonvoting*), Standards Council Liaison, Faber & Associates, Terra Alta, W.Va.

W.C. Hagenburger, Crossland Heavy Contractors, Lowell, Ark.

F.S. Kurtz (*liaison, nonvoting*), Standards Engineer Liaison, AWWA, Denver, Colo.
A.S. Maughn (*alternate*), Freese and Nichols Inc., Dallas, Tex.
R. Ortega, Aurora Technical Services LLC, Houston, Tex.
A. Rodriguez, HDR Engineering Inc., San Antonio, Tex.
A.E. Romer, Industry Consultant, Huntington Beach, Calif.
R.F. Williams, AECOM, Miami, Fla.
M.S. Zarghamee, Simpson Gumpertz & Heger Inc., Waltham, Mass.

Producer Members

K.R. Baas (*alternate*), American Concrete Pressure Pipe Association, Hattiesburg, Miss.
K.M. Brown, American Concrete Pressure Pipe Association, Rockledge, Fla.
C.D. Ciobanu, Forterra/Rinker Pipe, Saint-Eustache, Que.
M. DeFranco (*alternate*), Decast Ltd., Utopia, Ont.
D.W. Dunker, Thompson Pipe Group, Grand Prairie, Tex.
B.D. Keil, Northwest Pipe Company, Salt Lake City, Utah
Y. Lan, Decast Ltd., Utopia, Ont.
D. Miceli (*alternate*), Forterra/Rinker Pipe, Saint-Eustache, Que.
R.D. Mielke (*alternate*), Northwest Pipe Company, Raleigh, N.C.
R. Wu (*alternate*), Thompson Pipe Group, Grand Prairie, Tex.

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
<i>Foreword</i>		4.2	Drawings and Data to Be Provided by the Purchaser 7
I	Introduction..... vii	4.3	Data to Be Submitted by the Manufacturer 7
I.A	Background..... vii	4.4	Materials 8
I.B	History..... vii	4.5	Design..... 11
I.C	Acceptance viii	4.6	Fabrication 15
II	Special Issues ix	4.7	Fittings and Special Pipe..... 24
II.A	Advisory Information on Product Application ix	5	Verification
II.B	Other Special Issues..... ix	5.1	Inspection and Testing by the Purchaser..... 27
II.C	Chlorine and Chloramine Degradation of Elastomers ix	5.2	Tests 28
III	Use of This Standard x	5.3	Quality Assurance 29
III.A	Purchaser Options and Alternatives ... x	6	Delivery
III.B	Modification to Standard xi	6.1	Marking 29
IV	Major Revisions xi	6.2	Transportation..... 30
V	Comments xi	6.3	Affidavit of Compliance 30
<i>Standard</i>		<i>Tables</i>	
1	General	1	Thicknesses and Tolerances for Concrete or Cement–Mortar Linings..... 12
1.1	Scope..... 1	2	Minimum Nominal Cylinder Thicknesses 13
1.2	Purpose 2	3	Cumferential Tolerances for Steel Cylinders..... 13
1.3	Application..... 2	4	Minimum Thickness of Sheet or Plate for Fittings..... 25
2	References 2		
3	Definitions 5		
4	Requirements		
4.1	Permeation 6		

This page intentionally blank.

Foreword

This foreword is for information only and is not a part of ANSI/AWWA C303.*

I. Introduction.

I.A. *Background.* Bar-wrapped steel-cylinder concrete pressure pipe has been manufactured and used extensively for many years. The basic element of the pipe is a welded steel cylinder with steel joint rings welded to the ends, formed and tested in the same general manner as other types of steel-cylinder concrete pressure pipe. The cylinder is lined with centrifugally placed cement mortar or concrete that is ½ in. (13 mm) thick for pipe sizes up to and including 16 in. (400 mm) and is ¾ in. (19 mm) thick for larger sizes. Continuous reinforcing bar is then helically wound, under measured tension, around the lined cylinder; and a mortar coating not less than ¾ in. (19 mm) thick measured from the outside of the reinforcing bars is placed using high-velocity impaction.

This standard describes bar-wrapped steel-cylinder concrete pressure pipe in sizes ranging from 10 through 72 in. (250 through 1,830 mm) in diameter, which is the prevailing range in sizes. The pipe is generally made in lengths ranging from 24 through 40 ft (7.5 through 12.5 m). In this standard, however, the laying length for pipe 18 in. (450 mm) in diameter and smaller is restricted to a maximum of 36 ft (11 m). This type of pipe is used extensively for cross-country transmission mains, distribution feeder mains, water treatment plants, and other uses (see Section III, Use of This Standard).

I.B. *History.* The first edition of this standard, designated ANSI/AWWA C303-70, Reinforced Concrete Water Pipe—Steel Cylinder Type, Pretensioned, was approved by the AWWA Board of Directors on Jan. 26, 1970. Federal Specification and Standard SS-P-381 (April 2, 1953), SS-P-381 (Sept. 14, 1955), and SS-P-381 (Dec. 14, 1967) preceded this standard and were used as the basis for AWWA C303. An addendum, designated ANSI/AWWA C303a-74, was subsequently approved on Jan. 28, 1974. The third printing, issued July 27, 1973, included an erratum notice that corrected errors in the original printing. The second edition, designated ANSI/AWWA C303-78, Reinforced Concrete Pressure Pipe—Steel Cylinder Type, Pretensioned, for Water and Other Liquids, was approved on June 25, 1978. In February 1981, an addendum designated ANSI/AWWA C303a-81 was approved and subsequently published. The third edition, designated ANSI/AWWA C303-87 with the same title

* American National Standards Institute, 25 West 43rd Street, 4th Floor, New York, NY 10036.

as the second edition, was approved on June 14, 1987. The fourth edition, designated ANSI/AWWA C303-95, Concrete Pressure Pipe, Bar-Wrapped Steel-Cylinder Type, was approved on Jan. 22, 1995. Subsequent editions were approved on June 16, 2002; Jan. 27, 2008; and Jan. 14, 2017. This edition was approved on Jan. 11, 2024.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International[†] (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). AWWA and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.[‡] Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.
2. Four standards developed under the direction of NSF: NSF/ANSI/CAN[§] 60, Drinking Water Treatment Chemicals—Health Effects; NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects; NSF/ANSI/CAN 372, Drinking Water System Components—Lead Content; and NSF/ANSI/CAN 600, Health Effects Evaluation and Criteria for Chemicals in Drinking Water.
3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,[¶] and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI/CAN 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

NSF/ANSI/CAN 600 (which formerly appeared in NSF/ANSI/CAN 60 and 61 as Annex A, “Toxicology Review and Evaluation Procedures”) does not stipulate a

[†] NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

[‡] Persons outside the United States should contact the appropriate authority having jurisdiction.

[§] Standards Council of Canada, 55 Metcalfe Street, Suite 600, Ottawa, ON K1P 6L5 Canada.

[¶] Both publications available from National Academies Press, 500 Fifth Street NW, Washington, DC 20001.

maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of NSF/ANSI/CAN 600 procedures may not always be identical, depending on the certifier.

ANSI/AWWA C303 does not address additives requirements. Thus, users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues.

II.A. *Advisory Information on Product Application.*

1. *Basis of design.* ANSI/AWWA C303 pertains to the manufacture and testing of the steel cylinder, bar reinforcement, joint rings, concrete or cement–mortar lining, and cement–mortar coating. Overall design of bar-wrapped steel-cylinder concrete pressure pipe is described in AWWA Manual M9, *Concrete Pressure Pipe*. The design of the steel-cylinder thickness and bar reinforcement is primarily governed by internal pressure, including operating static and transient pressures. The design procedure described in AWWA Manual M9 is used to determine the thickness of the steel cylinder and the required bar reinforcement.

2. *Deflection control.* The pipe described in this standard will safely support normal and usual external loads when installed according to appropriate and adequate bedding and backfilling procedures. To ensure satisfactory performance and continued serviceability of the pipe, bedding and backfilling procedures must be followed that will enable the deflection of the pipe to be controlled and kept within the limits contained in AWWA Manual M9.

II.B. *Other Special Issues.* Other special issues, including thrust restraint and field welding of pipe joints, are addressed in AWWA Manual M9.

II.C. *Chlorine and Chloramine Degradation of Elastomers.* The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric material, chemical concentration,

contact surface area, elastomer cross section, and environmental conditions, as well as temperature. Careful selection of and specifications for elastomeric materials and the specifics of their application for each water system component should be considered to provide long-term usefulness and minimum degradation (swelling, loss of elasticity, or softening) of the elastomer specified.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* Purchasers are advised that while this standard presents information on materials and procedures for manufacture of the pipe, it does not contain all of the engineering information needed to prepare a complete specification for a particular pipeline installation. A specific installation may require provisions more restrictive than those in the standards and will certainly require additional design and installation features.

AWWA Manual M9 should be considered a supplement to this standard. Material in the manual should not be regarded as superseding any portion of this standard. The purpose of AWWA Manual M9 is to provide information concerning some of the various subjects to be considered in, and the minimum standard of practice for, the design and installation of concrete pressure pipelines.

The following information should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA C303, Concrete Pressure Pipe, Bar-Wrapped Steel-Cylinder Type, of latest revision.
2. Whether compliance with NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects, is required.
3. Manner of storage and delivery, if required of the manufacturer.
4. Pipeline inside diameter, working pressure, surge pressure, field-test pressure, external loading conditions, and method of bedding and backfilling (Sec. 4.2.2).
5. If the manufacturer is not permitted to supply pipe from inventory (Sec. 4.3.1).
6. If detailed drawings and schedules are to be submitted for review (Sec. 4.3.1 and Sec. 4.7.1).
7. If a tabulated layout schedule will be required (Sec. 4.3.2).
8. Details of federal, state, and local requirements (Sec. 4.4).
9. If any material or manufacturing test reports will be required (Sec. 4.4, Sec. 5.1.2, and Sec. 5.2).
10. Type of cement required if there is a preference (Sec. 4.4.1.1).

11. If submission of the type and amount of admixtures will be required (Sec. 4.4.4).

12. If submission of manufacturer's design calculations will be required (Sec. 4.5.2.1).

13. If submission for approval of welder qualifications (Sec. 4.6.2 and Sec. 4.6.3) and welding procedure specifications will be required (Sec. 4.6.3).

14. If details of specials and fittings are to be provided by the manufacturer (Sec. 4.7.1).

15. If the purchaser desires to inspect the material, pipe, and fittings at the manufacturer's plant (Sec. 5.1.1).

16. If any material or manufacturing test reports will be required (Sec. 5.1.4).

17. If steel test specimens will be required (Sec. 5.2.6).

18. If an affidavit of compliance will be required (Sec. 6.3).

19. If pipeline conveys potentially aggressive waters, such as low-pH water or wastewater with hydrogen sulfide (H₂S).

III.B. *Modification to Standard.* Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. Major Revisions. Major revisions made to the standard in this edition include the following:

1. ASTM** C595 type IL cement has been added as a cement type (Sec. 4.4.1.1).

2. The allowable circumferential steel stress used in the design of fittings has been modified (Sec. 4.7.2.1).

V. Comments. If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or e-mail at standards@awwa.org.

** ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19380

This page intentionally blank.



**American Water Works
Association**

Dedicated to the World's Most Vital Resource®

ANSI/AWWA C303-24
(Revision of ANSI/AWWA C303-17)

AWWA Standard

Concrete Pressure Pipe, Bar-Wrapped Steel-Cylinder Type

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes the manufacture of concrete pressure pipe, reinforced with a steel cylinder that is helically wrapped with mild steel-bar reinforcement, in sizes ranging from 10 through 72 in. (250 through 1,830 mm), inclusive, and for working pressures up to 400 psi (2,760 kPa). Larger pipe sizes and pipe accommodating higher pressures have been manufactured based on the concepts of this standard. With agreement by the purchaser and the manufacturer, pipe may be manufactured to larger sizes and for higher pressures than indicated herein. This standard does not include requirements for design, handling, delivering, laying, field testing, or disinfecting of pipe and fittings. See AWWA Manual M9, *Concrete Pressure Pipe*, for that information, as well as certain supplementary design considerations related to thrust restraint, subaqueous installations, and installation in corrosive environments.

1.1.1 *Essential requirements.* The pipe shall have the following principal features: a welded steel cylinder with sized steel joint rings welded to the ends; a lining of concrete or cement mortar centrifugally applied within the steel cylinder and spigot ring; reinforcement consisting of continuous steel bar helically wound tightly around the outside of the cylinder and securely fastened by welding to the

steel joint ring at each end of the cylinder; an exterior coating of dense mortar covering the cylinder and bars, except for the necessarily exposed surfaces of the spigot joint ring; and a self-centering joint with a preformed gasket of rubber so designed that the joint will be watertight under all design conditions of service.

Sec. 1.2 Purpose

The purpose of this standard is to provide the minimum requirements for concrete pressure pipe, bar-wrapped steel-cylinder type, including fabrication and testing requirements.

Sec. 1.3 Application

This standard can be referenced in documents for purchasing and receiving concrete pressure pipe, bar-wrapped steel-cylinder type. This standard can be used as a guide for manufacturing concrete pressure pipe with a steel cylinder that is helically wrapped with bar reinforcement. The stipulations of this standard only apply when this document has been referenced in relation to bar-wrapped steel-cylinder concrete pressure pipe.

SECTION 2: REFERENCES

This standard references the following documents. In their latest editions, they form a part of this standard to the extent specified within this standard. In any case of conflict, the requirements of this standard shall prevail. When specific standards are cited without dates, the designation shall be construed to refer to the latest revision under the same standard number or to superseding standards under a new number.

ANSI*/AWWA C210—Liquid Epoxy Coatings and Linings for Steel Water Pipe and Fittings.

ASME[†] Boiler and Pressure Vessel Code (BPVC)—Section VIII, Division 1, Rules for Construction of Pressure Vessels.

ASME BPVC—Section IX, Welding, Brazing, and Fusing Qualifications, Part QW Welding.

ASTM[‡] A36/A36M—Standard Specification for Carbon Structural Steel.

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

† ASME, Two Park Avenue, New York, NY 10016.

‡ ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428.