

ANSI/AWWA **C518-24**
(Revision of ANSI/AWWA C518-18)

AWWA Standard




Double-Disc Swing-Check Valves for Waterworks Service, 2-in. Through 48-in. (50-mm Through 1,200-mm) NPS

Effective date: Jan. 1, 2025.

First edition approved by Board of Directors Jan. 27, 2008.

This edition approved June 8, 2024.

Approved by American National Standards Institute June 25, 2024.

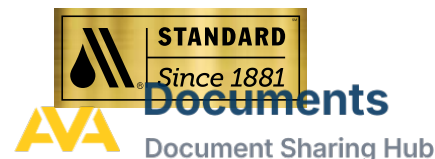


AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by writing to the American National Standards Institute, 1180 Avenue of the Americas, 10th Floor, New York, NY 10036; calling 212.642.4900; or e-mailing info@ansi.org.

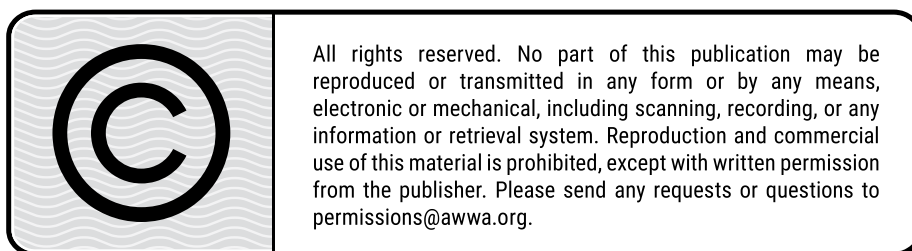

ISBN-13, print: 978-1-64717-210-7

ISBN-13, electronic: 978-1-61300-735-8

DOI: <http://dx.doi.org/10.12999/AWWA.C518.24>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2024 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Standards Subcommittee on Swing-Check Valves, which developed and reviewed revisions to this standard, had the following personnel at the time of approval:

Tim O'Shea, *Chair*

P. Berken, American Flow Control, Beaumont, Tex.

D. Burczynski, Kenney Valve, Elmira, N.Y.

A. Dail (*liaison, nonvoting*), Standards Engineer Liaison, AWWA, Denver, Colo.

P. Gifford, Mueller Water Products, Chattanooga, Tenn.

J.D. Grant, DeZurik, Inc., Sartell, Minn.

T.C. Harbour, Mueller Water Products, Decatur, Ill.

I. Hardy, Bray International, Houston, Tex.

J. Hebenstreit, UL LLC, Northbrook, Ill.

R. Kilborn, EPCOR, Phoenix, Ariz.

R.L. Larkin, J&S Valve, Gardendale, Ala.

T. O'Shea, Val-Matic Valve & Mfg. Corp., Elmhurst, Ill.

D.B. Scott, American Flow Control, Birmingham, Ala.

J.H. Wilber, American AVK, Littleton, Colo.

The AWWA Standards Committee on Gate Valves and Swing-Check Valves, which reviewed and approved this standard, had the following personnel at the time of approval:

J. Warren Green, *Chair*

Daniel Stickel, *Vice-Chair*

General Interest Members

A. Dail (*liaison, nonvoting*), Standards Engineer Liaison, AWWA, Denver, Colo.

J.W. Green, Lockwood Andrews & Newnam, Oakbrook Terrace, Ill.

J. Hebenstreit, UL LLC, Northbrook, Ill.

M.C. Johnson, Utah State University, Water Research Laboratory, Logan, Utah

K. LeBrasse, Burns and McDonnell, Denver, Colo.

K.C. Morgan (*liaison, nonvoting*), Standards Council Liaison, San Diego, Calif.

J.S. Olson, Advanced Engineering and Environmental Services, Grand Forks, N.D.

T.R. Volz, AECOM, Denver, Colo.

Producer Members

P. Berken (*alternate*), American Flow Control, Beaumont, Tex.
J. Bolender, J&S Valve, Inc., Huffman, Tex.
D.E. Burczynski (*alternate*), Kennedy Valve, Elmira, N.Y.
P. Gifford (*alternate*), Mueller Water Products, Chattanooga, Tenn.
T.C. Harbour, Mueller Water Products, Decatur, Ill.
J. Holstrom (*alternate*), Val-Matic Valve & Mfg. Corp., Addison, Ill.
C. Keeling, U.S. Valve/Champion Valve, Linthicum Heights, Md.
R.L. Larkin (*alternate*), J&S Valve, Gardendale, Ala.
R. Looney, American AVK Company, Minden, Nev.
T. O'Shea, Val-Matic Valve & Mfg. Corp., Elmhurst, Ill.
M. Page, EJ, East Jordan, Mich.
D.B. Scott, American Flow Control, Birmingham, Ala.
B. Strasser, McWane, Inc., Coshocton, Ohio
J.H. Wilber (*alternate*), American AVK, Littleton, Colo.
K.J. Wright (*alternate*), EJ, East Jordan, Mich.

User Members

A. Bodulow, Sonoma County Water Agency, Santa Rosa, Calif.
B. Hasanabadi, Colorado Springs Utilities, Colorado Springs, Colo.
S. Hattan, Tarrant Regional Water District, Fort Worth, Tex.
R. Irwin, Metropolitan Water District, Los Angeles, Calif.
K.S. Jeng-Bullock, City of Huntsville, Huntsville, Tex.
M. Lobik, Springfield Water and Sewer Commission, Agawam, Mass.
C.A. Norris, Montgomery Water Works & Sanitary Sewer Board, Montgomery, Ala.
A. Quiniones (*alternate*), Bureau of Reclamation, Denver, Colo.
D.M. Rausch, Aurora Water Department, Aurora, Colo.
P.J. Ries, Denver Water, Denver, Colo.
V. Stariha, US Bureau of Reclamation, Denver, Colo.
D. Stickel, Saginaw-Midland Municipal Water Supply Corp., Bay City, Mich.
R.E. Tierney, Weir River Water System, Hingham, Mass.

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
<i>Foreword</i>		4	Requirements
I	Introduction..... vii	4.1	Data to Be Provided by the Manufacturer 5
I.A	Background..... vii	4.2	Materials 5
I.B	History..... vii	4.3	General Design..... 7
I.C	Acceptance vii	4.4	Workmanship and Coating..... 10
II	Special Issues ix	5	Verification
II.A	General ix	5.1	Inspection 11
II.B	Advisory Information on Product Application ix	5.2	Testing 11
II.C	Chlorine and Chloramine Degradation of Elastomers x	5.3	Nonconformance 12
II.D	Permeation x	6	Delivery
III	Use of This Standard x	6.1	Marking 12
III.A	Purchaser Options and Alternatives x	6.2	Shipping..... 12
III.B	Modification to Standard xii	6.3	Affidavit of Compliance 13
IV	Major Revisions xii	<i>Appendixes</i>	
V	Comments xii	A	Installation, Operation, and Maintenance of Double-Disc Swing-Check Valves
<i>Standard</i>		A.1	General 15
1	General	A.2	Unloading 15
1.1	Scope..... 1	A.3	Storage 15
1.2	Purpose 2	A.4	Inspection Prior to Installation 16
1.3	Application..... 2	A.5	Installation 16
2	References 2	A.6	Field Testing..... 17
3	Definitions 4	A.7	Owner's Records..... 17

SEC.	PAGE	SEC.	PAGE
A.8	Operation.....	17	<i>Tables</i>
A.9	Maintenance	17	1 End-to-End Dimensions for Wafer and Threaded-Lug Valves 7
B	Specification and Data Sheet for		
	Check Valves	19	2 Valve Test Cycles Required 12

Foreword

This foreword is for information only and is not a part of ANSI/AWWA C518.*

I. Introduction.

I.A. *Background.* Double-disc swing-check valves have been commonly used on pump discharge applications in the waterworks industry for more than half a century. These check valves are designed to prevent backflow by automatically closing rapidly on flow reversal. They provide tight shutoff while requiring relatively little space for installation.

I.B. *History.* The need for standardization of double-disc swing-check valves was recognized by AWWA in 1992. The AWWA Gate and Check Valve Committee worked to publish the first edition of ANSI/AWWA C518 beginning in 2003, with eventual approval by the AWWA Board of Directors on Jan. 27, 2008. Subsequent editions were approved by the AWWA Board of Directors on Jan. 20, 2013, and Oct. 24, 2018. This edition was approved on June 8, 2024.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). AWWA and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in or in contact with drinking water rests with individual states.[†] Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.
2. Four standards developed under the direction of NSF[‡]: NSF/ANSI/CAN[§] 60, Drinking Water Treatment Chemicals—Health Effects; NSF/ANSI/CAN 61,

* American National Standards Institute, 1180 Avenue of the Americas, 10th Floor, New York, NY 10036.

[†] Persons outside the United States should contact the appropriate authority having jurisdiction.

[‡] NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

[§] Standards Council of Canada, 55 Metcalfe Street, Suite 600, Ottawa, ON K1P 6L5 Canada.

Drinking Water System Components—Health Effects; NSF/ANSI/CAN 372, Drinking Water System Components—Lead Content; and NSF/ANSI/CAN 600, Health Effects Evaluation and Criteria for Chemicals in Drinking Water.

3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,⁴ and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI/CAN 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdiction. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

NSF/ANSI/CAN 600 (which formerly appeared in NSF/ANSI/CAN 60 and 61 as Annex A, “Toxicology Review and Evaluation Procedures”) does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of NSF/ANSI/CAN 600 procedures may not always be identical, depending on the certifier.

ANSI/AWWA C518 does not address additives requirements. Thus, users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with or treatment of drinking water.
3. Determine current information on product certification.

Some jurisdictions (including California, Maryland, Vermont, and Louisiana) call for reduced lead limits for materials in contact with potable water. Various third-party certifiers have been assessing products against these lead content criteria, and an ANSI-approved national standard, NSF/ANSI/CAN 372, Drinking Water System Components—Lead Content, was published in 2010. On Jan. 4, 2011, legislation was signed revising the definition for “lead free” within the Safe Drinking Water Act (SDWA) as it pertains to “pipe, pipe fittings, plumbing fittings, and fixtures.” The changes went into effect on Jan. 4, 2014. In brief, the new provisions to the SDWA require that these products meet a weighted average lead content of not more than 0.25 percent.

⁴ Both publications available from National Academies Press, 500 Fifth Street, NW, Washington, DC 20001.

II. Special Issues.

II.A. *General.* Conditions under which a valve is to be operated must be evaluated carefully by the purchaser. The evaluations must include the determination of the hydraulic characteristics of the system in which the valve will be installed and the operation of the valve, including (1) the maximum transient and static differential pressure across the valve disc and (2) minimum and maximum flow through the valve under the most adverse operating conditions.

Hydraulic testing, flow capacities, and valve characteristics are based on the flow upstream of a valve being uniform and undisturbed, like the flow produced by a constant-diameter, straight pipe of at least six diameters. Piping configurations that produce a nonuniform or turbulent flow pattern upstream of the valve can create damaging vibrations, increase head loss, and increase stresses in valve components.

II.B. *Advisory Information on Product Application.* This standard does not describe all possible applications or manufacturing technologies. The purchaser should identify special requirements and required deviations from this standard and include appropriate language in purchase documents. Refer to Sec. III.A in this foreword. Other advisory information is provided as follows.

1. Check valves may be subject to excessive wear if there is insufficient flow to open the valve fully. Manufacturers can supply information during the valve sizing process to prevent this from occurring.

2. These valves are designed for use with clean water and installation in horizontal pipelines with the hinge pin oriented in the vertical plane or in vertical pipelines with the flow-up. If installed in a flow-down application, the valve may not have sufficient spring torque to close.

3. These valves are sometimes used for air blower discharge service and therefore are subject to unusual temperature and flow conditions. Air service should be considered a special application for this valve and warrants a review of the operating parameters with the supplier or manufacturer.

4. When open, the valve discs extend a significant distance into the downstream piping and may strike or interfere with downstream valves or flow elements. A sufficient distance of open pipe downstream of the valve should be planned for every installation.

5. The ozone test requirement given in Sec. 4.2.2.6.5 is intended as an accelerated ozone resistance test for atmospheric ozone. If the valve is intended for ozone disinfection service, the system concentration should be specified and provided to the manufacturer to assist in the selection of an appropriate rubber seat material.

II.C. Chlorine and Chloramine Degradation of Elastomers. The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric material, chemical concentration, contact surface area, elastomer cross section, environmental conditions, and temperature. Careful selection of and specifications for elastomeric materials and the specifics of their application for each water system component should be considered to provide long-term usefulness and minimum degradation (swelling, loss of elasticity, or softening) of the elastomer specified.

II.D. Permeation. The selection of materials is critical for potable water, reclaimed water service, and distribution piping in locations where there is likelihood the pipe will be exposed to significant concentrations of pollutants consisting of low-molecular-weight petroleum products or organic solvents or their vapors. Research has documented that pipe materials (such as polyethylene, polybutylene, polyvinyl chloride, and asbestos cement) and elastomers, such as those used in jointing gaskets and packing glands, are subject to permeation by lower-molecular-weight organic solvents or petroleum products. If a potable water, wastewater, or reclaimed water pipe must pass through such a contaminated area or an area subject to contamination, consult with the manufacturer regarding permeation of pipe walls, jointing material, and so on, *before* selecting materials for use in that area.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. Purchaser Options and Alternatives. The following information should be provided by the purchaser:

1. Standard to be used—that is, ANSI/AWWA C518, Double-Disc Swing-Check Valves for Waterworks Service, 2-in. Through 48-in. (50-mm Through 1,200-mm) NPS, of latest revision.
2. Whether compliance with NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects, is required.
3. Whether compliance with NSF/ANSI/CAN 372, Drinking Water System Components—Lead Content, or an alternative lead content criterion is required.
4. Size of check valves.
5. Quantity required.

6. Maximum and minimum line pressure.
7. Required flow rate through valve.
 - a. Under minimum conditions.
 - b. Under maximum-flow conditions.
8. Description of connecting piping: material, outside diameter (OD), inside diameter (ID), and end connection.
9. Valve orientation, either horizontal, vertical flow-up, or vertical flow-down (Sec II.B.2).
10. Maximum transient pressure and characteristics, if known.
11. Water temperature range.
12. A drawing or description of the piping arrangement sufficient to describe significant turbulent line flow conditions to which the valve disc may be subjected (Sec II.A).
13. Considerations relating to anticipated problems with rubber components exposed to line content containing chlorine, chloramines, or other chemicals. If these problems are anticipated, the purchaser should identify the maximum expected concentrations of these chemicals and other factors, such as pH and temperature ranges, which may affect the corrosivity of these chemicals. The purchaser should consult with the manufacturers and, if appropriate, specify special requirements for these components.
14. Catalog data, net weight, and assembly drawings to be provided by the manufacturer (Sec. 4.1), if required.
15. Details of federal, state, provincial, territorial, and local requirements (Sec. 4.2.1).
16. Whether the valve will be subjected to water that promotes galvanic corrosion or that reacts chemically with materials used in these valves and requires the use of a particular disc material as described in Sec. 4.3.4.1.
17. Protective coatings if other than specified in Sec. 4.4.2 of this standard.
18. If shop inspection of tests by the purchaser is required (Sec. 5.1).
19. The providing of test records that are specified according to Sec. 5.2.1 and Sec. 5.2.2 of this standard. The purchaser may require all records or may stipulate a breakdown of production test records.
20. If an affidavit of compliance is to be provided (Sec. 6.3).
21. If replaceable seats, seats located on the disc, and/or internally retained pins are acceptable (Sec. 4.3.3.6 and Sec. 4.3.5.4).