



Document No.	GIS 72-103
Applicability	Group
Date	29 December 2005

Guidance on Practice for Hex-Mesh Anchoring Details


GIS 72-103

BP GROUP
ENGINEERING TECHNICAL PRACTICES

List of Figures

	Page
Figure 1 Hex Mesh Grating 19-25mm (3/4 – 1") (Sheet 1)	3
Figure 2 Hex Mesh Grating 19-25mm (3/4 – 1") (Sheet 2)	4
Figure 3 Hex Mesh Grating 19-25mm (3/4 – 1") (Sheet 3)	5
Figure 4 Hex Mesh Grating 19-25mm (3/4 – 1") (Sheet 4)	6
Figure 5 Fleximetal Grating 19-25mm (3/4 – 1")	7

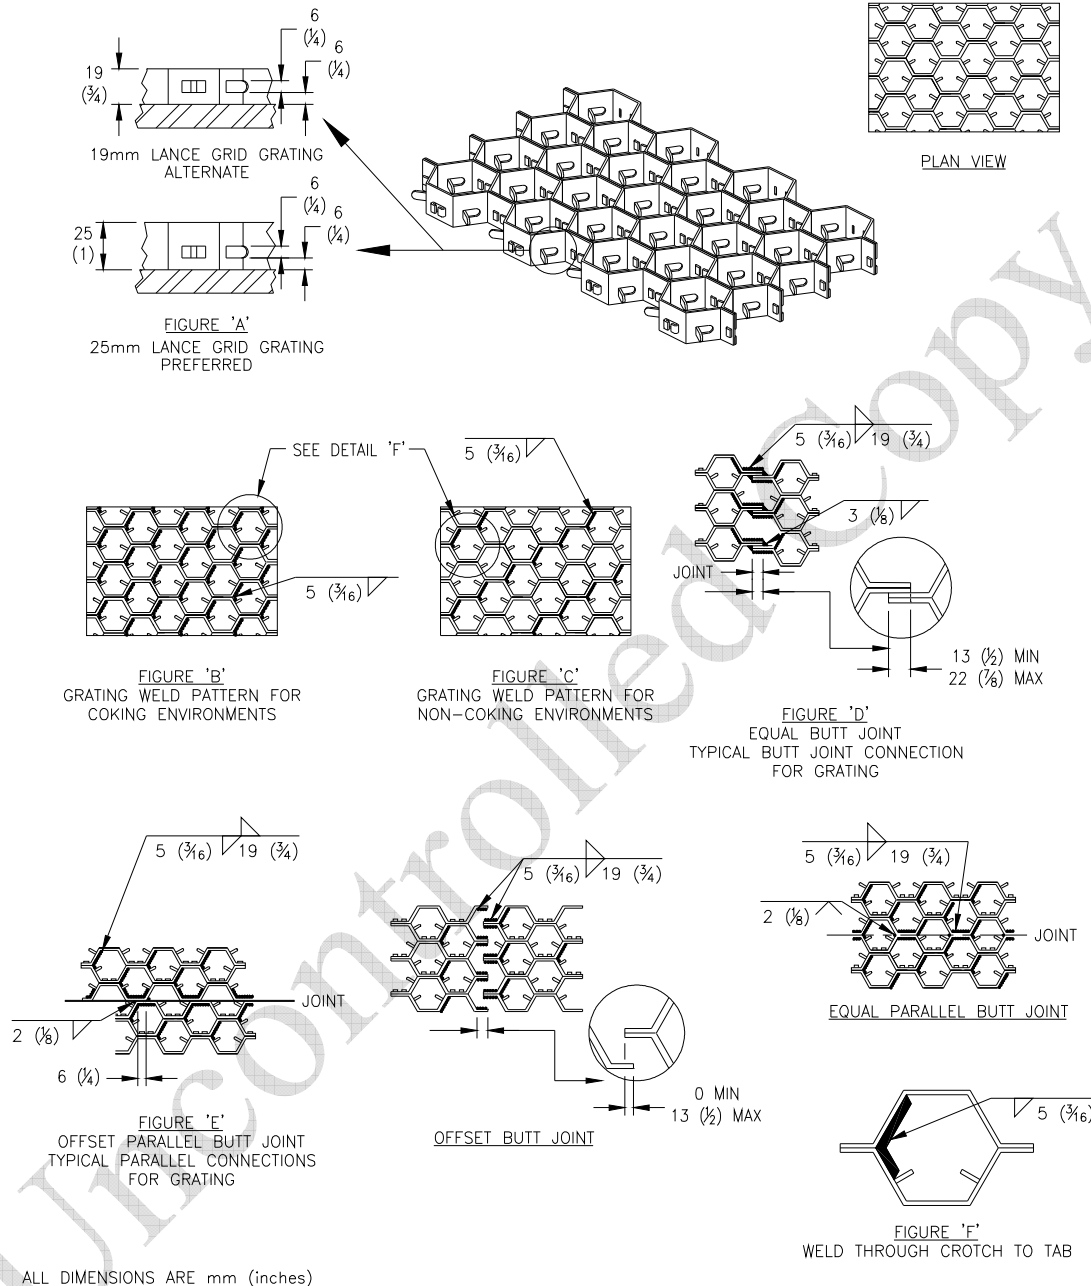

Figure 1 Hex Mesh Grating 19-25mm (3/4 – 1") (Sheet 1)**Notes**

1. All Hex-Mesh Grating shall be 2mm (14 gauge) Lance Grid Type
2. When Hex-Mesh Grating is applied to curved surfaces, it shall be rolled in the stiff direction (hard way) unless otherwise specified
3. Hex-Mesh Grating shall be Type 304 stainless steel, unless otherwise specified
4. The open area at grating joints shall be greater than one half the normal opening area, but shall not exceed one and one half times the normal opening

