



Document No.	GIS 72-104
Applicability	Group
Date	29 December 2005

Guidance on Practice for Independent Anchor Systems - Corner Tab, U-Tabs and Ring Tabs

GIS 72-104

BP GROUP
ENGINEERING TECHNICAL PRACTICES


List of Figures

	Page
Figure 1 Fixed Corner Tab 19mm (3/4").....	3
Figure 2 Fixed Corner Tab 25mm (1").....	4
Figure 3 Variable Corner Tab 19mm (3/4").....	4
Figure 4 Variable Corner Tab 25mm (1")	6
Figure 5 Variable Corner Tab 50mm (2")	7
Figure 6 Variable Corner Tab 100mm (4") w/200mm (8") Leg.....	8
Figure 7 Variable Corner Tab 100mm (4") w/300mm (12") Leg.....	9
Figure 8 Variable Corner Tab 125mm (5") w/300mm (12") Leg.....	9
Figure 9 Variable Corner Tab 150mm (6") w/300mm (12") Leg.....	10
Figure 10 U-Tab 19mm (3/4").....	11
Figure 11 U-Tab 25mm (1")	13
Figure 12 Ring Tab 25mm (1").....	14
Figure 13 Ring Tab 50mm (2").....	15



Figure 1 Fixed Corner Tab 19mm (3/4")

Notes

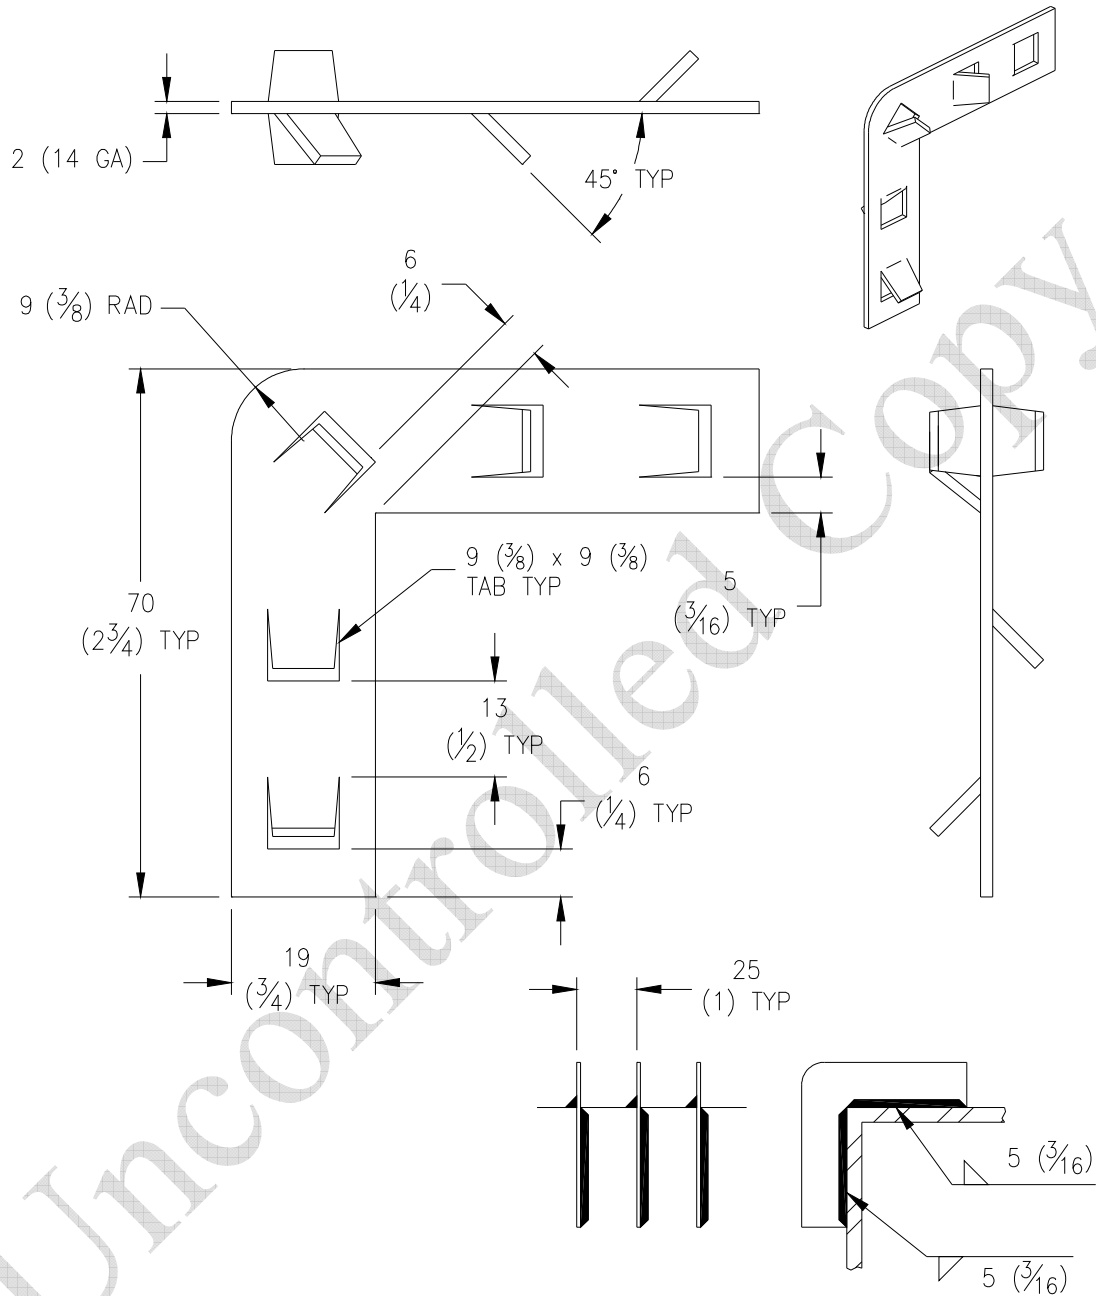


ALL DIMENSIONS ARE mm (inches)

1. Material identification shall be stamped on all Corner Tabs
2. Colour Coding is acceptable after approval from BP
3. Corner Tabs shall be fabricated from Type 304 stainless steel unless otherwise specified




Figure 2 Fixed Corner Tab 25mm (1")

Notes

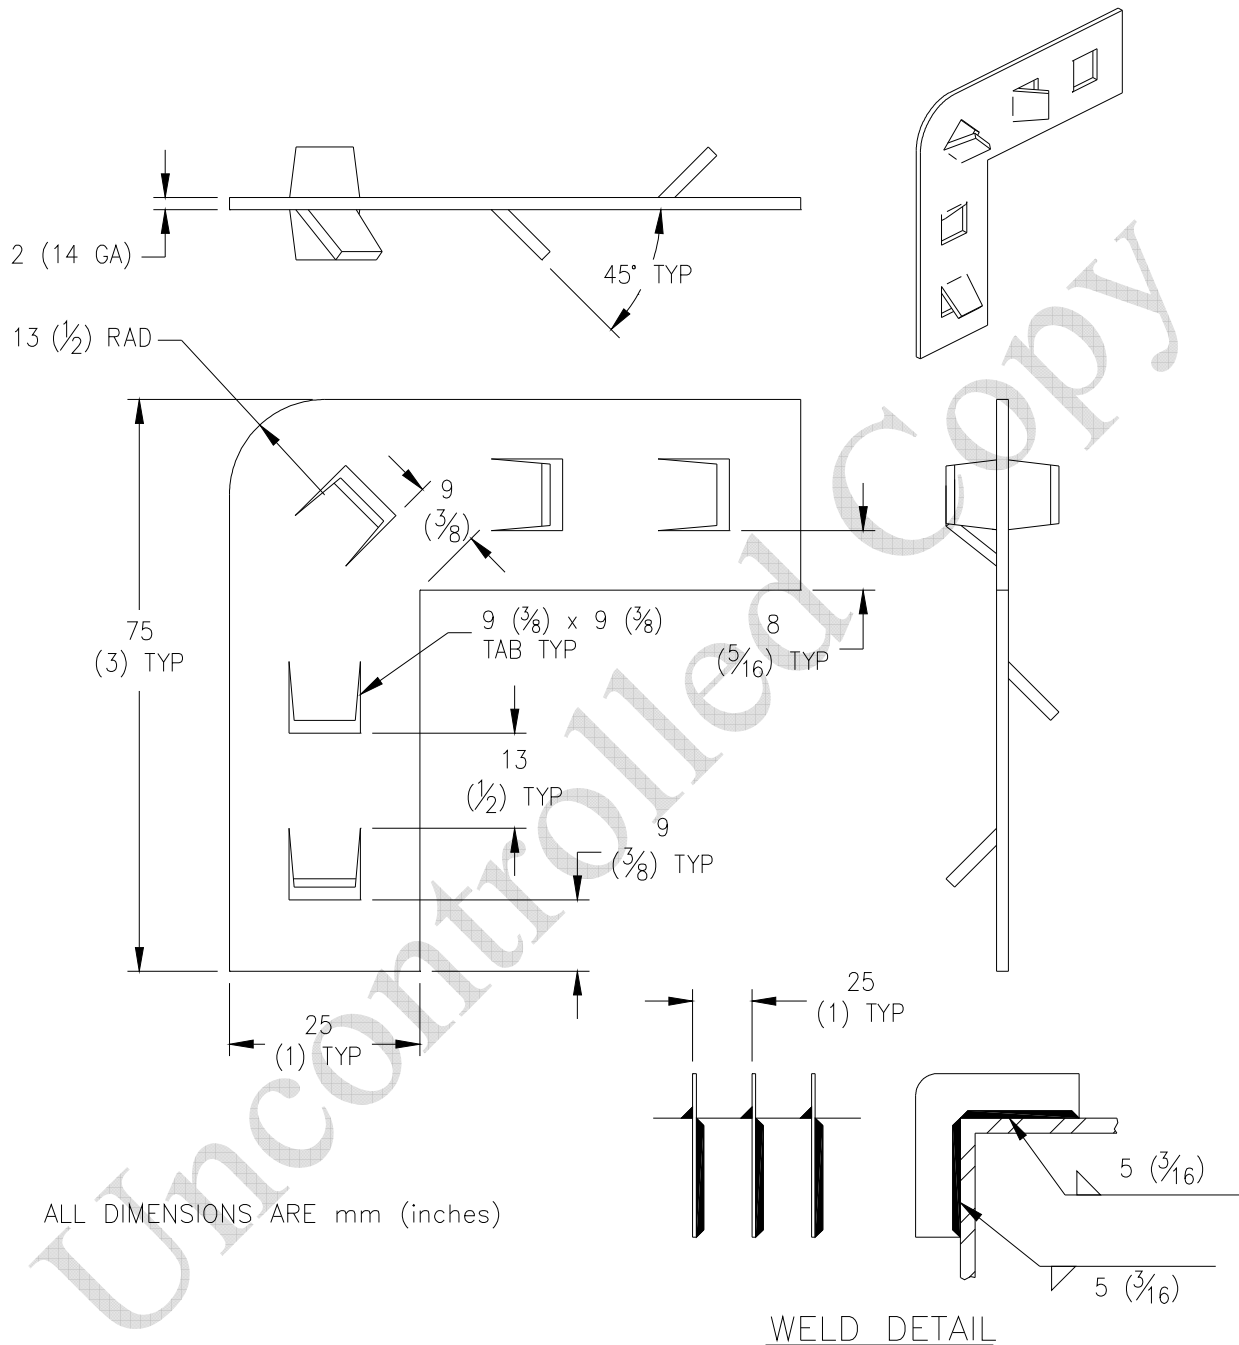

- 1 Material identification shall be stamped on all Corner Tabs
- 2 Colour Coding is acceptable after approval from BP
- 3 Corner Tabs shall be fabricated from Type 304 stainless steel unless otherwise specified

Figure 3 Variable Corner Tab 19mm (3/4)

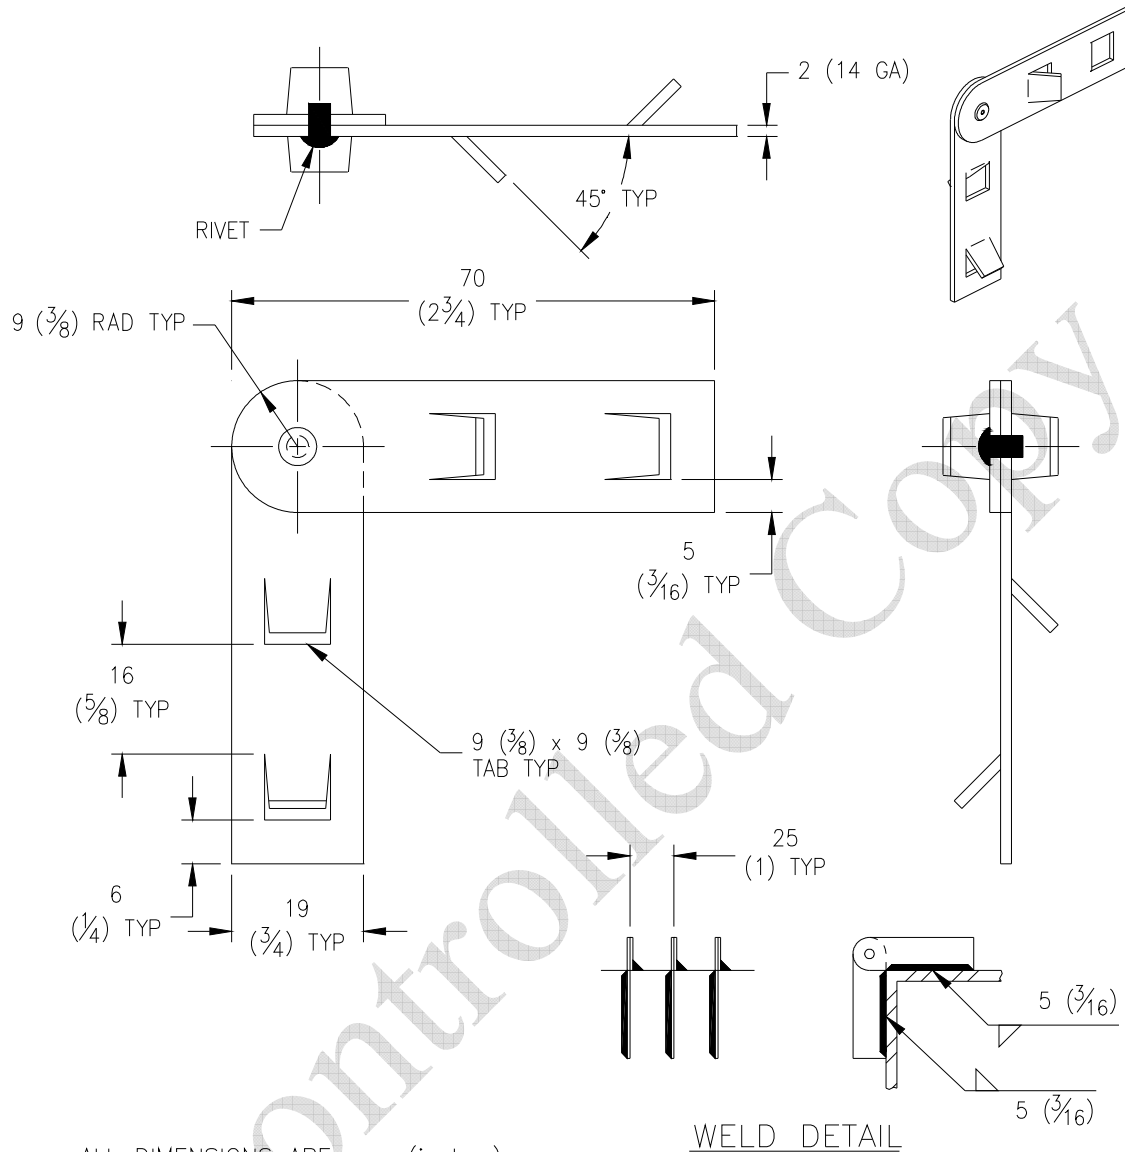

ALL DIMENSIONS ARE mm (inches)

Notes

- 1 Material identification shall be stamped on all Corner Tabs
- 2 Colour Coding is acceptable after approval from BP
- 3 Corner Tabs shall be fabricated from Type 304 stainless steel unless otherwise specified

