

UNJ threads — General requirements and limit dimensions

ICS 49.030.10

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW



Document Sharing Hub

National foreword

This British Standard reproduces verbatim ISO 3161:1999 and implements it as the UK national standard. It supersedes BS 4084:1996 which is withdrawn.

The UK participation in its preparation was entrusted by Technical Committee ACE/12, Aerospace fasteners and fastening systems, to Subcommittee ACE/12/1, Aerospace fasteners and fastening systems (International), which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled “International Standards Correspondence Index”, or by using the “Find” facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the ISO title page, pages ii and iii, a blank page, pages 1 to 40, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

This British Standard, having been prepared under the direction of the Engineering Sector Committee, was published under the authority of the Standards Committee and comes into effect on 15 January 2000

© BSI 01-2000

Amendments issued since publication

Amd. No.	Date	Comments

ISBN 0 580 34016 3

INTERNATIONAL STANDARD

**ISO
3161**

Third edition
1999-12-01

Aerospace — UNJ threads — General requirements and limit dimensions

*Aéronautique et espace — Filetage UNJ — Exigences générales et
dimensions limites*



Reference number
ISO 3161:1999(E)

AVA Documents
Document Sharing Hub

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 3161 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 4, *Aerospace fasteners systems*.

This third edition cancels and replaces the second edition (ISO 3161:1996), which has been technically revised.

Aerospace — UNJ threads — General requirements and limit dimensions

1 Scope

This International Standard specifies the general requirements and limit dimensions of inch series UNJ threads with controlled root radius for aerospace construction.

It determines the basic triangular profile for this type of thread and gives a system for designating the diameter and number of threads per inch combinations. For all diameters 0,060 in (1,524 mm) to 6,000 in (152,4 mm), it offers in the form of tables the basic dimensions and tolerances for a selection of diameter and number of threads per inch combinations. It also provides the method of calculation for the dimensions and tolerances for any diameter and number of threads per inch combination not given in the tables, including threads with a diameter in excess of 6,000 in.

2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 15872:—¹⁾, *Aerospace—UNJthreads—Gauging*.

3 Term and definition

For the purposes of this International Standard, the following term and definition apply.

3.1

basic profile

in an axial plan, the theoretical profile corresponding to the basic dimensions

See Figure 1.

4 Basic profile

4.1 Symbols

See Figure 1.

¹⁾ To be published.

4.2 Basic profile dimensions

See Figure 1 and Table 1.

Values given in Table 1 have been calculated according to the following formulae:

$$P = \frac{1}{n}$$

$$n = \frac{1}{P}$$

$$H = \frac{\sqrt{3}}{2} \times P = 0,866\,025P = \frac{0,866\,025}{n}$$

$$\frac{9}{16}H = 0,487\,14P = \frac{0,487\,14}{n}$$

$$\frac{3}{8}H = 0,324\,76P = \frac{0,324\,76}{n}$$

$$\frac{5}{16}H = 0,270\,63P = \frac{0,270\,63}{n}$$

$$\frac{H}{8} = 0,108\,25P = \frac{0,108\,25}{n}$$

4.3 Basic dimensions of thread

Values given in Table 2 have been calculated according to the following formulae:


$$D_2 = D - \left(2 \times \frac{3}{8}H\right) = D - 0,649\,519P = D - \frac{0,649\,519}{n}$$

$$d_2 = d - \left(2 \times \frac{3}{8}H\right) = d - 0,649\,519P = d - \frac{0,649\,519}{n}$$

$$D_1 = D - \left(2 \times \frac{9}{16}H\right) = D - 0,974\,28P = D - \frac{0,974\,28}{n}$$

$$d_1 = d - \left(2 \times \frac{9}{16}H\right) = d - 0,974\,28P = d - \frac{0,974\,28}{n}$$

The tolerances shall be applied to the basic profile.

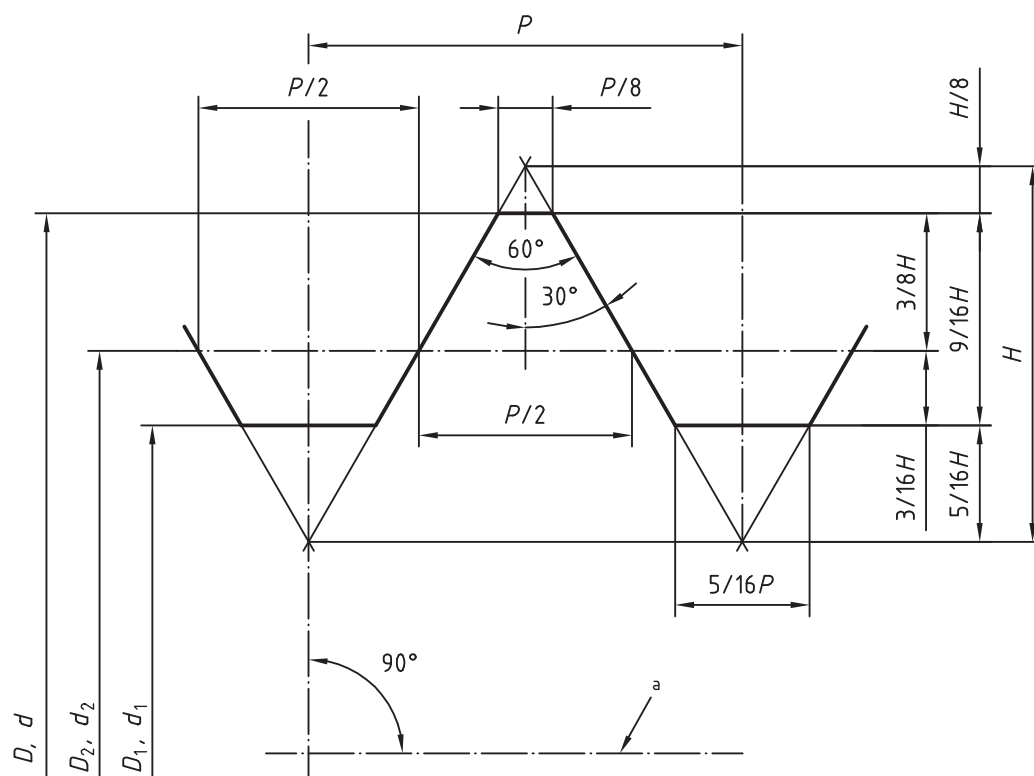

where

- D is the basic major diameter of internal thread
- D_2 is the basic pitch diameter of internal thread
- D_1 is the basic minor diameter of internal thread
- d is the basic major diameter of external thread
- d_2 is the basic pitch diameter of external thread
- d_1 is the basic minor diameter of external thread
- H is the height of fundamental triangle
- P is the pitch
- n is the number of threads per inch

a Axis of thread

Figure 1 — Basic profile

5 Series of threads

5.1 General

This International Standard includes various series of threads, i.e. groups of diameter and number of threads per inch combinations distinguished from each other by the number of threads per inch associated with any given thread diameter. These series of threads are given in Table 3.

5.2 Diameters

Columns 1 and 2 of Table 3 give the primary and secondary series nominal sizes which satisfy current requirements.

5.3 Number of threads per inch (n)

5.3.1 General

Columns 3 to 9 (inclusive) of Table 3 give the numbers of threads per inch which are recommended to be associated with the diameters in columns 1 and 2. These columns of the numbers of threads per inch are divided into two groups:

- series with increasing (progressive) pitches: columns 3, 4 and 5;
- constant (uniform) pitch series: columns 6, 7, 8 and 9.

5.3.2 Series with increasing (progressive) pitches

There are three series of increasing pitches. They are headed "Coarse pitch", "Fine pitch" and "Extra fine pitch" in accordance with current practice.

These terms indicate the relative pitches of the three series for each given thread diameter and do not imply a difference in quality between the series.

5.3.3 Constant (uniform) pitch series

In addition to these three series of increasing pitches, Table 3 includes details of constant pitch series which have been selected from the range of 8 threads per inch to 20 threads per inch. Each of these series is limited to an appropriate range of diameters.

5.4 Threads outside selection

The threads specified in 5.3.2 and 5.3.3 and indicated in Table 3 meet most requirements. If other diameter and number of threads per inch combinations or threads larger than 6,000 in in diameter are required, then these shall be calculated using the formulae in 6.3.2.

6 Tolerances

6.1 Length of thread engagement used for calculating the pitch diameter tolerances

The length of thread engagement (L_e) (see Figure 2) used in this International Standard is equal to

- the basic major diameter for the series UNJC, UNJF and 8 UNJ. This is applicable for actual lengths of engagement between $1,0D$ and $1,5D$;
- $9P$ for the series UNJEF, 12 UNJ, 16 UNJ, 20 UNJ and all UNJS. This is applicable for actual lengths of engagement between $5P$ and $15P$.

For applications with lengths of engagement not within the above limits, the tolerances on the pitch diameter shall be calculated according to the calculation formulae for T_{d2} and T_{D2} , using the design length of engagement as L_e .

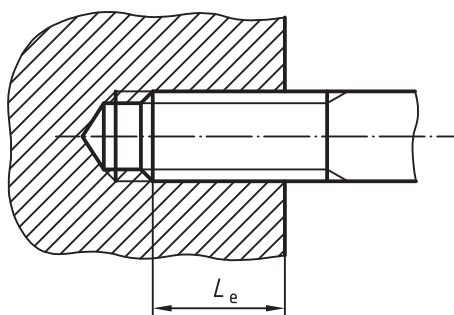


Figure 2 — Length of engagement


6.2 Position of tolerances

6.2.1 General

The tolerances are positive (+) for the internal threads and negative (–) for the external threads (that is, the tolerances are applied in the direction of minimum material).

6.2.2 Internal thread

See Figure 3.

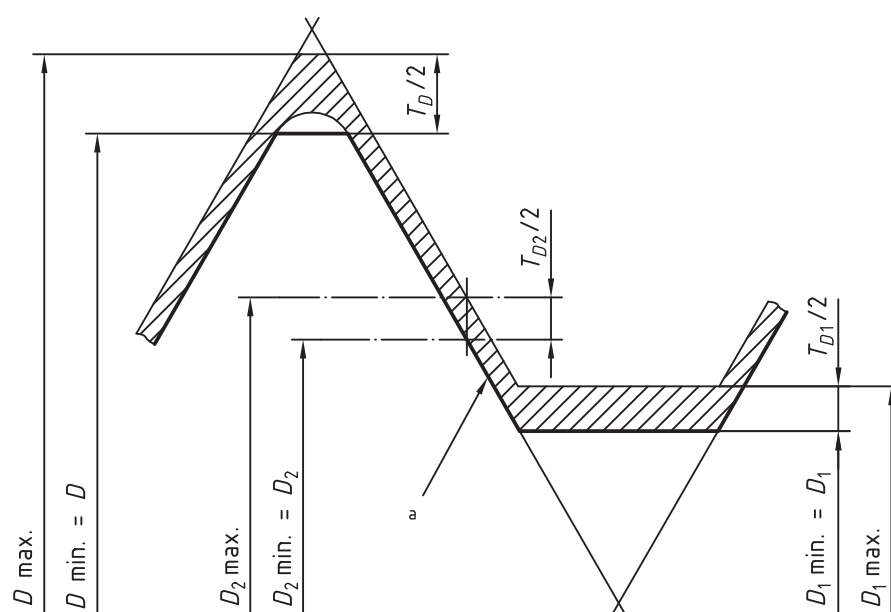


a Basic UNJ profile

Figure 3 — Internal thread tolerances

6.2.3 External thread

See Figure 4.

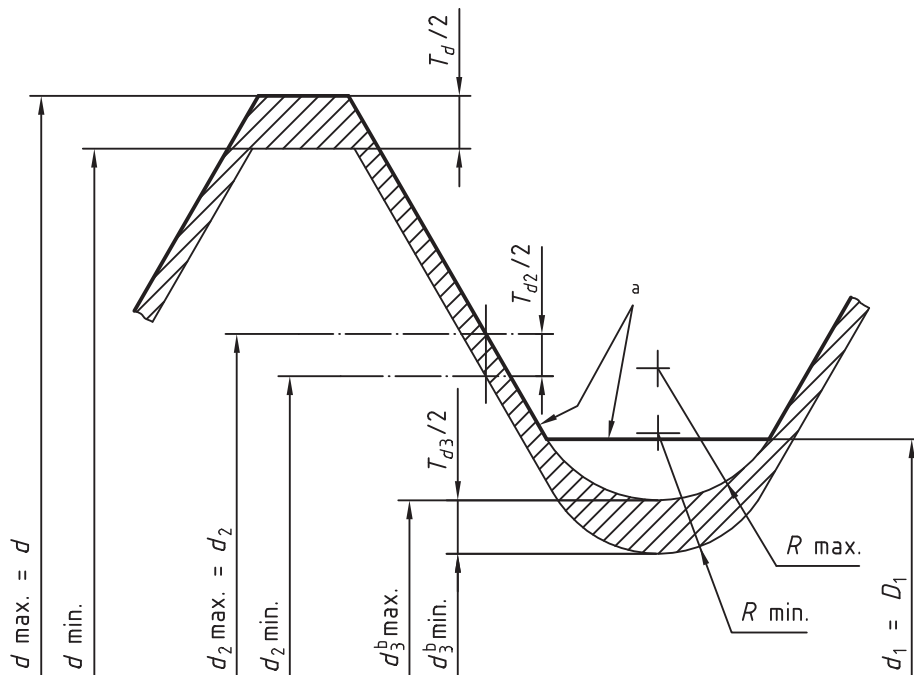

- a Basic UNJ profile
- b d_3 is the external thread profile minor diameter.

Figure 4 — External thread tolerances

6.3 Values of tolerances for profile dimensions and tolerances of the profile form

6.3.1 General

Values indicated in Tables 4, 5 and 6 have been calculated according to the formulae given in 6.3.2 and are based on the length of engagement equal to that shown in 6.1,

where

- α is the basic half-angle at the base of the thread side, i.e. 30° ;
- $\Delta\alpha$ is the maximum permissible variation of the half-angle;
- T_D is the internal thread basic major diameter tolerance;
- T_{D1} is the internal thread basic minor diameter tolerance;
- T_{D2} and T_{d2} are the basic pitch diameter tolerances;
- T_d is the external thread basic major diameter tolerance;
- T_{d1} is the external thread basic minor diameter tolerance;
- T_{d3} is the external thread profile minor diameter tolerance;
- ΔP is the maximum permissible pitch variation of external or internal threads;

- ΔD_2 is the pitch diameter increment due to lead variation for the internal threads;
- $\Delta D'_2$ is the pitch diameter increment due to variations in the half-angles for the internal threads;
- Δd_2 is the pitch diameter increment due to lead variation for the external threads;
- $\Delta d'_2$ is the pitch diameter increment due to variations in the half-angles for the external threads.

6.3.2 Calculation formulae

Limits of size for untabulated (UNJS) threads shall also be calculated using the formulae given in 6.3.2.1 and 6.3.2.2.

6.3.2.1 External threads

The formulae are as follows:

$$d \text{ max.} = d$$

$$d \text{ min.} = d \text{ max.} - \text{tolerance } 0,060 \sqrt[3]{P^2}$$

$$0,060 \sqrt[3]{P^2} : \text{ see Table 7, column 3.}$$

$$d_2 \text{ max.} = d_2 = d \text{ max.} - \text{value } 0,649\,519P$$

$$0,649\,519P : \text{ see Table 7, column 4.}$$

$$d_2 \text{ min.} = d_2 \text{ max.} - T_{d2}$$

$$T_{d2} = 0,750 \left(0,0015 \sqrt[3]{d} + 0,0015 \sqrt{L_e} + 0,015 \sqrt[3]{P^2} \right) \text{ (listed in Table 8)}$$

$$d_3 \text{ max.} = d_3 = d_2 \text{ max.} - \text{value } 0,505\,18P$$

$$0,505\,18P : \text{ see Table 7, column 5.}$$

$$d_3 \text{ min.} = d_2 \text{ min.} - \text{value } 0,565\,80P$$

$$0,565\,80P : \text{ see Table 7, column 6.}$$

$$R \text{ max.} = 0,180\,42P \text{ (listed in Table 7, column 7)}$$

$$0,180\,42P : \text{ see Table 7, column 7.}$$

$$R \text{ min.} = 0,150\,11P \text{ (listed in Table 7, column 8)}$$

$$0,150\,11P : \text{ see Table 7, column 8.}$$

$$\Delta P = \frac{\Delta d_2}{\cot \alpha} = \frac{\Delta d_2}{1,732\,1} = \frac{0,4T_{d2}}{1,732\,1}$$

$$\tan \Delta \alpha = \frac{\Delta d'_2}{1,5P} = \frac{0,4T_{d2}}{1,5P} \text{ 2)}$$

2) The calculation formulae for the tangent of the variations of the half-angle of the thread pitch are approximations of the maximum effects when the two half-angles are equal.

6.3.2.2 Internal threads

The formulae are as follows:

$$D \text{ max.} = D_2 \text{ max.} + \text{value } 0,793\,86P$$

$0,793\,86P$: see Table 7, column 9.

$$D \text{ min.} = D$$

$$D_2 \text{ max.} = D_2 \text{ min.} + T_{D2}$$

$$T_{D2} = 0,975 \left(0,0015 \sqrt[3]{d} + 0,0015 \sqrt{L_e} + 0,015 \sqrt[3]{P^2} \right) \text{ (listed in Table 9)}$$

$$D_2 \text{ min.} = D \text{ min.} - \text{value } 0,649\,519P$$

$0,649\,519P$: see Table 7, column 4.

$$D_1 \text{ max.} = D_1 \text{ min.} + T_{D1}$$

$$T_{D1} \text{ for threads with more than 12 threads per inch} = \left(0,05 \sqrt[3]{P^2} + 0,03 P/d \right) - 0,002 \text{ (listed in Table 10)}$$

$$T_{D1} \text{ for threads with 12 threads per inch or less} = 0,120P \text{ (listed in Table 10)}$$

$$D_1 \text{ min.} = D \text{ min.} - \text{value } 0,974\,28P$$

$0,974\,28P$: see Table 7, column 10.

$$\Delta P = \frac{\Delta D_2}{\cot \alpha} = \frac{\Delta D_2}{1,732\,1} = \frac{0,4 T_{D2}}{1,732\,1}$$

$$\tan \Delta \alpha = \frac{\Delta D'_2}{1,5P} = \frac{0,4 T_{D2}}{1,5P} \quad 3)$$

NOTE On completion of the calculations, round off to four decimal points, except values in Table 6 which shall be rounded to five decimal points. Round up if the fifth, or sixth decimal, as applicable, is ≥ 5 . Keep the fourth, or fifth decimal, as applicable, if the next one is < 5 .

6.3.3 Root radius of the thread


6.3.3.1 Internal threads

For internal threads, the profile of the actual root of the thread shall at no point be below the basic profile given in Figure 3. No particular radius is specified.

³⁾ The calculation formulae for the tangent of the variations of the half-angle of the thread pitch are approximations of the maximum effects when the two half-angles are equal.

6.3.3.2 External threads

For external threads, the profile of the actual root of the thread shall lie within the tolerance zone shown in Figure 5. The limit values of the root radius R are specified in Table 4. The profile shall be a continuous blended curve, no part of which shall have a radius of less than $0,150\ 11P$ and which is tangential to the thread flanks at not less than $0,562\ 5H$ thread depth. The profile may comprise tangent flank radii that are only joined by a tangential flat at the root.

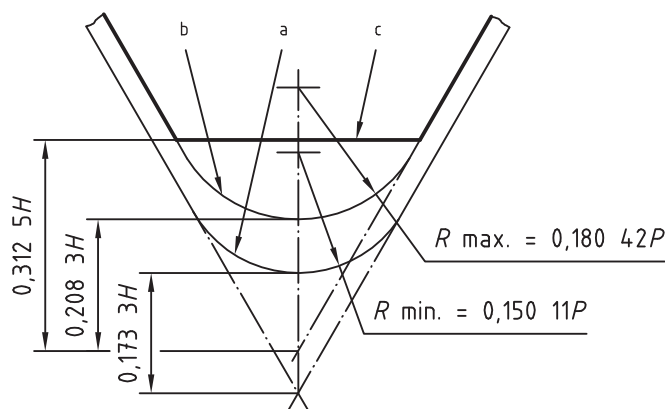

- a Lower limit profile
- b Upper limit profile
- c Basic UNJ profile

Figure 5 — Radius at the root of the screw thread

6.4 Provisions for coated threads

Before coating, the dimensions of the threads shall be compatible with the thickness of the coating selected and with the limit dimensions for finished parts specified in Tables 5 and 6.

7 Gauging

See ISO 15872.

The radius of the thread root shall be checked by an appropriate method. In case of dispute, optical method shall be used as a referee method.

8 Designation of threads

8.1 General

Threads shall be designated as shown in 8.2, 8.3, 8.4 and 8.5 by indicating, in sequence, the nominal size in inch decimals, the number of threads per inch, the thread series symbol, the tolerance class⁴⁾, the thread type (A external or B internal) and, if necessary, symbol LH put at the designation end for left-hand threads, followed by reference to this International Standard.

⁴⁾ For this International Standard, there is only one tolerance class: 3.