

**Harmonized system of quality
assessment for electronic components**

**Sectional specification:
Fixed capacitors for
electromagnetic
interference
suppression and
connection to the
supply mains
(Assessment level D)**

The European Standard EN 132400:1994, with the incorporation of its amendments A2:1998, A3:1998 and A4:2001, has the status of a British Standard

ICS 31.060.10

Cooperating organizations

The European Committee for Electrotechnical Standardization (CENELEC), under whose supervision this European Standard was prepared, comprises the national committees of the following countries:

Austria	Italy
Belgium	Luxembourg
Denmark	Netherlands
Finland	Norway
France	Portugal
Germany	Spain
Greece	Sweden
Iceland	Switzerland
Ireland	United Kingdom

This British Standard, having been prepared under the direction of the Electrotechnical Sector Board, was published under the authority of the Standards Board and comes into effect on 15 January 1995

© BSI 08 February 2002

The following BSI references relate to the work on this standard:
Committee reference ECL/4
Special announcement in *BSI News*, September 1994

ISBN 0 580 23548 3

Amendments issued since publication

Amd. No.	Date	Comments
10257	September 1999	Addition of Annex F.
13455	08 February 2002	Indicated by a sideline

Contents

	Page
Cooperating organizations	Inside front cover
National foreword	ii
Foreword	2
Text of EN 132400	5
National annex NA (informative) Committees responsible	51
National annex NB (informative) Cross-references	51

National foreword

This British Standard has been prepared under the direction of the Electrotechnical Sector Board and is the English language version of EN 132400:1994 *Harmonized system of quality assessment for electronic components. Sectional specification: Fixed capacitors for electromagnetic interference suppression and connection to the supply mains (Assessment level D)*, including its amendments A2:1998, A3:1998 and A4:2001. EN 132400:1994 was published by the European Components Committee (CECC) of the European Committee for Electrotechnical Standardization (CENELEC).

Amendment No. 1 to BS EN 132400:1995 implements both CENELEC amendment A2 (which incorporates amendment A1) and CENELEC amendment A3 to EN 132400:1994.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the EN title page, pages 2 to 52, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Sidelining in this document indicates the most recent changes by amendment.

Descriptors: Fixed capacitors, electromagnetic interference suppression, connection to the supply mains, sectional specification, assessment level D

English version

Sectional specification:
Fixed capacitors for electromagnetic interference
suppression and connection to the supply mains
(Assessment level D)

(includes amendments A2:1998, A3:1998 and A4:2001)

Spécification intermédiaire:
Condensateurs fixes d'antiparasitage et
raccordement à l'alimentation
(Niveau d'assurance D)
(inclut les amendements A2:1998, A3:1998
et A4:2001)

Rahmenspezifikation:
Festkondensatoren zur Unterdrückung
elektromagnetischer
Störungen, geeignet für Netzbetrieb
(Gütebestätigungsstufe D)
(enthält Änderungen A2:1998, A3:1998
und A4:2001)

This European Standard was approved by the CENELEC Electronic Components Committee (CECC) on 21 November 1993. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat of CENELEC or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B-1050 Brussels

Foreword

The CENELEC Electronic Components Committee (CECC) is composed of those member countries of the European Committee for Electrotechnical Standardization (CENELEC) who wish to take part in a harmonized System for electronic components of assessed quality.

The object of the system is to facilitate international trade by the harmonization of the specifications and quality assessment procedures for electronic components, and by the grant of an internationally recognized Mark, or Certificate, of Conformity. The components produced under the System are thereby acceptable in all member countries without further testing.

This European Standard was prepared by CECC WG 3, Capacitors.

The text of the draft based on document CECC 32 400 was submitted to the formal vote: together with the voting report, circulated as document CECC(Sec)3457, it was approved by CECC as EN 132400 on 21 November 1993.

The text of EN 132400 is based on the following documents:

- CECC 32 400 Issue 1 (1992) and
- CECC(Sec) 3258/11.92
[RV CECC(Sec) 3458/10.93].

The following dates were fixed:

- latest date of announcement of the EN at national level (doa) 1993-12-26
- latest date of publication of an identical national standard (dop) 1994-06-26
- latest date of withdrawal of conflicting national standards (dow) 1995-06-26

Foreword to amendment A2

This amendment to the European Standard EN 132400 was prepared by CENELEC/TC CECC/SC 40XA, Capacitors.

It contains the combined texts of two draft amendments which were submitted to the CENELEC Unique Acceptance Procedure. The text of the first draft amendment was approved as amendment A1 on 1996-12-09; that of the second as amendment A2 on 1997-03-11.

This amendment A2 includes amendment A1.

The following dates were fixed:

- latest date by which the amendment has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 1999-01-01
- latest date by which the national standards conflicting with the amendment have to be withdrawn (dow) 1999-01-01

Foreword to amendment A3

This amendment was prepared by the Technical Committee CENELEC TC 40XA, Capacitors.

The text of the draft was submitted to the Unique Acceptance Procedure and was approved by CENELEC as amendment A3 to EN 132400:1994 on 1998-10-01.

The following dates were fixed:

- latest date by which the amendment has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 1999-10-01
- latest date by which the national standards conflicting with the amendment have to be withdrawn (dow) 1999-10-01

Foreword to amendment A4

This amendment was prepared by the Technical Committee CENELEC TC 40XA, Capacitors.

The text of the draft was submitted to the Unique Acceptance Procedure and was approved by CENELEC as amendment A4 to EN 132400:1994 on 2000-08-01.

The following dates were fixed:

- latest date by which the amendment has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2002-02-01
- latest date by which the national standards conflicting with the amendment have to be withdrawn (dow) 2003-08-01

Contents

	Page	Page
Foreword	2	Annex D Circuit for the charge and discharge test 45
1 General	5	Annex E Pulse test circuits 46
1.1 Scope	5	Annex F Declaration of design 48
1.2 Object	5	Annex G Particular requirements for safety test of surface mounting capacitors 49
1.3 Related documents	5	Figure 1 — Two-terminal capacitor 8
1.4 Information to be given in a detail specification	6	Figure 2 — RC unit 8
1.5 Terminology	7	Figure 3 — Lead-through capacitor (coaxial) 9
1.6 Marking	12	Figure 4a — Lead-through capacitor for symmetrical use (non-coaxial) 9
2 Preferred ratings and characteristics	13	Figure 4b — Lead-through capacitor for asymmetrical use (non-coaxial) 9
2.1 Preferred climatic categories	13	Figure 4c — Multiple unit lead-through capacitor (non-coaxial) for symmetrical and asymmetrical use 10
2.2 Preferred values of ratings	13	Figure 5a — Single by-pass capacitor 10
3 Assessment procedures	15	Figure 5b — Delta by-pass capacitor 11
3.1 Primary stage of manufacture	15	Figure 5c — Example of a T-connected by-pass capacitor 11
3.2 Structurally similar components	15	Figure 6 — Impulse wave form 30
3.3 Certified test records	15	Figure 7 — Circuit for pulse loading of capacitors under a.c. voltage 35
3.4 Approval testing	15	Figure 7a — Fundamental a.c. wave with randomly, not synchronized, superimposed high-voltage pulse 36
3.5 Conformance inspection	20	Figure 8 — Impulse voltage test circuit 43
4 Test and measurement procedures	23	Figure 9 — Endurance test circuit 44
4.1 Visual examination and check of dimensions	23	Figure 10 — Charge and discharge test circuit 45
4.2 Electrical tests	26	Table 1 7
4.3 Robustness of terminations	26	Table 2 8
4.4 Resistance to soldering heat	26	Table 3 — Test schedule and sampling plan for safety tests 17
4.5 Solderability	26	Table 4 — Test schedule and sampling plan for safety tests and qualification approval tests — Assessment level D 18
4.6 Rapid change of temperature	27	Table 5 — Test schedule and sampling plan for lot-by-lot tests 19
4.7 Vibration	27	Table 6 — Test schedule and sampling plan for periodic test — Assessment level D 20
4.8 Bump	27	Table 7 23
4.9 Shock	28	Table 8 24
4.10 Container sealing	28	Table 9 — Insulation resistance — Safety tests only 25
4.11 Climatic sequence	28	Table 10 — Insulation resistance — Safety and performance tests 26
4.12 Damp heat, steady state	29	Table 11 27
4.13 Impulse voltage	29	Table 12 29
4.14 Endurance	31	Table 13 30
4.15 Charge and discharge	32	Table 14 32
4.16 Radio frequency characteristics	33	Table 15 33
4.17 Passive flammability	34	Table 16 43
4.18 Active flammability	34	Table 17 50
4.19 Component solvent resistance	36	
4.20 Solvent resistance of the marking	36	
Annex A1 Test schedule for safety tests only	37	
Annex A2 Test schedule for safety tests and qualification approval tests — Assessment level D	39	
Annex B Circuit for the impulse voltage test	43	
Annex C Circuit for the endurance test	44	

Section 1. General

1.1 Scope

This specification applies to capacitors which will be connected to an a.c. mains or other supply with a nominal voltage not exceeding 1 000 V a.c. (r.m.s) or 1 000 V d.c. and with a nominal frequency not exceeding 100 Hz.

This specification prescribes tests which are appropriate when the suppression capacitor is to be connected to the supply mains. The relevant equipment specification may also prescribe other circuit positions where capacitors meeting the requirements of this specification shall be used.

Combinations of two or more capacitors within one enclosure are included within the scope of this specification.

Series resistor-capacitor combinations are within the scope of this specification provided that the resistor is in the same enclosure, and the resultant equivalent series resistance of the combination does not exceed 1 k Ω .

Parallel resistor-capacitor combinations where the resistor acts as a discharge resistor for the capacitor are within the scope of this specification.

Capacitors for special environmental conditions (e.g. drip-proof, splash-proof) may have to comply with additional requirements.

NOTE For notes on the application of electromagnetic interference suppression capacitors see IEC-940.

1.2 Object

The principal object of this specification is to prescribe preferred ratings and characteristics and to select from EN 130000, the appropriate quality assessment procedures, tests and measuring methods and to give general performance requirements for this type of capacitor. Test severities and requirements prescribed in detail specifications referring to this sectional specification shall be of equal or higher performance level, because lower performance levels are not permitted.

A further object of this specification is to provide a test schedule for safety approval.

1.3 Related documents

ISO 3:1973, *Preferred numbers — Series of preferred numbers*.

IEC 60-1:1989, *High voltage test techniques — Part 1: General definitions and test requirements*.

IEC 60-2:1973, *High voltage test techniques — Part 2: Test procedures*.

IEC 62:1974, *Amendment 2:1989, Marking codes for resistors and capacitors*.

IEC 63:1963, *Amendment 1:1967, Amendment 2:1977, Preferred number series for resistors and capacitors*.

IEC 68, *Basic environmental testing procedures*.

IEC 335-1:1976, *Amendment 4:1984, Amendment 5:1986, Amendment 6:1988, Safety of household and similar electrical appliances*.

IEC 384-14:1993, *Fixed capacitors for electromagnetic interference suppression and connection to the supply mains*.

IEC 410:1973, *Sampling plans and procedures for inspection by attributes*.

IEC 536:1976, *Classification of electrical and electronic equipment with regard to protection against electrical shock*.

IECs 664/664A:1980/1981, *Insulation coordination within low-voltage systems including clearances and creepage distances for equipment*.

IEC 685, *Connecting devices (junction and/or tapping) for household and similar fixed electrical installations*.

IEC 695-2-2:1980, *Fire hazard testing — Part 2: Test methods — Section 2: Needle-flame test*.

IEC 760:1989, *Flat, quick-connect terminations*.

IEC 940:1988, *Guidance information on the application of capacitors, resistors, inductors and complete filter units for radio interference suppression*.

CISPR IEC 17:1981, *Methods of measurement of the suppression characteristics of passive radio interference filters and suppression components*.

Guide 104:1984, *Guide to the drafting of safety standards, and the role of committees with safety pilot functions and safety group functions*.

EN 130000:1993, *Generic specification: Fixed capacitors*.

1.4 Information to be given in a detail specification

Detail specifications shall be derived from the relevant blank detail specification.

Detail specifications shall not specify requirements inferior to those of the generic, sectional or blank detail specification. When more severe requirements are included, they shall be listed in 1.9 of the detail specification, and indicated in the test schedules, for example by an asterisk.

NOTE The information given in 1.4.1 may for convenience be presented in tabular form.

The following information shall be given in each detail specification and the values quoted shall preferably be selected from the appropriate clause of this sectional specification.

1.4.1 Outline drawing and dimensions

There shall be an illustration of the capacitor as an aid to easy recognition and for comparison of the capacitor with others. Dimensions and their associated tolerances, which affect interchangeability and mounting, shall be given in the detail specification. All dimensions shall preferably be stated in millimetres, however, when the original dimensions are given in inches, the converted metric dimensions in millimetres shall be added.

Normally the numerical values shall be given for the length of the body, the width and height of the body and the wire spacing, or for cylindrical types, the body diameter and the length and diameter of the terminations. When necessary, for example when a number of items (capacitance values/voltage ranges) are covered by a detail specification, their dimensions and their associated tolerances shall be placed in a table below the drawing.

When the configuration is other than that described above, the detail specification shall state such dimensional information as will adequately describe the capacitor. When the capacitor is not designed for use on printed boards, this shall be clearly stated in the detail specification.

1.4.2 Mounting

The detail specification shall specify the method of mounting to be applied for the application of the vibration and the bump or shock tests. The design of the capacitor may be such that special mounting fixtures are required in its use. In this case, the detail specification shall describe the mounting fixtures and they shall be used in the application of the vibration and bump or shock tests.

NOTE If recommendations for mounting for “normal” use are made, they shall be included in the detail specification under “1.8 Additional information (Not for inspection purposes)”. If they are included a warning can be given that the full vibration, bump and shock performance may not be available if mounting methods other than those specified in 1.1 of the detail specification are used.

1.4.3 Ratings and characteristics

The ratings and characteristics shall be in accordance with the relevant clauses of Section 2 of this specification, together with the following:

1.4.3.1 Rated capacitance range

See 2.2.1.

NOTE When products approved to the detail specification have different ranges, the following statement should be added: “The range of values available in each voltage range is given in CECC 00 200 (Register of Firms, Products and Services Approved under the CECC System).”

1.4.3.2 Rated resistance range (if applicable)

See 2.2.4.

1.4.3.3 Particular characteristics

Additional characteristics may be listed when they are considered necessary to specify adequately the component for design and application purposes.

1.4.4 Marking

The detail specification shall specify the content of the marking on the capacitor and on the package.

1.5 Terminology

NOTE Some definitions of EN 130000 have been expanded and this is indicated in the definitions by reference to this note.

In addition to the applicable terms and definitions of EN 130000, the following definitions apply.

1.5.1

a.c. capacitor

a capacitor designed essentially for application with a power-frequency alternating voltage

NOTE A.C. capacitors may be used on d.c. supplies having the same voltage as the capacitor a.c. r.m.s. rated voltage.

1.5.2

radio interference suppression capacitor; electromagnetic interference suppression capacitor

a capacitor used for the reduction of electromagnetic interference caused by electrical or electronic apparatus, or other sources

1.5.3

capacitor or RC-unit of Class X

a capacitor or RC-unit of a type suitable for use in situations where failure of the capacitor or RC-unit would not lead to danger of electric shock

Class X capacitors are divided into three sub-classes (see Table 1) according to the peak voltage of the impulses superimposed on the mains voltage to which they may be subjected in service. Such impulses may arise from lightning strikes on outside lines, from switching in neighbouring equipment, or switching in the equipment in which the capacitor is used.

1.5.4

capacitor or RC-unit of Class Y

a capacitor or RC-unit of class Y suitable for use in situations where failure of the capacitor could lead to danger of electric shock

Class Y capacitors are further divided into four sub-classes Y1, Y2, Y3 and Y4, as shown in Table 2.

The enclosure of a Y1-capacitor shall not contain other components. Otherwise separate elements may be built together from Y-capacitors and X-capacitors if they fulfil the requirements for the relevant X and Y sub-classes.

One Y-capacitor may bridge basic insulation. One Y-capacitor may bridge supplementary insulation. If combined basic and supplementary insulations are bridged by two Y2-, Y3- or Y4-capacitors in series, they shall have the same nominal value.

Table 1

Sub-class	Peak pulse voltage in service	IEC-664 installation category	Application	Peak impulse voltage U_p applied before endurance test
X1	$>2,5 \text{ kV}$ $\leq 4,0 \text{ kV}$	III	High pulse application	For $C_R \leq 1,0 \mu\text{F}$: $U_p = 4 \text{ kV}$ For $C_R > 1,0 \mu\text{F}$: $U_p = 4/\sqrt{C_R} \text{ kV}$
X2	$\leq 2,5 \text{ kV}$	II	General purpose	For $C_R \leq 1,0 \mu\text{F}$: $U_p = 2,5 \text{ kV}$ For $C_R > 1,0 \mu\text{F}$: $U_p = 2,5/\sqrt{C_R} \text{ kV}$
X3	$\leq 1,2 \text{ kV}$	—	General purpose	none

NOTE 1 C_R is in microfarads

NOTE 2 The sub-class X3 corresponds to the sub-class X2 described in Table 1 of IEC 384-14 Edition 1.

Table 2

Sub-class	Type of insulation bridged	Range of rated voltages	Peak impulse voltage before endurance test
Y1	Double insulation or reinforced insulation	≤ 500 V	8,0 kV
Y2	Basic insulation or supplementary insulation	≥ 150 V ≤ 300 V	5,0 kV
Y3	Basic insulation or supplementary insulation	≥ 150 V ≤ 250 V	None
Y4	Basic insulation or supplementary insulation	<150 V	2,5 kV

NOTE 1 For definitions of basic, supplementary, double and reinforced insulation see IEC 60536, sub-clauses 2.1, 2.2, 2.3 and 2.4.

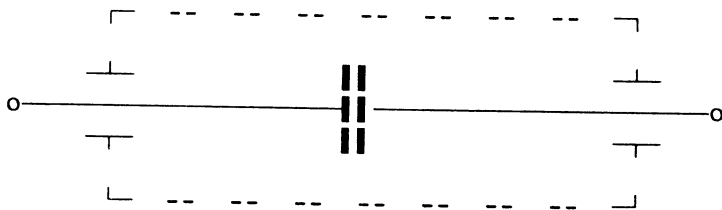


Figure 1 — Two-terminal capacitor

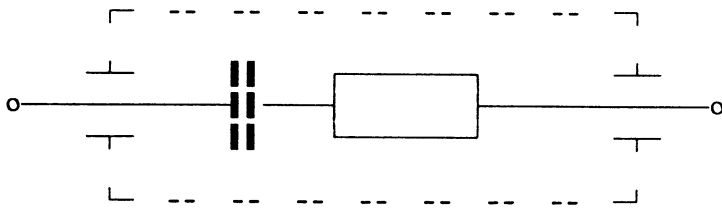


Figure 2 — RC unit

1.5.5
two-terminal capacitor

an electromagnetic interference suppression capacitor having two terminals
See Figure 1.


1.5.6
series RC-unit

a functional combination of a resistor in series with a capacitor of class X or Y
See Figure 2.

In this specification, where the word “capacitor” appears, the words “capacitor or RC-unit” shall be understood where the context permits.

1.5.7
lead-through capacitor (coaxial)

a capacitor with a central current-carrying conductor surrounded by a capacitor element which is symmetrically bonded to the central conductor and to the outer casing to form a coaxial construction
It should be mounted coaxially.
See Figure 3.


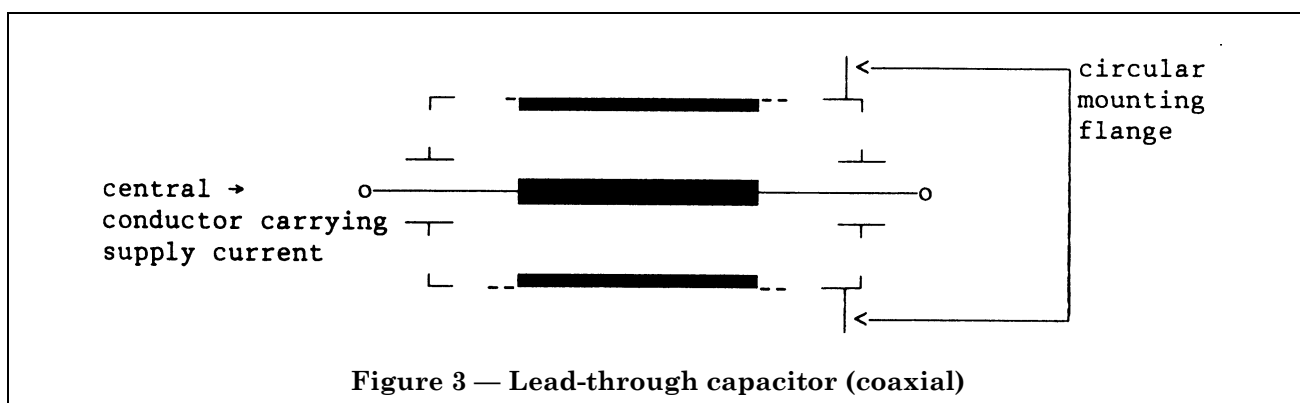


1.5.8

lead-through capacitor (non-coaxial)

a capacitor in which the supply currents flow through or across the electrodes

See Figure 4a, Figure 4b and Figure 4c.

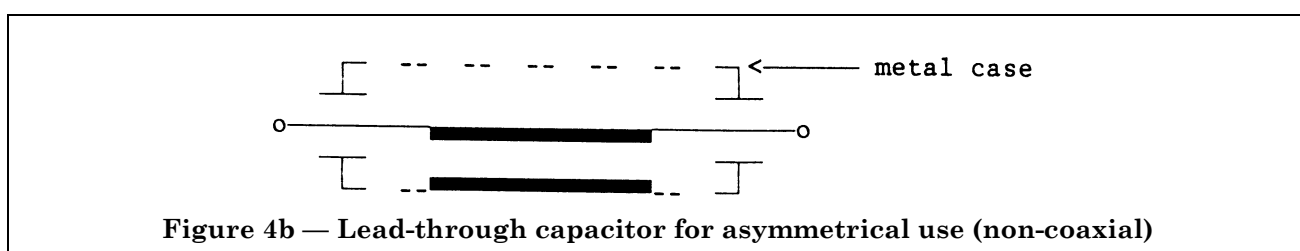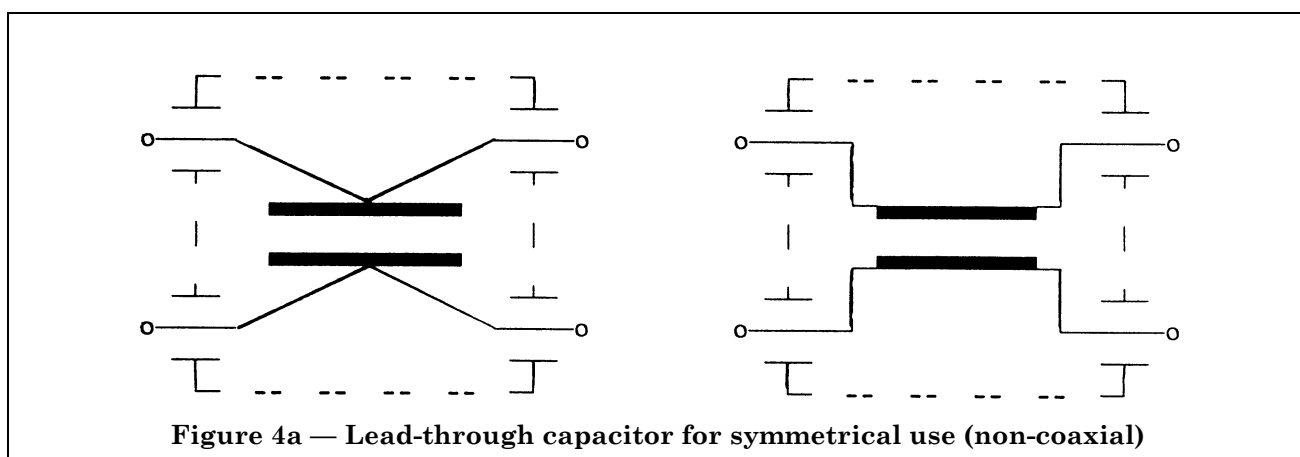

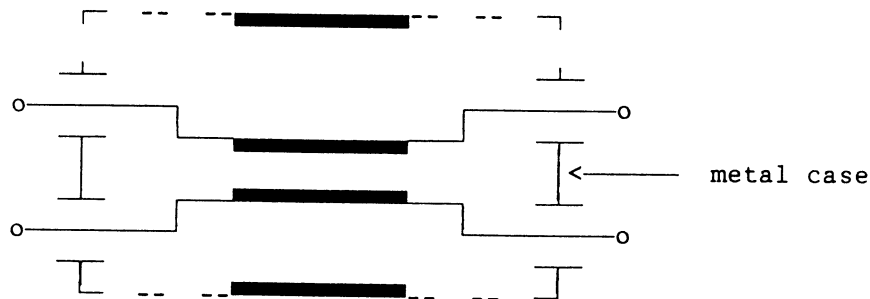


Figure 4c — Multiple unit lead-through capacitor (non-coaxial) for symmetrical and asymmetrical use

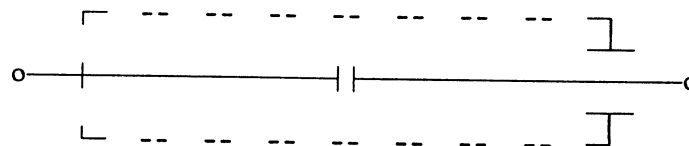


Figure 5a — Single by-pass capacitor

1.5.9 by-pass capacitor

a capacitor where radio-frequency interference currents are by-passed

There are three common forms, single, delta and T-connected. The single capacitor employs a capacitor in a metal case with one termination connected to the case as in Figure 5a. The delta form consists of an X-capacitor and two Y2- or Y3-capacitors arranged in a delta network as in Figure 5b. The T-connected form consists of three capacitors C_A , C_B and C_C connected in T as shown in Figure 5c.

The delta and T-connected forms are electrically equivalent (star-delta transformation). In the T-connected form the X-capacitor is the result of the series connection of $C_B - C_C$ and the Y-capacitors are the results of the series connections of $C_A - C_B$ and $C_A - C_C$.

When T-connected capacitors are submitted to tests, and it is stated that voltages must be applied across the X-capacitors, such voltages shall be applied between the line and neutral terminations. Similarly when it is stated that voltages must be applied across the Y-capacitors, such voltages shall be applied between the line and neutral terminations connected together and the earth termination.

NOTE For capacitors with non-metallic housings the earth connection will be brought out as a separate termination.

1.5.10 rated voltage

the rated voltage is either the r.m.s. operating voltage of rated frequency, or the d.c. operating voltage, which may be applied continuously to the terminations of a capacitor at any temperature between the lower and the upper category temperatures

This implies, for capacitors covered by this specification, that the category voltage is the same as the rated voltage.

1.5.11**rated power (of a series RC-unit)**

the maximum power which can be dissipated by the RC-unit at the rated temperature during continuous operation

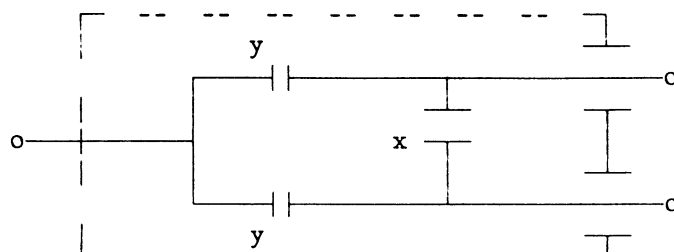


Figure 5b — Delta by-pass capacitor

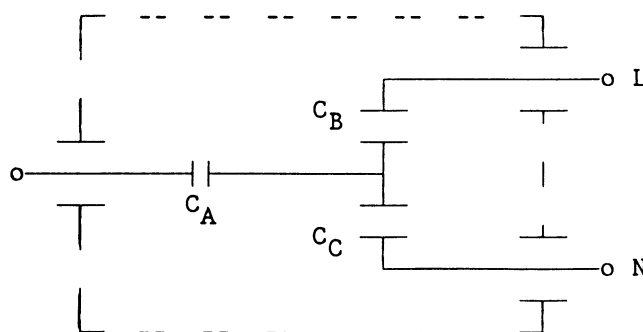


Figure 5c — Example of a T-connected by-pass capacitor

1.5.12**upper category temperature**

the maximum surface temperature for which the capacitor has been designed to operate continuously (see note in 1.5)

NOTE 1 For lead-through capacitors and series RC-units the external surface temperature can be affected by internal heating due to the lead-through current. The terminations of a capacitor are considered to be part of the external surface.

NOTE 2 This definition replaces that in 2.2.14 of EN 130000, because suppression capacitors in accordance with this specification are intended to be connected to the mains network and may have internal heat generation as a result.

1.5.13**lower category temperature**

the minimum surface temperature for which the capacitor has been designed to operate continuously (see note in 1.5)

NOTE This definition replaces that in 2.2.15 of EN 130000 (see note 2 in 1.5.12 above).

1.5.14**rated temperature (of a lead-through capacitor or series RC-unit)**

the maximum ambient temperature at which a lead-through capacitor can carry its rated lead-through current or a series RC-unit dissipate its rated power

NOTE This definition replaces that in 2.2.16 of EN 130000 (see note 2 in 1.5.12 above).

1.5.15 insertion loss

the ratio of the voltage before and after the insertion of the suppressor as measured at the terminations

NOTE When measured in decibels, the insertion loss is 20 times the logarithm to base 10 of the ratio stated.

1.5.16 rated current of the conductors (lead-through capacitor)

the maximum permissible current flowing through the conductors of the capacitor at the rated temperature during continuous operation

1.5.17 main resonant frequency (two-terminal capacitor)

the lowest frequency at which the impedance of the capacitor is a minimum when applying a sinusoidal voltage

1.5.18 impulse voltage

an impulse voltage is an aperiodic transient voltage of a defined waveform as described in IEC 60-1

1.5.19 passive flammability

the ability of a capacitor to burn with a flame as a consequence of the application of an external source of heat

1.5.20 active flammability

the ability of a capacitor to burn with a flame as a consequence of electrical loading

1.6 Marking

See 2.4 of EN 130000 with the following details:

The information given in the marking is normally selected from the following list;

The relative importance of each item is indicated by its position in the list:

- a) manufacturer's name or trademark;
- b) manufacturer's type designation or the type designation given in the detail specification;
- c) capacitor class and sub-class;
- d) recognised approval mark;
- e) rated capacitance(s) and rated resistance (if applicable);
- f) rated voltage and nature of supply (alternating voltage may be indicated by the symbol and direct voltage by the symbol — or $\text{—} \text{—} \text{—}$);
- g) the method of connection, if necessary;
- h) rated current of the conductor (in the case of a lead-through capacitor);
- i) tolerance on rated capacitance if different from $\pm 20\%$;
- j) climatic category, followed by a letter indicating passive flammability category;
- k) rated temperature;
- l) year and month (or week) of manufacture;
- m) reference to the CECC detail specification.

1.6.1 The capacitor shall be clearly marked with a), b) c) and d), and also e) and f) if these are not implied by b), and as many of the remaining items as are considered necessary by the manufacturer. The marking shall be sufficient to enable a clear identification of the component to be made.

Any duplication of information in the marking on the capacitor should be avoided.

1.6.2 The package containing the capacitor(s) shall be clearly marked with all the information listed above. National approvals may be indicated by lettering as an alternative to the approval mark.

1.6.3 Any additional marking shall be so applied that no confusion can arise.

Section 2. Preferred ratings and characteristics

The values given in detail specifications shall preferably be selected from the following:

2.1 Preferred climatic categories

The capacitors covered by this specification are classified into climatic categories according to the general rules given in IEC 68-1.

The lower and upper category temperature and the duration of the damp heat, steady state test shall be chosen from the following:

Lower category temperature: -55°C , -40°C , -25°C and -10°C ;

Upper category temperature: $+85^{\circ}\text{C}$, $+100^{\circ}\text{C}$ and $+125^{\circ}\text{C}$.

Duration of the damp heat, steady state test: 21 and 56 days.

The severities for the cold and dry heat tests are the lower and upper category temperatures respectively.

For guidance on the application of the categories described above, see IEC-940.

2.2 Preferred values of ratings

2.2.1 Rated capacitance (C_R)

The preferred values of rated capacitance are:

1 – 1,5 – 2,2 – 3,3 – 4,7 – 6,8 and their decimal multiples.

These values conform to the E6 series of preferred values given in IEC-63.

2.2.2 Tolerance on rated capacitance

The maximum tolerance on rated capacitance is $\pm 20\%$.

2.2.3 Rated voltage (U_R)

The preferred values or rated voltages are:

115 V, 250 V, 400 V, 500 V and 760 V.

NOTE A star connect can be used for X-capacitors in cases where line-to-line nominal voltages exceed 500 V d.c. or a.c. (r.m.s.).

2.2.4 Rated resistance (R_R)

Preferred values of rated resistance shall be taken from the E6 series of IEC-63.

2.2.5 Rated temperature

The rated temperature for lead-through capacitors and series RC-units shall not be less than $+40^{\circ}\text{C}$.

2.2.6 Passive flammability

The minimum category of passive flammability permitted is category C. See 4.17.

