



BSI Standards Publication

Unfired pressure vessels

Part 6: Requirements for the design and fabrication of pressure vessels and pressure parts constructed from spheroidal graphite cast iron

National foreword

This British Standard is the UK implementation of EN 13445-6:2014+A2:2018. It supersedes BS EN 13445-6:2014+A1:2015, which is withdrawn.

CEN Amendment A2:2018 is included in its entirety at the end of this document.

The UK participation in its preparation was entrusted to Technical Committee PVE/1, Pressure Vessels.

A list of organizations represented on this committee can be obtained on request to its committee manager.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2018
Published by BSI Standards Limited 2018

ISBN 978 0 580 98079 4

ICS 23.020.30

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2014.

Amendments/corrigenda issued since publication

Date	Text affected
30 September 2015	Corrected version issued by CEN, see EN foreword for details
30 September 2016	Corrected version issued by CEN, see EN foreword for details of CEN amendment 1:2015
28 February 2018	Corrected version issued by CEN, see EN foreword for details
31 October 2018	Corrected version issued by CEN, see EN foreword for details
31 July 2020	Inclusion of CEN amendment A2:2018 in its entirety

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 13445-6

September 2014

ICS 23.020.30

Supersedes EN 13445-6:2009

English Version

**Unfired pressure vessels - Part 6: Requirements for the design
and fabrication of pressure vessels and pressure parts
constructed from spheroidal graphite cast iron**

Réceptacles sous pression non soumis à la flamme - Partie 6:
Exigences pour la conception et la fabrication des réceptacles
sous pression et des parties sous pression moulés en fonte
à graphite sphéroïdal

Unbefeuerte Druckbehälter - Teil 6: Anforderungen an die
Konstruktion und Herstellung von Druckbehältern und
Druckbehälterteilen aus Gusseisen mit Kugelgraphit

This European Standard was approved by CEN on 19 August 2014.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

© 2014 CEN All rights of exploitation in any form and by any means reserved
worldwide for CEN national Members.

Ref. No. EN 13445-6:2014 E

Contents

Page

Foreword.....	5
1 Scope	7
2 Normative references	7
3 Terms, definitions, units and symbols	8
3.1 Terms and definitions	8
3.2 Units	9
3.3 Symbols	9
3.4 Inter-relation of thicknesses definitions	11
4 Service conditions	11
4.1 Cyclic loading.....	11
4.2 Limitations on temperature and energy content	12
5 Requirements	12
5.1 Materials	12
5.2 Design	14
5.2.1 Technical documentation	14
5.2.2 Design methods	14
5.3 Founding.....	20
5.3.1 General.....	20
5.3.2 Welding	20
6 Material testing.....	20
6.1 General.....	20
6.2 Frequency and number of tests	20
6.3 Chemical analysis.....	20
6.4 Graphite structure.....	21
6.5 Inspection documents.....	21
7 Testing and final assessment.....	21
7.1 Testing	21
7.1.1 General.....	21
7.1.2 Testing requirements for $C_Q = 0,8$	21
7.1.3 Testing requirements for $C_Q = 0,9$	21
7.1.4 Surface imperfections	22
7.1.5 Cracks, laps, cold shut and non-fused chaplets	23
7.1.6 Ultrasonic testing and/or sectioning	23
7.1.7 Magnetic particle testing (only for ferritic grades).....	23
7.1.8 Penetrant testing.....	23
7.1.9 Radiographic testing	23
7.1.10 Surface roughness	24
7.1.11 Minimum wall thickness.....	24
7.1.12 Wall thickness tolerances	24
7.1.13 Other dimensions	24
7.1.14 Qualification of testing personnel.....	24
7.2 Final assessment.....	24
7.2.1 General.....	24
7.2.2 Hydraulic test pressure	24
8 Pressure vessels constructed of a combination of parts in different materials	25
9 Marking and documentation	25
9.1 Marking of castings	25
9.2 Name plate for the complete pressure vessel	25
9.3 Documentation.....	25

Annex A (normative) Technical data for the design calculations	26
A.1 Purpose	26
A.2 Technical data	26
A.2.1 Ferritic spheroidal graphite cast iron according to EN 1563:1997	26
A.2.2 Austenitic spheroidal graphite cast iron according to EN 13835:2002	27
Annex B (informative) Ductility	28
Annex C (informative) Determination of the minimum local wall thickness and minimum required burst test pressure	29
Annex D (normative) Assessment of fatigue life	30
D.1 Purpose	30
D.2 Specific definitions	30
D.3 Specific symbols and abbreviations	30
D.4 Limitations	31
D.5 General	31
D.6 Simplified fatigue assessment	31
D.6.1 Pseudo-elastic stress range	31
D.6.2 Correction factors	32
D.6.3 Fatigue design curves	32
D.6.4 Allowable number of cycles	38
D.6.5 Allowable stress range $\Delta\sigma$	38
D.7 Detailed fatigue assessment	38
D.7.1 Pseudo-elastic stress ranges	38
D.7.2 Corrections to stress range	39
D.7.3 Fatigue design curves	40
D.7.4 Allowable number of cycles	41
D.7.5 Allowable stress range	42
D.8 Assessment rule for total fatigue damage	42
D.9 Repairs of surface imperfections	42
Annex E (normative) Design by analysis for castings	43
E.1 Introduction	43
E.2 Special requirements to EN 13445-3:2014, Annex B	43
E.2.1 Addition to B.8.2.3: Design checks for normal operating load cases	43
E.2.2 Addition to B.8.2.4: Design checks for testing load cases	43
E.3 Additions to EN 13445-3:2014, Annex C	43
E.4 Requirements	44
Annex F (informative) Recommendations for in-service validation and inspection	45
F.1 Purpose	45
F.2 Tests during operation	45
F.3 Measures to be taken when the calculated allowable fatigue lifetime has been reached	46
F.3.1 General	46
F.3.2 Testing of vessels and pressure parts at end of life without indicated damages	46
F.3.3 Hydraulic testing of vessels and vessel parts with indicated damages	46
Annex G (normative) Specific design requirements	47
G.1 Scope	47
G.2 Design	47
G.2.1 General	47
G.2.2 Cover thickness, pressure to convex side	48
G.2.3 Pressure to concave side	48
G.2.4 Flange thickness	48
Annex H (normative) Experimental cyclic pressure testing procedure	49
H.1 Purpose	49
H.1.1 General	49
H.1.2 Experimental methods and other design methods	49
H.2 Validity	49
H.3 Tests requirements	49
H.3.1 General	49
H.3.2 Number of parts	49
H.3.3 Procedure	32

H.3.4	Material tests	51
H.4	Allowable number of cycles	51
Annex Y (informative)	History of EN 13445-6	53
Y.1	Differences between EN 13445-6:2009 and EN 13445-6:2014	53
Y.2	List of corrected pages of Issue 2 (2015-07)	53
Y.3	List of corrected pages of Issue 3 (2016-07)	53
Y.4	List of corrected pages of Issue 4 (2017-07)	53
Y.5	List of corrected pages of Issue 5 (2018-07)	53
Annex ZA (informative)	Relationship between this European Standard and the essential requirements of Directive 2014/68/EU aimed to be covered	54
Bibliography		55

Foreword

This document (EN 13445-6:2014) has been prepared by Technical Committee CEN/TC 54 “Unfired pressure vessels”, the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2014, and conflicting national standards shall be withdrawn at the latest by December 2014.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative annex ZA, which is an integral part of this document.

This European Standard consists of the following Parts:

- Part 1: *General*
- Part 2: *Materials*
- Part 3: *Design*
- Part 4: *Fabrication*
- Part 5: *Testing and Inspection*
- Part 6: *Requirements for the design and fabrication of pressure vessels and pressure parts constructed from spheroidal graphite cast iron*
- CR 13445-7, *Unfired pressure vessels* — Part 7: *Guidance on the use of conformity assessment procedures*
- Part 8: *Requirements for the design and fabrication of pressure vessels and pressure parts constructed from spheroidal graphite cast iron.*
- CEN/TR 13445-9, *Unfired pressure vessels* — Part 9: *Conformance of EN 13445 series to ISO 16528*
- Part 10: *Additional requirements for pressure vessels of nickel and nickel alloys*

Although these Parts may be obtained separately, it should be recognised that the Parts are inter-dependant. As such the manufacture of unfired pressure vessels requires the application of all the relevant Parts in order for the requirements of the Standard to be satisfactorily fulfilled.

Corrections to the standard interpretations where several options seem possible are conducted through the Migration Help Desk (MHD). Information related to the Help Desk can be found at <http://www.unm.fr/en13445@unm.fr>. A form for submitting questions can be downloaded from the link to the MHD website. After subject experts have agreed an answer, the answer will be communicated to the questioner. Corrected pages will be given specific issue number and issued by CEN according to CEN Rules. Interpretation sheets will be posted on the website of the MHD.

This document supersedes EN 13445-6:2009. This new edition incorporates the Amendments which have been approved previously by CEN members, and the corrected pages up to Issue 5 without any further technical change. Annex Y provides details of significant technical changes between this European Standard and the previous edition.

Amendments to this new edition may be issued from time to time and then used immediately as alternatives to rules contained herein. It is intended to deliver a new Issue of EN 13445:2014 each year, consolidating these Amendments and including other identified corrections. Issue 5 (2018-07) includes the corrected pages listed in Annex Y.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

1 Scope

This European Standard specifies requirements for the design, materials, manufacturing and testing of pressure vessels and pressure vessel parts intended for use with a maximum allowable pressure, PS, equal or less than:

- 100 bar when containing gases or liquids in group 1 or 2
- 1000 bar when containing liquids in group 2 only.

and shell wall thicknesses not exceeding 60 mm, which are constructed of ferritic or austenitic spheroidal graphite cast iron. The thickness limitation of the shell does not apply to thickness of flanges, reinforcements, bosses etc.

NOTE 1 Austenitic spheroidal graphite cast iron grades are principally used for high and low temperature applications and for their corrosion resistance properties.

NOTE 2 The allowable grades of spheroidal graphite cast iron are listed in Tables 5.1-1 and 5.1-2. Service conditions are given in Clause 4.

This European standard, EN 13445-6, does not include lamellar graphite cast iron grades for ferritic and austenitic grades with, with an elongation after fracture equal or less than 15 % which are explicitly excluded. Requirements for the use of cast irons with an elongation after fracture equal or less than 15 % are given in EN 15776.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 287-6:2010, *Qualification test of welders — Fusion Welding — Part 6: Cast iron*

EN 764-2:2012, *Pressure equipment — Part 2: Quantities, symbols and units*

EN 764-5:2002, *Pressure equipment — Part 5: Compliance and inspection documentation of materials*

EN 837-1:1996, *Pressure gauges — Part 1: Bourdon tube pressure gauges — Dimensions, metrology, requirements and testing*

EN 837-3:1996, *Pressure gauges — Part 3: Diaphragm and capsule pressure gauges — Dimensions, metrology, requirements and testing*

EN 1011-8:2004, *Welding — Recommendations for welding of metallic materials — Part 8: Welding of cast irons*

EN 1369:2012, *Founding — Magnetic particle testing*

EN 1370:2011, *Founding — Examination of surface condition*

EN 1371-1:2011, *Founding — Liquid penetrant testing — Part 1: Sand, gravity die and low pressure die castings*

EN 1559-1:2011, *Founding — Technical conditions of delivery — Part 1: General*

EN 1559-3:2011, *Founding — Technical conditions of delivery — Part 3: Additional requirements for iron castings*

EN 1563:2011, *Founding — Spheroidal graphite cast irons*

EN 12680-3:2011, *Founding — Ultrasonic testing — Part 3: Spheroidal graphite cast iron castings.*

EN 12681:2003, *Founding — Radiographic examination*

EN 13445-1:2014, *Unfired pressure vessels — Part 1: General*

EN 13445-3:2014, *Unfired pressure vessels — Part 3: Design*

EN 13445-5:2014, *Unfired pressure vessels — Part 5: Inspection and testing*

EN 13835:2012, *Founding — Austenitic cast irons*

EN ISO 945-1:2008, *Microstructure of cast irons — Part 1: Graphite classification by visual analysis* (ISO 945-1:2008)

EN ISO 8062-1:2007, *Geometrical product specifications (GPS) — Dimensional and geometrical tolerances for moulded parts — Part 1: Vocabulary* (ISO 8062-1:2007)

EN ISO 8062-3:2007, *Geometrical product specifications (GPS) — Dimensional and geometrical tolerances for moulded parts — Part 3: General dimensional and geometrical tolerances and machining allowances for castings* (ISO 8062-3:2007)

EN ISO 15614-3:2008, *Specification and qualification of welding procedures for metallic materials — Welding procedure test — Part 3: Fusion welding of non-alloyed and low-alloyed cast irons* (ISO 15614-3:2008)

3 Terms, definitions, units and symbols

3.1 Terms and definitions

For the purposes of this European Standard, the following terms and definitions apply.

3.1.1

critical zone

highly stressed area where a fracture is expected to occur in a burst test or where surface fatigue cracks are expected to be initiated due to fluctuating pressure loads

Note 1 to entry: Critical zones may occur, for example, by any of the following:

- sudden change in cross section;
- sharp edges;
- sharp radii;
- peak stresses;
- bending stresses;
- stresses due to other than membrane stress;
- changes in curvature.

Note 2 to entry: A critical zone is analysed by any appropriate method, e.g. holographic, interferometric, strain gauge methods, burst test, fatigue testing, FEM analysis etc.

Note 3 to entry: Additionally, thermal gradients and thermal stresses due to different operating wall temperatures need to be considered in defining critical zones.

3.1.2

purchaser

individual or organisation that buys pressure equipment, including assemblies or parts, for its own use or on behalf of the user and/or operator

3.1.3

manufacturer

individual or organisation responsible for the design, fabrication, testing, inspection, installation of pressure equipment and assemblies where relevant

Note 1 to entry: The manufacturer may subcontract one or more of the above mentioned tasks under its responsibility.

Note 2 to entry: In EU member states the manufacturer is responsible for compliance with the Pressure Equipment Directive 97/23/EC. For those manufacturers outside of the EU their authorized representative inside the EU assumes this responsibility.

3.1.4

casting manufacturer

subcontractor that produces the castings used in the manufacture of pressure equipment

3.1.5

testing factor

A reduction factor applied to the nominal design stress to take account of possible manufacturing deficiencies

3.1.6

temperature factor

A reduction factor applied to the 0,2 % proof strength to take account of temperature influence

3.1.7

wall thickness factor

a reduction factor applied to the nominal design stress to take account of reduced mechanical properties

3.1.8

ferritic spheroidal graphite cast iron

cast material, iron and carbon based (carbon being present mainly in the form of spheroidal graphite particles) with a predominantly ferritic matrix

3.1.9

austenitic spheroidal graphite cast iron

cast material with an austenitic matrix which is iron and carbon based and alloyed with nickel and manganese, copper and/or chromium in order to stabilize the austenitic structure at room temperature

3.2 Units

For the purposes of this European Standard, the units given in EN 764-2:2012 apply.


3.3 Symbols

Symbols used in this European Standard are listed in Table 3.3-1.

Table 3.3-1 — Symbols

Symbol	Quantity	Unit
c	Corrosion allowance	mm
e	Required thickness	mm
e_a	Analysis thickness	mm
e_{act}	Actual thickness	mm
e_{min}	Minimum thickness as specified on drawing	mm
E	Modulus of elasticity	MPa
f	Nominal design stress	MPa
F	Fatigue factor related to 99,8 % survival	—
$P_{b,act}$	Actual burst test pressure	MPa ^a
P_b	Minimum required bursting pressure	MPa ^a
P_d	Design pressure	MPa ^a
PS, P_s	Maximum allowable pressure	MPa ^a
PT, P_t	Test pressure	MPa ^a
RM	Material strength parameter	MPa
$R_{p0,2}$	0,2 %-proof strength	MPa
R_m	Tensile strength	MPa
$RM3$	Average material strength from 3 test samples for DBE purposes	MPa
TS_{min}, TS_{max}	Minimum / maximum allowable temperature	°C
T	Calculation temperature	°C
V	Volume	L
C_e	Wall thickness factor	—
C_T	Temperature factor	—
C_Q	Testing factor	—
n	Factor depending on shape of shell	—
f_e	Thickness correction factor	—
f_m	Mean stress correction factor	—
f_s	Surface finish correction factor	—
S	Safety factor	—
γ_R	Partial safety factor	—
δ	Casting tolerance	mm
ε	Extra thickness due to casting process	mm
ν	Poisson's ratio	—
^a MPa for calculation purpose only, otherwise the unit be bar (1 MPa = 10 bar)		

3.4 Inter-relation of thicknesses definitions

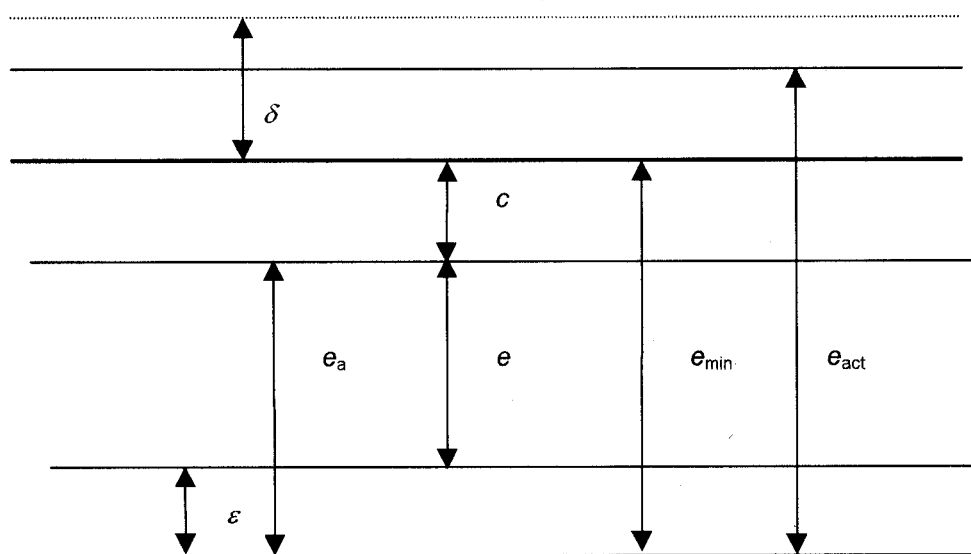

Key

- e is the required thickness
- e_a is the analysis thickness
- e_{min} is the minimum thickness including corrosion allowance as indicated on drawings
- e_{act} is the actual thickness
- c is the corrosion allowance
- ε is the extra thickness due to casting process
- δ is the casting tolerance

Figure 3.4-1 — Inter-relation of thicknesses definitions

4 Service conditions

4.1 Cyclic loading

Spheroidal graphite cast iron pressure vessels and vessel parts can be used for cyclic operation if the stress factor is limited to 3. If the calculated number of cycles is close to a limit number of cycles mentioned in Table 4.1-1 below to determine the need for fatigue analysis, a worst-case model shall be implemented for this determination.

If it is expected that under service conditions the maximum number of full pressure cycles will exceed the limit number according to Table 4.1-1, or exceeds more than the equivalent number of cycles with smaller amplitude, then a fatigue analysis shall be performed according to Annex D.

Table 4.1-1 — Number of full pressure cycles for cyclic loading consideration

Testing factor	Maximum number of full pressure cycles without mandatory fatigue analysis according to Annex D	
$C_Q = 0,9$	1 000	
$C_Q = 0,8$	40 000	if $2,5 < \text{stress factor} \leq 3$
	200 000	If stress factor $\leq 2,5$

NOTE 1 A testing factor of 0,9 implies the application of higher nominal design stresses and consequently results in a lower maximum number of full pressure cycles without mandatory fatigue analysis.

NOTE 2 A stress factor (ratio of peak stress to fatigue stress) of more than 3, determined by any of the design methods given in 5.2 can be the result of inappropriate design. By enlarging radii or other small changes, an acceptable design may be generated.

For pressure cycles at a pressure difference ΔP_i less than the full pressure, the number of equivalent full cycles is given by Equation (4.1-1):

$$n_{eq} = \sum_{i=1}^{i=N} n_i \cdot \left(\frac{\Delta P_i}{P_{max}} \right)^{8,6} \quad (4.1-1)$$

where

N is the total number of envisaged types of pressure cycles with different amplitude;

n_i is the number of cycles of amplitude ΔP_i ;

ΔP_i is the pressure cycle amplitude;

P_{max} is the maximum permissible pressure, as defined in EN 13445-3:2014, 3.15.

4.2 Limitations on temperature and energy content

The minimum and maximum allowable temperatures TS_{min} and TS_{max} shall be in accordance with the limits given in Tables 5.1-1 and 5.1-2.

The product $PS \cdot V$ for a single casting shall not exceed 100 000 bar·L.

5 Requirements

5.1 Materials

All cast iron grades subject to internal or external pressure shall comply with EN 1563 for ferritic spheroidal graphite cast iron and EN 13835 for austenitic spheroidal graphite cast iron.

The material grades listed in Table 5.1-1 and Table 5.1-2 may be produced in the as-cast or heat treated condition (see EN 1563:2012, Clause 6).

The ferritic material grades given in Table 5.1-1 shall be used for applications where the minimum allowable temperature is higher or equal to -10°C .

The material grades listed in Table 5.1-2 are intended for low temperature or high temperature design conditions.

Table 5.1-1 — Allowable material grades for usual design temperatures (-10 °C up to 300 °C)

Material standard	Material designation ^a		Design temperature limits °C
	Symbol	Number	
EN 1563:2012	EN-GJS-350-22-RT	5.3101	-10 ≤ TS ≤ 300
	EN-GJS-350-22	5.3102	-10 ≤ TS ≤ 300
	EN-GJS-400-18-RT	5.3104	-10 ≤ TS ≤ 300
	EN-GJS-400-18	5.3105	-10 ≤ TS ≤ 300
	EN-GJS-450-18	5.3108	-10 ≤ TS ≤ 300

^a When materials specified in these tables are not available, other suitable materials may be used when the technical documentation defining the characteristics of the materials has been accepted in accordance with the requirements for European approval for materials (EAM) or particular material appraisal (PMA).

Table 5.1-2 — Allowable material grades for low or high temperature design conditions

Material standard	Material designation ^a		Design temperature limits °C
	Symbol	Number	
EN 1563:2012	EN-GJS-350-22-LT	5.3100	-40 ≤ TS ≤ 300
	EN-GJS-400-18-LT	5.3103	-20 ≤ TS ≤ 300
EN 13835:2012	EN-GJSA-XNiMn23-4	5.3501	-196 ≤ TS ≤ 300
	EN-GJSA-XNi22	5.3503	-40 ≤ TS ≤ 540
	EN-GJSA-XNiMn13-7	5.3506	-40 ≤ TS ≤ 300

^a When materials specified in these tables are not available, other suitable materials may be used when the technical documentation defining the characteristics of the materials has been accepted in accordance with the requirements for European approval for materials (EAM) or particular material appraisal (PMA).

Material grades EN-GJS-350-22-LT or EN-GJS-350-22U-LT can be used at design temperatures down to $-60\text{ }^{\circ}\text{C}$. When used between $(-40 \pm 2)\text{ }^{\circ}\text{C}$ and $(-60 \pm 2)\text{ }^{\circ}\text{C}$, impact testing at the minimum design temperature shall be:

- mean value from 3 tests 12 J for $e_{act} \leq 60\text{ mm}$;
- 10 J for $60\text{ mm} \leq e_{act} \leq 200\text{ mm}$;
- individual value 9 J for $e_{act} \leq 60\text{ mm}$ and 7 J for $60\text{ mm} \leq e_{act} \leq 200\text{ mm}$.

The applicable requirements for the delivery conditions given in EN 1559-1:2011 and EN 1559-3:2011 shall also apply.

NOTE The use of materials working in the creep domain is not applicable to this standard since stress ranges are limited to elastic behaviour.

5.2 Design

5.2.1 Technical documentation

The manufacturer shall document those items listed in EN 13445-5:2014, Clause 5 prior to fabrication.

5.2.2 Design methods

5.2.2.1 Generality

5.2.2.1.1 Principle

The loadings to be accounted for shall be in accordance with EN 13445-3:2014, Clause 5.

The service conditions of Clause 4 shall be accounted for.

Design methods shall be in accordance with this European Standard and, when applicable, with the relevant clauses of EN 13445-3:2014.

If the geometry of the component or the loading case do not allow calculation by the formulas given in EN 13445-3:2014 and Annex G, design by analysis (DBA) (see Annex E) or design by experiment (DBE) shall be applied.

Depending on the complexity of the component, the loading conditions and the level of NDT testing, the designer may choose one of the following available design methods mentioned below. Guidance is given on the correlation between safety factor, testing factor and the method to assess dynamic loading (see Table 5.2-1).

NOTE 1 Testing factors (0,8 or 0,9) are already accounted for in determining nominal design stress in 5.2.2.2 of this Part 6.

NOTE 2 For non-circular sections (rectangular sections), see EN 13445-3:2014, Clause 15 (see remark about fatigue design and radius requirements in 5.2.2.7).

5.2.2.1.2 Static loading

In order to design the part for static loading, the following options can be considered by the designer.

5.2.2.1.2.1 Design by formula (DBF)

Equations for the calculation of the various components of the pressure part are given in EN 13445-3:2014 and Annex G. Annex G gives additional equations for non-standard shaped parts often used in casting design.

5.2.2.1.2.2 Design by analysis (DBA)

The following applies:

- 1) decide whether the direct route (limit load – EN 13445-3:2014, Annex B) or the stress categorisation method (EN 13445-3:2014, Annex C) will be followed. Decide whether linear or non-linear approach will be used;
- 2) base modelling and interpretation of calculation results shall be based on analysis thicknesses (e_a) and material characteristics at operation temperature;
- 3) for interpretation of calculation results, follow the evaluation procedures and assessment criteria in order to evaluate the fitness for purpose of the real structure. These design checks and related procedures are typical for the failure mode to be dealt with. For the different failure modes see EN 13445-3:2014.

5.2.2.1.2.3 Design by experiment (DBE)

Where design by equations according to EN 13445-3:2014 is not considered appropriate due to complex shape of the component, then a hydraulic burst test to determine the analysis thickness e_a and the minimum thickness $e_{\min}$ shall be performed according to the procedure in 5.2.2.1.6. This test is also a part of the technical documentation.

This design method may be used without additional calculations if $P_d \cdot V < 60\,000 \text{ bar} \cdot \text{L}$.

If $P_d \cdot V > 60\,000 \text{ bar} \cdot \text{L}$ for the complete vessel, this method can be used in addition to DBA or DBF.

The minimum required thickness at a specific location is given by:

$$e_a = e_{act} \cdot \left(\frac{S \cdot PS \cdot RM3}{P_{b,act} \cdot R_{p0,2} \cdot C_Q \cdot C_T \cdot C_e} \right)^{1/n} \quad (5-1)$$

$$e_{\min} \geq e_a + c \quad (5-2)$$

where

e_{act} is the minimum measured wall thickness at the specific location;

$R_{p0,2}$ is in accordance with Annex A;

$P_{b,act}$ is the actual obtained value of burst pressure or the highest pressure during the test;

$n = 1$ for curved surfaces (cylinders, spheres) or cones with angles $\alpha \leq 60^\circ$, stayed surfaces and stressed parts if bending stress is less than 2/3 of the total stress;

$n = 2$ for all other surfaces.

For determining $RM3$ three tensile test specimens shall be performed in accordance with EN 1563:2012 or EN 13835:2012 material standards for each of the required positions taken from the same cast.

The specimen positions shall be in accordance with the specifications in the technical delivery conditions of the product form for materials for pressure equipment. In addition to the requirements of the material standards, the manufacturer and the purchaser may agree on the properties required at stated positions in the casting. These properties shall be determined by testing machined test pieces cut from the casting at these stated positions. The mean value of the three specimens shall be used to determine the ratio of $RM3/R_m$.

Specimens may be taken before the burst test on an identical part or on the same part after burst test. It is not allowed to use scaled-down part of the part under investigation. ¹⁾

The position on the casting from where the sample is cut shall be in an area where the casting wall thickness is close to the relevant wall thickness of the casting. For the purpose of determining the size of the test pieces to be used, the purchaser shall, by the time of acceptance of the order, indicate to the manufacturer which are the important sections. In the absence of any direction by the purchaser, the manufacturer may choose the size of the test piece to be used according to the relevant standard.

No specimen may show a lower value than the minimum value of R_m stated in the respective material standards of the material grade under investigation, taking into account the corresponding thickness.

The preferred test piece diameter is 14 mm, but, for technical reasons and for test pieces machined from castings, it is permitted to use a test piece of different diameter or equivalent diameter.

Retesting shall be carried out if a test is not valid. A test is not valid if there is:

- a faulty mounting of the test piece or defective operation of the test machine;
- a defective test piece because of incorrect pouring or incorrect machining;
- a fracture of the tensile test piece outside the gauge length;
- a casting defect in the test piece, evident after fracture.

In all cases, a new test piece shall be taken from the same sample or a duplicate sample cast at the same time. The result of the retest shall be used.

5.2.2.1.2.4 Determination of the hydraulic burst pressure and maximum allowable pressure for static loading

A random sample from the production of the vessel or vessel part shall be taken for the burst test or to determine the maximum allowable working conditions. The procedure shall be as follows:

1) When taking values after burst testing these may show lower tensile strength properties for some grades and should only be used with caution in exceptional cases (single part or very large part, etc.)

- 1) verify that the part or vessel to be tested is cast according to the specified drawing and any revision thereof. The material used shall be the same type and grade as for the production part;
- 2) verify that the part or vessel is machined to the same dimensions as the production part;
- 3) verify that the material properties meet the requirements of 5.1. For each casting used for the burst test, 3 test pieces for tensile testing, and, if applicable, for impact testing, shall be separately cast and tested. The results and the calculated average tensile strength shall be certified in accordance with 6.5;
- 4) the wall thicknesses of the entire casting shall be measured (at least one measurement per 100 mm x 100 mm). The results shall be marked on the casting at the location of the measurement or on the drawing;
- 5) verify that a calibrated pressure gauge is used; maximum tolerance shall conform to at least class 1 or better according to EN 837-1 and EN 837-3. The scale of the pressure gauge shall be approximately 4/3 of the anticipated burst pressure;
- 6) the pressure shall be increased in a controlled manner until the minimum required burst pressure is obtained:

$$P_b \geq PS \cdot \frac{RM3}{f} \left(\frac{e_{act}}{e_{min} - c} \right)^n \quad (5-3)$$

The pressure shall be increased further in a controlled manner until rupture occurs. Record burst pressure $P_{b,act}$, test date, material specification, details of material, part number, and wall thickness e_{act} measured at burst location. A relation with the actual burst pressure $P_{b,act}$, which can be higher than P_b on account of a better stress distribution, and the maximum allowable pressure PS , can be deducted according to the converted Equation (5-3), replacing P_b by $P_{b,act}$

$$PS \leq P_{b,act} \cdot \frac{f}{RM3} \left(\frac{e_{min} - c}{e_{act}} \right)^n \quad (5-4)$$

- 7) if a part fails to meet any of those requirements, a second identical production part may undergo the same test procedure. If this second part meets the test requirements, this part may be accepted after investigation of the cause of failure of the first part. If the second part does not meet the test requirements, the design of the part shall be deemed not to conform to the specification;
- 8) during the burst test, it is acceptable for leaks and lack of pressure tightness to occur between flanged, gasketed or bolted parts as long as the pressure P_b can be reached during the test. It is acceptable for gasket(s) to break during the burst test; their characteristics may be modified without unduly changing flange load properties as long as their design meets the design rules of EN 13445-3:2014 for the anticipated maximum allowable pressure P_s ;
- 9) only for the test, bolts of higher mechanical strength than required by the design specification may be accepted;

- 10) when flanged connections are designed according to the requirements of EN 13445-3:2014 with respect to minimum required thickness, minimum required bolt area and shape, it is acceptable, in order to reach burst test pressure, to install extra bolts in addition to the number specified for production;
- 11) the rupture under test pressure or any hydraulic test shall not be performed by means of a construction on a hydraulic press that can counteract the free shell bending under pressure.

5.2.2.1.3 Dynamic loading

5.2.2.1.3.1 General

If the number of full pressure cycles or equivalent full pressure cycles according to Equation (4.1-1) exceeds the number of full pressure cycles for static loading considered in Table 4.1-1, a fatigue assessment of the complete design is required. In order to design the part for dynamic loading, the following options can be considered by the designer.

5.2.2.1.3.2 Simplified fatigue assessment (SFA)

A simplified fatigue assessment will return a value of maximum allowable number of equivalent pressure fluctuations under service conditions. The assessment shall be performed according to Annex D. A maximum stress factor of 3 is pre-supposed, unless for construction details as limited in Table D.1A where equal or lower values than 3 may be used.

NOTE This Table D.1A may also be used for other metallic castings than spheroidal graphite cast iron (e.g. cast steel, cast aluminium and so on).

The simplified fatigue assessment may be used for vessels with a testing factor $C_Q=0,8$ or vessels with a testing factor $C_Q=0,9$.

5.2.2.1.3.3 Detailed fatigue assessment (DFA)

A detailed fatigue assessment returns a value of maximum allowable number of equivalent pressure fluctuations using detailed stress analysis in service conditions. The assessment shall be performed according to Annex D.

5.2.2.1.3.4 Experimental fatigue assessment (EFA)

This method, as described in Annex H, shall be used if a theoretical stress analysis is inadequate or for which the design analysis shows abnormal low fatigue life values indicating a too conservative approach by theory.

An evaluation of a part by experimental fatigue design is not required when a similar part underwent already such a fatigue assessment and the data are available and transposable into the new design.

Cyclic loading shall be in accordance with EN 13445-3:2014, 5.3.

This method does not take into account excessive wall thickness of the material, linings and all material, which does not contribute to strength.

NOTE For vessels for which $P_d \cdot V \geq 6\,000 \text{ bar} \cdot \text{L}$ this experimental method may be used in addition to detailed fatigue design.