



BSI Standards Publication

Explosion suppression systems

National foreword

This British Standard is the UK implementation of EN 14373:2021+A1:2025. It supersedes BS EN 14373:2021, which is withdrawn.

The start and finish of text introduced or altered by amendment is indicated in the text by tags. Tags indicating changes to CEN text carry the number of the CEN amendment. For example, text altered by CEN amendment A1 is indicated by A1 A1.

The UK participation in its preparation was entrusted to Technical Committee EXL/23, Explosion and fire precautions in industrial and chemical plant.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

This publication has been prepared under a mandate given to the European Standards Organizations by the European Commission and the European Free Trade Association. It is intended to support requirements of the EU legislation detailed in the European Foreword. A European Annex, usually Annex ZA or ZZ, describes how this publication relates to that EU legislation.

For the Great Britain market (England, Scotland and Wales), if UK Government has designated this publication for conformity with UKCA marking (or similar) legislation, it may contain an additional National Annex. Where such a National Annex exists, it shows the correlation between this publication and the relevant UK legislation. If there is no National Annex of this kind, the relevant Annex ZA or ZZ in the body of the European text will indicate the relationship to UK regulation applicable in Great Britain. References to EU legislation may need to be read in accordance with the UK designation and the applicable UK law. Further information on designated standards can be found at www.bsigroup.com/standardsandregulation.

For the Northern Ireland market, UK law will continue to implement relevant EU law subject to periodic confirmation. Therefore Annex ZA/ZZ in the European text, and references to EU legislation, are still valid for this market.

UK Government is responsible for legislation. For information on legislation and policies relating to that legislation, consult the relevant pages of www.gov.uk.

© The British Standards Institution 2025
Published by BSI Standards Limited 2025

ISBN 978 0 539 26838 6

ICS 13.230

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2021.

Amendments/corrigenda issued since publication

Date	Text affected
28 February 2025	Implementation of CEN amendment A1:2025

English Version

Explosion suppression systems

Systèmes de suppression d'explosion

Explosions-Unterdrückungssysteme

This European Standard was approved by CEN on 27 September 2021 and includes Amendment 1 approved by CEN on 29 December 2024.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents

Page

European foreword	4
1 Scope.....	5
2 Normative references.....	5
3 Terms and definitions	6
4 Symbols and abbreviations (EN 14373)	9
5 Explosion suppression	10
5.1 Design.....	10
5.2 General function.....	10
5.3 Requirements for explosion suppression systems.....	11
6 Environmental aspects	15
6.1 General.....	15
6.2 Suppressant	15
6.3 Actuators and other components.....	15
7 Experimental testing of the efficacy of an explosion suppression system.....	16
7.1 Information to be submitted prior to testing	16
7.1.1 General.....	16
7.1.2 Intended use	16
7.1.3 Information on the parts of the suppression system.....	16
7.1.4 Calculation model	17
7.2 Testing	17
7.2.1 General requirements for test setup	17
7.2.2 Test program for non metallic dusts	17
7.2.3 Test program for metal dust.....	21
7.2.4 Test program for gas.....	21
7.2.5 Test program for hybrid mixtures of non metallic dust and gas.....	22
7.2.6 Test program for mist-air mixtures	22
7.3 Parameters to be measured.....	22
7.4 Test report.....	23
8 Instructions.....	24
8.1 General.....	24
8.2 Installation of cables.....	24
8.3 Assembling.....	25
8.3.1 General.....	25
8.3.2 Process information requirements.....	25
8.4 Commissioning	25
8.4.1 General.....	25
8.4.2 Instructions for hand-over	25
8.4.3 Commissioning report	25
8.5 Safety	26
8.6 Maintenance	26
9 Marking and packaging	26
9.1 General.....	26
9.2 Parts of the explosion suppression system	26
9.3 Explosion suppression system	28

Annex A (informative) Development of an explosion suppression calculation model	29
A.1 General	29
A.2 Extinction.....	29
A.3 Functional tests for model development	30
A.4 Model validation	31
Annex B (informative) Applications.....	32
B.1 General	32
B.2 Hazard definition.....	32
B.3 Typical process equipment.....	33
B.3.1 Spray dryers	33
B.3.1.1 Introduction	33
B.3.1.2 Definition of elements.....	33
B.3.1.3 Dust concentration.....	34
B.3.1.4 Protection concept	35
B.3.1.5 Isolation	35
B.3.1.6 Advanced inerting	35
B.3.1.7 Flame Duration.....	35
B.3.1.8 Interlocking	35
B.3.2 Clean volumes.....	35
B.3.3 Elevators	35
B.3.4 Elongated enclosures	36
B.3.5 Pipes	36
B.3.6 Occupied spaces	36
Annex C (informative) Extrapolation to larger volumes	38
Annex D (informative) Significant changes between this European Standard and EN 14373:2005	42
Annex ZA (informative) Relationship between this European Standard and the essential requirements of EU Directive 2014/34/EU aimed to be covered.....	44
Bibliography	46

European foreword

This document (EN 14373:2021+A1:2025) has been prepared by Technical Committee CEN/TC 305 “Potentially explosive atmospheres - Explosion prevention and protection”, the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2025, and conflicting national standards shall be withdrawn at the latest by August 2025.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes A1 EN 14373:2021 A1.

This document includes Amendment 1 approved by CEN on 29 December 2024.

The start and finish of text introduced or altered by amendment is indicated in the text by tags A1 A1.

The significant changes between this document and EN 14373:2005 are given in Annex D.

This document has been prepared under a standardization request addressed to CEN by the European Commission. The Standing Committee of the EFTA States subsequently approves these requests for its Member States.

For the relationship with EU Legislation, see informative Annex ZA, which is an integral part of this document.

Any feedback and questions on this document should be directed to the users’ national standards body. A complete listing of these bodies can be found on the CEN website.

According to the CEN-CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.

1 Scope

This document describes the basic requirements for the design and application of explosion suppression systems. This document also specifies test methods for evaluating the effectiveness and the scaling up of explosion suppression systems against defined explosions. This document covers:

- general requirements for explosion suppression system parts;
- evaluating the effectiveness of an explosion suppression system;
- evaluating the scale up of an explosion suppression system to larger than tested volumes;
- development and evaluation of design tools for explosion suppression systems;
- installation, operation and maintenance instructions for an explosion suppression system.

This document is applicable only to explosion suppression systems intended for the protection of closed, or essentially closed, enclosures in which an explosion could result as a consequence of ignition of an explosible mixture, e.g. dust-air, gas(vapour)-air, dust-gas(vapour)-air and mist-air.

This document is not applicable for explosions of materials listed below, or for mixtures containing some of those materials:

- unstable materials that are liable to dissociate;
- explosive materials;
- pyrotechnic materials;
- pyrophoric materials.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1127-1:2019, *Explosive atmospheres - Explosion prevention and protection - Part 1: Basic concepts and methodology*

EN 13237:2024, *Potentially explosive atmospheres - Terms and definitions for equipment and protective systems intended for use in potentially explosive atmospheres*

EN 15233:2007, *Methodology for functional safety assessment of protective systems for potentially explosive atmospheres*

EN 15967:2022, *Determination of maximum explosion pressure and the maximum rate of pressure rise of gases and vapours*

EN 14034-1:2004+A1:2011, *Determination of explosion characteristics of dust clouds - Part 1: Determination of the maximum explosion pressure p_{max} of dust clouds*

EN 14034-2:2006+A1:2011, *Determination of explosion characteristics of dust clouds - Part 2: Determination of the maximum rate of explosion pressure rise $(d_p/d_t)_{max}$ of dust clouds*

Ⓐ¹ EN IEC 60079-0:2018,¹ *Explosive atmospheres - Part 0: Equipment - General requirements (IEC 60079-0:2017)* Ⓐ¹

Ⓐ¹ EN IEC 60079-14:2024, *Explosive atmospheres - Part 14: Electrical installation design, selection and installation of equipment, including initial inspection (IEC 60079-14:2024)* Ⓐ¹

Ⓐ¹ EN 60529:1991,² *Degrees of protection provided by enclosures (IP Code) (IEC 60529:1989)* Ⓐ¹

Ⓐ¹ EN ISO 80079-36:2016,³ *Explosive atmospheres - Part 36: Non-electrical equipment for explosive atmospheres - Basic method and requirements (ISO 80079-36:2016)* Ⓐ¹

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 1127-1:2019 and Ⓐ¹ EN 13237:2024 Ⓐ¹ and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

high rate discharge suppressor

HRD-suppressor

vessel with opening mechanism, which upon activation discharges an explosion suppressant at a high rate

3.2

suppressant

substance contained in the HRD-suppressor which, when dispersed into an enclosure to be protected, can arrest and mitigate a developing explosion in that enclosure

3.2.1

powder suppressant

powder with recognised flame extinguishing properties such as products based on monoammonium phosphate, potassium bicarbonate or sodium bicarbonate

3.2.2

liquid suppressant

substance stored as a liquid with recognised flame extinguishing properties such as cold or hot water

3.3

dispersion pressure

p_s

pressure in HRD-suppressor to disperse the suppressant, which is provided by gas, chemical reaction or the application of heat

¹ As impacted by EN IEC 60079-0:2018/AC:2020-02 and EN IEC 60079-0:2018/A11:2024.

² As impacted by EN 60529:1991/A1:2000, EN 60529:1991/A2:2013, EN 60529:1991/AC:2016-12 and EN 60529:1991/A2:2013/AC:2019-02.

³ As impacted by EN ISO 80079-36:2016/AC:2019.

3.4**suppressant charge** M_s

mass of the suppressant contained within the suppressor

3.5**explosion detector**

device that responds to an explosion (e.g. developing pressure and/or radiation) and provides a signal to the control and indicating equipment

Note 1 to entry: See 3.10.

3.6**activation pressure** p_a

pressure at which the control and indicating equipment activates the high rate discharge suppressor(s)

3.7**maximum reduced (suppressed) explosion pressure** $p_{red,max}$

maximum explosion overpressure generated by an explosion of an explosive atmosphere in an enclosure at optimum fuel concentration, after effective explosion venting or explosion suppression

3.8**explosion suppression**

technique limiting and/or avoiding the destructive effect of an explosion by the deployment of suppressant

3.9**explosion suppression system**

arrangement comprising one or more explosion detectors, control and indicating equipment and one or more high rate discharge suppressors aiming at achieving explosion suppression

3.10**control and indicating equipment****CIE**

safety device, which is an electronic system which controls, records and monitors the status of the explosion protection system and initiates the explosion protection devices upon detection

Note 1 to entry: The CIE is intended to activate the explosion protection devices and to initiate alarm systems and process shutdown.

3.11**dispersion nozzle**

device fitted on a HRD-suppressor and designed to distribute the suppressant throughout the enclosure to be protected

3.12**compact enclosure/cubic enclosure**

enclosures having a length (height) to diameter ratio of less than 2

3.13

elongated enclosures

enclosures with a length (height) to diameter ratio of 2 to 10

3.14

pipe

construction with a length (height) to diameter ratio greater than 10

3.15

hazard sector

three-dimensional space for which the explosion suppression system is designed to be active

3.16

lowest observable adverse effect level

LOAEL

lowest concentration of the suppressant at which an adverse toxicological or physiological effect has been observed

3.17

suppression model

mathematical calculation which predicts the course of an explosion, the action of the suppression system and its interaction with the explosion, in order to enable an accurate design of explosion suppression systems

3.18

maximum throw

maximum distance from a suppressor at which the concentration of the expelled suppressant is still sufficiently high to extinguish an explosion flame

3.19

arming

enabling the explosion suppression system for fault free operation

3.20

activation

initiation of the high rate discharge suppressor to discharge

3.21

discharge

opening and consequential emptying of the high rate discharge suppressor

3.22

lock out

mechanical device to prevent discharge of the high rate discharge suppressor

4 Symbols and abbreviations (EN 14373)

CIE	control and indicating equipment
C_p	heat capacity at constant pressure
HRD	high rate discharge
IP	ingress protection
$K_{\max}$	maximum rate of pressure rise to be applied and determined according to EN 14034-2:2006+A1:2011 for a certain dust and dust concentration normalised to a 1 m ³ volume or according to A1 EN 15967:2022 A1 for a certain gas or vapour and gas or vapour concentration normalised to a 1 m ³ volume
$K_{\min}$	minimum rate of pressure rise to be applied and determined according to EN 14034-2:2006+A1:2011 for a certain dust and dust concentration normalised to a 1 m ³ volume or according to A1 EN 15967:2022 A1 for a certain gas or vapour and gas or vapour concentration normalised to a 1 m ³ volume
K_{St}	maximum rate of pressure rise of a dust determined according to EN 14034-2:2006+A1:2011 normalised to a 1 m ³ volume
L/D	length-to-diameter ratio
LEL	lower explosion limit
LOAEL	lowest observable adverse effect level
MIE	minimum ignition energy
MIT	minimum ignition temperature of a dust cloud
MSDS	material safety data sheets
M_s	suppressant charge
p_a	activation pressure
$p_{\max}$	maximum explosion overpressure of a dust determined according to EN 14034-2:2006+A1:2011 or gas or vapour determined according to A1 EN 15967:2022 A2
p_{red}	reduced (suppressed) overpressure
$p_{\text{red,max}}$	maximum reduced (suppressed) explosion pressure
p_s	dispersion pressure
p_t	pressure transducer
S_u	laminar burning velocity
TPED	Transportable Pressure Equipment Directive
PED	Pressure Equipment Directive
V	volume

5 Explosion suppression


5.1 Design

Explosion suppression systems shall be designed to extinguish propagating flames and to reduce the maximum explosion pressure, $p_{\max}$, to a reduced explosion pressure (p_{red}), following an ignition in the protected enclosure. Successful explosion suppression implies that the p_{red} will not exceed the strength of the protected equipment. Explosion suppression systems can be applied to flammable gases, mists, dusts or hybrid mixtures.

See Annex B for examples of applications of explosion suppression systems.

5.2 General function

Explosion suppression is a protective measure for enclosures, where a gas, mist, dust or hybrid mixture explosion is detected and arrested during incipient stages (see Figure 1).

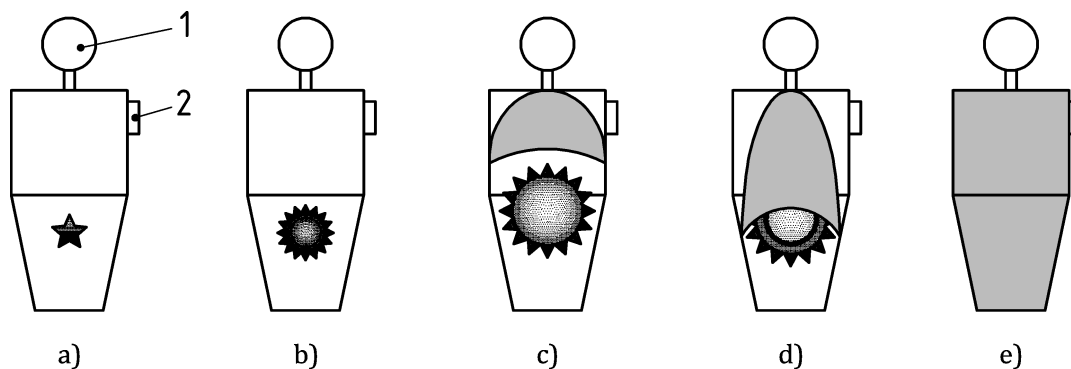

Key

- 1 suppressor
- 2 explosion detector $\boxed{A_1}$ (2) $\langle A_1 \rangle$
- a The explosive atmosphere in an enclosure is ignited. The enclosure is provided with one (or more) explosion detectors $\boxed{A_1}$ (2) $\langle A_1 \rangle$ and one (or more) suppressors (1).
- b The explosion is detected by the explosion detector(s).
- c The control and indicating equipment CIE (not shown) has received the signal from the explosion detector(s) and activated the suppressor(s). The suppressor(s) has (have) started to inject suppressant into the enclosure.
- d The suppressant cloud reaches the explosion flame.
- e The flame is extinguished: the explosion is suppressed.

Figure 1 — Stages in explosion suppression of an enclosure

The performance of an explosion suppression system depends on:

- the response time of the system: time until explosion is detected + response time of the various items + time required to inject sufficient suppressant into the enclosure;
- the suppressant dispersion: spatial distribution, as a function of time;
- the effectiveness of the suppressant.

Explosion suppression measures shall be designed and installed such that their operational effectiveness is assured.

The effectiveness of a suppression system is dependent on many factors also related to the application:

- volume and geometry of the component to be protected;
- reactivity of the combustible dust:
 - $p_{\max}$ maximum explosion pressure,
 - K_{St} explosion rate constant,
- process conditions: airflow and turbulence;
- detection pressure threshold value;
- type and efficiency of explosion suppressors;
- number, and geometric distribution of suppressors;
- propellant pressure.

5.3 Requirements for explosion suppression systems

An explosion suppression system consists of at least one: explosion detector, HRD suppressor, complete with suppressant / dispersion nozzle and connected to control and indicating equipment (CIE).

Essential requirements are:

- the overall requirement of the explosion suppression system is to detect an explosion in the incipient stage and to have a fast response to allow for the dispersion of suppressant and extinguishment of the flame in order to limit the maximum reduced explosion pressure below the admissible pressure of the protected equipment - Experimental validation shall be performed as described in Clause 7;
- the system as installed or any of its parts shall not introduce ignition hazards, such as electrostatic discharge, mechanical friction, electrical sparks, hot surfaces:
 - All electrical and non-electrical equipment and components, as parts of explosion suppression system, intended for use in potentially explosive atmospheres, shall be designed and constructed in conformity with the required categories for group II equipment to ensure avoidance of any ignition sources as detailed in EN 1127-1:2019.
 - Any electrical equipment as a part of an explosion suppression system installed and located in hazardous areas shall conform to the requirements of [\[A1\]](#) EN IEC 60079-14:2024 [\[A1\]](#) through at least EN IEC 60079-0:2018¹ and relevant type(s) of protection.
 - Any non-electrical equipment as a part of an explosion suppression system installed and located in hazardous areas shall conform to the requirements of EN ISO 80079-36:2016³ and relevant type(s) of protection.
- the activation of the suppression system shall not result in dangerous ejected parts;
- the explosion suppression system shall have a defined reliability for safety-functions according to the intended use (see 5.3 h);

- if discharging the suppressant during maintenance or inspection can result in injury, the explosion suppression system shall have safe provisions in place to prevent an unintended suppressor discharge prior to performing such operations;
- the supplier shall provide instructions which ensure safe operation of the explosion suppression system and the system is always armed when explosible atmospheres are present and is disarmed and locked out before access to be inside protected equipment is granted (see 8.5);
- the explosion suppression system shall avoid operation of the protected process by provision of a safe signal interface through the CIE so that operation cannot be started or resumed until the suppression system is armed and fault free;
- relevant parts of the explosion suppression system directly exposed to the explosion shall be capable of withstanding the expected maximum explosion pressure.

NOTE 1 Parts of suppression systems like suppressors, valves, pipe systems and hoses which are exposed to internal pressure under normal operating conditions are expected to comply with, and be handled in accordance with applicable official standards and instructions, the Pressure Equipment Directive (PED) and the Transportable Pressure Equipment Directive (TPED).

Other essential requirements are:

a) explosion detector

An explosion detector shall detect the onset of the explosion in time to allow for achieving successful suppression.

b) CIE

The hardware and software used in the Control and Indication Equipment (CIE) shall ensure explosion suppression system functionality by undertaking the following:

- process detection signals;
- initiate the suppressors;
- initiate interlocks/alarms;
- enable safe disarming;
- enable an automatic and orderly safe-mode of the protected process upon activation, fault/trouble condition.

c) emergency power (e.g. battery)

Emergency power shall be specified and facilitated such that full uninterrupted unchanged explosion protection functionality is ensured for at least 4 h immediately after a mains power failure. For the selection of appropriate batteries, see IEEE 1184:2006.

NOTE 2 4 hours is assumed to be sufficient time to put the protected installation in a safe condition.