

Clamp type coupling assemblies for use with steam hoses rated for pressures up to 18 bar

The European Standard EN 14423:2004 has the status of a British Standard

ICS 23.040.70

National foreword

This British Standard is the official English language version of EN 14423:2004 including Corrigendum May 2006.

The UK participation in its preparation was entrusted to Technical Committee PRI/66, Rubber and plastics tubing, hoses and hose assemblies, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 24, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 July 2006

© BSI 2006

ISBN 0 580 46631 0

Amendments issued since publication

Amd. No.	Date	Comments

English version

Clamp type coupling assemblies for use with steam hoses rated for pressures up to 18 bar

Raccords avec colliers de serrage pour tuyaux à vapeur
utilisant une pression jusqu'à 18 bar

Schlaucharmaturen mit Klemmfassung für Dampf bis 18
bar

This European Standard was approved by CEN on 30 September 2004.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

	page
Foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	5
4 General requirements.....	5
5 Survey on coupling assemblies and their designation	6
6 Hose dimensions	8
7 Design and dimensions	9
8 Bolts and nuts	19
9 Materials	19
10 Marking	21
11 Testing	22
12 Mounting of hose fittings	23
Bibliography	24

Foreword

This document (EN 14423:2004) has been prepared by Technical Committee CEN/TC 218 "Rubber and plastics hoses and hose assemblies", the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2005, and conflicting national standards shall be withdrawn at the latest by May 2005.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

1 Scope

This document specifies the design, materials and dimensions of fittings for clamp type coupling assemblies for use with nominal sizes DN 15 to DN 50 steam and hot water hoses. It covers assemblies up to a maximum working pressure of 18 bar (corresponding to a saturated steam temperature of 210 °C).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 288-1, *Specification and qualification of welding procedures for metallic materials — Part 1: General rules for fusion welding*

EN 1092-1, *Flanges and their joints — Circular flanges for pipes, valves, fittings and accessories, PN designated — Part 1: Steel flanges*

EN 1982, *Copper and copper alloys — Ingots and castings*

EN 10025, *Hot rolled products of non-alloy structural steels — Technical delivery conditions*

EN 10088-1, *Stainless steels — Part 1: List of stainless steels*

EN 10088-2, *Stainless steels — Part 2: Technical delivery conditions for sheet/plate and strip for general purposes*

EN 10204, *Metallic products — Types of inspection documents*

EN 10213-4, *Technical delivery conditions for steel castings for pressure purposes — Part 4: Austenitic and austenitic-ferritic steel grades*

EN 10226-1, *Pipe threads where pressure tight joints are made on the threads — Part 1: Taper external threads and parallel internal threads — Dimensions, tolerances and designation*

EN 10283, *Corrosion resistant steel castings*

EN 12420, *Copper and copper alloys — Forgings*

EN 20898-2, *Mechanical properties of fasteners — Nuts with specified proof load values — Coarse thread (ISO 898-2:1992)*

EN ISO 898-1, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 1: Bolts, screws and studs (ISO 898-1:1999)*

EN ISO 4042, *Fasteners — Electroplated coatings (ISO 4042:1999)*

EN ISO 228-1:2003, *Pipe threads where pressure tight joints are not made on the threads — Part 1: Dimensions, tolerances and designation (ISO 228-1:2000)*

EN ISO 3506-1, *Mechanical properties of corrosion-resistant stainless-steel fasteners — Part 1: Bolts, screws and studs (ISO 3506-1:1997)*

EN ISO 3506-2, *Mechanical properties of corrosion-resistant stainless-steel fasteners — Part 2: Nuts (ISO 3506-2:1997)*

EN ISO 4032, *Hexagon nuts, style 1 — Product grades A and B (ISO 4032:1999)*

EN ISO 4762, *Hexagon socket head cap screws (ISO 4762:2004)*

EN 22768-1:1989, *General tolerances - Part 1: Tolerances for linear and angular dimensions without individual tolerance indications (ISO 2768-1:1989)*

EN 22768-2:1989, *General tolerances - Part 2: Geometrical tolerances for features without individual tolerance indications (ISO 2768-2:1989)*

ISO 2859-1:1999, *Sampling procedures for inspection by attributes — Part 1: Sampling schemes indexed by acceptable quality limit (AQL) for lot-by-lot inspection*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

DN

see EN ISO 6708

3.2

s

width across flats

3.3

r_a

see EN ISO 4287

4 General requirements


Coupling assemblies in compliance with this document shall only be used with hoses rated for the service pressures and temperatures specified in Clause 1.

When coupling assemblies, consisting of tail end fittings and clamps of the dimensions given in Table 8, as well as bolts and nuts as specified in Table 9, which have been put together appropriately, are tested in accordance with Clause 11, the hose shall burst before the coupling is dismantled or begins to leak. The bolts shall be adjustable so that the hose is prevented from slipping.

Proof pressure 90 bar, burst pressure 180 bar at ambient temperature.

5 Survey on coupling assemblies and their designation

5.1 Survey

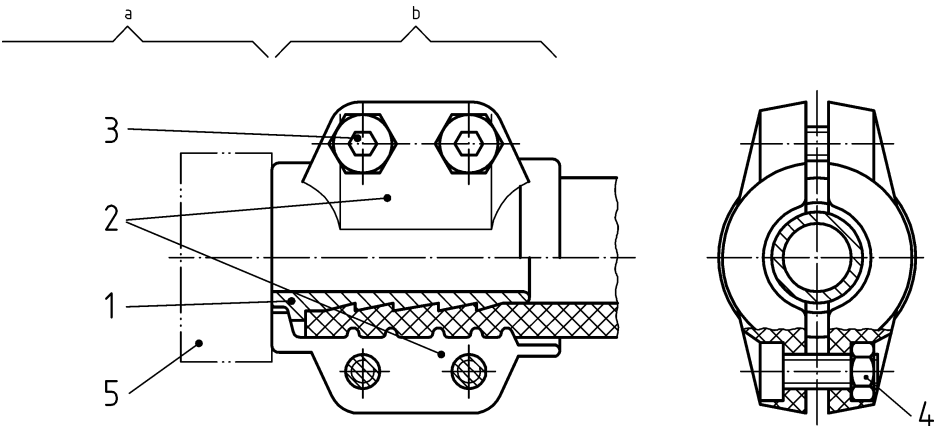

Key
a Connector end
b Tail end
For 1 to 5 see Table 1





Figure 1 — Coupling assembly

Table 1 — Coupling assembly components

Item number	Number	Denomination
1	1	Tail end fitting
2	2	Clamp
3	4	Hexagon socket head cap screw
4	4	Hexagon nut
5	1	Connector

A distinction is made between the connector end and the tail end of coupling assemblies. The former is the part by which the coupling is connected to an appliance or pipe (for various types of connectors, see Table 2), while the latter (including the tail end fitting and clamp) is fastened to a hose (see 7.2 and 7.4).

Table 2 — Connectors, survey

Illustration	Type	Description	DN	Thread size	l_1 ≈ mm	Details
	FL	PN 40 loose flange with weld-neck collar as in EN 1092-1	15 20 25 (32) 40 50		110 115 115 125 140 155	See 7.3.1
	FV	PN 40 weld-neck flange as in EN 1092-1				See 7.3.2
	G	Union nut with gasket, with parallel thread according to EN ISO 228 ^a	15 20 25 (32) 40 50	G 1/2 G 3/4 G 1 G 1 1/4 G 1 1/2 G 2	80 80 80 90 105 115	See 7.3.4
	GA	Tapered male thread with external thread according to EN 10226-1 ^a	15 20 25 (32) 40 50	R 1/2 R 3/4 R 1 R 1 1/4 R 1 1/2 R 2	95 95 100 110 125 140	See 7.3.5

^a Other threads may be agreed between the purchaser and manufacturer.