

Child care articles — Safety barriers — Safety requirements and test methods

The European Standard EN 1930:2000, with the incorporation of amendment A1:2005, has the status of a British Standard

ICS 97.190

National foreword

This British Standard is the official English language version of EN 1930:2000, incorporating amendment A1:2005. It supersedes BS 4125:1991 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee CW/41, Child use and care articles.

A list of organizations represented on this committee can be obtained on request to its secretary.

The start and finish of text introduced or altered by amendment is indicated in the text by tags **A1** **A1**. Tags indicating changes to CEN text carry the number of the amendment. For example, text altered by CEN amendment A1 is indicated in the text by **A1** **A1**.

UK Technical Committee CW/41 note that Amendment 1 of EN 1930 had some text omitted from the requirement for Footholds (6.9.1). The requirement should have included a height restriction on footholds and it was agreed that the requirement should be amended by inserting the missing text as follows:

“There shall be a band of 650 mm high, extending across the full width of the safety barrier within which there shall be no footholds on rigid components when tested in accordance with 6.9.4”

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

The BSI copyright notice displayed in this document indicates when the document was last issued.

This British Standard, having been prepared under the direction of the Consumer Products and Services Sector Committee, was published under the authority of the Standards Committee and comes into effect on 15 October 2000

© BSI 2006

ISBN 0 580 35131 9

Amendments issued since publication

Amd. No.	Date	Comments
16508	29 September 2006	See national foreword.

ICS 97.190

English version

Child care articles - Safety barriers - Safety requirements and test methods

Articles de puériculture - Barrières de sécurité - Exigences de sécurité et méthodes d'essai

Artikel für Säuglinge und Kleinkinder - Kinderschutzgitter - Sicherheitstechnische Anforderungen und Prüfverfahren

This European Standard was approved by CEN on 21 August 1999.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Contents

	Page
Foreword	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	4
4 General test conditions	4
4.1 Tolerances	4
4.2 Conditioning	5
4.3 Assembly	5
4.4 Setting up for testing in test frame	5
4.5 Cleaning and washing	6
5 Materials	6
5.1 Wood	6
5.2 Chemical properties	6
5.3 Flammability of textiles, coated textiles, supports and plastic coverings	6
6 Construction	6
6.1 Use of a tool	6
6.2 Connecting screws	7
6.3 Staples	7
6.4 Toys	7
6.5 Small parts	7
6.6 Structural integrity	8
6.7 Edges, projections and corners	8
6.8 Height	9
6.9 Footholds	9
6.10 Distance between adjacent members of the safety barrier and distances between the safety barrier and the opening	13
6.11 Holes, gaps and openings	14
6.12 Height from the floor	15
6.13 Horizontal alignment	15
6.14 Mesh strength	15
6.15 Out of alignment	15
6.16 Snagging and protruding parts	16
6.17 Locking mechanisms	19
6.18 Effectiveness of the fixing and locking mechanism and opening systems	19
6.19 Impact	21
7 Packaging	23
8 Marking	24
8.1 Marking of the product	24
8.2 Durability of the marking	24
9 Purchase information	24
10 Instruction for use	25

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 252 "Child use and care articles", the Secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2001, and conflicting national standards shall be withdrawn at the latest February 2001.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Foreword to amendment A1

This European Standard (EN 1930:2000/A1:2005) has been prepared by Technical Committee CEN/TC 252 "Child use and care articles", the secretariat of which is held by AFNOR.

This Amendment to the European Standard EN 1930:2005 shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2006, and conflicting national standards shall be withdrawn at the latest by April 2006.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

1 Scope

This European Standard specifies the safety requirements and test methods for child safety barriers for domestic use which are designed to be fitted across openings which limits the child's access within the home to prevent young children up to 24 months of age passing through, but which can be removed or opened by older persons able to operate the locking mechanism.

This European Standard does not apply to devices designed to be fitted across windows and the like.

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

EN 71-1:1998, *Safety of toys - Part 1: Mechanical and physical properties.*

EN 71-2:1994, *Safety of toys - Part 2: Flammability.*

EN 71-3:1995, *Safety of toys - Part 3: Migration of certain elements.*

3 Terms and definitions

For the purposes of this standard, the following definitions apply:

3.1

safety barrier

device which limits the child's access within the home

3.2

removable component

any component(s) which may be detached from the safety barrier without the use of a tool

3.3

opening system

means of allowing passage through the opening, which may be achieved by:

- a) removing the whole barrier from the opening;
- b) means of opening the barrier or a section of it.

3.4

hinged section

device which allows the barrier to be opened without removing the fixed element of the safety barrier

4 General test conditions

4.1 Tolerances

Unless otherwise stated all test equipment shall have an accuracy as follows:

- forces: ± 5 %;
- masses: $\pm 0,5$ %;
- dimensions: $\pm 0,5$ mm;
- time: ± 1 s.

4.2 Conditioning

Before any of the tests are commenced, the item shall be old enough to ensure that it has developed its full strength. At least four weeks in normal indoor conditions shall have elapsed between manufacture and testing in the case of glued joints and the like.

The tests shall be carried out in indoor ambient conditions with a temperature of $(23 \pm 1) ^\circ\text{C}$ and a relative humidity of $(50 \pm 5) \%$.

4.3 Assembly

The safety barrier shall be tested as delivered.

If of knock-down type, it shall be assembled according to the instructions supplied with the safety barrier. If the safety barrier can be assembled or combined in different ways, the most onerous combination shall be used for testing.


4.4 Setting up for testing in test frame

Before commencement of all tests, set up the safety barrier in accordance with manufacturer's instructions, including any extensions, in a rigid test frame opening to the maximum width for which the safety barrier is recommended. The test frame shall be rigid, to avoid variations due to absorption of energy by the frame itself.

4.4.1 Test frame

A steel frame with attachable planed beech pads as shown in Figure 1 which shall have a coefficient of $\mu = 0,25$ to $0,35$.

Dimensions in millimetres

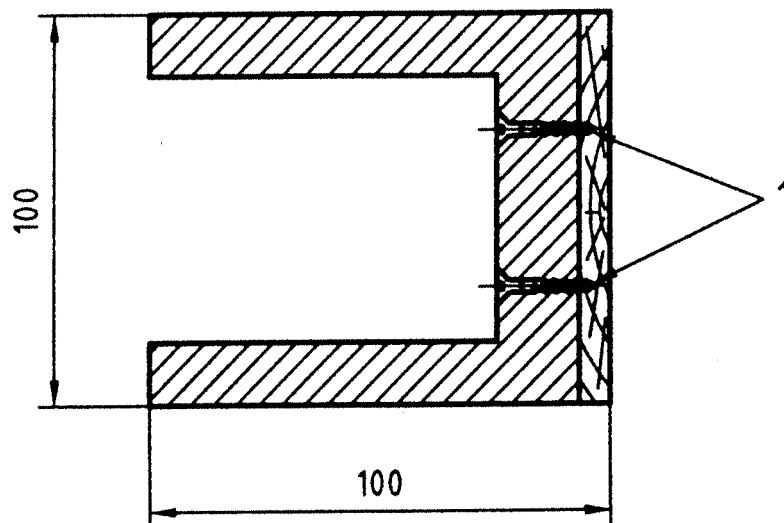

Key

1 Screws for attachment

Figure 1 — Test frame

Where appropriate tighten the locking mechanism designed for locking the safety barrier into place by the application of a force of $50\text{ N} \pm 2\text{ N}$ applied tangentially to the hand grip point of the device.

All requirements in this standard shall apply to both sides of the barrier.

4.5 Cleaning and washing

Before testing, any fabrics used shall be cleaned or washed and dried twice in accordance with the manufacturer's instructions. Removable fabrics shall be capable of being refitted for cleaning or washing/drying.

5 Materials

5.1 Wood

Wood and wood based materials shall be free from decay and insect attack.

5.2 Chemical properties

Plastics, any coating of paint, varnish, lacquer or similar substance, parts consisting of dyed materials integral with the structure and parts consisting of dyed textiles which may come into contact with the child's mouth shall which in their soluble compound state have a metal content not exceeding the following amount:

- antimony: 60 mg/kg;
- arsenic: 25 mg/kg;
- barium: 1 000 mg/kg;
- cadmium: 75 mg/kg;
- chromium: 60 mg/kg;
- lead: 90 mg/kg;
- mercury: 60 mg/kg;
- selenium: 500 mg/kg.

Where a surface is coated with a multi layer paint or similar coating, the sample shall be taken down to the substrate.

The test procedure is defined in EN 71-3:1994.

5.3 Flammability of textiles, coated textiles, supports and plastic coverings

The flame propagation speed shall not exceed 30 mm/s when tested in accordance with 6.3 of EN 71-2:1994.

If the textile area is less than 5 % of the total barrier area, this requirement shall not apply.

6 Construction

6.1 Use of a tool

It shall be possible to remove a non-opening safety barrier without the use of a key or tool.

6.2 Connecting screws

Connecting screws for direct fastening, e.g. self tapping screws, shall not be used for the assembly of any components that are designed to be removed or loosened when dismantling the safety barrier.

6.3 Staples

All staples shall be loaded in shear and not proud of the surface.

6.4 Toys

Safety barriers shall not contain any features that could be used as a child's plaything/toy.

6.5 Small parts

6.5.1 Requirements

Any small component not intended to be detachable which becomes detached during the test defined in 6.5.2 shall not fit wholly within the small parts cylinder specified in EN 71-1:1998.

Any component intended to be removable shall not fit wholly within the small parts cylinder as specified in EN 71-1.

6.5.2 Test method

6.5.2.1 Apparatus

Means of applying forces up to at least 90N with an accuracy of ± 2 N, e. g. a spring balance or a dead weight arrangement.

Feeler gauge with thickness of $(0,4 \pm 0,02)$ mm, with the end to be inserted having a radius of approximately 3 mm.

6.5.2.2 Tension test

Establish if the component to be tested is grippable by inserting the feeler gauge between the component and the underlaying layer or body of the item at an angle between 0° and 10° from the surface. If the gauge can be inserted more than 2 mm the component is to be judged as grippable.

If the component is grippable, affix a suitable clamp behind the component taking care not to damage the attachment mechanism or body of the item.

Apply a tensile force to the component to be tested through a clamp or by other suitable means.

Apply a force of:

- 50 N when the largest accessible dimension is less than or equal to 6 mm;
- 90 N when the largest accessible dimension is greater than 6 mm.

Apply the force gradually over 5 s and maintain for 10 s.

Examine whether the component has become detached.