

Information technology — Computer graphics — Metafile for the storage and transfer of picture description information

Part 1. Functional specification (ISO/IEC 8632-1 : 1992)

The European Standard EN 28632-1 : 1994 has the status of a
British Standard

ICS 35.140

National foreword

This British Standard reproduces verbatim EN 28632-1 : 1994 and implements it as the UK national standard. It is a revision of EN 28632-1 : 1992 and supersedes BS 6945 : Part 1 : 1988 (renumbered as BS EN 28632-1 : 1992), which is withdrawn.

This British Standard is published under the direction of the Information Systems Technology Standards Policy Committee whose Technical Committee IST/31 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE. International and European Standards, as well as overseas standards, are available from Customer Services, BSI, 389 Chiswick High Road, London W4 4AL.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

The following table identifies the current issue of each page. Issue 1 indicates that a page has been introduced for the first time by amendment. Subsequent issue numbers indicate an updated page. Vertical sidelining on replacement pages indicates the most recent changes (amendment, addition, deletion).

Page	Issue	Page	Issue
Front cover	2	88	original
Inside front cover	2	89	2
a	1	90	2
b	blank	91 to 101	original
EN title page	2	102 to 112	2
iib	2	112a	1
ISO title page	original	112b	1
ii	2	113	original
iii	2	114	original
iv	2	115	original
v	original	116	2
vi	2	117 to 125	original
vii	2	126	2
viii	1	126a	1
viii	blank	126b	blank
ix	2	127 to 141	original
x	2	142	2
xi	original	143	2
xii	original	144	2
xiii	original	145	2
xiv	2	146	original
1	blank	147	original
2	2	148	original
3 to 8	2	149	original
9	original	150	2
10	2	151	2
11	2	152	original
12	2	153	original
13	original	154	2
14	original	155 to 163	original
15	2	164	2
16 to 20	2	165	2
21	original	166 to 190	original
22	2	191	2
23	original	192 to 203	original
24	original	204	2
25	2	205	original
26 to 33	2	206 to 225	original
34	original	226	2
35	2	227	original
36 to 58	2	228	original
59	original	229	original
60	2	230	original
61	original	231	original
62 to 75	2	232	2
76	original	233 to 315	original
77	2	316	2
78 to 86	2	317 to 332	original
87	original	333 to 490	1
	2	Inside back cover	blank
		Back cover	2

Descriptors: Data processing, graphic data processing, information interchange, data handling, data transfer, data representation, description, files

English version

Information technology — Computer graphics — Metafile for the storage and transfer of picture description information

Part 1: Functional specification

(includes amendment A1 : Rules for Profiles and amendment A2 : Application structuring extensions)
(ISO/IEC 8632-1 : 1992 + A1 : 1994, A2 : 1995)

Technologies de l'information — Infographie —
Métafichier de stockage et de transfert des
informations de description d'images —
Partie 1: Description fonctionnelle
(inclut l'amendement A1 : Règles pour profils et
l'amendement A2 : Extensions de structure
d'application)
(ISO/IEC 8632-1 : 1992 + A1 : 1994, A2 : 1995)

Informationstechnik — Graphische
Datenverarbeitung Datei für die Speicherung und
Übertragung von Bildinformationen —
Teil 1 : Funktionsbeschreibung
(enthält Änderung A1 : Regeln für Profile und
Änderung A2 : Erweiterung für strukturierte
Anwendungen)
(ISO/IEC 8632-1 : 1992 + A1 : 1994, A2 : 1995)

This European Standard was approved by CEN on 1994-01-14, amendment A1 was approved by CEN on 1995-11-30 and amendment A2 was approved by CEN on 1996-05-01. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart 36, B-1050 Brussels

Foreword

On the proposal of the CEN Central Secretariat, the Technical Board decided to submit the International Standard:

Information technology — Computer graphics — Metafile for the storage and transfer of picture description information — Part 1: Functional specification (ISO/IEC 8632-1 : 1992) to the formal vote.

The result of the formal vote was positive.

For the time being, this document exists only in English and French.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by July 1994, and conflicting national standards shall be withdrawn at the latest by July 1994.

In accordance with the CEN/CENELEC Internal Regulations, the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Foreword to amendment A1

The text of the Amendment ISO 8632-1 : 1992/A1 : 1994 to the International Standard from ISO/IEC/JTC 1, Information Technology, of the International Organization for Standardization (ISO) and the International Electrotechnical Commission (IEC) has been taken over as Amendment to the European Standard by CEN Technical Board.

This Amendment to the European Standard EN 28632-1 : 1994 shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 1996, and conflicting national standards shall be withdrawn at the latest by June 1996.

Foreword to amendment A2

The text of this Amendment EN ISO/IEC 8632-1 : 1994/A2 : 1996 to the EN ISO/IEC 8632-1 : 1994 from Technical Committee ISO/IEC/JTC 1, Information Technology, of the International Organization for Standardization (ISO) and the International Electrotechnical Commission (IEC) has been taken over as an Amendment to the European Standard by Technical Board of CEN.

This Amendment to the European Standard EN ISO/IEC 8632-1 : 1994 shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 1996, and conflicting national standards shall be withdrawn at the latest by November 1996.

INTERNATIONAL STANDARD

ISO/IEC
8632-1

Second edition
1992-10-01

Information technology — Computer graphics — Metafile for the storage and transfer of picture description information —

Part 1: Functional specification

*Technologies de l'information — Infographie — Métafichier de stockage
et de transfert des informations de description d'images —*

Partie 1: Description fonctionnelle



Reference number
ISO/IEC 8632-1:1992(E)



Documents

Document Sharing Hub

CONTENTS

1	Scope	1
2	Normative references	2
3	Definitions and abbreviations	4
3.1	Definitions	4
3.2	Abbreviations	9
4	Concepts	10
4.1	Introduction	10
4.2	Delimiter elements	10
4.3	Metafile descriptor elements	11
4.3.1	Identification	12
4.3.2	Functional capability	12
4.3.3	Default metafile state	16
4.3.4	Fonts and character sets	16
4.3.5	Picture directory	21
4.4	Picture descriptor elements	21
4.4.1	Scaling mode	21
4.4.2	Colour selection mode	21
4.4.3	Specification modes	21
4.4.4	VDC extent	22
4.4.5	CGM tailoring	22
4.4.6	Background colour	24
4.4.7	Device viewport control	24
4.4.8	Representations	25
4.4.9	Definable attributes	25
4.5	Control elements	25
4.5.1	VDC space and range	25
4.5.2	Clipping	25
4.5.3	Save and restore primitive context	27
4.5.4	Compound clipping and shielding	27
4.5.5	Generalized text path	30
4.5.6	Mitre limit	30
4.5.7	Transparent cell colour	30
4.5.8	Application structure directory	
4.6	Graphical primitive elements	31
4.6.1	Line elements	33
4.6.2	Marker element	35
4.6.3	Text elements	36
4.6.4	Filled-area elements	36
4.6.5	Cell elements	38

4.6.6	Circular arc elements	41
4.6.7	Elliptical elements	41
4.6.8	Hyperbolic Arc Element	42
4.6.9	Parabolic arc element	42
4.6.10	Spline curve elements	46
4.6.11	Closed figures	48
4.6.12	Symbol elements	54
4.7	Attribute elements	55
4.7.1	Line attributes	58
4.7.2	Marker attributes	59
4.7.3	Text attributes	61
4.7.4	Filled-area attributes	85
4.7.5	Specification modes and transformation of aspects	87
4.7.6	Colour attributes	88
4.7.7	Pick identifier	90
4.7.8	Compound text path	90
4.7.9	Symbol Attributes	91
4.8	Escape elements	93
4.9	External elements	93
4.10	Segment elements	93
4.10.1	Introduction	93
4.10.2	Local and global segments	94
4.10.3	Delimiting and naming segments	95
4.10.4	Segment attributes	95
4.10.5	Copy segment and inheritance	96
4.11	Metafile states	101
4.12	Registration	112
4.13	Application Structures	112
4.13.1	Introduction	112
4.13.2	Location of and access to Application Structures	112a
4.13.3	Nesting of Application Structures	112a
4.13.4	Graphical Context of Application Structures	112a
4.13.5	Application Structure Attributes	112a
5	Abstract specification of elements	115
5.1	Introduction	115
5.2	Delimiter elements	119
5.2.1	BEGIN METAFILE	119
5.2.2	END METAFILE	119
5.2.3	BEGIN PICTURE	119
5.2.4	BEGIN PICTURE BODY	120
5.2.5	END PICTURE	121
5.2.6	BEGIN SEGMENT	121
5.2.7	END SEGMENT	121
5.2.8	BEGIN FIGURE	122
5.2.9	END FIGURE	122
5.2.10	BEGIN PROTECTION REGION	122
5.2.11	END PROTECTION REGION	123
5.2.12	BEGIN COMPOUND LINE	123
5.2.13	END COMPOUND LINE	123
5.2.14	BEGIN COMPOUND TEXT PATH	124
5.2.15	END COMPOUND TEXT PATH	124
5.2.16	BEGIN TILE ARRAY	124
5.2.17	END TILE ARRAY	125
5.2.18	BEGIN APPLICATION STRUCTURE	126
5.2.19	BEGIN APPLICATION STRUCTURE BODY	126

	5.2.20	END APPLICATION STRUCTURE	126a
5.3		Metafile descriptor elements	127
	5.3.1	METAFILE VERSION	127
	5.3.2	METAFILE DESCRIPTION	127
	5.3.3	VDC TYPE	127
	5.3.4	INTEGER PRECISION	128
	5.3.5	REAL PRECISION	128
	5.3.6	INDEX PRECISION	128
	5.3.7	COLOUR PRECISION	128
	5.3.8	COLOUR INDEX PRECISION	129
	5.3.9	MAXIMUM COLOUR INDEX	129
	5.3.10	COLOUR VALUE EXTENT	129
	5.3.11	METAFILE ELEMENT LIST	130
	5.3.12	METAFILE DEFAULTS REPLACEMENT	131
	5.3.13	FONT LIST	132
	5.3.14	CHARACTER SET LIST	132
	5.3.15	CHARACTER CODING ANNOUNCER	133
	5.3.16	NAME PRECISION	134
	5.3.17	MAXIMUM VDC EXTENT	134
	5.3.18	SEGMENT PRIORITY EXTENT	134
	5.3.19	COLOUR MODEL	135
	5.3.20	COLOUR CALIBRATION	135
	5.3.21	FONT PROPERTIES	137
	5.3.22	GLYPH MAPPING	141
	5.3.23	SYMBOL LIBRARY LIST	142
	5.3.24	PICTURE DIRECTORY	142
5.4		Picture descriptor elements	143
	5.4.1	SCALING MODE	143
	5.4.2	COLOUR SELECTION MODE	143
	5.4.3	LINE WIDTH SPECIFICATION MODE	144
	5.4.4	MARKER SIZE SPECIFICATION MODE	144
	5.4.5	EDGE WIDTH SPECIFICATION MODE	145
	5.4.6	VDC EXTENT	145
	5.4.7	BACKGROUND COLOUR	146
	5.4.8	DEVICE VIEWPORT	146
	5.4.9	DEVICE VIEWPORT SPECIFICATION MODE	147
	5.4.10	DEVICE VIEWPORT MAPPING	147
	5.4.11	LINE REPRESENTATION	148
	5.4.12	MARKER REPRESENTATION	148
	5.4.13	TEXT REPRESENTATION	149
	5.4.14	FILL REPRESENTATION	150
	5.4.15	EDGE REPRESENTATION	150
	5.4.16	INTERIOR STYLE SPECIFICATION MODE	151
	5.4.17	LINE AND EDGE TYPE DEFINITION	151
	5.4.18	HATCH STYLE DEFINITION	152
	5.4.19	GEOMETRIC PATTERN DEFINITION	153
	5.4.20	APPLICATION STRUCTURE DIRECTORY	154
5.5		Control elements	155
	5.5.1	VDC INTEGER PRECISION	155
	5.5.2	VDC REAL PRECISION	155
	5.5.3	AUXILIARY COLOUR	155
	5.5.4	TRANSPARENCY	156
	5.5.5	CLIP RECTANGLE	157
	5.5.6	CLIP INDICATOR	157
	5.5.7	LINE CLIPPING MODE	157
	5.5.8	MARKER CLIPPING MODE	158

5.5.9	EDGE CLIPPING MODE	158
5.5.10	NEW REGION	158
5.5.11	SAVE PRIMITIVE CONTEXT	159
5.5.12	RESTORE PRIMITIVE CONTEXT	160
5.5.13	PROTECTION REGION INDICATOR	160
5.5.14	GENERALIZED TEXT PATH MODE	161
5.5.15	MITRE LIMIT	161
5.5.16	TRANSPARENT CELL COLOUR	161
5.6	Graphical primitive elements	163
5.6.1	POLYLINE	163
5.6.2	DISJOINT POLYLINE	163
5.6.3	POLYMARKER	163
5.6.4	TEXT	164
5.6.5	RESTRICTED TEXT	165
5.6.6	APPEND TEXT	166
5.6.7	POLYGON	167
5.6.8	POLYGON SET	168
5.6.9	CELL ARRAY	171
5.6.10	GENERALIZED DRAWING PRIMITIVE (GDP)	173
5.6.11	RECTANGLE	173
5.6.12	CIRCLE	174
5.6.13	CIRCULAR ARC 3 POINT	174
5.6.14	CIRCULAR ARC 3 POINT CLOSE	175
5.6.15	CIRCULAR ARC CENTRE	177
5.6.16	CIRCULAR ARC CENTRE CLOSE	177
5.6.17	ELLIPSE	178
5.6.18	ELLIPTICAL ARC	179
5.6.19	ELLIPTICAL ARC CLOSE	180
5.6.20	CIRCULAR ARC CENTRE REVERSED	181
5.6.21	CONNECTING EDGE	181
5.6.22	HYPERBOLIC ARC	182
5.6.23	PARABOLIC ARC	182
5.6.24	NON-UNIFORM B-SPLINE	183
5.6.25	NON-UNIFORM RATIONAL B-SPLINE	183
5.6.26	POLYBEZIER	184
5.6.27	POLYSYMBOL	185
5.6.28	BITONAL TILE	185
5.6.29	TILE	187
5.7	Attribute elements	190
5.7.1	LINE BUNDLE INDEX	190
5.7.2	LINE TYPE	190
5.7.3	LINE WIDTH	191
5.7.4	LINE COLOUR	192
5.7.5	MARKER BUNDLE INDEX	192
5.7.6	MARKER TYPE	192
5.7.7	MARKER SIZE	193
5.7.8	MARKER COLOUR	194
5.7.9	TEXT BUNDLE INDEX	194
5.7.10	TEXT FONT INDEX	195
5.7.11	TEXT PRECISION	195
5.7.12	CHARACTER EXPANSION FACTOR	196
5.7.13	CHARACTER SPACING	196
5.7.14	TEXT COLOUR	197

5.7.15	CHARACTER HEIGHT	197
5.7.16	CHARACTER ORIENTATION	198
5.7.17	TEXT PATH	199
5.7.18	TEXT ALIGNMENT	199
5.7.19	CHARACTER SET INDEX	200
5.7.20	ALTERNATE CHARACTER SET INDEX	200
5.7.21	FILL BUNDLE INDEX	201
5.7.22	INTERIOR STYLE	201
5.7.23	FILL COLOUR	202
5.7.24	HATCH INDEX	202
5.7.25	PATTERN INDEX	203
5.7.26	EDGE BUNDLE INDEX	204
5.7.27	EDGE TYPE	204
5.7.28	EDGE WIDTH	205
5.7.29	EDGE COLOUR	205
5.7.30	EDGE VISIBILITY	206
5.7.31	FILL REFERENCE POINT	206
5.7.32	PATTERN TABLE	207
5.7.33	PATTERN SIZE	207
5.7.34	COLOUR TABLE	208
5.7.35	ASPECT SOURCE FLAGS	209
5.7.36	PICK IDENTIFIER	210
5.7.37	LINE CAP	210
5.7.38	LINE JOIN	211
5.7.39	LINE TYPE CONTINUATION	211
5.7.40	LINE TYPE INITIAL OFFSET	212
5.7.41	TEXT SCORE TYPE	212
5.7.42	RESTRICTED TEXT TYPE	213
5.7.43	INTERPOLATED INTERIOR	214
5.7.44	EDGE CAP	215
5.7.45	EDGE JOIN	216
5.7.46	EDGE TYPE CONTINUATION	216
5.7.47	EDGE TYPE INITIAL OFFSET	217
5.7.48	SYMBOL LIBRARY INDEX	217
5.7.49	SYMBOL COLOUR	218
5.7.50	SYMBOL SIZE	218
5.7.51	SYMBOL ORIENTATION	219
5.8	Escape elements	220
5.8.1	ESCAPE	220
5.9	External elements	221
5.9.1	MESSAGE	221
5.9.2	APPLICATION DATA	221
5.10	Segment elements	222
5.10.1	COPY SEGMENT	222
5.10.2	INHERITANCE FILTER	222
5.10.3	CLIP INHERITANCE	224
5.10.4	SEGMENT TRANSFORMATION	224
5.10.5	SEGMENT HIGHLIGHTING	224
5.10.6	SEGMENT DISPLAY PRIORITY	225
5.10.7	SEGMENT PICK PRIORITY	225
5.11	Application structure descriptor elements	226
5.11.1	APPLICATION STRUCTURE ATTRIBUTE	226
6	Metafile defaults	227

7	Profiles and conformance	382
7.1	Introduction	382
7.1.1	Objectives	382
7.1.2	Scope	383
7.1.3	Concept and purpose of profiles for CGM	383
7.1.4	Purpose of the Model Profile	384
7.2	Conformance	385
7.2.1	Conformance of profiles	385
7.2.2	Conformance of metafiles	385
7.2.3	Conformance of metafile generators	386
7.2.4	Conformance of metafile interpreters	386
7.3	Criteria for designing profiles	387
7.3.1	Criteria on the profile in its entirety	387
7.3.2	Criteria for the technical content of the profile	387
7.4	Form and format of a profile	388
7.5	Profile rules, proforma, and model profile	388
7.5.1	Overview	388
7.5.2	General principles	389
7.5.2.1	Self-identification of profiles	389
7.5.2.2	Source identification of profiles	389
7.5.2.3	Private encodings	389
7.5.2.4	Restrictions on grammar and state tables	389
7.5.2.5	Defining subsets	390
7.5.2.6	Metafile defaults	390
7.5.2.7	Restricting element values	391
7.5.2.8	Classification of elements and parameter values	391
7.5.2.9	Registered elements and values	392
7.5.2.10	Generator and interpreter behaviour	392
7.5.2.11	Physical media	392
7.5.3	Multifile rules	392
7.5.4	Multi-element rules	392
7.5.4.1	Colour	392
7.5.4.2	Indexes (except colour)	393
7.5.4.3	Line primitives – geometric degeneracies	394
7.5.4.4	Area primitives – geometric degeneracies	394
7.5.4.5	Graphical text strings	395
7.5.4.6	Non-graphical text strings	395
7.5.4.7	Data record strings	396
7.5.5	Individual element rules	397
7.5.6	Generator implementation requirements	397
7.5.6.1	Relationship to other profiles	397
7.5.6.2	Generator fidelity	397
7.5.6.3	Preservation of primitives	398
7.5.6.4	Semantic latitude	399
7.5.6.5	Generator error processing	399
7.5.6.6	Reporting	399
7.5.6.7	Degeneracies	399
7.5.7	Interpreter implementation requirements	400
7.5.7.1	Relationship to other profiles	400
7.5.7.2	Number of pictures	400
7.5.7.3	Empty pictures	400
7.5.7.4	Interpreter fidelity	400
7.5.7.5	Semantic latitude	402
7.5.7.6	Interpreter error processing	403
7.5.7.7	Reporting	403

7.5.7.8	Degeneracies	403
7.5.8	PPF tables	403
A	Formal grammar of the functional specification of version 1 metafiles	233
A.1	Introduction	233
A.2	Notation used	233
A.3	Detailed grammar	233
A.3.1	Metafile structure	233
A.3.2	Metafile descriptor elements	234
A.3.3	Picture descriptor elements	236
A.3.4	Control elements	236
A.3.5	Graphical elements	237
A.3.6	Attribute elements	240
A.3.7	Escape elements	243
A.3.8	External elements	243
A.4	Terminal symbols	244
B	Formal Grammar of the functional specification of version 2 metafiles	248
B.1	Introduction	248
B.2	Notation used	248
B.3	Detailed grammar	248
B.3.1	Metafile structure	248
B.3.2	Metafile descriptor elements	249
B.3.3	Picture descriptor elements	252
B.3.4	Control elements	254
B.3.5	Graphical elements	255
B.3.6	Attribute elements	257
B.3.7	Closed figure element	261
B.3.8	Escape elements	261
B.3.9	External elements	262
B.3.10	Segment elements	262
B.4	Terminal symbols	264
C	Formal grammar of the functional specification of version 3 metafiles	272
C.1	Introduction	272
C.2	Definitions	272
C.2.1	Notation Used	272
C.2.2	Structured Data Records:	272
C.3	Detailed Grammar	273
C.3.1	Metafile structure	273
C.3.2	Metafile descriptor elements	278
C.3.3	Picture descriptor elements	281
C.3.4	Control elements	285
C.3.5	Graphical elements	286
C.3.6	Attribute elements	289
C.3.7	Escape elements	294
C.3.8	External elements	294
C.3.9	Segment elements	294
C.4	Terminal symbols	297
D	Guidelines for metafile generators and interpreters	307
D.1	Introduction	307

D.2	Errors and degeneracies	307
D.2.1	Syntax errors	308
D.2.2	Geometrically degenerate primitives	308
D.2.3	Mathematical singularities and ambiguities	309
D.3	General guidelines	309
D.3.1	Indexes	309
D.3.2	Colour model	309
D.3.3	Order of metafile descriptor elements	312
D.3.4	Unsatisfied references	312
D.4	Guidelines for element classes	312
D.4.1	Delimiter elements	312
D.4.2	Metafile descriptor elements	312
D.4.3	Picture descriptor elements	312
D.4.4	Control elements	313
D.4.5	Graphical primitive elements	313
D.4.6	Attribute elements	316
D.4.7	Escape elements	318
D.4.8	External elements	318
D.4.9	Segment elements	318
E	Guidelines for private encodings	320
F	Reference models	321
G	Conversions between the CIEXYZ reference colour space and metafile colour spaces	325
G.1	Introduction	325
G.2	Definitions	325
G.3	CIELUV	325
G.3.1	Conversion from the CIEXYZ reference colour space to CIELUV	325
G.3.2	Conversion from CIELUV to the CIEXYZ reference colour space	326
G.4	CIELAB	327
G.4.1	Conversion from the CIEXYZ reference colour space to CIELAB	327
G.4.2	Conversion from CIELAB to the CIEXYZ reference colour space	328
G.5	RGB	329
G.5.1	Conversion from the CIEXYZ reference colour space to RGB	329
G.5.2	Conversion from RGB to the CIEXYZ reference colour space	330
G.6	RGB-related	331
G.7	CMYK	331
G.7.1	Conversion from CMYK to the CIEXYZ reference colour space	331
G.7.2	CMYK Calibration data	331
G.8	Bibliography	332
H	Font character codes and metrics	333
H.1	Introduction	333
H.2	Association of character code to glyph	333
H.3	Font metric table	336
I	Formal grammar of the functional specification of Version 4 metafiles	349

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 8632-1 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

This second edition cancels and replaces the first edition (ISO 8632-1:1987), which has been technically revised.

ISO/IEC 8632 consists of the following parts, under the general title *Information technology – Computer graphics – Metafile for the storage and transfer of picture description information* :

Part 1: Functional specification

Part 2: Character encoding

Part 3: Binary encoding

Part 4: Clear text encoding

Annexes A, B, and C form an integral part of this part of ISO/IEC 8632. Annexes D, E, F and G are for information only

Amendment 1 to International Standard ISO/IEC 8632-1:1992 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee 24, *Computer graphics and image processing*.

Amendment 2 to International Standard ISO/IEC 8632-1:1992 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 24, *Computer graphics and image processing*.

Introduction

0.1 Purpose

The Computer Graphics Metafile provides a file format suitable for the storage and retrieval of picture information. The file format consists of a set of elements that can be used to describe pictures in a way that is compatible between systems of different architectures and devices of differing capabilities and design. This picture description includes the capability for describing static pictures. Static pictures are those where elements which may lead to dynamic effects (for example those leading to regeneration) are prohibited within the picture body.

0.2 Reasons for this International Standard

The main reasons for producing a standard computer graphics metafile are

- a) to allow picture information to be stored in an organized way on a graphical software system;
- b) to facilitate transfer of picture information between different graphical software systems;
- c) to enable picture information to be transferred between graphical devices;
- d) to enable picture information to be transferred between different computer graphics installations.

0.3 Design requirements

To reach these objectives, a number of design principles were adopted:

- a) The metafile should provide a suitable set of elements for the transfer of a wide range of pictorial information.
- b) The metafile should address the more usual and essential features found on graphical devices directly and should provide access to less common facilities via an escape mechanism.
- c) The design of the metafile should not preclude extension of ISO/IEC 8632 at a later stage to cover facilities beyond those included in this version of the Standard. It should also not preclude further extensions to support future standards.
- d) The metafile should be usable from GKS (Graphical Kernel System — ISO 7942) with both metafile input and metafile output functions. It should include the capability to support ISO 7942 (GKS) static picture capture.

Design requirements**Introduction**

- e) ISO/IEC 8632 should address the needs of different applications that have conflicting requirements for size of metafile, speed of generation and interpretation, readability, editability and ease of transfer through different transport mechanisms.

0.4 Design criteria

The requirements of 0.3 were used to formulate the following criteria which were used to decide between different design possibilities.

- a) **Completeness:** In any area of ISO/IEC 8632, the functionality specified by ISO/IEC 8632 should be complete in itself.
- b) **Conciseness:** Redundant elements or parameters should be avoided.
- c) **Consistency:** Contradictory elements should be avoided.
- d) **Extensibility:** The ability to add new elements and generality to ISO/IEC 8632 should not be precluded.
- e) **Fidelity:** The minimal results and characteristics of elements should be well defined.
- f) **Implementability:** An element should be able to be supported efficiently on most host systems and/or graphics hardware.
- g) **Orthogonality:** The elements of the metafile should be independent of each other, or any dependencies should be structured and well defined.
- h) **Predictability:** ISO/IEC 8632 should be such that the recommended or proper use of standard elements guarantees the results of using a particular element.
- i) **Standard practice:** Only those elements that reflect existing practice, that are necessary to support existing practice, or that are necessary to support proposed standards should be standardized.
- j) **Usefulness:** Functions should be powerful enough to perform useful tasks.
- k) **Well-structured:** The assumptions that elements make about each other should be minimized. An element should have a well-defined interface and a simply stated unconditional purpose. Multipurpose elements and side effects should be avoided.

0.5 Access to a metafile

The metafile has been designed so that, although its main usage is anticipated as being with completely sequential access, non-sequential access is also possible. Once the basic environment of the metafile has been established, individual pictures may be accessible if the medium, the encoding and the implementation support this form of access.

0.6 Generation and interpretation of metafiles

The specific mechanisms of metafile generation and interpretation are not described by ISO/IEC 8632, although it does describe the intended result of such interpretation. The basic set of metafile elements includes a capability for the addition of application-dependent data, which do not have graphical meaning and for which no intended interpretation results are described.

0.7 Distinction between formal specification and encodings

The functionality provided by the metafile is separated from the specification of any particular encoding format. ISO/IEC 8632 provides for both standard and private encodings of the elements described in this

Introduction**Distinction between formal specification and encodings**

part of ISO/IEC 8632. Guidelines for private encodings are specified in annex E; these guidelines do not form part of ISO/IEC 8632.

Three standard encodings are specified in parts 2, 3 and 4 of ISO/IEC 8632. Each of the standardized encodings is capable of representing the full functionality described in this part of ISO/IEC 8632. Translation between the standardized encodings is possible without loss of picture information, although subsequent translation back into the original encoding may not result in precisely the same data stream, due to different quantizations of precisions in the different encodings.

The character encoding specified in ISO/IEC 8632-2 is intended to provide an encoding of minimum size. It conforms to the rules for code extension specified in ISO 2022 in the category of complete code system. It is particularly suitable for transfer through networks that cannot support binary transfers.

The binary encoding specified in ISO/IEC 8632-3 provides an encoding that requires least effort to generate and interpret on many systems.

The clear text encoding specified in ISO/IEC 8632-4 provides an encoding that can be created, viewed and edited with standard text editors. It is therefore also suitable for transfer through networks that support only transfer of text files.

0.8 Relationship to other International Standards

ISO/IEC 8632 draws extensively for its model of a graphics system on GKS (Graphical Kernel System — ISO 7942). In addition, ISO/IEC 8632 specifies a metafile that may be used as a static picture-capture metafile by GKS.

This part of ISO/IEC 8632 uses font concepts and the font architecture defined in ISO/IEC 9541-1 for defining CGM references to fonts and font resources. The font properties of ISO/IEC 9541-1 are adopted, where appropriate, to define CGM mechanisms to provide information useful for font substitution between parties interchanging Metafiles. This part of ISO/IEC 8632 includes the minimum font description subset defined in ISO/IEC 9541-2. Clause 3 contains a number of glossary definitions that are taken from, and are identical to, those found in ISO/IEC 9541-1. This part of ISO/IEC 8632 also defines access to extended families of glyph based on the principles and procedures of ISO/IEC 10036.

This part of ISO/IEC 8632 uses a colorimetrically precise reference colour space to allow for interchange of precise colour specifications. It uses concepts defined in ISO/IEC 8613/Amd.2 which are based on CIE publications. ISO/IEC 8613/Amd.2 provides tutorial material on relevant definitions and colour concepts, which is useful for understanding the material in this Standard but is not incorporated into this Standard in that amount of detail.

The character encoding specified in ISO/IEC 8632-2 conforms to the code extension techniques of ISO 2022.

The binary encoding specified in ISO/IEC 8632-3 employs the mechanism for representing floating point numbers specified in ANSI/IEEE 754-1986.

For certain elements, the CGM defines value ranges of parameters as being reserved for registration. The meanings of these values will be defined using the established procedures (see 4.12) of the ISO International Registration Authority for Graphical Items. These procedures do not apply to values and value ranges defined as being reserved for private use; these values and ranges are not standardized. There is a very close relationship between many of the elements in ISO 8632 and a subset of the functions in the CGI (Computer Graphics Interface — ISO/IEC 9636).

Versions

Introduction

0.9 Versions

ISO/IEC 8632 defines several versions of the Computer Graphics Metafile. A version is defined by a formal grammar and additional specifications contained in clauses 4, 5, and 6. Clause 7 contains conformance criteria defined by version.

The following versions are currently defined: Version 1 (one); Version 2 (two); Version 3 (three); Version 4 (four).

NOTES

1 A valid Version 3 metafile is also a valid Version 4 metafile. A valid Version 2 metafile is also a valid Version 3 metafile. A valid Version 1 metafile is also a valid Version 2 metafile.

2 Version 1 metafiles are as defined by the original CGM standard, which was designated ISO 8632:1987. Version 2 metafiles are as defined by the first amendment to the CGM standard, which was designated ISO 8632:1987/Amd.1:1990. Version 3 metafiles are as defined by an amendment to Version 2 of the CGM standard. This amendment was originally designated ISO/IEC 8632:1987/Amd.3:1991, but was never published as an amendment. Instead all documents were consolidated to produce this revision of ISO 8632; Versions 1, 2, and 3 are all defined by this revision. Version 4 metafiles are defined by ISO/IEC 8632:1992/Amd.2.

3 Many of the figures in this International Standard were produced using ISO/IEC 8632 standard Version 1 metafiles, as defined herein.

Information technology – Computer graphics – Metafile for the storage and transfer of picture description information –

Part 1 : Functional specification

1 Scope

ISO/IEC 8632 provides a file format suitable for the storage and retrieval of picture description information. The file format consists of an ordered set of elements that may be used to describe pictures in a way that is compatible between systems of different architectures, compatible with devices of differing capabilities and design, and meaningful to application constituencies. This picture description includes the capability for describing static images.

The elements specified provide for the representation of a wide range of pictures on a wide range of graphical devices. The elements are organized into groups that delimit major structures (metafiles, pictures, and application structures), that specify the representations used within the metafile, that control the display of the picture, that perform basic drawing actions, that control the attributes of the basic drawing actions, that allow application-specific structuring to be overlaid on the graphic content, and that provide access to non-standard device capabilities.

The metafile is defined in such a way that, in addition to sequential access to the whole metafile, random access to individual pictures and individual context-independent application structures is well-defined. Applications which require random access to pictures and/or context-independent application structures within pictures may, within the metafile, define directories to these pictures and/or context-independent application structures. The metafile may then be opened and randomly accessed without interpreting the entire metafile.

In addition to a functional specification, three standard encodings of the metafile syntax are specified. These encodings address the needs of applications that require minimum metafile size, minimum effort to generate and interpret, and maximum flexibility for a human reader or editor of the metafile.

This part of ISO/IEC 8632 describes the format using an abstract syntax. The remaining three parts of ISO 8632 specify three standardized encodings that conform to this syntax: ISO/IEC 8632-2 specifies a character encoding that conforms to the rules for code extension specified in ISO 2022 in the category of complete coding system; ISO/IEC 8632-3 specifies a binary encoding; ISO/IEC 8632-4 specifies a clear text encoding.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 8632. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO/IEC 8632 are encouraged to investigate the possibility of applying the most recent editions of the standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO/IEC 646:1991, *Information technology – ISO 7-bit coded character set for information interchange*.

ISO 2022:1986, *Information processing – ISO 7-bit and 8-bit coded character sets – Code extension techniques*.

ISO 2375:1985, *Data processing – Procedure for registration of escape sequences*.

ISO 7942:1985, *Information processing systems – Computer graphics – Graphical Kernel System (GKS) functional description*.

ISO 8601:1988 *Data elements and interchange formats – Information interchange – Representation of dates and time*.

ISO/IEC 8613:1989/Amd.1:–¹⁾, *Information processing systems – Text and office systems – Office document architecture (ODA) and interchange format – Amendment 1: Tiled raster graphics*.

ISO 8859-1:1987 *Information processing – 8-bit single-byte coded graphic character sets – Latin alphabet No. 1*.

ISO/IEC 8613:1989/Amd.2:–¹⁾, *Information processing systems – Text and office systems – Office document architecture (ODA) and interchange format – Amendment 2: Colour*.

ISO/IEC 9541-1:1991, *Information technology – Font information interchange – Part 1: Architecture*.

ISO/IEC 9541-2:1991, *Information technology – Font information interchange – Part 2: Interchange format*.

ISO/IEC 9636-1:1991, *Information technology – Computer graphics – Interfacing techniques for dialogues with graphical devices (CGI) – Functional specification – Part 1: Overview, profiles, and conformance*.

ISO/IEC 9636-2:1991, *Information technology – Computer graphics – Interfacing techniques for dialogues with graphical devices (CGI) – Functional specification – Part 2: Control*.

ISO/IEC 9636-3:1991, *Information technology – Computer graphics – Interfacing techniques for dialogues with graphical devices (CGI) – Functional specification – Part 3: Output*.

ISO/IEC 9636-4:1991, *Information technology – Computer graphics – Interfacing techniques for dialogues with graphical devices (CGI) – Functional specification – Part 4: Segments*.

ISO/IEC TR 9973:1988, *Information processing – Computer graphics – Procedures for registration of graphical items*.

ISO/IEC TR 10000-1:1992 *Information technology – Framework and taxonomy of International Standardized Profiles – Part 1: Framework*.

ISO/IEC TR 10000-2:1992 *Information technology – Framework and taxonomy of International Standardized Profiles – Part 2: Taxonomy of profiles*.

ISO/IEC 10036:–¹⁾, *Information technology – Font information interchange – Procedure for registration of glyph and glyph collection identifiers*.

¹⁾ To be published.

Normative references

CCITT Recommendation T.4 (1988), *Standardization of group 3 facsimile apparatus for document transmission*.

CCITT Recommendation T.6 (1988), *Standardization of group 4 facsimile apparatus for document transmission*.

CIE Publication 15.2, *Colorimetry, 1986 (2nd edition)*.

CIE Publication S002, *Colorimetric Observers, 1986 (1st edition)*.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of ISO/IEC 8632 the following definitions apply.

NOTE — As far as possible, commonly accepted graphics terminology is used.

3.1.1 anisotropic mapping: A mapping in which the scale factors applied along each axis are not equal. This is often used in reference to the mapping from VDC to distance units on the physical display surface. With anisotropic mapping, the angle between any pair of non-parallel line segments can change; circles cease to be circles and become ellipses after such a transformation. See "isotropic mapping".

3.1.2 aspect ratio: The ratio of the width to the height of a rectangular area, such as a window or viewport. For example, an aspect ratio of 2.0 indicates an area twice as wide as it is high.

3.1.3 aspect source flag (ASF): Indicator as to whether a particular attribute selection is to be individual or bundled.

3.1.4 aspects of primitives: Ways in which the appearance of a primitive can vary. Some aspects are controlled directly by primitive attributes; some are controlled indirectly through a bundle table.

3.1.5 attribute elements: Metafile elements that describe the appearance of graphical elements.

3.1.6 boundary: The mathematical locus that defines, in abstract VDC space, the limits of a region to be filled (for fill primitives and closed figures). The visual appearance of interior style 'hollow' consists of a depiction of the boundary obtained after clipping has been taken into account.

3.1.7 brightness: Attribute of a visual sensation according to which an area appears to emit more or less light.

3.1.8 bundle: Set of attributes associated with one of the following graphical element types: line, marker, text, and filled area.

3.1.9 bundle index: An index into a bundle table for a particular output primitive.

3.1.10 bundle table: An indexed table containing a set of attributes for each index.

3.1.11 character set: The set of displayable symbols mapped to individual characters in a TEXT, APPEND TEXT, or RESTRICTED TEXT string. This corresponds to the "G-set" defined in ISO 2022. A character set is independent of the font or typeface; examples of character sets are: ASCII (X3.4), German and Katakana.

3.1.12 chroma: Colourfulness (chromaticness) of an area judged in proportion to the brightness of a similarly illuminated area that appears white or highly transmitting.

3.1.13 chromaticity: Ratio of each of a set of three tristimulus values to their sum. (As the sum of the three chromaticity coordinates equals 1, two of them are sufficient to define a chromaticity.)

3.1.14 CIELAB colour space: A CIE recommended, approximately uniform, colour space with rectangular coordinates L^* , a^* , and b^* . L^* is the approximate correlate of lightness, a^* and b^* are used to calculate approximate correlates of hue and chroma. CIELAB uses the tristimulus ratios X/X_n , Y/Y_n , Z/Z_n instead of chromaticity coordinates as in CIELUV. X_n , Y_n , Z_n are the values of X, Y, Z for the appropriate chosen reference white. The reduced perceptual significance of a given difference in chromaticity as the colour becomes darker is incorporated by using the tristimulus ratios.

3.1.15 CIELUV colour space: A CIE recommended, approximately uniform, colour space with rectangular coordinates L^* , u^* , and v^* . L^* is the approximate correlate of lightness, u^* and v^* are used to calculate approximate correlates of hue and chroma. The colour stimulus is described by Y, u', v' and the reference white by Y_n, u'_n, v'_n . A given difference in chromaticity is reduced in magnitude by the factor L^* as the

Definitions and abbreviations

Definitions

colour becomes darker.

3.1.16 CIE tristimulus values: Amounts of the three reference colour stimuli, in a given trichromatic system, required to match the colour of the stimulus considered.

3.1.17 CIE uniform colour spaces: Two CIE recommended, approximately uniform colour spaces, CIELAB and CIELUV, are allowed in the CGM. These colour spaces are non-linear transformations of the CIE 1931 XYZ tristimulus space, into the approximate perceptual correlates of lightness, hue, and chroma. CIELAB and CIELUV closely approximate uniform colour spaces over small distances, and they each provide an approximately uniform measure of perceived colour differences. Both colour spaces allow for the perceptual effect that a given difference in chromaticity represents a smaller and smaller colour difference as the lightness is reduced.

3.1.18 clip indicator: Indicator as to whether metafile graphical elements are to be clipped at the limits of CLIP RECTANGLE.

3.1.19 clipping mode: A generic term referring to one of Line Clipping, Marker Clipping or Edge Clipping Modes. An object clipping may be either 'locus', 'shape' or 'locus then shape'.

3.1.20 clip rectangle: A rectangle defined in VDC space which is used as a clipping boundary when the metafile graphical elements are to be clipped.

3.1.21 clipping: Removing parts of display elements that lie outside a given boundary.

3.1.22 closed figure: A compound primitive that behaves as a fill primitive of more general shape. It is formed by delimiting a sequence of line or fill primitives, edge attributes, and certain control elements, with the elements BEGIN FIGURE and END FIGURE.

3.1.23 CMYK colour space: A colour space based on the subtractive colour mixture of Cyan (C), Magenta (M) and Yellow (Y) primaries with the inclusion of black (K).

3.1.24 colour component: One of the dimensions of a colour space.

3.1.25 colour model: A specification of a 3D colour coordinate system and a 3D subspace in the coordinate system within which each displayable colour is represented by a point. Some colour models include a fourth, redundant, dimension to allow the independent representation of black. For the purpose of ISO/IEC 8632 colour model refers to one of RGB, CIELAB, CIELUV, CMYK, or RGB-related.

3.1.26 colour selection mode: Indicator as to whether colour selection is to be direct (by specifying a colour value) or indexed (by specifying an index into a table of colour values). See COLOUR VALUE.

3.1.27 colour space: See COLOUR MODEL.

3.1.28 colour stimulus: Visible radiation entering the eye and producing a sensation of colour.

3.1.29 colour table: A table for use in mapping from a colour index to the corresponding colour. See DIRECT COLOUR, INDEXED COLOUR.

3.1.30 colour value: Value of the n-tuple of components describing a colour in a given colour model.

3.1.31 compound primitive: A compound primitive is specified by a sequence of CGM elements, as opposed to primitives represented by a single element. Compound text and closed figures are examples of compound primitives in the CGM.

3.1.32 Computer Graphics Interface (CGI): The specification for interface techniques for dialogues with graphical devices.

3.1.33 Computer Graphics Metafile (CGM): The specification for a mechanism for storing and transferring picture description information.

3.1.34 conjugate diameter pair (CDP): A pair D,d of diameters of an ellipse such that a tangent to the ellipse at each endpoint of one diameter is parallel to the other diameter.

3.1.35 control elements: Metafile elements that specify address space, clipping boundaries, picture delimiters, and format descriptions of the Metafile elements.

3.1.36 data interface: An interface between software modules or devices comprising one or more packets containing opcodes and data (as contrasted with a subroutine or function call interface).

3.1.37 descriptor elements: Metafile elements that describe the functional content, format, default conditions, identification, and characteristics of the Metafile.

3.1.38 device coordinates: The coordinates native to a device; device-dependent coordinates; physical device coordinates.

3.1.39 device driver: The device-dependent part of a graphics implementation which supports a physical device. The device driver generates device-dependent output.

3.1.40 device viewport: A rectangular subset of the physical display surface into which VDC EXTENT is mapped. See "effective viewport".

3.1.41 direct colour: A colour selection scheme in which the colour values are specified directly, without requiring an intermediate mapping via a colour table. See COLOUR TABLE, INDEXED COLOUR.

3.1.42 display surface: That part of a graphics device upon which a visible image appears (for example, the screen of a display, the paper in a plotter).

3.1.43 edge: The rendering of the perimeter of a filled region, controlled by edge attributes. Edges are clipped after being applied to the boundary, as distinct from the rendition of the boundary obtained from interior style 'hollow'. See "boundary".

3.1.44 effective viewport: The actual viewport resulting from forced isotropic mapping from the VDC extent to the viewport.

3.1.45 escape elements: Metafile elements that describe device- or system-dependent elements used to construct a picture, but that are not otherwise standardized.

3.1.46 external elements: Metafile elements that communicate information not directly related to the generation of a graphical image.

3.1.47 escapement: During the rendering of text strings onto a display, the movement of the current position on the display surface after a glyph representation is imaged.

3.1.48 escapement point: A glyph metric; a point in the glyph coordinate system, to which the current position on the display surface is usually translated, after the glyph representation is imaged.

3.1.49 font: A collection of glyph images having the same basic design, e.g., *Courier Bold Oblique*.

3.1.50 font family: A collection of fonts of common design, e.g., *Courier*, *Courier Bold*, *Courier Bold Oblique*.

3.1.51 font metrics: The set of dimensions and positioning information in a font resource common to all glyph representations contained in that font resource.

3.1.52 font resource: A collection of glyph representations together with descriptive and font metric information which are relevant to the collection of glyph representations as a whole.

3.1.53 foreground colour: The colour used in the rendering process in which primitives are rendered on the display surface, as opposed to the BACKGROUND COLOUR or AUXILIARY COLOUR. The foreground colour is set separately for each class of primitive.

Definitions and abbreviations

Definitions

- 3.1.54 glyph:** A recognizable abstract graphical symbol, which is independent of any specific design.
- 3.1.55 global segment:** A segment that is defined in the Metafile Descriptor (see "segment"), in which case it may be referenced from within any picture.
- 3.1.56 graphical primitive elements:** Metafile elements that describe images in the Metafile.
- 3.1.57 Graphical Kernel System (GKS):** An ISO standard application programmer's interface to graphics (ISO 7942).
- 3.1.58 graphics device:** A device (for example, refresh display, storage tube display, or plotter) on which display images can be represented.
- 3.1.59 graphic object:** A graphical primitive or a compound primitive, together with the associated attributes.
- 3.1.60 hatch style:** A format for filling closed figures. A hatch style consists of one or more sets of lines whose presence represents the interior of the figure in question.
- 3.1.61 hue** Attribute of a visual sensation according to which an area appears to be similar to one of the perceived colours, red, yellow, green, and blue, or to a combination of two of them.
- 3.1.62 indexed colour:** A colour selection scheme in which the colour index is used to retrieve colour values from a colour table. See COLOUR TABLE, DIRECT COLOUR.
- 3.1.63 isotropic mapping:** A mapping which is invariant with respect to direction; equal scaling in all orthogonal representational dimensions. It is often used to describe the mapping from VDC to distance units on the physical display surface. With isotropic mapping, the angle between any pair of non-parallel line segments remains unchanged; for example, circles remain circles. See "anisotropic mapping".
- 3.1.64 local segment:** A segment which is defined in the picture descriptor or picture body, and whose definition is local to the picture in which it appears.
- 3.1.65 message:** A string of characters used to communicate information to operators at Metafile interpretation time.
- 3.1.66 metafile:** A mechanism for retaining and transporting graphical data and control information. This information contains a device-independent description of one or more pictures.
- 3.1.67 Metafile Descriptor (MD):** A metafile element that describes the format of the metafile (but not its encoding method) and the functionality expected of a metafile interpreter.
- 3.1.68 metafile element:** A functional item that can be used to construct a picture or convey information.
- 3.1.69 metafile generator:** The process or equipment that produces the Computer Graphics Metafile.
- 3.1.70 metafile interpreter:** The process or equipment that reads the Computer Graphics Metafile and interprets the contents. An interpreter may be needed in order to drive a Computer Graphics Interface or other device interface to obtain a picture that resembles the intended picture as closely as possible.
- 3.1.71 normalized device coordinates (NDC):** Coordinates specified in a device-independent coordinate system, normalized to some range (typically 0 to 1). See VDC EXTENT, VDC RANGE, VDC SPACE, VIRTUAL DEVICE COORDINATES.
- 3.1.72 object clipping:** Object clipping is applied to a graphic object. For example, clipping is applied to a line after it has had the width attribute associated with it.
- 3.1.73 pattern style:** A format for filling closed figures with patterns. A pattern style consists of an array of variously coloured or shaded cells.
- 3.1.74 Picture Descriptor (PD):** A set of metafile elements used to set the interpretation modes of attribute elements for the entire picture.

3.1.75 pixel: The smallest element of a display surface that can be independently assigned colour.

3.1.76 posture: The extent to which the shape of a glyph or set of glyphs appear to incline, including any consequent design or form change.

3.1.77 primary colour stimuli: Three selected coloured lights used to specify the colour of any light presented by the amounts of the three lights that must be mixed additively to produce light matching the light presented. (Any three coloured lights may serve as primaries provided no one of them can be matched by a mixture of the other two. To achieve the maximum gamut of colours by additive mixture, saturated red, green, and blue primaries are commonly used.)

3.1.78 primary colorants: A small number of colorants (dyes or pigments) that may be mixed subtractively to produce a large gamut of colours. The most common primary colorants are cyan (greenish blue), magenta (purplish red), and yellow.

3.1.79 realized edge: The zero-width ideal boundary line of the filled-area if the edge is invisible, and the finite-width displayed line if the edge is visible.

3.1.80 realized interior: In a filled area element, that portion of the ideal interior as extending to and terminating at the realized edge.

3.1.81 region: In the context of closed figures or the POLYGON SET element, an area that is explicitly or implicitly closed, that is a subset of the full area being filled. Regions can be nested, disjoint or overlapping. The boundaries of all regions are considered together when applying the interior test for filling a closed figure or POLYGON SET.

3.1.82 RGB colour space: A colour space with colorimetric coordinates based on red, green and blue reference stimuli or primaries. Colour values may be negative in certain areas outside the gamut defined by the RGB primaries.

3.1.83 RGB-related colour space: A colour space related to the RGB colour space through a linear transformation (3x3 matrix). (Examples are YUV (PAL, SECAM), YIQ (NTSC) or $YC_R C_B$ (CCITT video codecs and CCIR601 studio standard).)

3.1.84 reference colour model: Basic colour model within CGM relative to which relationships to specifiable colour models (RGB, CMYK, CIELUV, CIELAB, and RGB-related) are calibrated. The reference colour model is defined by the CIE 1931 standard colorimetric system (XYZ).

3.1.85 saturation: Chromaticness (colourfulness) of an area judged in proportion to its brightness.

3.1.86 segment: A collection of primitives, primitive attributes and some additional attributes associated with the segment as a whole. See "segment attribute".

3.1.87 segment attribute: An attribute associated with a segment as a whole rather than attributes of individual primitives.

3.1.88 size specification mode: A generic term for Line Width Specification Mode, Edge Width Specification Mode, or Marker Size Specification Mode.

3.1.89 skewed: Used to describe stroke precision text when the CHARACTER ORIENTATION vectors are non-perpendicular; CELL ARRAYs when the three defining points form a parallelogram which is not a rectangle; or a segment transformation that causes rectangles to become non-rectangular parallelograms.

3.1.90 symbol: A graphical object which is included by reference at some point in the metafile.

3.1.91 trichromatic system: System for specifying colour stimuli in terms of tristimulus values, based on matching colours by additive mixture of three suitable chosen reference colour stimuli.

3.1.92 view surface: See DISPLAY SURFACE.

Definitions and abbreviations

Definitions

3.1.93 virtual device: An idealized graphics device that presents a set of graphics capabilities to graphics software or systems via the Computer Graphics Interface.

3.1.94 virtual device coordinates (VDC): The coordinates used to specify position in the VDC space. These are absolute two-dimensional coordinates. See VDC SPACE.

3.1.95 VDC extent: A rectangular region of interest contained within the VDC range. See VDC RANGE, VDC SPACE.

3.1.96 VDC range: A rectangular region within VDC space consisting of the set of all coordinates representable in the declared coordinate type, precision, and encoding format of the metafile. See VDC EXTENT, VDC SPACE.

3.1.97 VDC space: A two-dimensional Cartesian coordinate space of infinite precision and extent. Only a subset of VDC space, the VDC range, is realizable in a metafile. See VDC EXTENT, VDC RANGE, VIRTUAL DEVICE COORDINATES.

3.1.98 weight: The ratio of a glyph's or set of glyphs' stem width to font height.

3.1.99 colour device: A device which offers more than two colours.

3.1.100 grey scale device: A special case of colour device where hue and saturation are the same for all colours (generally saturation = 0).

3.1.101 geometric degeneracy: The degeneracy is intrinsic to the parameterization of the element. A degeneracy which results when parameterization for the geometry does not provide sufficient information to draw the intended primitive.

3.1.102 interoperability: The generator and the interpreter have the same understanding of the encodings, the syntax, and the semantics of the metafile.

3.1.103 monochrome device: A device which has only two colours, a foreground and a background colour. The background colour is the colour of the display surface after it has been cleared.

3.1.104 Profile Proforma (PPF): A template consisting of profile specifications, which is used by writers of profiles for generating instances of a profile. A completed PPF specifies the rules and options of a profile of ISO/IEC 8632.

3.1.105 application structure: A sequence of metafile elements delimited by the BEGIN APPLICATION STRUCTURE and END APPLICATION STRUCTURE elements, containing one BEGIN APPLICATION STRUCTURE BODY element, and optionally containing one or more APPLICATION STRUCTURE ATTRIBUTE elements.

3.2 Abbreviations

The following abbreviations are used in all parts of ISO/IEC 8632.

APS	Application Structure
ASF	Aspect Source Flag
CDP	Conjugate Diameter Pair
CGI	Computer Graphics Interface
CGM	Computer Graphics Metafile
GDP	Generalized Drawing Primitive
GKS	Graphical Kernel System
ISP	International Standardized Profile
MD	Metafile Descriptor
NDC	Normalized Device Coordinate(s)
PD	Picture Descriptor
PPF	Profile Proforma
VDC	Virtual Device Coordinate(s)

4 Concepts

4.1 Introduction

The objective of the Computer Graphics Metafile (CGM) is to provide for the description, storage, and communication of graphical information together with related, application-specific information in a device-independent manner. To accomplish this, ISO/IEC 8632 defines the form (syntax) and functional behaviour (semantics) of a set of elements that may occur in the CGM. The following classes of elements are defined:

- Delimiter Elements, which delimit significant structures within the Metafile.
- Metafile Descriptor Elements, which describe the functional content, default conditions, identification, and characteristics of the CGM; and optionally, define a directory.
- Picture Descriptor Elements, which set the interpretation modes of attribute elements for each picture and optionally, define a directory to the application structures contained in each picture.
- Control Elements, which allow picture boundaries and coordinate representation to be modified.
- Graphical Primitive Elements, which describe the visual components of a picture in the CGM.
- Attribute Elements, which describe the appearance of graphical primitive elements.
- Escape Elements, which describes device- or system-dependent elements used to construct a picture; however, the elements are not otherwise standardized.
- External Elements, which communicate information not directly related to the generation of a graphical image.
- Segment Elements, which enable the grouping of graphic objects for graphical operations such as copying.
- Application Structure Elements, which enable the grouping of elements for retrieval, electronic linking, and other specific application-dependent operations.

A Computer Graphics Metafile is a collection of elements from this standardized set. The **BEGIN METAFILE** and **END METAFILE** elements each occur exactly once in a complete metafile; as many or as few of the elements in the other classes may occur as are needed. A metafile needs to be interpreted in order to display its pictorial content on a graphics device. The descriptor elements give the interpreter sufficient data to interpret metafile elements and to make informed decisions concerning the resources needed for display.

Any CGM contains certain delimiter elements. In addition it may include control elements for metafile interpretation, Picture Descriptor elements for declaring parameter modes of attribute elements and defining the representations of certain attribute index values, graphical primitive elements for defining graphical entities, attribute elements for defining the appearance of the graphical primitive elements, escape elements for accessing non-standardized features of particular devices, and external elements for communication of information external to the definition of the pictures in the CGM. In Version 2 and Version 3 metafiles, graphical output primitives, attributes, and control elements may be grouped in segments. In Version 4 metafiles, graphical output primitives, attributes, control elements, and application structure attributes may be grouped in application structures.

A minimal correct metafile consists of **BEGIN METAFILE**, a Metafile Descriptor consisting of **METAFILE VERSION** and **METAFILE ELEMENT LIST**, and **END METAFILE**.

4.2 Delimiter elements

Every metafile starts with a **BEGIN METAFILE** element and ends with an **END METAFILE** element. This allows multiple metafiles to be stored or transferred together.

Each picture starts with a **BEGIN PICTURE** element and ends with an **END PICTURE** element. Between these delimiters the Picture Descriptor is separated from the picture body by a **BEGIN PICTURE BODY** element.

Concepts**Delimiter elements**

Once the Metafile Descriptor has been read, access to individual pictures, on a random as opposed to sequential basis, may be safely accomplished if the encoding, access mechanism and implementation permit.

BEGIN METAFILE and BEGIN PICTURE both have parameters for a name by which the metafile and picture (respectively) can be identified.

In Version 2, Version 3, and Version 4 metafiles, primitives may be grouped together to form a composite primitive known as a closed figure. The primitives to be included in the closed figure being defined are delimited by the elements BEGIN FIGURE and END FIGURE.

In Version 2, Version 3, and Version 4 metafiles, groups of elements, called segments, are delimited by BEGIN SEGMENT and END SEGMENT. Each segment is uniquely identified by a segment identifier. Segments may be defined in the Metafile Descriptor, in the Picture Descriptor, or within picture bodies.

In Version 3 and Version 4 metafiles, a compound clipping and shielding region may be defined by line and filled-area elements occurring between BEGIN PROTECTION REGION and END PROTECTION REGION.

In Version 3 metafiles a compound path may be defined for drawing a compound line primitive. A compound line is defined by line primitive elements occurring between BEGIN COMPOUND LINE and END COMPOUND LINE elements. A compound path may also be defined for displaying text strings along an arbitrary text path. A compound text path is defined by line primitive elements occurring between BEGIN COMPOUND TEXT PATH and END COMPOUND TEXT PATH elements. The allowed elements and rules for definition are identical for the two types of paths.

In Version 3 and Version 4 metafiles, a tile array may be defined by tile elements occurring between BEGIN TILE ARRAY and END TILE ARRAY.

The exact list of elements which may occur in any of these definition states will be found in the state table, table 8.

In Version 4 metafiles, application structures consisting of groups of elements within picture bodies, are delimited by BEGIN APPLICATION STRUCTURE and END APPLICATION STRUCTURE. Between these delimiters the BEGIN APPLICATION STRUCTURE BODY element separates the APPLICATION STRUCTURE ATTRIBUTE elements in the application structure descriptor from the other elements contained in the application structure body.

4.3 Metafile descriptor elements

The Metafile Descriptor (MD) is a group of elements that describes the functional capabilities required to interpret the CGM. These elements are

METAFILE VERSION	FONT LIST
METAFILE DESCRIPTION	CHARACTER SET LIST
VDC TYPE	CHARACTER CODING ANNOUNCER
INTEGER PRECISION	NAME PRECISION
REAL PRECISION	MAXIMUM VDC EXTENT
INDEX PRECISION	SEGMENT PRIORITY EXTENT
COLOUR PRECISION	COLOUR MODEL
COLOUR INDEX PRECISION	COLOUR CALIBRATION
MAXIMUM COLOUR INDEX	FONT PROPERTIES
COLOUR VALUE EXTENT	GLYPH MAPPING
METAFILE ELEMENT LIST	SYMBOL LIBRARY LIST
METAFILE DEFAULTS REPLACEMENT	PICTURE DIRECTORY

NOTE 1 Other elements, as defined in this part of ISO/IEC 8632, may appear within the Metafile Descriptor within the definition of a global segment.

In a particular metafile, the METAFILE ELEMENT LIST lists at least those standardized elements that occur in the metafile. The CGM interpreter is thus informed of the capabilities required to successfully interpret the Computer Graphics Metafile. The CGM contains a single Metafile Descriptor. The Metafile Descriptor immediately follows the BEGIN METAFILE element in a metafile (with the possible exception

of intervening external and escape elements).

METAFILE VERSION and METAFILE ELEMENT LIST shall occur only once in the Metafile Descriptor for metafiles of all three versions.

NOTE 2 It is recommended that the following elements: METAFILE VERSION, METAFILE ELEMENT LIST and (possibly multiple occurrences of) METAFILE DESCRIPTION appear first in the Metafile Descriptor and in the order listed.

4.3.1 Identification

The identifying information includes declaration of the version of ISO/IEC 8632, by the METAFILE VERSION element, and descriptive information about the metafile (origin, owner, generation date, etc.), by the METAFILE DESCRIPTION element.

4.3.2 Functional capability

The contents of the Computer Graphics Metafile are defined by the METAFILE ELEMENT LIST element. This shall contain a list of the non-mandatory elements that are utilized in the metafile (see 4.1 for mandatory elements). Several shorthand names for CGM elements are also provided for use with the METAFILE ELEMENT LIST. The shorthand names shall not be considered macro names, nor shall they be construed to be levels of conformance.

4.3.2.1 Drawing set

The drawing set includes the mandatory CGM elements (i.e., those that shall appear in every conforming CGM) and most of the graphical primitive elements and attribute elements. The drawing set is specified by the shorthand name DRAWING SET.

The elements included in the drawing set are:

BEGIN METAFILE	LINE TYPE
END METAFILE	LINE WIDTH
BEGIN PICTURE	LINE COLOUR
BEGIN PICTURE BODY	MARKER BUNDLE INDEX
END PICTURE	MARKER TYPE
METAFILE VERSION	MARKER SIZE
METAFILE DESCRIPTION	MARKER COLOUR
VDC TYPE	TEXT BUNDLE INDEX
METAFILE ELEMENT LIST	TEXT FONT INDEX
AUXILIARY COLOUR	TEXT PRECISION
TRANSPARENCY	CHARACTER EXPANSION FACTOR
CLIP RECTANGLE	CHARACTER SPACING
CLIP INDICATOR	TEXT COLOUR
VDC EXTENT	CHARACTER HEIGHT
BACKGROUND COLOUR	CHARACTER ORIENTATION
COLOUR SELECTION MODE	TEXT PATH
POLYLINE	TEXT ALIGNMENT
DISJOINT POLYLINE	FILL BUNDLE INDEX
POLYMARKER	INTERIOR STYLE
TEXT	FILL COLOUR
RESTRICTED TEXT	HATCH INDEX

Concepts**Metafile descriptor elements**

APPEND TEXT	PATTERN INDEX
POLYGON	EDGE BUNDLE INDEX
POLYGON SET	EDGE TYPE
CELL ARRAY	EDGE WIDTH
GENERALIZED DRAWING PRIMITIVE	EDGE COLOUR
RECTANGLE	EDGE VISIBILITY
CIRCLE	FILL REFERENCE POINT
CIRCULAR ARC 3 POINT	PATTERN TABLE
CIRCULAR ARC 3 POINT CLOSE	PATTERN SIZE
CIRCULAR ARC CENTRE	COLOUR TABLE
CIRCULAR ARC CENTRE CLOSE	ASPECT SOURCE FLAGS
ELLIPSE	ESCAPE
ELLIPTICAL ARC	MESSAGE
ELLIPTICAL ARC CLOSE	APPLICATION DATA
LINE BUNDLE INDEX	

4.3.2.2 Drawing plus control set

The drawing-plus-control set may be used to indicate all of the elements in the drawing set plus additional control, Metafile Descriptor, Picture Descriptor, and attribute elements. It is specified by the shorthand name DRAWING PLUS CONTROL SET.

The elements included in the drawing-plus-control set are all of the elements in the drawing set and the following elements:

INTEGER PRECISION	CHARACTER CODING ANNOUNCER
REAL PRECISION	VDC INTEGER PRECISION
INDEX PRECISION	VDC REAL PRECISION
COLOUR PRECISION	SCALING MODE
COLOUR INDEX PRECISION	LINE WIDTH SPECIFICATION MODE
MAXIMUM COLOUR INDEX	MARKER SIZE SPECIFICATION MODE
COLOUR VALUE EXTENT	EDGE WIDTH SPECIFICATION MODE
METAFILE DEFAULTS REPLACEMENT	CHARACTER SET INDEX
FONT LIST	ALTERNATE CHARACTER SET INDEX
CHARACTER SET LIST	

NOTE — The drawing-plus-control set essentially constitutes a "Version-1 set", however that designation was not defined in the original ISO 8632:1987 and therefore cannot be used for reasons of upward compatibility of versions.

4.3.2.3 Version 2 set

The Version-2 set includes all elements from the drawing-plus-control set and the following elements defined in Version 2 metafiles:

BEGIN SEGMENT	MARKER CLIPPING MODE
END SEGMENT	EDGE CLIPPING MODE
BEGIN FIGURE	NEW REGION
END FIGURE	SAVE PRIMITIVE CONTEXT
NAME PRECISION	RESTORE PRIMITIVE CONTEXT

MAXIMUM VDC EXTENT	CIRCULAR ARC CENTRE REVERSED
SEGMENT PRIORITY EXTENT	CONNECTING EDGE
DEVICE VIEWPORT	PICK IDENTIFIER
DEVICE VIEWPORT MAPPING	COPY SEGMENT
DEVICE VIEWPORT SPECIFICATION MODE	INHERITANCE FILTER
LINE REPRESENTATION	CLIP INHERITANCE
MARKER REPRESENTATION	SEGMENT TRANSFORMATION
TEXT REPRESENTATION	SEGMENT HIGHLIGHTING
FILL REPRESENTATION	SEGMENT DISPLAY PRIORITY
EDGE REPRESENTATION	SEGMENT PICK PRIORITY
LINE CLIPPING MODE	

4.3.2.4 Extended primitives set

The extended-primitives set may be used to indicate those primitives which are available in Version 1 metafiles but are not defined in ISO 7942 (GKS). These elements are:

DISJOINT POLYLINE	CIRCULAR ARC CENTRE
RESTRICTED TEXT	CIRCULAR ARC CENTRE CLOSE
APPEND TEXT	CIRCULAR ARC CENTRE REVERSED
POLYGON SET	ELLIPSE
RECTANGLE	ELLIPTICAL ARC
CIRCLE	ELLIPTICAL ARC CLOSE
CIRCULAR ARC 3 POINT	CONNECTING EDGE
CIRCULAR ARC 3 POINT CLOSE	

4.3.2.5 Version 2 GKSM set

The Version-2-GKSM set is a set of Version 2 metafile elements for ISO 7942 (GKS) picture capture. The elements included in the Version-2-GKSM set are:

BEGIN METAFILE	CELL ARRAY
BEGIN PICTURE	GDP
BEGIN PICTURE BODY	LINE BUNDLE INDEX
END PICTURE	LINE TYPE
BEGIN SEGMENT	LINE WIDTH
END SEGMENT	LINE COLOUR
END METAFILE	MARKER BUNDLE INDEX
METAFILE VERSION	MARKER TYPE
METAFILE DESCRIPTION	MARKER SIZE
VDC TYPE	MARKER COLOUR
INTEGER PRECISION	TEXT BUNDLE INDEX
REAL PRECISION	TEXT FONT INDEX
INDEX PRECISION	TEXT PRECISION
COLOUR PRECISION	CHARACTER EXPANSION FACTOR
COLOUR INDEX PRECISION	CHARACTER SPACING
NAME PRECISION	TEXT COLOUR
MAXIMUM COLOUR INDEX	CHARACTER HEIGHT
COLOUR VALUE EXTENT	CHARACTER ORIENTATION
METAFILE ELEMENT LIST	TEXT PATH

Concepts

Metafile descriptor elements

METAFILE DEFAULTS REPLACEMENT	TEXT ALIGNMENT
FONT LIST	CHARACTER SET INDEX
CHARACTER SET LIST	ALTERNATE CHARACTER SET INDEX
CHARACTER CODING ANNOUNCER	FILL BUNDLE INDEX
MAXIMUM VDC EXTENT	INTERIOR STYLE
SEGMENT PRIORITY EXTENT	FILL COLOUR
VDC EXTENT	HATCH INDEX
DEVICE VIEWPORT	PATTERN INDEX
DEVICE VIEWPORT MAPPING	FILL REFERENCE POINT
DEVICE VIEWPORT SPECIFICATION MODE	PATTERN TABLE
LINE REPRESENTATION	PATTERN SIZE
MARKER REPRESENTATION	COLOUR TABLE
TEXT REPRESENTATION	ASPECT SOURCE FLAGS
FILL REPRESENTATION	PICK IDENTIFIER
VDC INTEGER PRECISION	ESCAPE
VDC REAL PRECISION	MESSAGE
CLIP RECTANGLE	APPLICATION DATA
POLYLINE	SEGMENT TRANSFORMATION
POLYMARKER	SEGMENT HIGHLIGHTING
TEXT	SEGMENT DISPLAY PRIORITY
POLYGON	SEGMENT PICK PRIORITY

4.3.2.6 Version 3 set

The Version-3 set may be used to indicate all elements in the Version-2 set and the elements:

BEGIN PROTECTION REGION	PARABOLIC ARC
END PROTECTION REGION	NON-UNIFORM B-SPLINE
BEGIN COMPOUND LINE	NON-UNIFORM RATIONAL B-SPLINE
END COMPOUND LINE	POLYBEZIER
BEGIN COMPOUND TEXT PATH	POLYSYMBOL
END COMPOUND TEXT PATH	BITONAL TILE
BEGIN TILE ARRAY	TILE
END TILE ARRAY	LINE CAP
COLOUR MODEL	LINE JOIN
COLOUR CALIBRATION	LINE TYPE CONTINUATION
FONT PROPERTIES	LINE TYPE INITIAL OFFSET
GLYPH MAPPING	TEXT SCORE TYPE
SYMBOL LIBRARY LIST	RESTRICTED TEXT TYPE
INTERIOR STYLE SPECIFICATION MODE	INTERPOLATED INTERIOR
LINE AND EDGE TYPE DEFINITION	EDGE CAP
HATCH STYLE DEFINITION	EDGE JOIN
GEOMETRIC PATTERN DEFINITION	EDGE TYPE CONTINUATION
PROTECTION REGION INDICATOR	EDGE TYPE INITIAL OFFSET
GENERALIZED TEXT PATH MODE	SYMBOL LIBRARY INDEX
MITRE LIMIT	SYMBOL COLOUR
TRANSPARENT CELL COLOUR	SYMBOL SIZE
HYPERBOLIC ARC	SYMBOL ORIENTATION

4.3.2.7 Version 4 set

The Version 4 set may be used to indicate all the elements in Version 3 and the elements:

PICTURE DIRECTORY	BEGIN APPLICATION STRUCTURE BODY
APPLICATION STRUCTURE DIRECTORY	END APPLICATION STRUCTURE
BEGIN APPLICATION STRUCTURE	APPLICATION STRUCTURE ATTRIBUTE

4.3.3 Default metafile state

The default state is the state to which the interpreter is returned at the start of each picture. The default states of all metafile elements are defined in clause 6. These default values may be selectively replaced by using the METAFILE DEFAULTS REPLACEMENT element. The correspondence between character set indexes and registered or private character sets, and the meaning assigned to text font indexes, are also established in the Metafile Descriptor.

4.3.4 Fonts and character sets

4.3.4.1 Font list and font resources

ISO/IEC 9541-1 defines an architecture for font resources, but does not define or standardize applications' use of the information in a font resource — ranging from gross or aggregate properties such as font posture to very specific and detailed properties such as individual glyph metrics. A metafile generator (with its associated application) will be a user of such font resource information. The application, in defining a picture which contains text strings, has knowledge of the properties of the font resource. It makes use of these properties to format or layout strings of text so that the complete strings have the desired characteristics.

CGM is used to transmit such pictures from a generating application to an interpreting application, possibly remote in time and space and possibly of very different architecture and resource availability. The font facilities of CGM are designed to provide a font referencing mechanism. Font referencing is the process of identifying or characterizing a font resource. Referencing may include identification of a specific font by name, or provide sufficient descriptive information to permit identification of a suitable font or substitute. This concept is described in ISO/IEC 9541-1, annex B.

The FONT LIST element of CGM allows the exact naming of a font resource. Such font resources may in the future be registered and given structured names under the mechanisms of ISO/IEC 9541. In the ideal case the metafile interpreter recognizes and has available the font resource named in the FONT LIST. For cases where the named font is not available to the interpreter, the CGM has elements (FONT PROPERTIES and GLYPH MAPPING) which allow generators to pass to interpreters additional descriptive information about desired fonts and font resources. An alternative font can be selected by an interpreter through this descriptive information if the specified one is not available.

4.3.4.2 Font properties

The FONT PROPERTIES element can be used to guide selection of a best fit font if an exact match is not available on a specific device. The font properties which may appear are those in the Minimum Font Description Subset of ISO/IEC 9541-2. Applications may use registered extensions to access additional properties from amongst the ISO/IEC 9541 font properties.

NOTE — Registration of additional font properties is done using the registration procedures of the ISO International Register of Graphical Items, as described in ISO/IEC TR9973.

The element allows the importance of each property to be assigned a priority relative to the other properties. In the case that a font named in the FONT LIST is not available, the priorities of the properties instruct the interpreter of the relative importance of the various characteristics of the requested font. In some cases it may not even be necessary to get a particular font, but rather any font with certain characteristics — boldness, presence of serif, etc. The FONT PROPERTIES element enables generators to specify such concepts. The use of this information by interpreters is not standardized.

4.3.4.3 Character set repertoire in graphical text strings

The CHARACTER SET LIST element allows designation of registered character sets for use in the metafile. It also allows designation of private character sets, and in combination with the GLYPH MAPPING element allows designation of collections of glyphs which are registered (according to the procedures of ISO/IEC 10036).

Concepts

Metafile descriptor elements

Format effector control characters (NUL, CR, LF, BS, HT, VT, and FF) are permitted in a parameters of type String but their interpretation is implementation dependent. Control characters used for character set invocation and designation (SI, SO, ESC, SS2, and SS3) are permitted according to the setting of CHARACTER CODING ANNOUNCER. The other control codes from the C0 and C1 sets are reserved for future standardization.

NOTE — SI and SO are only defined and usable with 7-bit coding.

The mechanisms described in this section for character set definition, and the mechanisms for accessing the character sets (CHARACTER CODING ANNOUNCER, CHARACTER SET INDEX, and ALTERNATE CHARACTER SET INDEX) apply only to string parameters (S) of graphical text elements (TEXT, RESTRICTED TEXT, APPEND TEXT, and appropriate GDPs). They do not apply to non-graphical text strings (SF) such as the *metafile identifier* parameter of the BEGIN METAFILE element.

For designation of ISO registered character sets, two pieces of information are specified by the parameters: a character set type, and the tail of its designating sequence by which it is known in the ISO register.

There are five types of character sets: 94-character G-sets, 96-character G-sets, 94-character multibyte G-sets, 96-character multibyte G-sets, and character sets intended to be designated as "complete codes".

94-CHARACTER G-SETS. These character sets are designated by ISO 2022 escape sequences of the form <ESC> <I1> <I>(o) <F>. Here, <I1> is either 2/8, 2/9, 2/10, or 2/11; <I>(o) represents zero or more intermediate characters from column 2 of the code chart; and <F> is a final character from columns 3 through 7 of the code chart. If <F> is from column 3 of the code chart, the character set is a "private" character set. If <F> is from columns 4 through 7 of the code chart, the character set is a "standard" character set in the sense that it and its designating escape sequences are registered in the International Register Of Coded Character Sets To Be Used With Escape Sequences.

For 94-character G-sets, the character set declaration consists of '94-character G-set', followed by a string consisting of all characters in the ISO 2022 designating escape sequence except the first two characters, <ESC> <I1>.

For example, the G-set from the U.K.'s national 7-bit character set is registered in the International Register Of Coded Character Sets To Be Used With Escape Sequences. Its designating escape sequences are as follows:

<ESC>	2/8	4/1	{to designate it as G0}
<ESC>	2/9	4/1	{to designate it as G1}
<ESC>	2/10	4/1	{to designate it as G2}
<ESC>	2/11	4/1	{to designate it as G3}

Again, the French character set (1982 version, from the 1982 version of AFNOR NF Z 62-010) is registered in the International Register Of Coded Character Sets To Be Used With Escape Sequences. Its designating escape sequences are as follows:

<ESC>	2/8	6/6	{to designate it as G0}
<ESC>	2/9	6/6	{to designate it as G1}
<ESC>	2/10	6/6	{to designate it as G2}
<ESC>	2/11	6/6	{to designate it as G3}

Therefore, a CHARACTER SET LIST element could specify that the U.K. character set is to be referred to by character set index 1, and the French character set by character set index 2, as follows:

<CHARACTER-SET-LIST: U.K., French>

‘94-character G-set’ 4/1

‘94-character G-set’ 6/6

96-CHARACTER G-SETS. These character sets are similar to 94-character G-sets, but include the code positions 2/0 and 7/15, which are excluded from 94-character G-sets. Their ISO 2022 designating escape sequences take the form <ESC> <I1> <I>(o) <F>, where the first intermediate character <I1> is either 2/13, 2/14, or 2/15. The remainder of the escape sequence is similar to the escape sequences for 94-character G-sets: zero or more intermediate characters from column 2 of the code chart and a final character from columns 3 through 7 of the code chart.

For 96-character G-sets, the character set declaration consists of ‘96-character G-set’, followed by a string consisting of all characters in the ISO 2022 designating escape sequence except the first two characters, <ESC> <I1>.

It is possible for interchanging parties to agree on a private 96-character G-set whose designating escape sequences would end with a character from column 3 of the code chart. For example, the following might be private escape sequences to designate such a G-set:

<ESC>	2/13	3/0	{to designate it as G1}
<ESC>	2/14	3/0	{to designate it as G2}
<ESC>	2/15	3/0	{to designate it as G3}

(96-character G-sets may not be designated as G0 sets.)

For example, the following CHARACTER SET LIST element establishes the U.K. 94-character G-set, the French 94-character G-set, and a private 96-character G-set as the character sets named by character set indexes 1, 2, and 3, respectively:

<CHARACTER-SET-LIST: U.K., French, private 96-character G-set>

‘94-character G-set’ 4/1

‘94-character G-set’ 6/6

‘96-character G-set’ 3/0

94-CHARACTER MULTIBYTE G-SETS. A 94-character multibyte G-set can contain 94 to the Nth power characters, each coded as a sequence of N bytes from columns 2 through 7 of the code chart, not including the bytes 2/0 and 7/15, which are excluded from 94-character G-sets. For example, a 94-character 2-byte G-set can contain 8,836 characters.

The ISO 2022 designating escape sequences for 94-character multibyte G-sets have the following forms:

<ESC>	2/4	2/8	<F>	{to designate it as G0}
<ESC>	2/4	2/9	<F>	{to designate it as G1}
<ESC>	2/4	2/10	<F>	{to designate it as G2}
<ESC>	2/4	2/11	<F>	{to designate it as G3}

For compatibility with the first version of ISO 2022, when <f> is 4/0, 4/1, or 4/2 the byte 2/8 may be left out of the designating escape sequence as a G0 set.

For 94-character multibyte G-sets, the character set declaration consists of ‘94-character multibyte G-set’, followed by a string consisting only of the final character in the ISO 2022 designating escape sequence.

Concepts

Metafile descriptor elements

For example, a Japanese 2-byte character set of 6802 graphic characters has been registered in the International Register Of Coded Character Sets To Be Used With Escape Sequences, and its designating escape sequences have the form shown above, with the final character <F> being 4/0. Thus, the following CHARACTER SET LIST element could be used to specify that this 2-byte Japanese character set is to be referred to by character set index 1:

<CHARACTER-SET-LIST: Japanese 2-byte character set>

'94-character multibyte G-set' 4/0

96-CHARACTER MULTIBYTE G-SETS. A 96-character multibyte G-set is similar to a 94-character multibyte G-set except that it can include the bytes 2/0 and 7/15. Thus, a 96-character 2-byte G-set could have 96 times 96 (or 9216) 2-byte character codes.

The ISO 2022 designating escape sequences for 96-character multibyte G-sets have the following forms:

<ESC>	2/4	2/13	<F>	{to designate it as G1}
<ESC>	2/4	2/14	<F>	{to designate it as G2}
<ESC>	2/4	2/15	<F>	{to designate it as G3}

It is not possible to designate a 96-character multibyte G-set as a G0 set.

The character set declaration for a 96-character multibyte G-set consists of '96-character multibyte G-set' followed by a string consisting only of the final character <F> in the character set's ISO 2022 designating escape sequence.

At the time of this publication, no 96-character multibyte G-sets have been registered in the International Register of Coded Character Sets To Be Used with Escape Sequences.

CHARACTER SETS INTENDED TO BE DESIGNATED AS COMPLETE CODES. Other character sets may not fit the ISO 2022 "G-set" structure. ISO 2022 provides an escape sequence format for invoking coding systems different from ISO 2022. The complete code escape sequences have the following form

<ESC> 2/5 <I>o <F>

where <I>o means "zero or more characters from column 2 of the code chart", and <F> is a final character from columns 3 through 7 of the code chart. If <F> is from column 3, the coding system is a private code. If <F> is from columns 4 through 7, it is a code for which a designating and invoking escape sequence has been registered in the International Register Of Coded Character Sets To Be Used With Escape Sequences.

The character set declaration for a character set that would be invoked as a coding system different from ISO 2022 consists of 'complete code' followed by a string consisting only of those characters in the code's ISO 2022 escape sequence which come after the first two characters, <ESC> 2/5.

As well as using a registered complete code, a private code could be used. For example, suppose the inter-changing parties have agreed on a private 8-bit code to be invoked by the following escape sequence:

<ESC> 2/5 3/0

The following CHARACTER SET LIST element would declare the French character set to have character set index 1 and that 8-bit private code to have character set index 2:

<CHARACTER-SET-LIST: French, private coding system>

'94-character G-set' 6/6

'complete code' 3/0

Information regarding the designation sequence tail parameter is found in the International Register of Coded Character Sets to be Used with Escape Sequences. This register is maintained by the Registration

Authority for ISO 2375, which is the European Computer Manufacturers Association (ECMA), Rue du Rhone 114, CH-1204, Geneva, Switzerland.

4.3.4.4 Glyph repertoire

ISO/IEC 10036 specifies a procedure and a registrar (registering authority) for registering typographic glyph collections. There currently is no standard that associates codes (i.e., character codes) with these glyphs. However the registrar — the Association for Font Information Interchange, or AFII — assigns a unique 4-byte integer identifier with each glyph.

This part of ISO/IEC 8632 defines a means to access these registered glyph collections for use in graphical text strings. The GLYPH MAPPING element associates the AFII 4-byte identifiers with single-byte or multi-byte codes. A set of such codes is defined as a collection, forming a locally defined character set for use within the metafile. The local character set is associated with an index, and within the body of the CGM the normal character set access and switching mechanisms (based upon, and adapted from, ISO 2022) may be used to access the AFII registered glyphs within CGM text strings.

NOTE — The glyph complement is a property of a font resource in the ISO/IEC 9541 font architecture. When the separate mechanisms of ISO/IEC 8632 for font reference and glyph access are used there is potential for incompatibility between the specifications — the requested glyph complement may not be representable in the requested font.

4.3.4.5 Character set selection in non-graphical text strings

The mechanisms discussed in the preceding sections apply to graphical text strings — text strings which result in display as graphical entities. These are the parameters of TEXT, RESTRICTED TEXT, APPEND TEXT, and possibly GDP elements.

They do not apply to other, non-graphical text strings which occur as metafile parameters. See 5.1, type String Fixed (SF). For these strings, character set selection shall be accomplished only through use of embedded ISO 2022 controls, to switch sets within the string.

For the purposes of coding type SF parameters in ISO/IEC 8632 metafiles, 7-bit coding environment shall be used. It is not possible, either using ISO 2022 controls or any other defined facilities in this International Standard, to select other than 7-bit coding for type SF parameters.

In SF parameters, therefore, the two character sets which are currently designated as G0 and G1 may be accessed by using: SI to invoke G1 into positions 2/1 to 7/14 of the 7-bit code chart; and using SO to invoke G0 into positions 2/1 to 7/14 of the 7-bit code chart.

BEGIN METAFILE causes ISO 646 International Reference Version to be designated as the G0 set and ISO 8859-1, Right Hand Side of Latin Alphabet Nr. 1 to be designated as the G1 set. In other words, ISO 646 is the default character set of type SF parameters, an SI embedded in the string will cause subsequent 7-bit codes to access the characters of ISO 8859-1, and an SO embedded in the string will cause subsequent 7-bit codes to access ISO 646 again. These two character set may be switched between using only SI and SO — no ISO 2022 designation sequences are required.

EXAMPLE — Many of the characters of the Latin-based alphabets would be accessible with ISO 646 and the Right Hand Side of ISO 8859-1, Latin Alphabet Number 1. These are the default G0 and G1 sets of the metafile. ISO 2022 sequences could be used to designate any other character sets as G0 and/or G1, and then SI/SO could be used to switch between these sets.

The ISO 2022 designating sequence

ESC 2/8 4/2,

for example, would designate ISO 646, U.S. National Character Set (ASCII) as the G0 set (the default set).

Similarly, the ISO 2022 designating sequence

ESC 2/13 4/2

Concepts**Metafile descriptor elements**

would designate ASCII as the G1 set, superseding the default G1 set (ISO 8859-1) — character codes following an SI would then refer to ASCII, not ISO 8859-1.

Format effector control characters (NUL, CR, LF, BS, HT, VT, and FF) are permitted in a parameters of type String Fixed but their interpretation is implementation dependent. Control characters used for character set invocation and designation (SI, SO, ESC, SS2, and SS3) are permitted according to the setting of CHARACTER CODING ANNOUNCER. The other control codes from the C0 and C1 sets are reserved for future standardization.

4.3.5 Picture directory

The PICTURE DIRECTORY element contains locations of the pictures in a metafile. The picture directory contains a list of picture identifiers and their locations relative to the BEGIN METAFILE element. The picture directory may optionally contain the location of the APPLICATION STRUCTURE DIRECTORY element in each picture relative to the BEGIN METAFILE element. An interpreter wishing to randomly address a picture in a metafile with a picture directory need only interpret the Metafile Descriptor and skip to the locations of the picture specified in the PICTURE DIRECTORY. The next element read will be the desired BEGIN PICTURE.

4.4 Picture descriptor elements

Picture Descriptor elements include elements to declare the parameter modes of other elements for an entire picture, to configure that portion of coordinate space that is of interest in the picture, and to set the colour to which the view surface is cleared at the start of the picture. These elements are:

SCALING MODE	LINE REPRESENTATION
COLOUR SELECTION MODE	MARKER REPRESENTATION
LINE WIDTH SPECIFICATION MODE	TEXT REPRESENTATION
MARKER SIZE SPECIFICATION MODE	FILL REPRESENTATION
EDGE WIDTH SPECIFICATION MODE	EDGE REPRESENTATION
VDC EXTENT	INTERIOR STYLE SPECIFICATION MODE
BACKGROUND COLOUR	LINE AND EDGE TYPE DEFINITION
DEVICE VIEWPORT	HATCH STYLE DEFINITION
DEVICE VIEWPORT SPECIFICATION MODE	GEOMETRIC PATTERN DEFINITION
DEVICE VIEWPORT MAPPING	APPLICATION STRUCTURE DIRECTORY

In Version 1 metafiles, any Picture Descriptor elements within a picture shall appear after the BEGIN PICTURE element and before the BEGIN PICTURE BODY element. Escape and external elements are permitted in the Picture Descriptor.

In Version 2, Version 3, and Version 4 metafiles, some of the Picture Descriptor elements may appear within the picture body. Table 8 indicates which Picture Descriptor elements may appear and where they may appear for each metafile version.

4.4.1 Scaling mode

VDC space may be either an abstract space, which may be mapped to an arbitrary size on a physical device, or a metric space, which is intended to be mapped to a particular size. Selection of the mode to be used can be made on a picture-by-picture basis by means of the SCALING MODE element. The scaling mode element provides a flag to select abstract space or metric space, and a scale factor which specifies the number of millimeters per VDC unit when metric space is selected.

4.4.2 Colour selection mode

COLOUR SELECTION MODE selects either indexed or direct colour specification and is described further under colour attributes, 4.7.6. For Version 1 metafiles, the selection is for the whole picture.

4.4.3 Specification modes

Line width, marker size, interiors of filled-area elements, and edge width may be specified in more than one way. The width of lines, for example, may be specified as either a measure in VDC units, a scale factor to be applied to a device-dependent nominal line width at interpretation time, a fraction of the device view surface, or a measure in millimetres. For each attribute element having such multiple modes, there is an associated control element that defines the mode of the parameter of the attribute element.

4.4.4 VDC extent

There is a metafile element to define the VDC extent. The extent is set with the VDC EXTENT element by specifying the addresses (in VDC) of the lower-left corner and the upper-right corner of this extent as seen by the viewer of the picture. Specification of values outside the VDC extent is permitted in CGM elements. It is intended that the visible portion of an image be contained within the VDC extent. It thus provides a frame for the region of interest in a picture. The values of the coordinates for either dimension may be either increasing or decreasing from the lower-left to the upper-right corner. For example, for devices with an upper-left origin, a picture may be described in coordinates that map directly to the device but still may be displayed correctly on a device with a lower-left origin. figure 1 illustrates these concepts.

The VDC extent thus establishes the sense and orientation of VDC space (that is, the directions of the positive x (+ x) and positive y (+ y) axes, and whether the + y axis is 90° clockwise or 90° counterclockwise from the + x axis). In particular, VDC EXTENT establishes the direction of positive and negative angles as follows: positive 90° is defined to be the right angle from the positive x -axis to the positive y -axis (see figure 1).

Note that some attributes such as text attributes (for example, the directions of the 'up' and 'base' component vectors of CHARACTER ORIENTATION, and therefore the meaning of the enumerative values 'right', 'left', 'up', 'down') are intimately bound to these definitions.

The default state of the extent is specified in clause 6. and can be changed in the METAFILE DEFAULTS REPLACEMENT element in the Metafile Descriptor. VDC EXTENT returns to this default state at the beginning of each picture. MAXIMUM VDC EXTENT defines an extent which bounds the VDC extent values which may be found in the metafile. It may be, but need not be, a closest bound in the sense that it exactly equals the union of the extent rectangles in the metafile. This element may be used, for example, to map integer virtual device coordinates of the metafile to a unit square in a normalized device space.

4.4.5 CGM tailoring

The ability to specify the VDC range and the VDC extent provides the flexibility to configure the metafile addressability in any way desired. It can be configured as an abstract, normalized address range for maximum device independence. It can also be configured to mimic the addressability of a particular target device in order to take advantage of particular device characteristics. The address range of such a device-specific metafile is just another normalized address range with the normalization limits inherent in the VDC-customizing element; therefore, device independence is maintained.

Such tailoring of the coordinates in a metafile can eliminate the need for transformation of coordinates at metafile interpretation time for the target device. The ability to specify the VDC extent thus allows for the exact registration of coordinates in a metafile with addressable points on the target graphics device.

The use of VDC EXTENT to directly encode world coordinates of large dynamic range and very small granularity will likely result in performance penalties at metafile interpretation time, and may result in decreased portability if such VDC extents exceed those compatible with less capable metafile interpreters.

In addition to VDC tailoring, a metafile generator can limit or tailor the functional content of a metafile to accommodate particular devices or applications, and announce such functional tailoring through the use of METAFILE ELEMENT LIST.

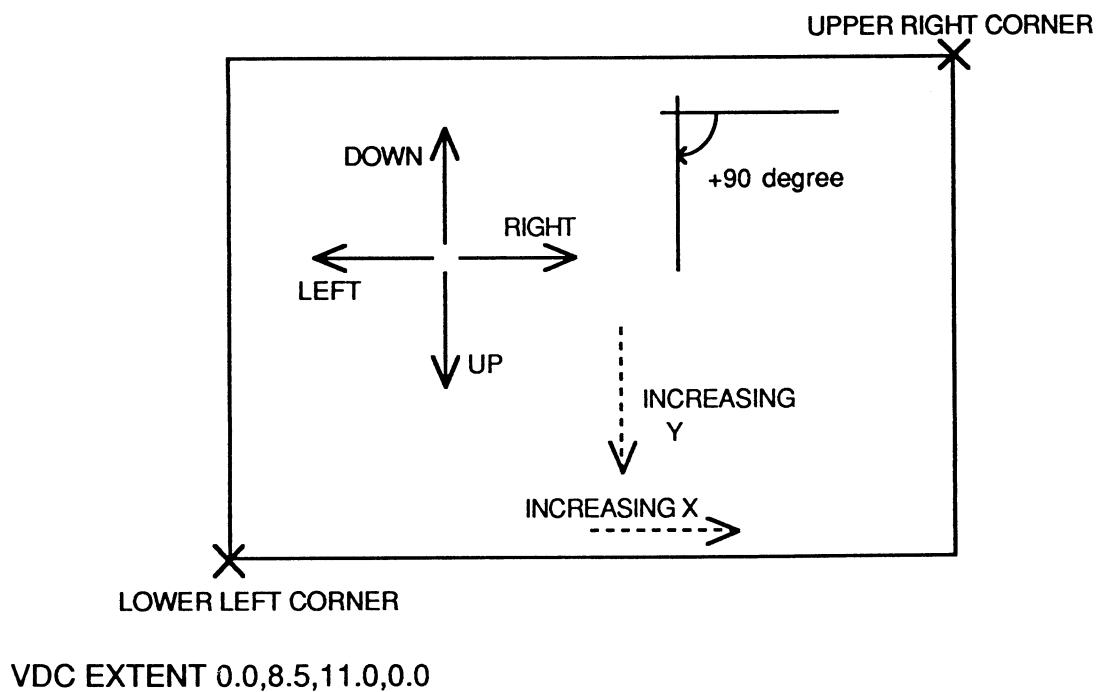
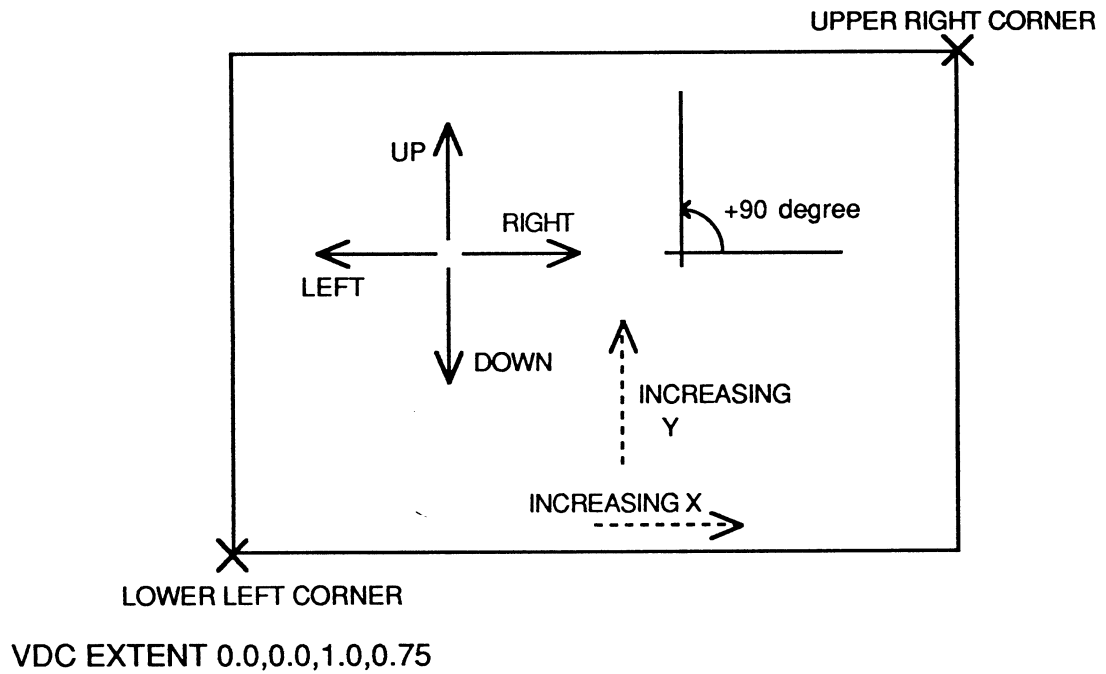


Figure 1 — VDC EXTENT establishes the direction of positive and negative angles

4.4.6 Background colour

Each picture defines a graphical image that is independent of the other images in a metafile. The background colour of the image may be specified by the BACKGROUND COLOUR Picture Descriptor element. If that element is not contained in the Picture Descriptor, the background colour of the image is the default background colour, whether that default is as specified in clause 6. or has been specified in the METAFILE DEFAULTS REPLACEMENT element.

The single parameter of BACKGROUND COLOUR is always a direct colour, regardless of the current value of COLOUR SELECTION MODE. If the COLOUR SELECTION MODE is indexed, then the BACKGROUND COLOUR element defines the initial representation of colour index 0 for the picture.

4.4.7 Device viewport control

The device viewport specifies the region of the device display surface into which the VDC extent is to be mapped on interpretation. VDC-to-Device mapping is determined by the VDC extent, device viewport, and device viewport mapping.

The position of the device viewport is specified in one of three coordinate systems selected by the DEVICE VIEWPORT SPECIFICATION MODE element:

- by fraction [0.0 to 1.0] of the available display surface, which allows reasonable placement and relative sizing of the viewport;
- in millimetres times a scale factor, which allows absolute sizing of images;
- in physical device coordinates.

The device viewport is specified in terms of two points on the device display surface at diagonally opposite corners of the rectangle. Mirroring or 180° rotation of the image may be achieved by specifying the corners in some way other than the first as below and to the left of the second.

The DEVICE VIEWPORT MAPPING element may be used to force isotropic mapping even if the specified VDC extent and device viewport would not otherwise have led to one. In such a case, the VDC extent is mapped on to a subset of the specified device viewport on interpretation. This subset is defined by shrinking either the vertical or horizontal dimension of the specified viewport as needed to reach the required aspect ratio. This smaller "effective viewport" is then used to define the coordinate mapping from VDC to the device's coordinates. The placement of the effective viewport rectangle within the original one can be specified. This placement can be one of 'left', 'right' or 'centred' when the shrinking is horizontal, and 'top', 'bottom' or 'centred' when it is vertical. These meanings are relative to the display surface of the device.

The VDC-to-Device mapping maps the first point specifying the VDC extent on to the corner of the effective viewport corresponding to the first point specifying the device viewport, and similarly for the second point. The mapping is linear in each dimension, but is not necessarily isotropic (for example, a circle in VDC may not appear as a circle to the viewer).

Both the way VDC space is oriented relative to the display surface and the way the effective viewport is placed on the physical device may lead to mirroring and 180° rotation.

The behaviour of primitives and attributes with significance in VDC space under transformations is further described in 4.6.

If both device viewport and scaling mode appear in the same metafile then the last specified is used. If neither appears then the default values for device viewport take precedence.

Concepts

Picture descriptor elements

4.4.8 Representations

The elements LINE REPRESENTATION, MARKER REPRESENTATION, TEXT REPRESENTATION, FILL REPRESENTATION and EDGE REPRESENTATION are used to set all of the attribute values in a bundle table entry at the same time. The attributes that may be bundled are described in 4.7

4.4.9 Definable attributes

A precise definition of line and edge types as well as hatch styles may be accomplished as described in 4.7. Moreover, geometric patterns may be defined (in addition to patterns which are arrays of colours confined to parallelogram-like cells) using the segment definition mechanism. See 4.7.

4.4.10 Application structure directory

The APPLICATION STRUCTURE DIRECTORY element contains the locations of the various application structures in a picture. The application structure directory contains a list of application structure identifiers and their locations relative to the BEGIN PICTURE element. APSs within a metafile containing multiple pictures can be accessed directly in two steps. First, the picture directory is used to locate a picture and possibly the application structure directory for the picture. 2nd, the APSs in the picture are located using the application structure directory.

4.5 Control elements

Control elements specify address space, clipping boundaries, and format descriptions of the CGM elements. Control of some of these format descriptions may be accomplished by Metafile Descriptor elements, while control of others is accomplished by control elements, which may appear in the picture bodies in the metafile. Those items in the former category are fixed for a given metafile, while those in the latter category are changeable; that is, they may change within a picture. Some of the control elements may appear in the Picture Descriptor if this is permitted by the formal grammar for the metafile version. See table 8.

4.5.1 VDC space and range

The graphical primitive elements of a metafile define virtual images. The coordinates of these elements (that is, the addresses of points in the virtual image) are absolute two-dimensional Virtual Device Coordinates (VDC). VDC space is a two-dimensional coordinate space of infinite precision and infinite extent. Only a subset of VDC space, the VDC range, is realizable. The VDC range comprises all coordinates representable in the format specified by the declared VDC TYPE and (depending on the type) the VDC INTEGER PRECISION or VDC REAL PRECISION.

The VDC range cannot be set directly; it is completely determined by VDC TYPE and either VDC INTEGER PRECISION or VDC REAL PRECISION elements in the metafile. These elements are controllable, some by dynamic elements in the metafile body and some by static elements in the Metafile Descriptor. Note that the VDC range thus defined (a rectangular subregion of the VDC space) does not enclose a continuum of values, but has a distinct granularity. Regardless of the aspect ratio of the VDC range and the granularity within the range, it is implicit that one VDC unit in the x-direction represents the same distance as one VDC unit in the y-direction in VDC space.

4.5.2 Clipping

In order to defer clipping of graphical primitive elements (particularly, expandable elements such as CIRCLE, CIRCULAR ARC 3 POINT, TEXT, etc.) until metafile interpretation time, a clipping control feature is provided in the CGM. Clipping control is achieved by defining CLIP RECTANGLE in VDC space. Whether clipping to the limits of CLIP RECTANGLE actually occurs at metafile interpretation time is controlled by the CLIP INDICATOR element that sets the mode of the metafile to 'on' or 'off'.

In Version 3 and Version 4 metafiles, primitives may also be clipped against more general regions as defined by BEGIN PROTECTION REGION and END PROTECTION REGION, and as controlled by PROTECTION REGION INDICATOR (see 4.5.4). Clipping effects in the remainder of this section are described in terms of the basic CLIP RECTANGLE capability, but they apply equally to general clip regions.

There are three different clipping modes for lines, markers and edges. The required clipping mode is recorded in the metafile with the elements: LINE CLIPPING MODE, MARKER CLIPPING MODE, and

EDGE CLIPPING MODE. When the CLIP INDICATOR associated with a graphical primitive is 'on', only those parts of a graphical primitive that are considered inside the effective clipping region are rendered on interpretation. The object clipping modes allow precise specification as to how clipping is applied to primitives on interpretation.

Clipping may be either 'locus', 'shape' or 'locus then shape'. Conceptually, a locus is a mathematical object like a point or line segment, while a shape is an area in 2-dimensional space. Loci are 0-, 1- or 2-dimensional subsets of real-valued 2-space. For markers and text, they are points. For lines, they are the individual line segments or portions of arcs. The locus of an area is the shape and the boundary. Shapes reflect the realization of geometric attributes and are generally 2-dimensional subsets of real-valued 2-space.

'Locus' clipping is applied for each portion of a graphical object based on its mathematical location and is independent of the area it will occupy after rendering. For example, no portion of a line segment is rendered if the ideal mathematical line lies outside the effective clipping region (even if its line width would carry some portion of the rendering of it into the clipping rectangle); no portion of a marker is rendered if its location lies outside the clipping rectangle.

If 'locus' clipping is used, the rendering is applied to the locus of the graphical object after clipping. The resulting rendered shape areas may therefore extend outside the effective clipping region.

'Shape' clipping is applied after the abstract rendering of shape in device coordinate space. The 2-dimensional point set associated with the graphical object is intersected with the effective clipping region, which has been transformed to device coordinate space.

'Locus then shape' clipping allows the specification that both 'locus' and 'shape' clipping be applied to graphical objects as described above. In this case however, the rendered shape will not extend outside the effective clipping region. A thick line whose locus is outside the clip rectangle will not have any portion visible even if its line width would carry some portion of the rendering inside the clip rectangle.

Figure 2 shows some examples of the effect of the clipping modes.

When a width or size specification mode is 'scaled', 'fractional', or 'mm', the rendering of shape proceeds in device coordinate space after application of the VDC- to-Device mapping.

When a width or size specification mode is 'absolute', the rendering of shape proceeds, in VDC space before application of the copy transformation and before application of the segment transformation (if the primitive is in a copied segment), and before the VDC-to-Device mapping.

Fill and text primitives do not have associated object clipping modes (though the edge of a fill primitive and the boundary edges of a closed figure do). Clipping for fill primitives is always consistent with 'shape' clipping (see 4.6.4). For text primitives, the type of clipping is determined by the associated text precision:

- For 'string' precision text, clipping proceeds, on a per string basis, in a manner consistent with 'locus' clipping.
- For 'character' precision text, clipping proceeds, on a per character basis, in a manner consistent with 'locus' clipping.
- For 'stroke' precision text, the clipping always proceeds in a manner consistent with 'shape' clipping.

NOTE — It is valid for an interpreter to perform 'shape' clipping of text in all cases, i.e., 'stroke' text precision is a valid realization of 'character' and 'string' text precision (and 'character' text precision is a valid realization of 'string' text precision).

Clip rectangles applied to graphical primitive elements within segments may be subject to transformations in VDC space. Intersection of clip rectangles (untransformed or transformed) may result in polygonal clipping boundaries (see 4.10.5).

4.5.3 Save and restore primitive context

Two elements, SAVE PRIMITIVE CONTEXT and RESTORE PRIMITIVE CONTEXT, are provided to save and restore a context; that is, attributes and control elements as collections. This capability allows a list of attributes and control elements (see 5.5.11) to be stored in the metafile which can be referenced by name at a later point in the metafile. This capability can be used to save and restore attributes and control elements in conjunction with opening and closing segments.

The values for attributes controlled by specification or selection modes are saved in the mode in which they were last specified along with the value of the corresponding mode. In restoring a context, the current specification and selection modes are not changed.

4.5.4 Compound clipping and shielding

The clipping and shielding elements consist of BEGIN PROTECTION REGION, END PROTECTION REGION, and PROTECTION REGION INDICATOR. The BEGIN PROTECTION REGION and END PROTECTION REGION elements are delimiter elements, and the PROTECTION REGION INDICATOR element is a control element.

Protection regions are identified by an index. Protection regions are constructed by the same primitive elements as closed figures. The interior of a given protection region is defined in the same way as the interior of a closed figure. Regions which are constructed by line elements are closed by NEW REGION, END PROTECTION REGION, or any filled area element. If the endpoints and beginning points of subsequent line elements are not identical they are implicitly connected by a straight line.

If a protection region is used within a segment (i.e., the PROTECTION REGION INDICATOR has the value 'clip' or 'shield' for that region inside the segment), it behaves as do clip rectangles with respect to transformations — it transforms by the copy transformation which is associated with the COPY SEGMENT element. Protection regions used in segments are also affected by the segment transformations of the segment.

The effective protection region for clipping and/or shielding, when protection regions are defined, or referenced, within segments, is determined by CLIP INHERITANCE in the same way as for the simpler rectangle clipping (see 4.10.5).

NOTE — Inheritance of regions is complicated by the fact that, conceptually, the entire list of regions together with their indicators must be subject to the inheritance mechanism, down to the point in the segment hierarchy where reference to a region is made or the region must be applied for clipping or shielding (in the case of the 'intersection' value of CLIP INHERITANCE).

If a protection region is defined within a segment, then its definition persists after the END SEGMENT terminating that segment definition. This is exactly as for clip rectangles, and primitive attributes. Thus the definition and activation of a region within a local segment in a picture body potentially has effect in the picture body following the segment. If a segment is copied into the picture body with a COPY SEGMENT function, then region definitions within the segment do not affect primitives following, again exactly as clip rectangle.

A protection region is associated with an index at definition time. If a region is defined with an index that is already in use, then the old definition is deleted. The associated protection region indicator for the newly defined region takes the initial value 'off'.

When a protection region is set for clipping, only the portions of the graphical elements inside or on the boundary of the protection region are drawn. When a protection region is set for shielding, only the portions of the graphical elements outside the protection region and its boundary are drawn.

Several clip and shield regions may be in effect simultaneously. In this case, only portions of the graphical elements inside or on the boundary of the intersection of all individual clip regions and outside the union of

all individual shield regions are drawn. See figure 3.

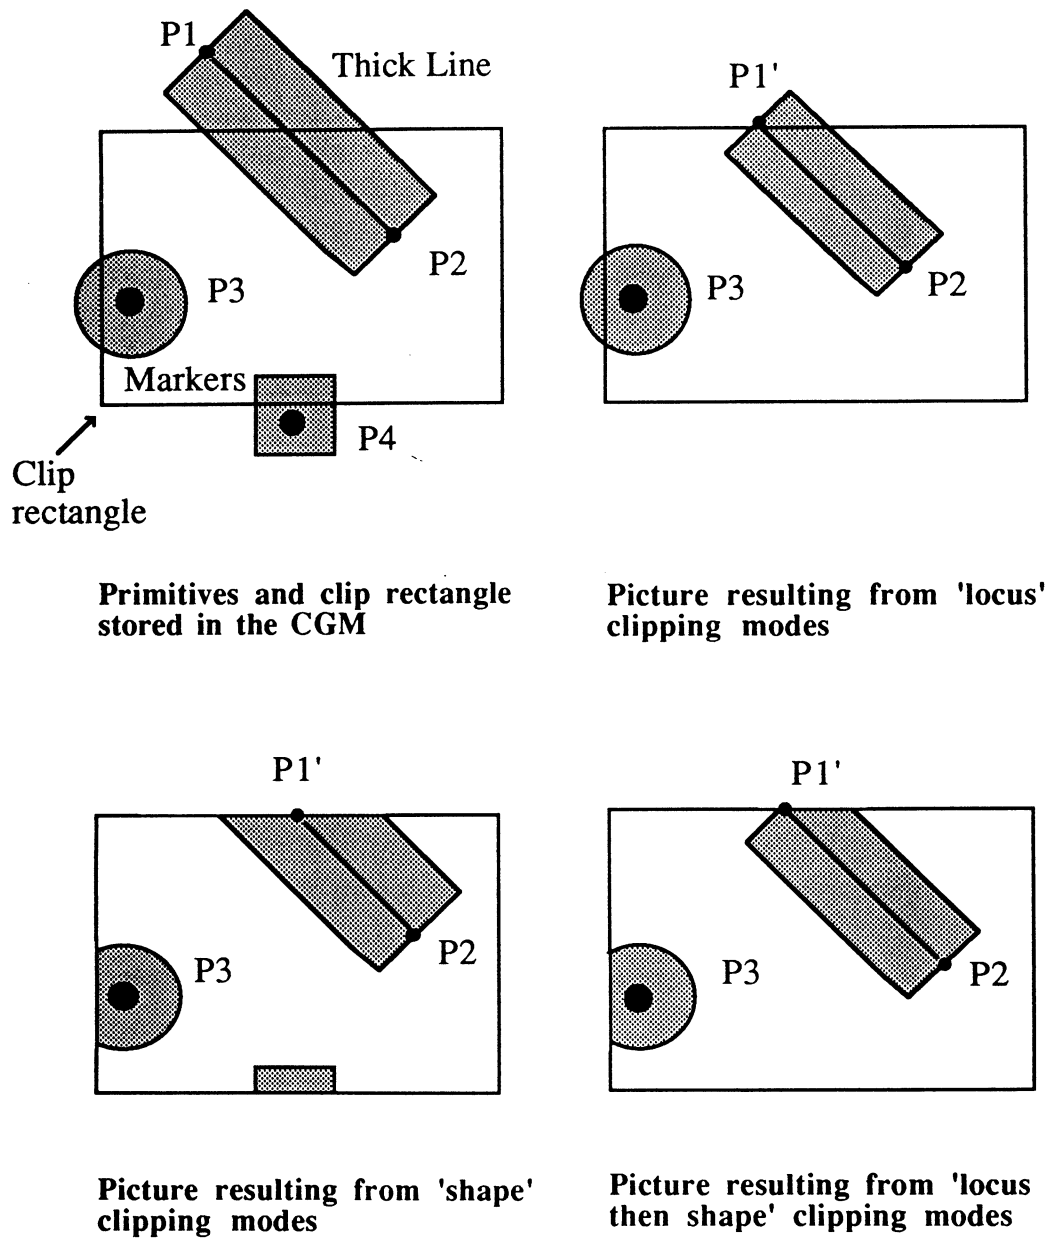


Figure 2 — Clipping modes