

Electromagnetic immunity of broadcast receivers and associated equipment

The European Standard EN 55020:1994, with the incorporation of amendments A11:1996, A12:1999, A13:1999 and A14:1999 has the status of a British Standard

ICS 33.100.20; 33.160.20; 33.160.25

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by Technical Committee GEL/110, Electromagnetic compatibility, to Subcommittee GEL/110/5, Household sound and vision equipment, upon which the following bodies were represented:

- British Radio and Electronic Equipment Manufacturers' Association
- Cable Communications Association
- ERA Technology Ltd.
- Federation of the Electronics Industry
- National Air Traffic Services
- Radio Society of Great Britain
- Radiocommunications Agency

This British Standard, having been prepared under the direction of the Electrotechnical Sector Board, was published under the authority of the Standards Board and comes into effect on 15 November 1995

© BSI 30 January 2002

The following BSI references relate to the work on this standard:
Committee reference GEL/110/5
Draft for comment 91/25187 DC

ISBN 0 580 24275 7

Amendments issued since publication

Amd. No.	Date	Comments
9175	November 1996	See national foreword
9512	July 1997	See national foreword
9964	April 1998	See national foreword
10711	April 2000	See national foreword
13443 Corrigendum No. 1	30 January 2002	See national foreword

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Foreword	2
Text of EN 55020	5

National foreword

This British Standard has been prepared by Subcommittee GEL/210/5 (formerly GEL/110/5) and is the English language version of EN 55020:1994 *Electromagnetic immunity of broadcast receivers and associated equipment*, including corrigendum December 1997 (which replaces corrigendum January 1996) and amendments A11:1996, A12:1999 together with its corrigendum August 1999, A13:1999 and A14:1999 and corrigendum July 2001 (which replaces corrigendum August 1999), published by the European Committee for Electrotechnical Standardization (CENELEC) and is related to CISPR Publication 20:1990 *Limits and methods of measurement of immunity characteristics of sound and television broadcast receivers and associated equipment*. Amendment No. 1:1996 implemented the corrigendum of January 1996 to the English version of EN 55020:1995. Amendment No. 3 implements the corrigendum of December 1997 to the English version of EN 55020:1994. This corrigendum replaces the corrigendum of January 1996 to the English version of EN 55020:1994.

The start and finish of text introduced or altered by amendment is indicated in the text by tags **A1** **A1**. Tags indicating changes to CENELEC text carry the number of the CENELEC amendment. For example, text altered by CENELEC amendment A11:1996 is indicated by **A11** **A11**; while A12:1999 together with its corrigendum is indicated by **A12** **A12**.

CENELEC corrigendum July 2001 replaces the latest date of withdrawal of conflicting national standards of the foreword to amendment A12. Corrigendum January 2002 inserts subclause numbers into clause 21.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled “International Standards Correspondence Index” or by using the “Find” facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the EN title page, pages 2 to 59 and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Descriptors: Electromagnetic compatibility, radio interference, broadcast receiver, associated equipment, method of measurement, immunity, characteristics

English version

Electromagnetic immunity of broadcast receivers and associated equipment

(includes amendments A11:1996, A12:1999, A13:1999 and A14:1999)

Immunité électromagnétique des récepteurs de radiodiffusion et appareils associés
(inclut les amendements A11:1996, A12:1999, A13:1999 et A14:1999)

Störfestigkeit von Rundfunkempfängern und verwandten Geräten der Unterhaltungselektronik
(enthält Änderungen A11:1996, A12:1999, A13:1999 und A14:1999)

This European Standard was approved by CENELEC on 1994-10-04; amendment A11 was approved by CENELEC on 1996-07-02; amendments A12:1999 and A13:1999 were approved by CENELEC on 1998-08-01; and amendment A14:1999 was approved by CENELEC on 1999-04-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B-1050 Brussels

Foreword

This European Standard has been prepared by CENELEC Sub-Committee 110A, EMC Products.

The first draft, which was submitted to the Unique Acceptance Procedure (UAP) in October 1992, was approved by CENELEC as EN 55020 on 1993-07-06. At the same time a draft amendment, submitted to UAP as prAA in October 1992, was approved for inclusion in the European Standard.

A second draft amendment, which grouped two Draft International Standards containing proposed amendments to CISPR Publication 20, was submitted to UAP in April 1993 and was approved by CENELEC as amendment A11 on 1993-12-08.

A further draft amendment (prAB), which was first submitted to UAP in June 1993 but failed the vote, was re-submitted to the formal vote in May 1994, and was approved.

CLC/SC 110A decided to combine all the drafts into a single document, which was approved by CENELEC as EN 55020 on 4 October 1994.

The following dates were fixed:

- Latest date of publication of an identical national standard (dop) 1995-12-31
- Latest date of withdrawal of conflicting national standards (dow) 1998-12-31

Annexes designated “normative” are part of the body of the standard. Annexes designated “informative” are given for information only. In this standard all annexes are normative.

The structure of this standard has been brought in line with CENELEC Report R110-001:1993, Guide on EMC standardization for product committees.

Foreword to amendment A11

This amendment was prepared by SC 210A, EMC Products, of Technical Committee CENELEC TC 210, EMC.

The text of the draft was submitted to the Unique Acceptance Procedure and was approved by CENELEC as amendment A11 to EN 55020:1994 on 1996-07-02.

The following dates were fixed:

- Latest date by which the amendment has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 1997-06-01
- Latest date by which the national standards conflicting with the amendment have to be withdrawn (dow) 1999-06-01

Foreword to amendment A12

This amendment was prepared by SC 210A, EMC Products, of Technical Committee CENELEC TC 210, EMC.

The text of the draft was submitted to the formal vote and was approved by CENELEC as amendment A12 to EN 55020:1994 on 1998-08-01.

The following dates were fixed:

- Latest date by which the amendment has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 1999-08-01
- Latest date by which the national standards conflicting with the amendment have to be withdrawn (dow) 2002-08-01

Foreword to amendment A13

This amendment was prepared by SC 210A, EMC Products, of Technical Committee CENELEC TC 210, EMC.

The text of the draft was submitted to the formal vote and was approved by CENELEC as amendment A13 to EN 55020:1994 on 1998-08-01.

The following dates were fixed:

- Latest date by which the amendment has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 1999-08-01
- Latest date by which the national standards conflicting with the amendment have to be withdrawn (dow) 2001-08-01

Foreword to amendment A14

This amendment was prepared by SC 210A, EMC Products, of Technical Committee CENELEC TC 210, EMC.

The text of the draft was submitted to the Unique Acceptance Procedure and was approved by CENELEC as amendment A14 to EN 55020:1994 on 1999-04-01.

The following dates were fixed:

- Latest date by which the amendment has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 1999-08-01
- Latest date by which the national standards conflicting with the amendment have to be withdrawn (dow) 2001-08-01

NOTE The description of test methods in EN 55020 for associated equipment is sufficient for stationary video tape equipment and need no modification on short notice. However, the given test methods are not adequate to meet the nature of portable video equipment. This amendment allows an appropriate evaluation of the special technologies of associated video and portable video equipment (Camcorders), such as 8 mm, Hi8, S-VHS, Digital Video and similar technologies.

Contents

	Page		Page
Foreword	2	9.1 Requirements for input immunity to RF voltages (in differential mode) of the VHF band II part of sound receivers and of satellite sound receivers	14
1 Scope	5	9.2 Requirements for input immunity to RF voltages (in differential mode) of television receivers and video tape equipment (including satellite television receivers)	15
2 Normative references	5	9.3 Requirements for immunity to RF voltages (in common mode)	19
3 Objective	6	9.3.1 Limits of immunity to RF voltages (in common mode) of antenna terminals of receivers and multifunction equipment	19
4 Definitions	20	9.3.2 Limits of immunity to RF voltages (in common mode) of associated equipment	20
5 Description of locations	9	9.4 Requirements for screening effectiveness	20
6 Performance criteria	9	9.5 Requirements for immunity to electrical fast transients	20
6.1 Performance criterion A	9	10 Immunity requirements at loudspeaker and headphone output connector	20
6.1.1 Evaluation of audio quality	9	11 Immunity requirements for audio input and output connectors (excluding loudspeaker and headphone)	21
6.1.2 Evaluation of picture quality	9	12 Immunity requirements for AC mains power connectors	21
6.2 Performance criterion B	9	13 Immunity requirements for the enclosure port	22
6.3 Performance criterion C	10	13.1 Requirements for immunity to ambient electromagnetic fields	22
7 Conditions during testing	10	13.1.1 Equipment with audio functions	22
7.1 Measurement procedure for audio assessment	10	13.1.2 VHF band II sound broadcast receivers	22
7.2 Audio power-output measurement	11	13.1.3 Television broadcast receivers	23
7.3 Measurement procedure for video assessment	12	13.1.4 Video tape equipment	24
8 Applicability	12	13.1.5 Associated equipment (except video tape equipment)	24
9 Immunity requirements for the antenna input connector	14	13.2 Requirements for immunity to RF voltages	24
		13.2.1 Limits of immunity to RF voltages of receivers and multifunction equipment	24
		13.3 Requirements for immunity to electrostatic discharge	25
		14 Measurement of input immunity	26
		14.1 Measurement of sound receivers	26
		14.1.1 Measuring set-up	26

	Page		Page
14.1.2 Measurement with unwanted signals outside the VHF band II range	26	Annex A (normative) Specification of the test-TV-set	43
14.1.3 Measurement with unwanted signals inside the VHF band II range	26	Annex B (normative) Specification of filters and weighting network	43
14.1.4 Measurement of satellite sound receivers	26	Annex C (normative) Specification of coupling units and of low-pass filter	44
14.2 Measurement of television receivers and video tape equipment	26	Annex D (normative) Matching networks and mains stop filter	49
14.2.1 Measuring set-up	26	Annex E (normative) ^{A13} Construction information for the open stripline and for the mains and loudspeaker band-stop filters ^{A13}	50
14.2.2 Measuring procedure	27	Annex F (normative) Calibration of the open stripline	57
14.2.3 Measurement of satellite television receivers	27	^{A13} Annex G (normative) Ferrite core sizes and materials ^{A13}	59
15 Measurement of immunity to RF voltage (common mode)	28		
15.1 Coupling units	28		
15.2 Measurement set-up	30		
15.3 Measurement circuit	30		
15.4 Measurement procedure	31		
16 Measurement of screening effectiveness	31		
16.1 Measuring set-up for television receivers	31		
16.2 Measurement procedure for television receivers	33		
16.3 Measuring set-up for VHF band II receivers	32		
16.4 Measurement procedure for VHF band II receivers	34		
17 Measurement of electrical transients	35		
18 Measurement of immunity to induced voltages	36		
18.1 Measuring circuit and set-up	36		
18.2 Measurement procedure	36		
19 Measurement of immunity from radiated fields	39		
19.1 The open stripline	39		
19.2 Measurement set-up	39		
19.3 Measurement procedure	41		
20 Measurement of electrostatic discharge	41		
21 Significance of the immunity limits	42		

1 Scope

1.1 This standard for immunity requirements applies to television broadcast receivers, sound broadcast receivers and associated equipment intended for use in the residential, commercial and light industrial environment.

1.2 Immunity requirements are given in the frequency range 0 Hz to 400 GHz. Radio-frequency tests outside the specified frequency bands or concerning other phenomena than given in this standard are not required.

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

European and International Standards

CISPR 16:1987, *CISPR specification for radio interference measuring apparatus and measuring methods*.

NOTE CISPR 16-1, *Specification for radio disturbance and immunity measuring apparatus and methods, Part 1: Radio disturbance and immunity measuring apparatus*, was published by IEC in August 1993. After Part 2 and Part 3 have also been published, CISPR 16:1987 will be withdrawn.

EN 55022:1994, *Limits and methods of measurement of radio disturbance characteristics of information technology equipment (CISPR 22:1993)*.

IEC 50 (161), *International Electrotechnical Vocabulary (IEV), Chapter 161: Electromagnetic Compatibility*.

IEC 315-1:1988, *Methods of measurement on radio receivers for various classes of emission — Part 1: General considerations and methods of measurement, including audio-frequency measurements*. (harmonized as HD 560.1 S1:1990).

IEC 801, *Electromagnetic compatibility for industrial-process measurement and control equipment*.

IEC 801-2:1991, *Part 2: Electrostatic discharge requirements*. (harmonized as EN 60801-2:1993)

IEC 801-3:1984, *Part 3: Radiated electromagnetic field requirements*. (harmonized as HD 481.3 S1:1987)

IEC 801-4:1988, *Part 4: Electrical fast transient/burst requirements*

Other publications

CCIR Recommendation 468-4:1986, *Measurement of audio-frequency noise voltage level in sound broadcasting*.

CCIR Recommendation 471-1:1986, *Nomenclature and description of colour bar signals*.

CCIR Recommendation 500-4:1990, *Method for the subjective assessment of the quality of television pictures*.

CCIR Report 624-4:1990, *Characteristics of television systems*

Annex A ETS 300 158:1992, *Satellite Earth Stations (SES) Television Receive Only (TVRO-FSS)*

ETS 300 249:1993, *Satellite Earth Stations (SES) Television Receive-Only (TVRO-BSS)*. **Annex B**

3 Objective

The objective of this standard is to define the immunity test requirements for equipment defined in the scope in relation to continuous and transient, conducted and radiated disturbances including electrostatic discharges.

These test requirements represent essential electromagnetic immunity requirements.

Test requirements are specified for each port considered.

NOTE 1 This standard does not specify electrical safety requirements for equipment such as protection against electric shocks, unsafe operation, insulation coordination and related dielectric tests.

NOTE 2 In special cases situations will arise where the level of disturbances may exceed the levels in this standard e.g. where a hand-held transmitter is used in proximity to an equipment. In these instances special mitigation measures may have to be employed.

4 Definitions

For the purposes of this standard, the definitions contained in IEC Publication 50 (161): *International Electrotechnical Vocabulary (IEV) Chapter 161: Electromagnetic Compatibility*, apply, extended with the following specific definitions.

4.1 Sound receivers are appliances intended for the reception of sound broadcast and similar services for terrestrial, cable and satellite transmissions.

A12 It may also concern digital apparatus (with digital incoming signals) or apparatus with digital processing (of digital or analogue incoming signals). **A12**

NOTE For the purposes of this standard, the VHF band II covers frequencies from 87,5 MHz to 108 MHz.

4.2 Television receivers are appliances intended for the reception of television broadcast and similar services for terrestrial, cable and satellite transmissions.

A12 It may also concern digital apparatus (with digital incoming signals) or apparatus with digital processing (of digital or analogue incoming signals). **A12**

NOTE 1 For the purposes of this standard, the following frequency bands are defined:

Band I	from 47 MHz to 68 MHz
Band III	from 174 MHz to 230 MHz
Band IV	from 470 MHz to 598 MHz
Band V	from 598 MHz to 862 MHz
S-bands	U.C.
Hyperband	U. C.

In practice not all television receivers are tunable over these complete frequency ranges. On the other hand many television receivers are tunable over additional channels, exclusively used in cable distribution networks.

NOTE 2 Modular units which are part of sound or television receiving systems, like tuners, frequency converters, modulators, etc. are considered to be sound or television receivers respectively.

Tuners may be provided with a broadcast-satellite-receiving stage and with demodulators, decoders, demultiplexers, D/A converters, encoders (e.g. PAL encoders) etc.

Frequency converters may be provided with a broadcast-satellite-receiving stage and with devices which convert the signals to other frequency bands.

Receivers, tuners, or frequency converters may be tunable or may only be able to receive a fixed frequency.

4.3 Associated equipment is either intended to be connected directly to sound or television receivers, or to generate or to reproduce audio or visual information. Excluded are information technology equipment even if they are intended to be connected to a television broadcast receiver.

Connections via the mains plug, local area network or home network are considered to be indirect connections.

A12 Infrared connections for instance for infrared remote control or for infrared headphones are considered to be direct connections. **A12**

NOTE Information technology equipment is defined in EN 55022.

4.4 Multifunction equipment are appliances in which two or more functions are provided in the same unit, for instance television reception, radio reception, digital clock, tape-recorder or disc player etc.

A non exhaustive survey of receiver and associated equipment types (including the appropriate parts of multifunction equipment) is shown in Table 1.

4.5 A disturbance signal is an unwanted signal which may degrade radio reception or cause malfunction in equipment. An unwanted signal is a radio frequency signal which simulates the disturbance signal.

4.6 Immunity is the ability to maintain a specified performance when the equipment is subjected to disturbance (unwanted) signals of specified levels.

NOTE In this standard the specified performance is:

- a specified sound signal-to-interference ratio; and/or
- no greater than just perceptible degradation of the picture when a wanted signal and an unwanted signal occur simultaneously.

In the case of digital sound/data information (e.g. D2MAC) the specified performance for the bit error rate (BER) and/or residual bit error rate (BER_P) is under consideration.

4.6.1 Input immunity is the immunity from unwanted signals present at the antenna input terminal.

4.6.2 Immunity from conducted voltages is the immunity from unwanted signal voltages present at the audio and mains input terminals and audio output terminals.

4.6.3 Immunity from conducted currents is the immunity from unwanted signal (common mode) currents present in cables connected to the equipment.

4.6.4 Immunity from radiated fields is the immunity from unwanted electromagnetic fields present at the equipment.

4.7 Screening effectiveness is the characteristic of a coaxial connector terminal to attenuate the transfer of external currents into internal voltages.

4.8 Port: Particular interface of the specified apparatus with the external electromagnetic environment (see Figure 1).

Enclosure port: The physical boundary of the apparatus through which electromagnetic fields may radiate or impinge.

4.9 Outdoor unit of Direct To Home satellite receiving systems for individual reception (Type B of ETS 300 158:1992). See clause 3 of ETS 300 249:1993.

NOTE Satellite receiving systems for collective reception (Type A of ETS 300 158:1992) in particular:


- cable distribution head ends (Community Antenna Television, CATV),
- community reception systems (Master Antenna Television, MATV)

are covered by EN 60083-2.

Table 1 — Survey (non exhaustive) of receiver and associated equipment types, including the appropriate parts of multifunction equipment

			Intended for mains powering and portable with external power connection facility		Battery powered portable, without external power connection facility (Portable)	Car radio (Car)	Satellite (Satellite)
			With a connection facility for an external antenna	Without a connection facility for an external antenna			
Sound broadcast receivers (Radio)	VHF band II (FM)		FM radio ant. [A12] PC FM tuner card [A12]	FM radio	Portable radio	Car radio FM	Satellite radio
	LW, MW, SW (AM)		AM radio ant. [A12] PC AM tuner card [A12]	AM radio		Car radio AM	
Television broadcast receivers (TV)			TV ant. [A12] PC TV tuner card [A12]	TV	Portable TV		Satellite TV
Associated equipment (Ass)	Video tape equipment (recording and/or play-back)	With ¹⁾ (Tun)	Ass. video tun. ant.		Portable ass. video		
		Without ¹⁾	Ass. video				
	Audio tape equipment		Ass. audio		Portable ass. audio		
Other, e.g. audio amplifiers, record and compact disk players, decoders, electronic organs		Ass. other		Portable ass. other [A12] e.g. infrared devices [A12]			

¹⁾ Built-in television broadcast receiving facility.

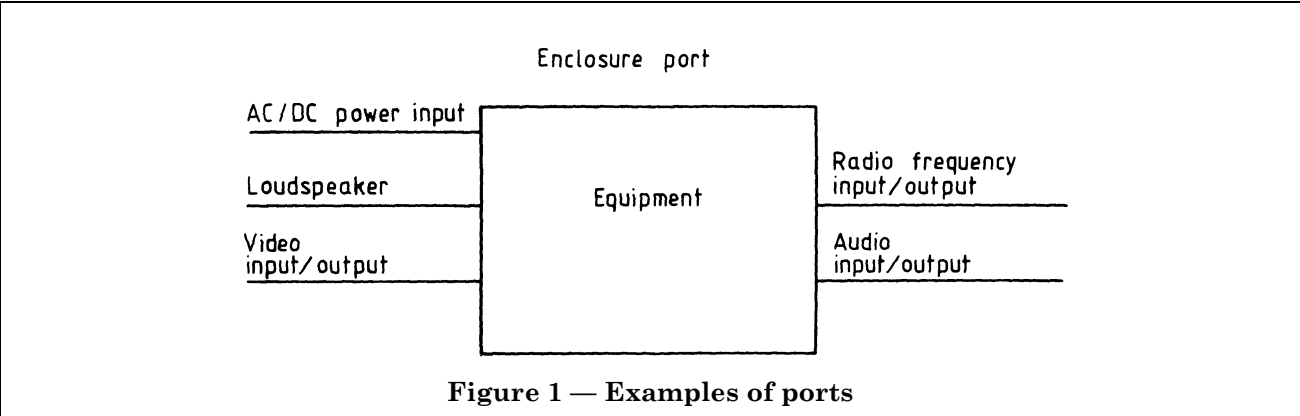

5 Description of locations

The environments encompassed by this standard are residential, commercial and light-industrial locations, both indoor and outdoor. The following list, although not comprehensive, gives an indication of locations which are included:

- residential properties, e.g. houses, apartments, etc.;
- retail outlets, e.g. shops, supermarkets, etc.;
- business premises, e.g. offices, banks, etc.;
- areas of public entertainment, e.g. cinemas, public bars, dance halls, etc.;
- outdoor locations, e.g. petrol stations, car parks, amusement and sports centres, etc.
- light-industrial locations e.g. workshops, laboratories, service centres, etc.;

Locations which are characterized by being supplied directly at low voltage from the public mains are considered to be residential, commercial or light industrial.

6 Performance criteria

6.1 Performance criterion A

The equipment shall continue to operate as intended during the test.

No change of actual operating state, for example change of channel, is allowed as a result of the application of the test.

Multifunction equipment shall for each function meet the relevant requirements.

Evaluation is carried out for audio and video functions.

6.1.1 Evaluation of audio quality

Unless otherwise specified in this standard, the criterion of compliance with the requirement is a wanted to unwanted audio signal ratio of ≥ 40 dB at a wanted audio signal level of 50 mW.

A14 If, for portable video equipment, the S/N ratio is less than 40 dB, the performance criteria for audio assessment is the actual S/N ratio minus 3 dB.

In this case, at the beginning of the audio quality evaluation, the actual S/N ratio is measured and noted in the test report as reference value. **A14**

For AM sound receivers the criterion is ≥ 26 dB at 50 mW. However the criterion for the audio part of TV receivers is ≥ 40 dB.

A12 For AM and FM car radios and broadcast receiver cards for computers the criterion is ≥ 26 dB at 500 mW.

For infrared headphones the criterion is ≥ 26 dB at an output level specified by the manufacturer.

This value of 26 dB will change to 40 dB three years after dop. **A12**

6.1.2 Evaluation of picture quality

In the evaluation of picture interference the wanted test signal produces a standard picture (in the case of video tape equipment on the screen of the test-TV-set) and the unwanted signal produces a degradation of the picture. The degradation may be in a number of forms, such as a superposed pattern, disturbance of synchronization, geometrical distortion, loss of picture contrast, of colour, etc.

The criterion of compliance with the requirement is just perceptible degradation by observation of the picture. The screen shall be observed under normal viewing conditions (brightness 15 – 20 Lux), at a viewing distance of six times the height of the screen.

In the case of video tape equipment the test criteria relate to the picture, assessed on a test-TV-set, which is connected to the video output terminal of the equipment.

6.2 Performance criterion B

The equipment shall continue to operate as intended after the test. No loss of function is allowed after the test when the apparatus is used as intended. No change of actual operating state for example change of channel or stored data and settings is allowed as a result of the application of the test. During the test, degradation of performance is allowed.

6.3 Performance criterion C

Temporary loss of function is allowed, provided the function is self recoverable or can be restored by the operation of the controls.

7 Conditions during testing

A12 For equipment for which the wanted signals are not explicitly described in this standard, the nominal signals as specified by the manufacturer shall be applied during the tests. (This is for instance the case with digital audio and video broadcast receivers, CD players, decoders, etc.) The manufacturer shall specify in his technical report which input signal was applied during the test. **A12**

Immunity measurements are performed by the application of a wanted test signal and an unwanted signal to the equipment under test. These signals and methods of application are specified in clause 14.

For the vision component of the wanted TV signal the level refers to the RMS value of the carrier at the peak of the modulation. The signal level refers in all other cases to the RMS level of the unmodulated carrier.

At transition frequencies the more stringent limit shall apply.

The limit values specified for the input immunity correspond to a nominal antenna impedance of 75 Ω . For receivers with nominal antenna impedance other than 75 Ω , these limit values and the level of the wanted signals on the antenna terminals are modified, according to the following formula:

$$\begin{aligned} &\text{Limit in } R \Omega, \text{ dB}(\mu\text{V}) \\ &= [\text{Limit in table, dB}(\mu\text{V})] + 10\log_{10} R/75. \end{aligned}$$

R is defined as the nominal input impedance.

There shall be 80 % confidence that at least 80 % of the series-produced appliances comply with these limits.

If in the case of video tape (or similar) equipment, the equipment under test has no active audio and/or video output terminals in the relevant operating mode the test-TV-set shall be connected to the modulator output terminal. In this case the sound criterion relates to the audio output terminal of the test-TV-set if appropriate.

The picture quality is assessed as in subclause 6.1.2. The specification of the test-TV-set is given in Annex A A.

NOTE The modulator of the equipment under test should be tuned to the centre channel of its tuning range and the test-TV-set tuned to this channel. Care should be taken that the modulator channel is not equal to the tuned input channel of the equipment under test or to the unwanted channels M as specified in Table 5 and Table 6.

The modulator output level shall be within the limits 60 to 75 dB(μ V) at 75 Ω .

Equipment under test with switchable or adjustable gain at the antenna input (e.g. High/Low-switch) shall be tested in position High or highest gain respectively.

7.1 Measurement procedure for audio assessment

First the wanted test signal is applied to the equipment under test. This produces a wanted audio signal which is measured. The volume control of the equipment under test or test set-up is adjusted to set this audio signal at the required level. The wanted audio signal is then removed by switching off the modulation or the audio test signal.

The “unwanted” disturbance signal is applied in addition and its frequency is swept through the test range; its level is kept at the relevant limit value.

The evaluation of the interference is made by measuring the level of the unwanted output signal and comparing this to the wanted output signal level.

NOTE Concerning the measurement procedure for the criterion of sound interference of television receivers the frequency of the unwanted signal is adjusted to the relevant values.

Concerning the measurement procedure for the criterion of sound interference of video tape equipment with automatic modulation control the modulation of the sound carriers of the wanted test signal or the wanted audio test signal must not be switched off continuously but switched off and on at an appropriate low rate (e.g. 10 seconds off and 1 second on).

The equipment under test is considered to meet the requirements if the level of the unwanted audio signal does not at any time exceed the 40 dB or 26 dB level below the wanted audio signal level as appropriate.




Figure 2 a




Figure 2 b




Figure 2 c

1. equipment under test
2. rated load impedance R_L of the audio output
3. filter, FR (see Annex B B) low pass or bandpass
4. audio frequency voltmeter V
5. amplifier A
6. rated load impedance R_A of the amplifier output
7. microphone M

Figure 2 — Audio power-output measurement

7.2 Audio power-output measurement

a) For equipment under test with audio power output available through an external loudspeaker connector, the levels of the wanted and the unwanted audio signals are measured at the external loudspeaker terminals across the load impedance specified by the manufacturer. See Figure 2a.

b) For equipment under test with no audio power output, such as a radio tuner, tape or record deck, an audio amplifier shall be provided and connected to the audio output under test. Level measurements are made at the output of the amplifier. The volume control, if any, of the equipment under test shall be set at the midway position. See Figure 2b.

The volume control of the audio amplifier provided shall then be adjusted to obtain the required level of the wanted audio signal. The amplifier noise shall be at least 50 dB below the level of the wanted signal. Care shall be taken to ensure that the amplifier is not subjected to the effects of the unwanted signal.

c) For equipment under test with audio power output fed to a built-in loudspeaker having no external loudspeaker connector, the audio signal levels are measured by placing a small high quality microphone (a directional type may be required) close to the front of the built-in loudspeaker under test. The microphone output is fed through a screened cable (ferrite loaded as required) to an external amplifier, filter and audio voltmeter to measure the audio output powers. See Figure 2c.

The microphone-audio voltmeter measurement chain shall be calibrated by the use of a loudspeaker of a type similar to the one in the equipment under test, placed at the same distance as that used in the measurement, and supplied with a 1 kHz tone at the required levels. For the measurement of input immunity, filter FR shall be of a 15 kHz low-pass type (see Annex B B). The audio frequency voltmeter shall be provided with a weighting filter according to CCIR Recommendation 468.

For the measurement of immunity from conducted voltages, radiated fields and conducted currents, filter FR shall be of a 0,5 kHz – 3 kHz band-pass type (see Annex B B). The audio frequency voltmeter shall be applied without weighting filter.

7.3 Measurement procedure for video assessment

The standard picture is a pattern consisting of vertical colour bars in accordance with CCIR Recommendation 471, 100/0/75/0 (see Figure A1b of the CCIR Recommendation).

First the wanted signal only is applied to the equipment under test. The controls of the equipment under test are set to obtain a picture of normal brightness, contrast, and colour saturation. This is obtained with the following luminance values:

black part of the test pattern	2 cd/m ²
magenta part of the test pattern	30 cd/m ²
white part of the test pattern	80 cd/m ² .

NOTE The luminance of the magenta bar shall be set to 30 cd/m². If this level cannot be reached, the luminance shall be set as close as possible to 30 cd/m². If a value different from 30 cd/m² is used, it shall be stated together with the results.

The unwanted signal is then applied in addition, its frequency adjusted to the relevant values (an accuracy of $\pm f_{\text{line}}/2$ may be necessary) ($f_{\text{line}} = 15\,625$ Hz, hor. scan. freq.). The level of the unwanted signal shall be maintained at the relevant limit value at each frequency. The equipment under test is considered to meet the requirement if the conditions of 6.1.2 are met (see CCIR Recommendation 500).

The degradation is more rapidly discerned and the variation of results due to individuals is reduced, if the unwanted signal is switched on and off at a low rate (about 0.5 Hz) during the test. This can be done manually or automatically by an electronic timer.

8 Applicability

Tests are applied at the relevant connectors and enclosure port of the equipment according to clauses 9.1 to 9.3. Tests shall only be carried out where the relevant port(s) or function exist. If more than one specific function exists, for example audio functions, then all these functions shall be tested.

It may be determined from consideration of the electrical characteristics and usage of a particular equipment that some of the tests are inappropriate and therefore unnecessary. In such a case it is required that the decision not to test and the rationale leading to this decision shall be recorded in the test report.

8.1 For battery powered:

- portable sound broadcast receivers;
- portable television broadcast receivers; and other
- portable audio and video equipment; as well as
- video tape equipment;

which have no external power connection facility, immunity requirements are under consideration.

8.2 For:

- sound broadcast receivers;
- television broadcast receivers; and
- video tape equipment with built-in television broadcast receiving facility;

without a connection facility for an external antenna, immunity requirements are under consideration.

8.3 For sound broadcast receivers in the long-wave, medium-wave and short-wave operation mode, immunity requirements are restricted to those in Table 2: RF voltage common mode.

8.4 Input immunity requirements apply for the VHF band II part of sound receivers (including car radios), for A_{12} satellite receivers A_{12} , for television receivers and for video tape equipment.

Input immunity requirements for associated equipment other than video tape equipment are under consideration.

Multi-function equipment which performs one or more of the functions included in this clause shall meet the relevant requirements.

A_{12}

8.5 For PC tuner cards immunity requirements for the antenna input connector are applicable according to Table 2. PC tuner cards which are separately marketed for incorporation in diverse host units shall be tested in at least one appropriate representative host unit (e.g. PC) of the choice of the card manufacturer.

Measurements are carried out with the tuner card inserted in a personal computer and in operation. Immunity tests to ambient electromagnetic fields are not applicable to PC tuner cards.

8.6 An IR remote control unit shall be tested together with the main unit. A_{12}

Table 2

Parameter	Test specification	Test setup	Applicability	Performance criteria
RF voltage differential mode A_{12} PC tuner cards for FM and TV A_{12}	See clauses 9.1 and 9.2	See clause 14 (input immunity)	FM radio ant. Car radio FM Satellite radio TV ant. Satellite TV Ass. video tun. ant.	A
RF voltage common mode A_{12} 1 kHz AM 80 % depth PC tuner cards for AM, FM and TV A_{12}	See clause 9.3	See clause 15	FM radio ant. Car radio FM Satellite radio TV ant. Satellite TV Ass. video tun. ant. AM radio ant. Car radio AM	A
Screening effectiveness	See clause 9.4	See clause 16	FM radio ant.	A
A_{12}				A_{12}

Table 3 — Limits of input immunity from unwanted signals outside the VHF band II range
(see also 14.1.2)

f_n MHz	f_f MHz	n_f [dB(μ V)] (75 Ω) 1 kHz AM at 80 % depth	
		mono	stereo
87.6	66.2 ¹⁾	80	80
	76.9	80	80
	87.1	80	80
	87.2	80	80
	87.25	80	80
	87.30	72.4	69.2
	87.35	64.8	58.4
	87.40	57.2	47.6
	87.45	49.6	36.8
	87.50	42.0	26.0
107.9	129.3 ²⁾	80	80
	118.6	80	80
	108.4	80	80
	108.3	80	80
	108.25	80	80
	108.20	72.4	69.2
	108.15	64.8	58.4
	108.10	57.2	47.6
	108.05	49.6	36.8
	108.00	42.0	26.0

¹⁾ Only applicable for receivers with the local oscillator frequency below the tuned frequency.

²⁾ Only applicable for receivers with the local oscillator frequency above the tuned frequency.

9 Immunity requirements for the antenna input connector

9.1 Requirements for input immunity to RF voltages (in differential mode) of the VHF band II part of sound receivers and of satellite sound receivers

Sound receivers with a VHF band II part shall meet the sound criterion of subclause 6.1.1. They shall be tested at a tuned frequency f_n and subjected to an unwanted signal of frequency f_f and level n_f as specified in Table 3 and Table 4. Receivers with mono/stereo facility shall be tested in stereo mode.

Table 4 — Limits of input immunity from unwanted signals inside the VHF band II range
(see also 14.1.3)

f_n MHz	f_f MHz	n_f [dB(μ V)] (75 Ω) 1 kHz FM dev. 40 kHz	
		mono	stereo
98	97.5 and 98.5	85	85
	97.6 and 98.4	85	85
	97.65 and 98.35	80	80
	97.7 and 98.3	72	72
	97.75 and 98.25	63	63
	97.8 and 98.2	59	58
	97.85 and 98.15	57	47
	97.9 and 98.1	53	32
	97.925 and 98.075	49	20
	97.95 and 98.05	41	14
	97.975 and 98.025	34	14
	98	29	20

Satellite sound receivers

Satellite sound receivers shall meet the sound criterion of **6.1.1**. The levels of the unwanted signals are specified in Table 8. See also **14.1.4**.

9.2 Requirements for input immunity to RF voltages (in differential mode) of television receivers and video tape equipment (including satellite television receivers)

Television receivers and video tape equipment with built-in television broadcast receiving facility in the RF recording mode shall be tested at a tuned television channel N and subjected to an unwanted signal in channel M, level n_t , and of the following types.

Unwanted signal types:

- A: an unmodulated signal at the picture carrier frequency of the relevant channel M;
- B: two unmodulated signals each at the level as given in the table, one at the relevant picture carrier frequency + 0.5 MHz and the other at the picture carrier frequency – 0.5 MHz;
- C: a modulated signal at the relevant sound carrier frequency, 1 kHz FM at 30 kHz deviation;
C shall be applied to receivers for countries in which mono-sound television signals of the systems B and G can be received. For television receivers for countries in which also two-sound-channel-television-signals of the systems B and G with two frequency modulated sound carriers can be received (even for one-sound-channel-television-receivers):
C1: a modulated signal at the relevant frequency of the first sound carrier, 1 kHz FM at 30 kHz deviation; and
C2: a modulated signal at the relevant frequency of the second sound carrier, 1 kHz FM at 30 kHz deviation;
C1 and C2 are applied simultaneously.
- D: a modulated signal at the relevant picture carrier frequency, 1 kHz AM at 80 % depth;
- E: a modulated signal 1 kHz AM at 80 % depth.

For the purposes of this standard, a television receiver shall meet the limits of Table 5, Table 6 and Table 7 as appropriate for all channels for which it is designed.

For tests for conformity of appliances in series production (see clause **21**) a television receiver shall be tested on one channel in each band for which it is designed, using the channel N for which the picture carrier frequency is nearest to the following frequencies:

Channel N_i	in Band I	nearest to 55 MHz
Channel N_{iii}	in Band III	nearest to 203 MHz
Channel N_{iv}	in Band IV	nearest to 503 MHz
Channel N_v	in Band V	nearest to 743 MHz

See note 1 in **4.2**.

For system L, signal D is an amplitude modulated signal at the relevant picture carrier frequency 1 kHz at 80 % depth. This signal is also used in a second measurement for simulating the unwanted signal at the sound carrier frequency. In that case the limits indicated in the table have to be reduced by 5 dB.

For input immunity measurements on TV receivers equipped with a “fine tuning” adjustment, easily accessible to the user, readjustment of the receiver oscillator is allowed (up to ± 250 kHz) referred to its nominal frequency, in order to minimize the interference, while maintaining the quality of picture and sound.

Table 5 — Limits of input immunity of television receivers for systems B, G and I

N	M	n_f [dB (μV)] (75 Ω) in channel M						Unwanted signal type
		N - 5	N - 1	N + 1	N + 5	N + 9	N + 11	
N_i	—	—	73	73	—	—	—	A
	—	—	61	61	—	—	—	B
N_{iii}	70	—	$73 - x$	$73 - x$	70	—	68	C = C1
	63	—	$73 - y$	$73 - y$	63	—	61	C2
	70	—	—	—	70	—	68	D
N_{iv}	—	—	77	77	80	68	—	A
	—	—	65	65	68	56	—	B
	74	—	$77 - x$	$77 - x$	$80 - x$	$68 - x$	—	C = C1
	67	—	$77 - y$	$77 - y$	$80 - y$	$68 - y$	—	C2
	74	—	—	—	—	—	—	D
N_v	80	—	77	77	80	—	—	A
	68	—	65	65	68	—	—	B
	$80 - x$	—	$77 - x$	$77 - x$	$80 - x$	62	—	C = C1
	$80 - y$	—	$77 - y$	$77 - y$	$80 - y$	55	—	C2
	—	—	—	—	—	62	—	D

x is the relative level (dB) of the first sound carrier (mono sound channel) with respect to the vision carrier;

y is the relative level (dB) of the second sound carrier (stereo sound channel) with respect to the vision carrier;

x = 13 and y = 20 for systems B and G; x = 10 for system I.

NOTE $N \pm m$ indicates the frequency of the picture carrier of the tuned television channel, plus or minus m times the channel frequency bandwidth. The test signal shall be applied at this frequency if a limit value is tabulated.