

BS EN 55032:2012

*Incorporating corrigenda August 2012, December 2012,
September 2013, September 2014 and August 2015*



BSI Standards Publication

Electromagnetic compatibility of multimedia equipment — Emission requirements

bsi.

...making excellence a habit.
AVA Documents™
Document Sharing Hub

National foreword

This British Standard is the UK implementation of EN 55032:2012, incorporating corrigenda December 2012 and September 2013. It is identical to CISPR 32:2012, incorporating corrigendum August 2012. It supersedes BS EN 55013:2013 and BS EN 55103-1:2009+A1:2012, which will be withdrawn on 5 March 2017. Together with BS EN 50561-1:2013, it supersedes BS EN 55022: 2010, which will be withdrawn on 5 March 2017.

This Standard is partially superseded by BS EN 50561-1:2013 to the effect that after 9 October 2016 it should no longer be used for the purposes of radio disturbance characteristics for in-home communication apparatus that use the low-voltage power installation as the transmission medium in the frequency range 1,606 5 MHz to 30 MHz.

The UK participation in its preparation was entrusted by Technical Committee GEL/210, EMC – Policy committee, to Subcommittee GEL/210/11, EMC product standards.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.
Published by BSI Standards Limited 2015

ISBN 978 0 580 91379 2

ICS 33.100.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 May 2012.

Amendments/corrigenda issued since publication

Date	Text affected
31 January 2013	Implementation of CISPR corrigendum August 2012: Notes in Tables B.1, C.1 and D.1 updated; subclause G.2.3, paragraph 2 updated Implementation of CENELEC corrigendum December 2012: Date of withdrawal in EN foreword corrected to read 2017-03-05
31 October 2013	Implementation of CENELEC corrigendum September 2013: foreword amended
30 September 2014	Updated supersession information in national foreword to match CENELEC supersession
31 August 2015	Updated supersession information in national foreword to be in accordance with corresponding standards

English version

**Electromagnetic compatibility of multimedia equipment -
Emission requirements
(CISPR 32:2012)**

Compatibilité électromagnétique des
équipements multimédia -
Exigences d'émission
(CISPR 32:2012)

Elektromagnetische Verträglichkeit von
Multimediageräten und -einrichtungen -
Anforderungen an die Störaussendung
(CISPR 32:2012)

This European Standard was approved by CENELEC on 2012-03-05. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

© 2012 CENELEC - All rights of exploitation in any form and by any means reserved worldwide for CENELEC members.

Ref. No. EN 55032:2012 E

AVA Documents
Document Sharing Hub

Foreword

The text of document CISPR/I/391/FDIS, future edition 1 of CISPR 32, prepared by CISPR SC I "Electromagnetic compatibility of information technology equipment, multimedia equipment and receivers" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 55032:2012.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2012-12-05
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2017-03-05

This document supersedes EN 55013:2013, EN 55022:2010 + AC:2011 and EN 55103-1:2009 + A1:2012.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For the relationship with EU Directive see informative Annex ZZ, which is an integral part of this document.

Endorsement notice

The text of the International Standard CISPR 32:2012 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

- | | |
|-----------------|--|
| CISPR 16 series | NOTE Harmonized in EN 55016 series. |
| CISPR 22:2008 | NOTE Harmonized as EN 55022:2010 (modified). |

Annex ZA

(normative)

Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
CISPR 16-1-1	2010	Specification for radio disturbance and	EN 55016-1-1	2010
+ corr. October	2010	immunity measuring apparatus and methods - + A1		2010
+ corr. October	2011	Part 1-1: Radio disturbance and immunity		
+ A1	2010	measuring apparatus - Measuring apparatus		
CISPR 16-1-2	2003	Specification for radio disturbance and	EN 55016-1-2	2004
+ corr. January	2009	immunity measuring apparatus and methods - + A1		2005
+ A1	2004	Part 1-2: Radio disturbance and immunity	+ A2	2006
+ A2	2006	measuring apparatus - Ancillary equipment - Conducted disturbances		
CISPR 16-1-4	2010	Specification for radio disturbance and	EN 55016-1-4	2010
+ corr. December	2010	immunity measuring apparatus and methods - Part 1-4: Radio disturbance and immunity measuring apparatus - Antennas and test sites for radiated disturbance measurements		
CISPR 16-2-1	2008	Specification for radio disturbance and	EN 55016-2-1	2009
+ A1	2010	immunity measuring apparatus and methods - + A1		2011
		Part 2-1: Methods of measurement of disturbances and immunity - Conducted disturbance measurements		
CISPR 16-2-3	2010	Specification for radio disturbance and	EN 55016-2-3	2010
+ A1	2010	immunity measuring apparatus and methods - + A1		2010
		Part 2-3: Methods of measurement of disturbances and immunity - Radiated disturbance measurements		
CISPR 16-4-2	2011	Specification for radio disturbance and	EN 55016-4-2	2011
		immunity measuring apparatus and methods - Part 4-2: Uncertainties, statistics and limit modelling - Measurement instrumentation uncertainty		
CISPR 16-4-3	2004	Specification for radio disturbance and	-	-
+ A1	2006	immunity measuring apparatus and methods - Part 4-3: Uncertainties, statistics and limit modeling - Statistical considerations in the determination of EMC compliance of mass- produced products		
IEC 61000-4-6	2008	Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields	EN 61000-4-6	2009

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60050-161	1990	International Electrotechnical Vocabulary (IEV) - Chapter 161: Electromagnetic compatibility	-	-
ISO/IEC 17025	2005	General requirements for the competence of testing and calibration laboratories	EN ISO/IEC 17025	2005
ANSI C63.5	2006	American National Standard (for) Electromagnetic Compatibility - Radiated Emission Measurements in Electromagnetic Interference (EMI) Control - Calibration of Antennas (9 kHz to 40 GHz)	-	-
IEEE 802.3	-	IEEE Standard for Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications	-	-

Annex ZZ
(informative)

Coverage of Essential Requirements of EU Directives

This European Standard has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association and within its scope the standard covers protection requirements of Annex I, Article 1(a) of the EU Directive 2004/108/EC, and essential requirements of Article 3.1(b) (emission only) of the EU Directive 1999/5/EC.

Compliance with this standard provides presumption of conformity with the specified essential requirements of the Directive concerned.

WARNING Other requirements and other EU Directives may be applicable to the products falling within the scope of this standard.

CONTENTS

1	Scope.....	9
2	Normative references	9
3	Terms, definitions and abbreviations	10
3.1	Terms and definitions	10
3.2	Abbreviations	14
4	Classification of equipment.....	16
5	Requirements	16
6	Measurements.....	16
6.1	General.....	16
6.2	Host systems and modular EUT	17
6.3	Measurement procedure.....	18
7	Equipment documentation	18
8	Applicability.....	18
9	Test report.....	19
10	Compliance with this publication	20
11	Measurement uncertainty	20
	Annex A (normative) Requirements.....	21
	Annex B (normative) Exercising the EUT during measurement and test signal specifications.....	29
	Annex C (normative) Measurement procedures, instrumentation and supporting information.....	34
	Annex D (normative) Arrangement of EUT, local AE and associated cabling	48
	Annex E (informative) Prescan measurements.....	63
	Annex F (informative) Test report contents summary	64
	Annex G (informative) Support information for the measurement procedures defined in C.4.1.1.....	65
	Bibliography.....	81
	Figure 1 – Examples of ports	13
	Figure 2 – Example of a host system with different types of modules	17
	Figure A.1 – Graphical representation of the limits for the AC mains power port defined in Table A.9	21
	Figure C.1 – Measurement distance.....	35
	Figure C.2 – Boundary of EUT, Local AE and associated cabling.....	36
	Figure C.3 – Decision tree for using different detectors with quasi peak and average limits.....	37
	Figure C.4 – Decision tree for using different detectors with peak and average limits.....	38
	Figure C.5 – Decision tree for using different detectors with a quasi-peak limit	38
	Figure C.6 – Calibration fixture	45
	Figure C.7 – Circuit arrangement for measurement of emission voltages at TV/FM broadcast receiver tuner ports	46
	Figure C.8 – Circuit arrangement for the measurement of the wanted signal and emission voltage at the RF modulator output port of an EUT	47

Figure D.1 – Example measurement arrangement for table-top EUT (Conducted and radiated emission) (Top view)	54
Figure D.2 – Example measurement arrangement for table-top EUT (Conducted emission measurement – alternative 1)	55
Figure D.3 – Example measurement arrangement for table-top EUT (Conducted emission measurement – alternative 2)	56
Figure D.4 – Example measurement arrangement for table-top EUT measuring in accordance with C.4.1.6.4	57
Figure D.5 – Example measurement arrangement for table-top EUT (Conducted emission measurement – alternative 2, showing AAN position)	58
Figure D.6 – Example measurement arrangement for floor standing EUT (Conducted emission measurement)	59
Figure D.7 – Example measurement arrangement for combinations of EUT (Conducted emission measurement)	60
Figure D.8 – Example measurement arrangement for table-top EUT (Radiated emission measurement)	60
Figure D.9 – Example measurement arrangement for floor standing EUT (Radiated emission measurement)	61
Figure D.10 – Example measurement arrangement for combinations of EUT (Radiated emission measurement)	62
Figure G.1 – Example AAN for use with unscreened single balanced pairs	65
Figure G.2 – Example AAN with high LCL for use with either one or two unscreened balanced pairs	66
Figure G.3 – Example AAN with high LCL for use with one, two, three, or four unscreened balanced pairs	67
Figure G.4 – Example AAN, including a 50 Ω source matching network at the voltage measuring port, for use with two unscreened balanced pairs	68
Figure G.5 – Example AAN for use with two unscreened balanced pairs	69
Figure G.6 – Example AAN, including a 50 Ω source matching network at the voltage measuring port, for use with four unscreened balanced pairs	70
Figure G.7 – Example AAN for use with four unscreened balanced pairs	71
Figure G.8 – Example AAN for use with coaxial cables, employing an internal common mode choke created by bifilar winding an insulated centre-conductor wire and an insulated screen-conductor wire on a common magnetic core (for example, a ferrite toroid)	72
Figure G.9 – Example AAN for use with coaxial cables, employing an internal common mode choke created by miniature coaxial cable (miniature semi-rigid solid copper screen or miniature double-braided screen coaxial cable) wound on ferrite toroids	72
Figure G.10 – Example AAN for use with multi-conductor screened cables, employing an internal common mode choke created by bifilar winding multiple insulated signal wires and an insulated screen-conductor wire on a common magnetic core (for example, a ferrite toroid)	73
Figure G.11 – Example AAN for use with multi-conductor screened cables, employing an internal common mode choke created by winding a multi-conductor screened cable on ferrite toroids	74
Figure G.12 – Basic circuit for considering the limits with defined common mode impedance of 150 Ω	77
Figure G.13 – Basic circuit for the measurement with unknown common mode impedance	77
Figure G.14 – Impedance layout of the components in the method described in C.4.1.6.3	78

Figure G.15 – Basic measurement setup to measure combined impedance of the 150 Ω and ferrites	80
Table 1 – Required highest frequency for radiated measurement	19
Table A.1 – Radiated emissions, basic standards and the limitation of the use of particular methods	22
Table A.2 – Requirements for radiated emissions at frequencies up to 1 GHz for Class A equipment.....	23
Table A.3 – Requirements for radiated emissions at frequencies above 1 GHz for Class A equipment.....	23
Table A.4 – Requirements for radiated emissions at frequencies up to 1 GHz for Class B equipment	23
Table A.5 – Requirements for radiated emissions at frequencies above 1 GHz for Class B equipment.....	24
Table A.6 – Requirements for radiated emissions from FM receivers	24
Table A.7 – Conducted emissions, basic standards and the limitation of the use of particular methods	25
Table A.8 – Requirements for conducted emissions from the AC mains power ports of Class A equipment.....	25
Table A.9 – Requirements for conducted emissions from the AC mains power ports of Class B equipment.....	26
Table A.10 – Requirements for asymmetric mode conducted emissions from Class A equipment.....	26
Table A.11 – Requirements for asymmetric mode conducted emissions from Class B equipment.....	27
Table A.12 – Requirements for conducted differential voltage emissions from Class B equipment.....	28
Table B.1 – Methods of exercising displays and video ports.....	30
Table B.2 – Display and video parameters	30
Table B.3 – Methods used to exercise ports.....	31
Table B.4 – Examples of digital broadcast signal specifications	32
Table C.1 – Analogue/digital data port emission procedure selection	40
Table C.2 – LCL values	41
Table C.3 – 5 m OATS/SAC NSA figures	47
Table D.1 – Arrangement spacing, distances and tolerances	50
Table F.1 – Summary of information to include in a test report.....	64
Table G.1 – Summary of advantages and disadvantages of the procedures described in C.4.1.6.....	75

ELECTROMAGNETIC COMPATIBILITY OF MULTIMEDIA EQUIPMENT –

Emission requirements

1 Scope

NOTE *Blue* coloured text within this document indicates text aligned with CISPR 35.

This International Standard applies to multimedia equipment (MME) as defined in 3.1.23 and having a rated r.m.s. AC or DC supply voltage not exceeding 600 V.

Equipment within the scope of CISPR 13 or CISPR 22 is within the scope of this publication.

MME intended primarily for professional use is within the scope of this publication.

The radiated emission requirements in this standard are not intended to be applicable to the intentional transmissions from a radio transmitter as defined by the ITU, nor to any spurious emissions related to these intentional transmissions.

Equipment, for which emission requirements in the frequency range covered by this publication are explicitly formulated in other CISPR publications (except CISPR 13 and CISPR 22), are excluded from the scope of this publication.

This document does not contain requirements for in-situ assessment. Such testing is outside the scope of this publication and may not be used to demonstrate compliance with it.

This publication covers two classes of MME (Class A and Class B). The MME classes are specified in Clause 4.

The objectives of this publication are:

- 1) to establish requirements which provide an adequate level of protection of the radio spectrum, allowing radio services to operate as intended in the frequency range 9 kHz to 400 GHz;
- 2) to specify procedures to ensure the reproducibility of measurement and the repeatability of results.

2 Normative references

The following reference documents are indispensable for the application of this publication. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

CISPR 16-1-1:2010, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-1: Radio disturbance and immunity measuring apparatus – Measuring apparatus*
Amendment 1 (2010)

CISPR 16-1-2:2003, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-2: Radio disturbance and immunity measuring apparatus – Ancillary equipment – Conducted disturbances*
Amendment 1 (2004)
Amendment 2 (2006)

CISPR 16-1-4:2010, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-4: Radio disturbance and immunity measuring apparatus – Antennas and test sites for radiated disturbance measurements*

CISPR 16-2-1:2008, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 2-1: Methods of measurement of disturbances and immunity – Conducted disturbance measurements*
Amendment 1 (2010)

CISPR 16-2-3:2010, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 2-3: Methods of measurement of disturbances and immunity – Radiated disturbance measurements*
Amendment 1 (2010)

CISPR 16-4-2:2011, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modelling – Measurement instrumentation uncertainty*

CISPR/TR 16-4-3:2004, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-3: Uncertainties, statistics and limit modelling – Statistical considerations in the determination of EMC compliance of mass-produced products*
Amendment 1 (2006)

IEC 60050-161:1990, *International Electrotechnical Vocabulary – Chapter 161: Electromagnetic compatibility*

IEC 61000-4-6:2008, *Electromagnetic compatibility (EMC) – Part 4-6: Testing and measurement techniques – Immunity to conducted disturbances, induced by radio-frequency fields*

ISO/IEC 17025:2005, *General requirements for the competence of testing and calibration laboratories*

IEEE Std 802.3, *IEEE Standard for Information technology – Specific requirements – Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications*

ANSI C63.5-2006, *American National Standard (for) Electromagnetic Compatibility - Radiated Emission Measurements in Electromagnetic Interference (EMI) Control - Calibration of Antennas (9 kHz to 40 GHz)*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

NOTE Terms and definitions related to EMC and to relevant phenomena are given in IEC 60050-161. It should be noted that a common set of definitions has been written for both CISPR 32 and CISPR 35 (to be published). It is noted that some terms and definitions will only be used in one of these two publications but for purposes of consistency they are intentionally included in both.

3.1.1

AC mains power port

port used to connect to the mains supply network

NOTE Equipment with a DC power port which is powered by a dedicated AC/DC power converter is defined as AC mains powered equipment.

3.1.2

analogue/digital data port

signal/control port (3.1.28), antenna port (3.1.3), wired network port (3.1.30), broadcast receiver tuner port (3.1.8), or optical fibre port (3.1.24) with metallic shielding and/or metallic strain relief member(s)

3.1.3

antenna port

port, other than a broadcast receiver tuner port (3.1.8), for connection of an antenna used for intentional transmission and/or reception of radiated RF energy

3.1.4

arrangement

physical layout of all the parts of the EUT, local AE and any associated cabling within the measurement or test area

3.1.5

associated equipment

AE

equipment needed to exercise and/or monitor the operation of the EUT

3.1.6

audio equipment

equipment which has a primary function of either (or a combination of) generation, input, storage, play, retrieval, transmission, reception, amplification, processing, switching or control of audio signals

3.1.7

broadcast receiver equipment

equipment containing a tuner that is intended for the reception of broadcast services

NOTE These broadcast services are typically television and radio services, including terrestrial broadcast, satellite broadcast and/or cable transmission.

3.1.8

broadcast receiver tuner port

port intended for the reception of a modulated RF signal carrying terrestrial, satellite and/or cable transmissions of audio and/or video broadcast and similar services

NOTE This port may be connected to an antenna, a cable distribution system, a VCR or similar device.

3.1.9

broadcast satellite outdoor system

antenna and the low-noise amplifier with its associated down-converter, forming part of a satellite reception system

NOTE The indoor receiver's intermediate frequency amplifier and demodulator are excluded.

3.1.10

common mode impedance

asymmetrical mode (see CISPR 16-2-1) impedance between a cable attached to a port and the Reference Ground Plane (RGP)

NOTE The complete cable is seen as one wire of the circuit and the RGP is seen as the other wire of the circuit. The common mode current flowing around this circuit can lead to the emission of radiated energy of EUT.

3.1.11

configuration

operational conditions of the EUT and AE, consisting of the set of hardware elements selected to comprise the EUT and AE, mode of operation (3.1.22) used to exercise the EUT and arrangement (3.1.4) of the EUT and AE

3.1.12

converted common mode current

asymmetrical mode current converted from differential mode current by the unbalance of a cable or network not forming part of an EUT

3.1.13

DC network power port

port, not powered by a dedicated AC/DC power converter and not supporting communication, that connects to a DC supply network

NOTE 1 Equipment with a DC power port which is powered by a dedicated AC/DC power converter is considered to be AC mains powered equipment.

NOTE 2 DC power ports supporting communications are considered to be wired networks ports, for example Ethernet ports which include Power Over Ethernet (POE).

3.1.14

enclosure port

physical boundary of the EUT through which electromagnetic fields may radiate

3.1.15

entertainment lighting control equipment

equipment generating or processing electrical signals for controlling the intensity, colour, nature or direction of the light from a luminaire, where the intention is to create artistic effects in theatrical, televisual or musical productions and visual presentations

3.1.16

Equipment Under Test

EUT

multimedia equipment (MME) being evaluated for compliance with the requirements of this standard

3.1.17

formal measurement

measurement used to determine compliance

NOTE This is often the final measurement performed. It may be carried out following a prescan measurement. It is the measurement recorded in the test report.

3.1.18

function

operation carried out by a MME

NOTE Functions are related to basic technologies incorporated in the MME such as: displaying, recording, processing, controlling, reproducing, transmitting, or receiving single medium or multimedia content. The content may be data, audio or video, either individually or in combination.

3.1.19

highest internal frequency

F_x

highest fundamental frequency generated or used within the EUT or highest frequency at which it operates

NOTE This includes frequencies which are solely used within an integrated circuit.

3.1.20

Information Technology Equipment

ITE

equipment having a primary function of either (or a combination of) entry, storage, display, retrieval, transmission, processing, switching, or control of data and/or telecommunication messages and which may be equipped with one or more ports typically for information transfer

NOTE Examples include data processing equipment, office machines, electronic business equipment and telecommunication equipment.

3.1.21

launched common mode current

asymmetric mode current produced by internal circuitry and appearing at the wired network port of the EUT

NOTE Measurement of the launched common mode current requires the EUT port to be loaded by a perfectly balanced termination.

3.1.22

mode of operation

set of operational states of all functions of an EUT during a test or measurement

3.1.23

MultiMedia Equipment

MME

equipment that is information technology equipment (3.1.20), audio equipment (3.1.6), video equipment (3.1.29), broadcast receiver equipment (3.1.7), entertainment lighting control equipment (3.1.15) or combinations of these

3.1.24

optical fibre port


port at which an optical fibre is connected to an equipment

3.1.25

port

physical interface through which electromagnetic energy enters or leaves the EUT

NOTE See Figure 1.

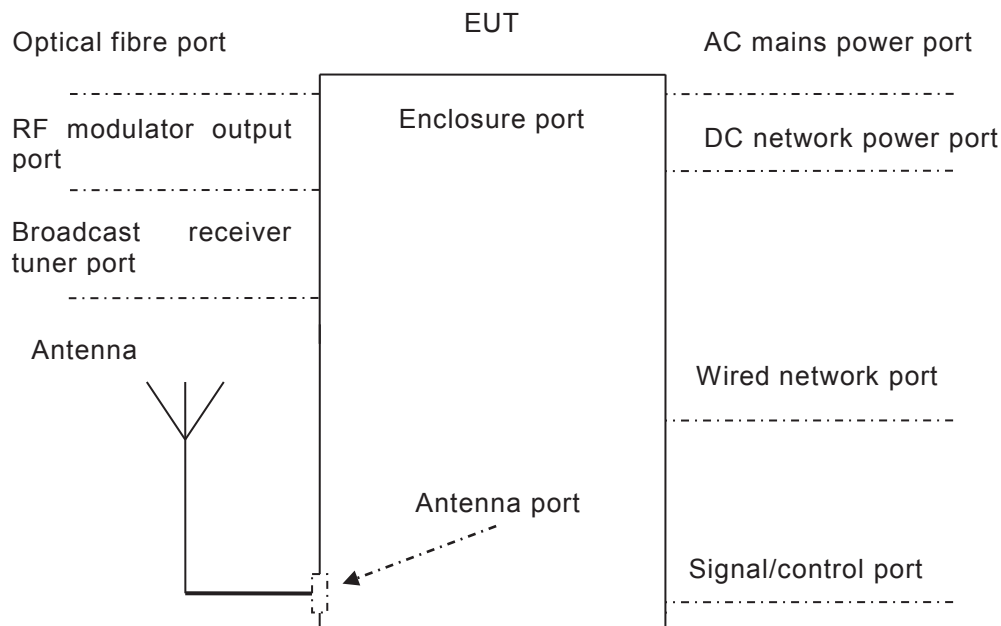

IEC 004/12

Figure 1 – Examples of ports

3.1.26

primary function

any function of an MME considered essential for the user or for the majority of users that needs to be monitored directly or indirectly during immunity testing

NOTE MME may have more than one primary function. For example the primary functions of a basic television set include broadcast reception, audio reproduction and display.

3.1.27

RF modulator output port

port intended to be connected to a broadcast receiver tuner port in order to transmit a signal to the broadcast receiver

3.1.28

signal/control port

port intended for the interconnection of components of an EUT, or between an EUT and local AE and used in accordance with relevant functional specifications (for example for the maximum length of cable connected to it)

NOTE Examples include RS-232, Universal Serial Bus (USB), High-Definition Multimedia Interface (HDMI), IEEE Standard 1394 ("Fire Wire").

3.1.29

video equipment

equipment which has a primary function of either (or a combination of) generation, input, storage, display, play, retrieval, transmission, reception, amplification, processing, switching, or control of video signals

3.1.30

wired network port

point of connection for voice, data and signalling transfers intended to interconnect widely-dispersed systems by direct connection to a single-user or multi-user communication network (for example CATV, PSTN, ISDN, xDSL, LAN and similar networks)

NOTE These ports may support screened or unscreened cables and may also carry AC or DC power where this is an integral part of the telecommunication specification.

3.2 Abbreviations

For the purposes of this document, the following abbreviations apply.

AAN	Asymmetric Artificial Network
AC	Alternating Current
AC-3	ATSC standard: digital Audio Compression (AC-3)
AE	Associated Equipment, see 3.1.5.
AM	Amplitude Modulation
AMN	Artificial Mains Network
ATSC	Advanced Television Systems Committee
AV	Audio Visual
BPSK	Binary Phase Shift Keying
CATV	Cable TV network
CISPR	International special committee on radio interference
CM	Common Mode
CMAD	Common Mode Absorbing Device
CVP	Capacitive Voltage Probe
DC	Direct Current
DMB-T	Digital Multimedia Broadcast – Terrestrial
DQPSK	Differential Quadrature Phase Shift Keying
DSL	Digital Subscriber Line

DVB-C	Digital Video Broadcast – Cable
DVB-S	Digital Video Broadcast – Satellite
DVB-T	Digital Video Broadcast – Terrestrial
DVD	Digital Versatile Disc (an optical disc format also known as a Digital Video Disc)
DVB	Digital Video Broadcast
EMC	ElectroMagnetic Compatibility
EUT	Equipment Under Test, see 3.1.16
FAR	Fully Anechoic Room
FM	Frequency Modulation
FSOATS	Free Space Open Area Test Site
HDMI	High-Definition Multimedia Interface
HID	Human Interface Device
IEC	International Electrotechnical Commission
IF	Intermediate Frequency
ISDB	Integrated Services Digital Broadcasting
ISDB-S	Integrated Services Digital Broadcasting – Satellite
ISDN	Integrated Services Digital Network
ISO	International Standardisation Organisation
ITE	Information Technology Equipment, see 3.1.20
ITU	International Telecommunication Union
ITU-R	International Telecommunication Union – Radio Communication Sector
ITU-T	International Telecommunication Union – Telecommunication Sector
LAN	Local Area Network
LCL	Longitudinal Conversion Loss
LNB	Low-Noise Block converter
MME	Multimedia Equipment, see 3.1.23
MPEG	Moving Picture Experts Group
NSA	Normalized Site Attenuation
OATS	Open Area Test Site
OFDM	Orthogonal Frequency Division Multiplexing
PC	Personal Computer
POE	Power Over Ethernet
POS	Point Of Sale
PSTN	Public Switched Telephone Network
PSU	Power Supply Unit (including a AC/DC power converter)
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keying
RF	Radio Frequency
RGP	Reference Ground Plane
SAC	Semi Anechoic Chamber
TV	Television
UHF	Ultra High Frequency

USB	Universal Serial Bus
VCR	Video Cassette Recorder
VHF	Very High Frequency
VSB	Vestigial Side Band
xBase-T	Where x is 10, 100 and 1 000 as defined in the IEEE 802.3 series of standards
xDSL	Generic term for all types of DSL technology

4 Classification of equipment

This standard defines Class A equipment and Class B equipment associated with two types of end-use environment.

Class A equipment is equipment which meets the requirements given in Table A.2, Table A.3, Table A.8, and Table A.10, using the limitations defined in Table A.1 and Table A.7.

Class B equipment is equipment which meets the requirements given in Table A.4, Table A.5, Table A.6, Table A.9, Table A.11 and Table A.12, using the limitations defined in Table A.1 and Table A.7.

The Class B requirements for equipment are intended to offer adequate protection to broadcast services within the residential environment.

Equipment intended primarily for use in a residential environment shall meet the Class B limits. All other equipment shall comply with the Class A limits.

Broadcast receiver equipment is class B equipment.

NOTE Equipment meeting Class A requirements may not offer adequate protection to broadcast services within a residential environment.

5 Requirements

The requirements for equipment covered within the scope of this publication are defined in Annex A.

6 Measurements

6.1 General

This clause defines the measurement facilities and instrumentation specific to the measurement of emissions from MME; it includes by reference the relevant basic requirements given in the CISPR 16 series and other standards shown in the normative references in this standard. It also defines how to configure and arrange the EUT, local AE and associated cabling, and provides the relevant measurement procedures.

The specification of the measurement facility, measurement equipment, procedures, and the arrangement of the measurement equipment to be used are given in the basic standards referred to in the tables in Annex A. Unless otherwise specified, the basic standards shall be used for all aspects of the measurement.

Where there are conflicts in the information presented in the CISPR 16 series and this publication, the content of this publication takes precedence.

The procedures to be used for measurement of emission levels depend upon several elements. These include but are not limited to:

- the type of EUT,
- the type of port,
- the types of cables used,
- the frequency range,
- the mode of operation.

If a single port satisfies the definition of more than one of the types of port defined in this publication, it is subject to the requirements for each of the port types that it satisfies. Where a port is specified by the manufacturer for use with both screened and unscreened cables, the port shall be evaluated with both cable types.

6.2 Host systems and modular EUT

This subclause describes how to configure EUTs that are a host system or modular in nature. Modular systems can comprise different types of module(s), for example the EUT can be:

- an external module, for example an infra-red remote control;
- an internal module, for example a computer hard disk;
- a plug-in module, for example a memory stick;
- a mounted module, for example a sound card or a video card.

Modules intended to be marketed and/or sold separately from a host shall be assessed with at least one representative host system. The modules may be internal, mounted, plug-in or external as illustrated in Figure 2. The port(s) of any module being assessed shall be terminated in accordance with Annex D. The functions of the host device that are specific to the module being assessed shall be exercised during the measurements. Modules shown to meet the requirements of this publication in any one representative host are deemed to meet the requirements of this publication when used in any host. The host and modules used during measurements shall be listed in the test report.

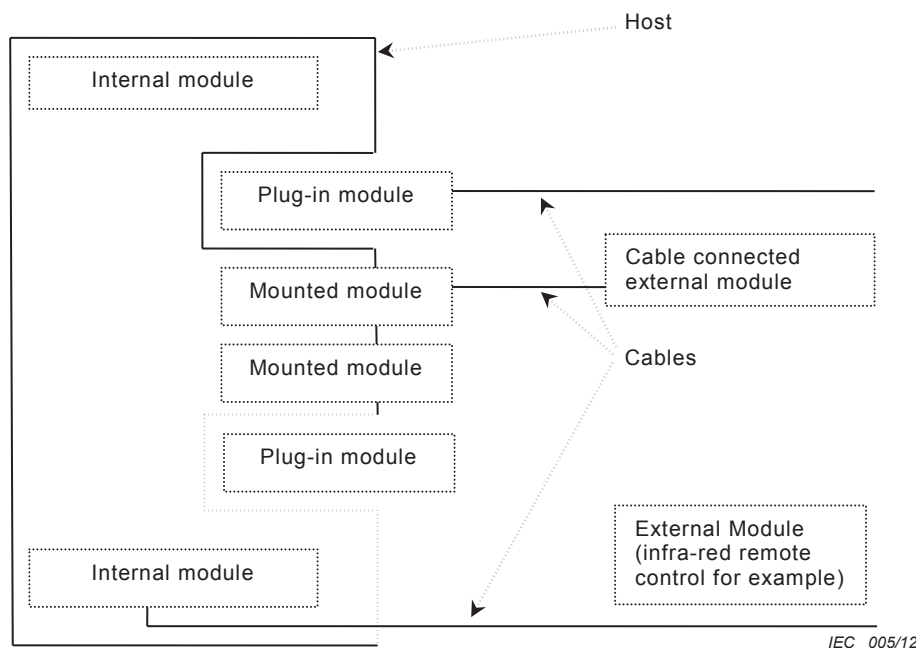


Figure 2 – Example of a host system with different types of modules

Modules whose functionality and connectivity allow them to be either, plug-in, internal, mounted and/or external shall be tested in each of the applicable configurations. However, where it can be shown that one particular configuration provides a worst case, testing in the worst case configuration is sufficient to show compliance.

When the EUT is a host, it shall be configured with modules so that the resulting system is representative of typical use.

In the case where the EUT is a module, the host is considered as an AE.

In the case of plug-in, mounted, external or internal modules, the host shall be located in the measurement area.

6.3 Measurement procedure

Measurements shall be performed as follows:

- using the relevant measurement methods and procedures given in Table A.1, Table A.7 and Annex C, and the EUT exercised in accordance with Annex B;
- with the EUT, local AE and associated cabling configured and arranged, and with ports loaded as shown in 6.2 and Annex D;
- in accordance with supporting information and clarifications defined elsewhere within this publication.

In addition, during prescan measurements, the arrangement of the EUT, the arrangement of the local AE and the placement of cables shall be varied within the range of typical and normal placement to attempt to determine the cable arrangement giving the maximum emission level, as described in Annex D.

The arrangement for formal measurement shall be representative of a typical arrangement of the EUT, local AE and associated cabling.

7 Equipment documentation

The user documentation and/or manual shall contain details of any special measures required to be taken by the purchaser or user to ensure EMC compliance of the EUT with the requirements of this publication. One example would be the need to use shielded or special cables.

Class A equipment shall have the following warning in the instructions for use, to inform the user of the risk of operating this equipment in a residential environment:

Warning: This equipment is compliant with Class A of CISPR 32. In a residential environment this equipment may cause radio interference.

8 Applicability

Measurements shall be performed on the relevant ports of the EUT according to the appropriate tables given in Annex A.

Where a manufacturer determines from the electrical characteristics and intended usage of the EUT that one or more measurements are unnecessary, the decision and justification not to perform these measurements shall be recorded in the test report.

The following table shows the highest frequency up to which radiated emission measurements shall be performed.

Based upon the value of F_x , Table 1 specifies the highest frequency applicable for the limits given in Table A.3 or Table A.5.

Table 1 – Required highest frequency for radiated measurement

Highest internal frequency (F_x)	Highest measured frequency
$F_x \leq 108$ MHz	1 GHz
$108 \text{ MHz} < F_x \leq 500$ MHz	2 GHz
$500 \text{ MHz} < F_x \leq 1$ GHz	5 GHz
$F_x > 1$ GHz	$5 \times F_x$ up to a maximum of 6 GHz
NOTE 1 For FM and TV broadcast receivers, F_x is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.	
NOTE 2 F_x is defined in 3.1.19.	

Where F_x is unknown, the radiated emission measurements shall be performed up to 6 GHz.

9 Test report

General requirements for compiling a test report taken from 5.10 of ISO/IEC 17025:2005, can be found in Annex F. Sufficient details shall be provided to facilitate reproducibility of the measurements. This shall include photographs of the measurement configuration for the formal measurements where this is appropriate.

The test report shall state the mode of operation of the EUT and how its ports were exercised (see Annex B). The test report shall clearly indicate whether the product is compliant with the Class A or Class B limits defined in Annex A.

For each relevant table clause in Annex A, the measurement results of at least the six highest emissions from the type of port being assessed relative to the limit, unless they are 10 dB or more below the limit, shall be recorded in the test report. Where a table clause includes more than one detector, the measurement results of these six emissions shall be recorded for each type of detector.¹ The results shall include the following information for each of these emissions:

- the port assessed (including enough information to identify it);
- for AC power line measurements the line under test, for example line or neutral;
- frequency and amplitude of the emission;
- margin with respect to the specified limit;
- the limit at the frequency of the emission;
- the detector used.

The report shall indicate if fewer than six emissions within 10 dB of the limit are observed.

NOTE It may also be beneficial to record emissions 10 dB or more below the limit. In addition other aspects, such as antenna polarization or turntable azimuth, may be useful to record.

Additionally, the following shall be included in the test report:

- the frequency F_x of the highest internal frequency source within the EUT as defined in 3.1.19. This frequency need not be reported if radiated emissions are measured up to 6 GHz;

¹ It is sufficient to show compliance with all limits and detectors as shown in Figure C.3 to Figure C.5

- the calculated measurement instrumentation uncertainty for each measurement type performed (see Table 1 of CISPR 16-4-2:2011). No reporting is required if U_{CISPR} is not defined for the relevant measurement type;
- the category of cable simulated by the AAN, where emissions from wired network ports are measured using an AAN. See Table C.2;
- the measurement distance for radiated emission measurements as defined in C.2.2.4 and Table A.2 to Table A.6. If another measurement distance is used, the report shall include a description of how the limits were calculated.

Further guidance is given in Annex F.

10 Compliance with this publication

Compliance with this publication requires that the EUT satisfies either the Class A or Class B requirements defined in Annex A, as appropriate. An EUT which fulfils the applicable requirements specified in Annex A is deemed to fulfil the requirements in the entire frequency range from 9 kHz to 400 GHz. No measurements need be performed at frequencies where no requirement is specified.

Where this publication gives options for testing particular requirements with a choice of test methods, compliance can be shown against any of the test methods using the appropriate limit. In any situation where it is necessary to re-test the equipment to show compliance with this publication, the test method originally chosen shall be used in order to guarantee consistency of the results, unless it is agreed by the manufacturer to do otherwise. Requirements for radiated emission measurements are defined in Table A.2 to Table A.6 with the restrictions and limitations defined in Table A.1. Requirements for conducted emission measurements are defined in Table A.8 to Table A.12 with the restrictions defined in Table A.7.

The determination of compliance with this publication shall be based solely on contributions from the EUT. For example, where an AE is required to exercise or monitor the EUT, and emissions from the AE are known to contribute to the overall measured emission of the system being assessed (for example an AE which is a plug-in module for the EUT), the AE selected should, wherever possible, be compliant with relevant emission limits. If the AE is known to cause significant emissions, these emissions may be reduced by mitigation measures, as long as these measures do not reduce the emissions from the EUT. The preferred configuration is that the AE is removed from the measurement area, as allowed by D.1.

Compliance can be shown by measuring the EUT's emissions when operating its functions simultaneously, individually in turn, or any combination thereof.

11 Measurement uncertainty

The measurement instrumentation uncertainty shall be calculated in accordance with CISPR 16-4-2 and reported as described in Clause 9.

Measurement instrumentation uncertainty shall not be taken into account in the determination of compliance. Refer to CISPR/TR 16-4-3 for guidance on the applicability of the limits to a series produced MME.

Annex A (normative)

Requirements

A.1 General

The requirements for an EUT covered by this publication are given on a port by port basis in Table A.1 to Table A.12, respectively.

Throughout this annex and unless otherwise stated:

Where the limit value varies over a given frequency range, it changes linearly with respect to the logarithm of the frequency. For example, a graphical representation of the AC mains power port limits defined in Table A.9 is presented in Figure A.1.

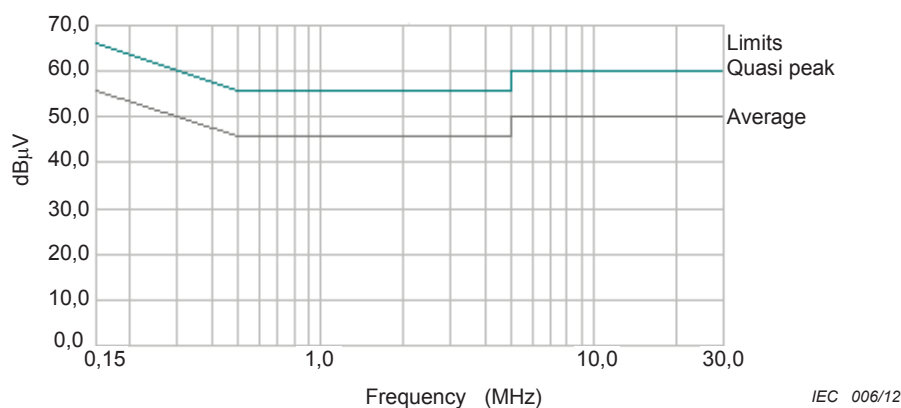


Figure A.1 – Graphical representation of the limits for the AC mains power port defined in Table A.9

- Where there is a step in the relevant limit, the lower value shall be applied at the transition frequency.
- The measurements shall be limited to:
 - a) the operating ranges of voltage and frequency as specified for the EUT, having regard to the supply voltage and frequency for the intended market of the EUT.
Testing at two nominal voltages of 230 V (± 10 V) and 110 V (± 10 V), using a frequency of 50 Hz or 60 Hz, is normally sufficient for an EUT intended for worldwide use.
 - b) the environmental parameters (temperature, humidity and atmospheric pressure) specified for the EUT.
No additional environmental parameters are defined. It is not necessary to repeat measurements at more than one set of environmental parameters.
- If different detectors have been specified, the EUT shall be assessed using all relevant detectors against the appropriate limits. This procedure can be optimised by use of the decision trees in Figure C.3 to Figure C.5.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.
- The measurement facility validation shall be performed in accordance with the relevant basic standard and, for the purposes of this publication, may be limited to the frequency range where requirements are defined in Annex A.

- Equipment with a DC power port powered by a dedicated AC/DC power converter is considered to be AC mains powered equipment and shall be tested with a power converter. Where the power converter is provided by the manufacturer, the provided converter shall be used.

A.2 Requirements for radiated emissions

The EUT is deemed to comply fully with the radiated emission requirements in this publication when it has been shown to be compliant with the applicable limits as given in Table A.2 to Table A.6 using the specified requirements in the relevant table clause.²

Compliance may only be shown at measurement distances for which compliant measurement facility (or site) validation measurements exist for the measurement facility used.

Where limits in a frequency range are given for different types of measurement facility and/or distances, measurements only need to be performed using one combination of measurement facility and distance. The same combination shall be used for all frequencies in the range.

Table A.1 – Radiated emissions, basic standards and the limitation of the use of particular methods

Table clause	Measurement facility	Validation method	Measurement		Limitations and clarifications
			Procedure	Arrangement	
A1.1	SAC or OATS with weather protection cover	5.3 of CISPR 16-1-4	7.3 of CISPR 16-2-3	Annex D	The maximum width of the EUT, local AE and associated cabling shall be within the test volume as demonstrated during the NSA test site validation. The validated measurement volume does not need to encompass any local AE and associated cabling which are located below the RGP or turntable, or remotely located, as described in D.1. NSA verification figures for 5 m facilities are presented in Table C.3.
A1.2	OATS without weather protection cover	5.2 of CISPR 16-1-4	7.3 of CISPR 16-2-3	Annex D	NSA verification figures for 5 m facilities are presented in Table C.3.
A1.3	FSOATS	8.3 of CISPR 16-1-4	7.6.6 of CISPR 16-2-3	Annex D	A facility validated against the FSOATS requirements shall be used for measurements above 1 GHz. The EUT, local AE and associated cabling shall be within the measurement volume as demonstrated during the test site validation. An FSOATS may be a SAC/OATS with RF absorber on the RGP or a FAR.
NOTE As per Clause 2, the version of CISPR 16-1-4 is CISPR 16-1-4:2010. The version of CISPR 16-2-3 is CISPR 16-2-3:2010+A1:2010.					

² In this publication, table clauses are referenced using an x.y format, where x denotes the table and y denotes the referenced clause by row within the table. For example table clause A1.2 is Table A.1, clause (row) 2.

**Table A.2 – Requirements for radiated emissions at frequencies up to 1 GHz
for Class A equipment**

Table clause	Frequency range	Measurement		Class A limits dB(μV/m)
	MHz	Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)
A2.1	30 – 230	10	Quasi Peak / 120 kHz	40
	230 – 1 000			47
A2.2	30 – 230	3		50
	230 – 1 000			57
Apply only A2.1 or A2.2 across the entire frequency range.				

**Table A.3 – Requirements for radiated emissions at frequencies above 1 GHz
for Class A equipment**

Table clause	Frequency range MHz	Measurement		Class A limits dB(μV/m)
		Distance m	Detector type/ bandwidth	FSOATS (see Table A.1)
A3.1	1 000 – 3 000	3	Average / 1 MHz	56
	3 000 – 6 000			60
A3.2	1 000 – 3 000		Peak / 1 MHz	76
	3 000 – 6 000			80
Apply A3.1 and A3.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.				

**Table A.4 – Requirements for radiated emissions at frequencies up to 1 GHz
for Class B equipment**

Table clause	Frequency range MHz	Measurement		Class B limits dB(μV/m)
		Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)
A4.1	30 – 230	10	Quasi Peak / 120 kHz	30
	230 – 1 000			37
A4.2	30 – 230	3		40
	230 – 1 000			47
Apply only table clause A4.1 or A4.2 across the entire frequency range.				

Table A.5 – Requirements for radiated emissions at frequencies above 1 GHz for Class B equipment

Table clause	Frequency range MHz	Measurement		Class B limits dB(μV/m)
		Distance m	Detector type/ bandwidth	FSOATS (see Table A.1)
A5.1	1 000 – 3 000	3	Average/ 1 MHz	50
	3 000 – 6 000			54
A5.2	1 000 – 3 000		Peak/ 1 MHz	70
	3 000 – 6 000			74
Apply A5.1 and A5.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.				

Table A.6 – Requirements for radiated emissions from FM receivers

Table clause	Frequency range MHz	Measurement		Class B limit dB(μV/m)		
		Distance m	Detector type/ bandwidth	Fundamental	Harmonics	
				OATS/SAC (see Table A.1)	OATS/SAC (see Table A.1)	
A6.1	30 – 230	10	Quasi peak/ 120 kHz	50	42	
	230 – 300				42	
	300 – 1 000				46	
A6.2	30 – 230	3		60	52	
	230 – 300				52	
	300 – 1 000				56	
Apply only A.6.1 or A.6.2 across the entire frequency range.						
These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the local oscillator. Signals at all other frequencies shall be compliant with the limits given in Table A.4.						

A.3 Requirements for conducted emissions

The EUT is deemed to comply with the conducted emission requirements when it has been shown to be compliant with all applicable limits as given in Table A.8 to Table A.12. The required measurement methods are stated in Table A.7.