

Clothes washing machines for household use — Methods for measuring the performance

ICS 97.060

National foreword

This British Standard is the UK implementation of EN 60456:2011, incorporating corrigendum July 2011. It is identical to IEC 60456:2010. It supersedes BS EN 60456:2005, which will be withdrawn on 21 March 2014.

The CENELEC common modifications have been implemented at the appropriate places in the text. See the CENELEC foreword.

The UK participation in its preparation was entrusted by Technical Committee CPL/59, Performance of household electrical appliances, to Subcommittee CPL/59/1, Dishwashers and washing machines.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 3 May 2005

© BSI 2011

ISBN 978 0 580 62899 3

Amendments/corrigenda issued since publication

Date	Comments

**Clothes washing machines for household use -
Methods for measuring the performance**
(IEC 60456:2010, modified)

Machines à laver le linge pour usage domestique -
Méthodes de mesure de l'aptitude à la fonction
(CEI 60456:2010, modifiée)

Waschmaschinen für den Hausgebrauch -
Verfahren zur Messung der Gebrauchseigenschaften
(IEC 60456:2010, modifiziert)

This European Standard was approved by CENELEC on 2011-03-21. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

Foreword

The text of the International Standard IEC 60456:2010, prepared by SC 59D, Home laundry appliances, of IEC TC 59, Performance of household and similar electrical appliances, together with common modifications prepared by the Technical Committee CENELEC TC 59X, Performance of household and similar electrical appliances, was submitted to the formal vote and was approved by CENELEC as EN 60456 on 2011-03-21.

This document supersedes EN 60456:2005 + A11:2006 + A12:2011

Significant technical differences are

- a) a test procedure for a combined test sequence of cotton 40 °C and cotton 60 °C with full load and partial load is introduced,
- b) a test procedure for measuring power consumption in low power modes is introduced,
- c) a formula to calculate the energy consumption of washing machines including low power modes is added,
- d) the detergent dosage is reduced to 75 % for cotton and synthetic/blends,
- e) the detergent dosage of the reference machine type 1 is adjusted to maintain the washing performance level of the reference machine type 2,
- f) the reference machine type 1 is to be used for testing according to Commission Regulations with regard to energy labelling and ecodesign,
- g) control procedures for checking measured values in comparison to values declared by the manufacturer under consideration of permitted tolerances are updated.

The procedures described in this European Standard were modified substantially compared to EN 60456:2005, e.g. with regard to detergent dosage. Therefore results of tests according to this standard cannot and shall not be directly compared to results of similar procedures of previous versions. Also results based on a specific reference programme shall not be compared to results based on other reference programmes.

This European Standard also specifies, as far as necessary, the test methods which shall be applied in accordance with the COMMISSION DELEGATED REGULATION (EU) No 1061/2010 implementing Directive 2010/30/EU of the European Parliament and of the Council with regard to energy labelling of household washing machines and in accordance with the COMMISSION REGULATION (EU) No 1015/2010 implementing Directive 2009/125/EC of the European Parliament and of the Council with regard to ecodesign requirements for household washing machines.

Clauses, subclauses, notes, tables and figures which are additional to those in IEC 60456:2010 are prefixed “Z”.

Annexes ZA, ZB and ZC have been added by CENELEC.

Annex ZA sets out the procedure to be applied for testing according to Commission Regulations with regard to energy labelling and ecodesign and provides all necessary links to all relevant clauses of this European Standard.

Annex ZB provides control procedures for checking measured values in comparison to values declared by the manufacturer and taking into account any permitted tolerances.

Annex ZC lists normative references.

The following dates were fixed:

- latest date by which the EN has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2012-03-21
- latest date by which the national standards conflicting
with the EN have to be withdrawn (dow) 2014-03-21

Endorsement notice

The text of the International Standard IEC 60456:2010 was approved by CENELEC as a European Standard with common modifications **printed in red letters**.

CONTENTS

1	Scope	9
2	Normative references	9
3	Terms, definitions and symbols	9
3.1	Terms and definitions	9
3.2	Symbols	14
3.2.1	Symbols relating to Subclause 9.2 – washing performance	14
3.2.2	Symbols relating to Subclause 9.3 – water extraction (spinning)	14
3.2.3	Symbols relating to Subclause 9.4 – rinsing performance	14
3.2.4	Symbols relating to Subclause 9.5 – energy, water and time	15
3.2.5	Symbols relating to Clause 10 – wool shrinkage	15
3.2.6	Symbols relating to Annex G	15
3.2.7	Symbols relating to Annex I	15
3.2.8	Symbols relating to Annex L	15
	3.2.Z1 Symbols relating to Annex ZA	16
4	Requirements	21
4.1	General	21
4.2	Rated capacity	22
4.3	Dimensions	22
5	Test conditions, materials, equipment and instrumentation	23
5.1	General	23
5.2	Ambient conditions	23
5.2.1	Electricity supply	23
5.2.2	Water supply	23
5.2.3	Ambient temperature and humidity	25
5.3	Test materials	25
5.3.1	General	25
5.3.2	Base loads	25
5.3.3	Stain test strips	26
5.3.4	Wool shrinkage specimens	26
5.3.5	Detergents	26
5.4	Equipment	27
5.4.1	General	27
5.4.2	Reference machine	27
5.4.3	Spectrophotometer	27
5.4.4	Equipment for conditioning the base load	28
5.4.5	Standard extractor	28
5.4.6	Iron for preparation of stain test strips after washing	29
5.4.7	Titration equipment	29
5.4.8	Other equipment	30
5.5	Instrumentation and accuracy	30
5.5.1	General	30
5.5.2	Instruments	30
5.5.3	Measurements	31
6	Preparation for testing	31
6.1	General	31

6.2	Test washing machine and reference machine preparation.....	32
6.2.1	Test washing machine	32
6.2.2	Reference machine.....	33
6.3	Detergent	33
6.3.1	General	33
6.3.2	Detergent dose	33
6.3.3	Mixing detergent.....	34
6.3.4	Detergent placement	34
6.4	Test loads	35
6.4.1	General	35
6.4.2	Pre-treatment of new base load items prior to use	37
6.4.3	Requirements regarding the age of base load items	38
6.4.4	Normalization of base load items before a new test series	38
6.4.5	Conditioning of base load items before a new test series	39
6.4.6	Test load composition.....	40
6.4.7	Addition of stain test strips or wool shrinkage specimens to the base load	43
7	Performance measurements – general requirements	44
8	Tests for performance	46
8.1	General	46
8.2	Test procedure for performance tests	46
8.2.1	Test conditions, materials and preparation for testing	46
8.2.2	Test load and loading	47
8.2.3	Programme.....	47
8.2.4	Test procedure	47
8.2.5	Test series	48
8.3	Measurements to determine washing performance	50
8.3.1	General	50
8.3.2	Removal and drying of stain test strips	50
8.3.3	Assessment of stain test strips	50
8.4	Measurements to determine water extraction performance	51
8.4.1	General	51
8.4.2	Washing machines	51
8.4.3	Spin extractors	51
8.5	Measurements to determine rinsing performance	52
8.5.1	General	52
8.5.2	Spin extraction and sampling.....	52
8.5.3	Alkalinity measurements.....	53
8.6	Measurements to determine water and energy consumption and programme time.....	54
8.6.1	General	54
8.6.2	Procedure.....	54
9	Assessment of performance	55
9.1	General	55
9.2	Evaluation of washing performance	55
9.3	Evaluation of water extraction performance	57
9.4	Evaluation of rinsing performance	58
9.4.1	General	58
9.4.2	Calculations.....	58
9.4.3	Evaluation	58

9.5	Evaluation of water and energy consumption and programme time	59
9.5.1	General	59
9.5.2	Water volumes	59
9.5.3	Programme time	60
9.5.4	Energy consumption	60
10	Shrinkage during the wool wash programme	61
10.1	General	61
10.2	Overview	61
10.2.1	General	61
10.2.2	Determination of reference shrinkage	61
10.3	Procedure	62
10.3.1	Preparation of wool shrinkage specimens	62
10.3.2	Wool programme test	64
10.3.3	Evaluation	65
11	Data to be reported	66
Annex A (normative)	Specification of stain test strips with standardized soiling	67
Annex B (normative)	Reference detergent A*	71
Annex C (normative)	Specifications for base loads	73
Annex D (normative)	Reference machine specification	76
Annex E (normative)	Reference machine programme definitions	81
Annex F (informative)	Reference programmes and examples of comparable washing machine programmes	84
Annex G (normative)	The bone-dry method of conditioning	85
Annex H (normative)	Folding and loading the test load	87
Annex I (normative)	Calculation of weighted average age of the cotton base load	104
Annex J (normative)	Loading a large standard extractor (rinsing performance)	106
Annex K (informative)	Laboratory internal testing guide	110
Annex L ~~(normative)~~ (informative)	Measurement of energy consumption in low power modes of washing machines	115
Annex M ~~(normative)~~ (informative)	Testing procedure for manual washing machines	118
Annex N ~~(normative)~~ (informative)	Procedure to determine test load size where rated capacity is not declared	120
Annex O (informative)	Additional evaluation of washing performance	122
Annex P (informative)	Testing deviations to reduce costs and their limitations	126
Annex Q (informative)	Uncertainty of measurements in IEC 60456	132
Annex R (informative)	Environmental aspects of washing machine use determined in IEC 60456	135
Annex S (normative)	Test report – data to be reported	138
Annex T (normative)	Wool shrinkage specimens	145
Annex U (informative)	Sources of materials and supplies	146
Annex ZA (normative)	Test procedure for a combined test sequence of cotton 40 °C and cotton 60 °C with full load and partial load	147
Annex ZB (normative)	Tolerances and control procedures	189
Annex ZC (normative)	Normative references to international publications with their corresponding European publications	191
Bibliography		192

Figure 1 – Load item preparation prior to a test series	36
Figure 2 – Load composition and age requirements	37
Figure 3 – Attached test strip	44
Figure 4 – Test series: process and decisions for load mass and age	48
Figure 5 – Positions for measuring soiled test pieces	50
Figure 6 – Wool shrinkage specimen, uncut	62
Figure 7 – Wool shrinkage specimen, fraying the edges and V-cuts	62
Figure 8 – Wool shrinkage specimen, marks	63
Figure H.1 – Folding towel with a stain test strip attached	86
Figure H.2 – Folding towel without a stain test strip attached	87
Figure H.3 – Folding pillowcases	87
Figure H.4 – Folding bed sheets	87
Figure H.5 – Folding pillowcases with a stain test strip attached	88
Figure H.6 – Folding pillowcases without a stain test strip attached	88
Figure H.7 – Folding shirts	89
Figure H.8 – Illustration of horizontal axis washing machine	89
Figure H.9 – Illustration of vertical axis washing machine	90
Figure H.10 – Horizontal axis washing machine: placement of items in the drum	91
Figure H.11 – Vertical axis washing machine: placement of items in the drum	91
Figure H.12 – Horizontal axis washing machine: illustration of alternating orientation	93
Figure H.13 – Placement of 2 towels with strips in one layer for load sizes larger than 10 kg	96
Figure H.14 – Vertical axis washing machines, four quadrants (plan view)	98
Figure I.1 – Example for the exchange of load items for a 5 kg cotton load	104
Figure J.1 – Example of a large standard extractor	105
Figure J.2 – View from the top: loading the large standard extractor	105
Figure J.3 – Areas for loading	106
Figure J.4 – Folding of items	106
Figure J.5 – 3 areas of loading	107
Figure J.6 – Outer circle	107
Figure J.7 – Outer circle	107
Figure J.8 – Middle circle	108
Figure J.9 – Inner circle	108
Figure J.10 – Towels covering the load	108
Table 1 – Detergent dose	
Table 2 – Number of items in the cotton test load for various test load masses	
Table 3 – Number of items in the synthetics/blends test load for various test load masses	
Table 4 – Number of items in the wool programme test load for various test load masses	
Table A.1 – Ratios and tolerances of standardized soils, Reference Machine CLS and MP Lab	
Table B.1 – Composition of the reference detergent A*	
Table C.1 – Specification of the cotton base load items	

Table C.2 – Specification of the synthetics/blends base load items	
Table D.1 – Description of the reference washing machine and method of use type 1	
Table D.2 – Description of the reference washing machine and method of use type 2	
Table D.3 – Programmed volume for type 2 reference machine	
Table E.1 – Specification of reference washing programmes.....	
Table E.2 – Tolerances given for some procedure parameters	
Table F.1 – Reference programmes and examples of comparable washing machine programmes.....	
Table H.1 – Vertical axis washing machines, loading sequence example for a synthetics/blends load	
Table H.2 – Horizontal axis washing machines, loading sequence	
Table H.3 – Horizontal axis washing machine, loading example (5 kg)	
Table H.4 – Vertical axis washing machines, small loads without sheets (1,0 kg to 2,5 kg)	
Table H.5 – Vertical axis washing machines, medium loads with two sheets (3,0 kg to 7,0 kg)	
Table H.6 – Vertical axis washing machines, large loads with three sheets (7,5 kg to 8,5 kg)	
Table H.7 – Vertical axis washing machines, very large loads with four sheets (9,0 kg to 10,0 kg)	
Table H.8 – Vertical axis washing machine – loading example (5 kg)	
Table S.1 – Data for test washing machine	
Table S.2 – Data, parameters and performance results, cotton or synthetics/blends base loads	
Table S.2a – Data, parameters and results, cotton or synthetics/blends base loads	
Table S.2b – Performance results, cotton or synthetics/blends base loads.....	
Table S.3 – Data, parameters and results – wool shrinkage – polyester base load.....	
Table S.4 – Weighted average age – cotton load	
Table S.5 – Materials	
Table S.6 – Equipment	

1 Scope

This European Standard specifies methods for measuring the performance of clothes **washing machines** for household use, with or without heating devices utilising cold and/or hot water supply. It also deals with appliances for water extraction by centrifugal force (**spin extractors**) and is applicable to appliances for both washing and drying textiles (**washer-dryers**) with respect to their washing related functions. This European Standard also covers **washing machines** which specify the use of no detergent for normal use.

NOTE 1 Tumble dryer performance is assessed to IEC 61121.

The object is to state and define the principal performance characteristics of electric household **washing machines** and **spin extractors** and to describe the test methods for measuring these characteristics.

NOTE 2 This European standard applies also to **washing machines** for communal use in blocks of flats or in laundrettes. It does not apply to **washing machines** for commercial laundries. This European Standard is not intended to be used for the comparative evaluation of detergents.

NOTE 3 This European Standard does not specify acoustical noise requirements for **washing machines**. Acoustical noise measurements are specified in IEC 60704-1 and IEC 60704-2-4.

NOTE 4 This European Standard does not specify safety requirements for **washing machines**. Safety requirements are specified in IEC 60335-2-7.

2 Normative references

Void.

NOTE Z1: Normative references to the relevant European Standards are listed in Annex ZC (normative).

3 Terms, definitions and symbols

3.1 Terms and definitions

For the purposes of this document, the following definitions apply.

3.1.1

washing machine

appliance for cleaning and rinsing of textiles using water which may also have a means of extracting excess water from the textiles

3.1.2

test washing machine

washing machine that is subjected to part or all of the requirements in this document in order to determine its performance

NOTE **Test washing machine** may include washing machines according to 3.1.7, 3.1.8, 3.1.9 and/or 3.1.10.

3.1.3

reference machine

specially constructed **washing machine** of known performance which is used to increase repeatability and reproducibility of results

NOTE It may be used to provide a known performance level within a laboratory against which to compare selected performance parameters on test washing machines as defined in this document – refer 5.4.2.

3.1.4

washer-dryer

washing machine which includes both a **spin extraction** function and also a means for drying the textiles, usually by heating and tumbling

NOTE This document only covers the operations which relate to the **washing machine** function – see Scope.

3.1.5

spin extractor

separate water-extracting appliance in which water is removed from textiles by centrifugal action (**spin extraction**)

3.1.6

standard extractor

spin extractor used to remove water remaining in the base load at the completion of the programme where a rinse performance measurement is required

3.1.7

vertical axis washing machine

washing machine in which the load is placed in a drum which rotates around an axis which is vertical or close to vertical. For the purposes of this document, vertical axis is where the angle of the axis of rotation is more than 45 degrees to horizontal. Where the drum does not rotate, the washing machine shall be classified as a vertical axis washing machine.

NOTE The classification of vertical axis or horizontal axis in this document is only used to define the placement of the load into the drum.

3.1.8

horizontal axis washing machine

washing machine in which the load is placed in a drum which rotates around an axis which is horizontal or close to horizontal. For the purposes of this document, horizontal axis is where the angle of the axis is less than or equal to 45 degrees to horizontal.

NOTE The classification of vertical axis or horizontal axis in this document is only used to define the placement of the load into the drum.

3.1.9

manual washing machine

washing machine where the machine requires user intervention at one or more points during the programme to enable the machine to proceed to the next **operation**

NOTE Examples of user intervention could include manual fill (non automatic water level), transfer of the load between a washing drum and a **spin extractor** drum or manual draining. **Manual washing machines** have special requirements regarding the **programme** which is tested for this document; see Annex M.

3.1.10

automatic machine

washing machine where the load is fully treated by the machine without the need for user intervention at any point during the **programme** prior to its completion

3.1.11

test run

single performance assessment as specified in Clause 7 of this document

3.1.12

test series

group of **test runs** on a **test washing machine** which, collectively, are used to assess the performance of a **washing machine**

3.1.13

operation

each performance of a function that occurs during the **washing machine programme** such as pre-wash, washing, rinsing, draining or spinning

3.1.14

programme

series of **operations** which are pre-defined within the **washing machine** and which are declared by the manufacturer as suitable for washing certain textile types

3.1.15

cycle

complete washing process, as defined by the **programme** selected, consisting of a series of **operations** (wash, rinse, spin, etc.) and including any **operations** that occur after the completion of the **programme**

NOTE Examples of **operations** that may occur after the completion of the **programme** are pumping, monitoring and anti-creasing (where applicable).

3.1.16

spin extraction

water-extracting function by which water is removed from textiles by centrifugal action. This is included as a function (built in **operation**) of an **automatic washing machine** but may also be performed in a **spin extractor**

3.1.17

spin speed

rotational frequency of a drum during **spin extraction**

NOTE A method for determination of **spin speed** is not defined in this standard.

3.1.18

base load

textile load used for testing without stain test strips or wool shrinkage specimens

3.1.19

test load

base load used for testing plus stain test strips or wool shrinkage specimens

3.1.20

test load mass

actual mass of the base load plus stain test strips or wool specimen

3.1.21

nominal test load mass

mass of dry textiles of a particular type for which the performance of the test washing machine shall be tested (rated capacity or part load). Target value for the conditioned **test load mass**

3.1.22

rated capacity

maximum mass in kg of dry textiles of a particular type which the manufacturer declares can be treated in the **washing machine** on the **programme** selected

3.1.23

programme time

programme time is the time from the initiation of the **programme** (excluding any user programmed delay) until the completion of the **programme**. If the end of **programme** is not indicated, the **programme time** is equal to the **cycle time**.

3.1.24

end of programme

the **programme** is complete when the **washing machine** indicates the end of the **programme** and the load is accessible to the user. Where there is no end of **programme** indicator and the door is locked during operation, the **programme** is complete when the load is accessible to the user. Where there is no end of **programme** indicator and the door is not locked during operation, the **programme** is complete when the power consumption of the appliance drops to some steady state condition and is not performing any function

NOTE An indication of the end of the **programme** may be in the form of a light (on or off), a sound, an indicator shown on a display or the release of a door or latch. In some **washing machines** there may be a short delay from an end of **programme** indicator until the load is accessible by the user.

3.1.25

cycle time

time from the initiation of the **programme** (excluding any user programmed delay) until all activity ceases. Activity is considered to have ceased when the power consumption reverts to a steady state condition that persists indefinitely without user intervention. If there is no activity after the end of the **programme**, the **cycle time** is equal to the **programme time**

NOTE **Cycle time** includes any activity that may occur after the **programme** is completed. This could include any electronic activity or any additional mechanical activity that occurs for a limited period after any end of **programme** indicator. Any cyclic event that occurs indefinitely is considered to be steady state.

3.1.26

main wash duration

time from the commencement of the initial water intake for the main wash until the commencement of the initial water intake for the first rinse

NOTE Variations in the laboratory water supply pressure may affect the **main wash duration**. This definition is only applicable to **test washing machines**. The **reference machine** wash time used for calibration of the **reference machine** is defined differently. Refer to Table E.1.

3.1.27

remaining moisture content

measure for the additional amount of moisture that is contained in the **base load** in relation to the equilibrium condition for **base load** items which have been conditioned in a controlled space (refer to 6.4.5.2)

NOTE This equilibrium condition is defined as 0 % **remaining moisture content** in this document. Hence it is possible for a **base load** or load items to have a negative **remaining moisture content** when treated with a tumble drier. Refer also to Annex G.

3.1.28

off mode

condition where the product is switched off using appliance controls or switches that are accessible and intended for operation by the user during normal use to attain the lowest power consumption that may persist for an indefinite time while connected to a mains power source and used in accordance with the manufacturer's instructions. Where there are no controls, the washing machine is left to revert to a steady state power consumption of its own accord

3.1.29

left on mode

lowest power consumption mode that may persist for an indefinite time after the completion of the programme and unloading of the machine without any further intervention of the user

NOTE In some products this mode may be an equivalent power to **off mode**.

3.1.30

rated voltage

voltage assigned to the appliance by the manufacturer

3.1.Z1
full load

test load to be used for a combined **test series** according to Annex ZA, having a nominal mass that is equal to the greatest amount of cotton textiles that may be washed using the standard 60 °C cotton **programme** or the standard 40 °C cotton **programme**, as stated by the manufacturer in the instruction manual or on the energy label supplied with the **test washing machine**, whichever is higher

3.1.Z2
partial load
half of the **full load** for cotton textiles

3.1.Z3
treatment
combination of **test load** and **programme** to be used for a **test run** within a combined **test series**

3.1.Z4
treatment 60½
standard 60 °C cotton **programme** with **partial load**

3.1.Z5
treatment 40½
standard 40 °C cotton **programme** with **partial load**

3.1.Z6
treatment 60
standard 60 °C cotton **programme** with **full load**

3.1.Z7
unstable left on mode
condition after opening the door, at the end of the **programme** where the power consumption may change without any intervention by the end-user

3.1.Z8
post programme phases
phases after the end of **programme** defined to be used for the measurement of **left on mode**

3.1.Z9
post programme phase LU
phase after the end of **programme** defined to be used for the measurement of the **unstable left on mode**

3.1.Z10
post programme phase LO
phase after the end of **programme** defined to be used for the measurement of the **left on mode**

3.1.Z11
left on mode duration
time to revert automatically the machine to **off mode** after the end of the **programme** if the **test washing machine** is equipped with a **power management system**

3.1.Z12
power management system
system within the **test washing machine** which reverts it automatically to **off mode**

3.2 Symbols

3.2.1 Symbols relating to Subclause 9.2 – washing performance

C_k	the sum of the average reflectance values (Y-values) for each test run
$\bar{C}$	the average sum of the reflectance values (Y-values) for each of the five types of soils, for all valid test runs
$C_{k\text{test}}$	the sum of the reflectance values in each test run of the test washing machine
$\bar{C}_{\text{test}}$	the average sum of the reflectance values of the test washing machine
$\bar{C}_{\text{ref}}$	the average sum of the reflectance values in each test run of the reference machine
m	the number of soil types per stain test strip
n	the number of stain test strips in each test run
p	confidence interval for q
q	ratio between the test washing machine , $\bar{C}_{\text{test}}$, and the reference machine , $\bar{C}_{\text{ref}}$
s_q	standard deviation of the ratio q
s_C	the standard deviation of C_k
s_i	the standard deviation of the reflectance values for each soil type within a given test run
$t_{w-1, 0,05}$	the “Student T” factor for (w-1) degrees of freedom for a confidence of 95 % (i.e. 2,776 for five test runs equals four degrees of freedom, two sided test)
w	the number of test runs in the test series
$\bar{x}_i$	the average reflectance values for each soil type
x_{ij}	the average reflectance value of the 4 individual readings for each of the 5 soil types on a stain test strip

3.2.2 Symbols relating to Subclause 9.3 – water extraction (spinning)

RMC	remaining moisture content
M	the mass of the conditioned base load (g)
M_r	the mass of base load at the end of the test run (g)

3.2.3 Symbols relating to Subclause 9.4 – rinsing performance

A_m	the amount of wash alkali remaining in the base load
$A_{m,\text{test}}$	the amount of wash alkali remaining in the base load measured in the test washing machine
$A_{m,\text{ref}}$	the amount of wash alkali remaining in the base load measured in the reference machine with the relevant programme as described in Annex E
A_r	the increased concentration of alkalinity in extracted water
W_e	the averaged concentration of alkalinity in extracted water
W_s	the averaged concentration of alkalinity in the laboratory supply water
m_e	the mass of the sample of extracted water
m_s	the mass of the sample of laboratory supply water
M	the mass of the conditioned base load (g)

M_r	the mass of base load at the end of the test run
R	rinsing index
$\bar{R}$	the mean of rinse indices for all valid test runs in the test series
R_k	the rinsing index from one test run
s	standard deviation of the rinse indices for all valid test runs

3.2.4 Symbols relating to Subclause 9.5 – energy, water and time

t_c	the measured average cold water inlet temperature (°C)
t_h	the measured average hot water inlet temperature (°C)
V_c	the volume of the cold water used during an operation (l)
V_h	the volume of external hot water used during operation (l)
W_c	the cold water energy correction for the operation (kWh)
W_{ct}	the total cold water energy correction determined during the test (kWh)
W_{et}	the total electrical energy metered during the test (kWh)
W_h	the calculated hot water energy for the operation (kWh)
W_{ht}	the calculated total hot water energy determined during the test (kWh)
W_{total}	total energy (kWh)

3.2.5 Symbols relating to Clause 10 – wool shrinkage

CFS	cycle felting severity – average shrinkage per wash
LS	linear felting shrinkage (%) – length
SR	the shrinkage rate at the completion of the test series (test washing machine)
SRI	the shrinkage rate index (compared to reference shrinkage rate)
W_0	the mean measurements (width or length), of the original wool shrinkage specimens after initial preparation and before washing
W_k	the mean measurements (width or length) of the washed wool shrinkage specimens at the completion of the test series
WS	Linear felting shrinkage (%) – width
$\bar{y}$	the arithmetic mean of the individual readings for each set of measurements (width or length) for the set of three wool shrinkage specimens
y_i	the individual readings for each measurement (width or length) of each individual wool shrinkage specimen

3.2.6 Symbols relating to Annex G

M_{bd}	the mass of base load at the end of the bone dry run (g)
----------	--

3.2.7 Symbols relating to Annex I

$\bar{A}$	weighted average age of the base load as number of test runs
a_i	age of item (after conditioning)
n_i	number of items; (of the same type and age)
w_i	the mass per piece given in Table C.1

3.2.8 Symbols relating to Annex L

P_{off}	Off mode power
-----------	-----------------------

P_{on} Left on mode power

3.2.Z1 Symbols relating to Annex ZA

$[]$	rounding up/down to full integer values (no decimal places) as described in ISO 31-0
$\lfloor \rfloor$	always rounding up to full integer values (no decimal places)
$\lceil \rceil$	always rounding down to full integer values (no decimal places)
AE_c	Annual Energy Consumption (kWh)
AW_c	Annual Water Consumption (l)
c	rated capacity to calculate the Standard Annual Energy Consumption of the test washing machine
CI	two sided confidence interval per test series
C_k	sum of the average reflectance values (Y-values) for each test run
$\overline{C_z}$	average value for the sum of the reflectance values for the treatments 40½ and 60½ with partial load
$\overline{C_{ref}}$	average sum of the reflectance values in each test run of the reference machine out of all 5 runs
$\overline{C_{60}}$	average value for the sum of the reflectance values for the treatment 60
D	average value for the remaining moisture content for the combined test series (%)
D_i	remaining moisture content of test run i with full load (%)
$\overline{D_{max}}$	maximum remaining moisture (%)
$\overline{D_z}$	average value for the remaining moisture content for the treatments 40½ and 60½ with partial load (%)
$D_{z,part,i}$	remaining moisture content with partial base load part (part = A,B) of test run i with treatment type z (z = 40½, 60½) (%)
$\overline{D_{40\%}}$	average for the remaining moisture content for treatment 40½ (%)
$\overline{D_{60\%}}$	average value for the remaining moisture content for treatment 60½ (%)
$\overline{D_{60}}$	average value for the remaining moisture content for treatment 60 with full load (%)
EEI	Energy Efficiency Index of a test washing machine

i	test run
I_W	Washing Efficiency Index for the combined test series
$I_{W,z}$	Washing Efficiency Index for the treatments 40½ and 60½ with partial load
$I_{W40½}$	Washing Efficiency Index for treatment 40½
$I_{W60½}$	Washing Efficiency Index for treatment 60½
$I_{W,60}$	Washing Efficiency Index for the treatment 60
M	mass of the conditioned base load (g)
M_{det}	mass of detergent used (g)
M_{dry}	mass of base load before each test run (without test strips) (g)
$M_{r,i}$	mass of the base load at the end of the test run i ($i = 1,2,3$) (g)
M_{part}	mass of the conditioned partial load (part A or part B) (g)
$M_{r,z,\text{part},i}$	mass of the partial base load (part = A,B) at the end of the test run ($i = 1,2$) for the treatment type z ($z = 60½, 40½$) (g)
Mn_{part}	nominal partial test load mass (kg)
n	number of test runs per treatment
$n_{A,PC}$	number of pillowcases in part A
$n_{A,SH}$	number of sheets in part A
$n_{A,STS}$	number of stain test strips in part A
$n_{A,T}$	number of towels in part A
$n_{B,PC}$	number of pillowcases in part B
$n_{B,SH}$	number of sheets in part B
$n_{B,STS}$	number of stain test strips in part B
$n_{B,T}$	number of towels in part B
n_{PC}	number of pillowcases at rated test load mass

n_{SH}	number of sheets at rated test load mass
n_T	number of towels at rated test load mass
$part$	partial load identifier (part = A,B)
p_c	laboratory supply water pressure cold (kPa)
p_h	laboratory supply water pressure hot (if connected) (kPa)
$P_{LU,z}$	value for the average power for the 2 post programme phases (LU and LO) for the treatments 40½, 60½ and 60 (W)
P_{LU}	average power during post programme phase LU (W)
P_{LO}	average power during post programme phase LO (W)
$P_{LO,z}$	average power during post programme phase LO per treatment (W)
P_{LX}	average value for left on mode power during post programme phase X for the combined test series (W)
$P_{LX40½}$	average power in post programme phase X for treatment 40½ (W)
$P_{LX60½}$	average power in post programme phase X for treatment 60½ (W)
P_{LX60}	average power in post programme phase X for treatment 60 (W)
P_O	average value for left on mode power for the combined test series (W)
$P_{O,z}$	average power in the off mode per treatment (W)
$P_{O40½}$	average energy consumption for treatment 40½ (W)
$P_{O60½}$	average energy consumption for treatment 60½ (W)
P_{O60}	average energy consumption for treatment 60 (W)
$r_{40½,60½,60}$	sum of squared residuals per treatment
r_x	residual per treatment
RMS	root mean square error per test series
S	average value for the maximum spin speed for the combined test series (rpm)
SAE_C	Standard Annual Energy Consumption (kWh)

S_i	maximum spin speed of test run i with treatment type p (p = 60) (rpm)
$\overline{S_{\max}}$	lowest value for the maximum spin speed (rpm)
$\overline{S_z}$	average value for the maximum spin speed for the treatments 40½ and 60½ with partial load (rpm)
$S_{z,i}$	maximum spin speed of test run i with treatment type z (z = 40½, 60½) (rpm)
$\overline{S_{40\%}}$	average maximum spin speed for the treatment 40½ (rpm)
$\overline{S_{60\%}}$	average maximum spin speed for the treatment 60½ (rpm)
$\overline{S_{60}}$	average value for the maximum spin speed for the treatment 60 with full load (rpm)
S_x	standard deviation per treatment
Std_Y	pooled standard deviation per test series
t_a	ambient temperature (test room) (°C)
t_c	measured average cold water inlet temperature (°C)
t_h	measured average hot water inlet temperature (°C)
t_i	programme time for test run i with treatment type z (z = 60) (min)
t_{mLU}	measurement time for post programme phase LU (min)
t_{mLO}	measurement time for post programme phase LO (min)
$t_{m,z}$	measurement time in off mode for each treatment (min)
t_{MW}	main wash duration (min)
$\overline{t_z}$	average value for the programme time for the treatments 40½ and 60½ with partial load (min)
$t_{z,i}$	programme time for test run i with treatment type z (z = 40½, 60½) (min)
$\overline{t_{40\frac{1}{2}}}$	average programme time for treatment 40½ (min)
$\overline{t_{60\frac{1}{2}}}$	average programme time for treatment 60½ (min)
$\overline{t_{60}}$	average programme time for treatment 60 (min)
$\overline{t_L}$	average value for left on duration (min)

$\overline{t_{L40\frac{1}{2}}}$	left on duration for treatment 40½ (min)
$\overline{t_{L60\frac{1}{2}}}$	left on duration for treatment 60½ (min)
$\overline{t_{L60}}$	left on duration for treatment 60 (min)
t_t	average value for the programme time for the combined test series (min)
$t_{4,1-\alpha/2}$	“Student T” factor for 4 degrees of freedom for a confidence level of 95 %, is 2,776
V	pooled mean (weighted mean) per test series
V_{cm}	volume of cold water used during the main wash (l)
V_{hm}	volume of supply hot water used during the main wash (l)
V_{ct}	volume of cold water used in the test (l)
V_{ht}	volume of supply hot water used in the test (l)
V_i	total water consumption for test run i with treatment type p (p = 60) in min
V_m	water consumption during the main wash (l)
$V_{z,i}$	total water consumption for test run i with treatment type z (l)
$\overline{V_z}$	average value for the total water consumption for the treatments 40½ and 60½ with partial load (l)
$\overline{V_{60}}$	average value for the total water consumption for the treatment 60 with full load (l)
$\overline{V_{40\frac{1}{2}}}$	average water consumption for treatment 40½ (l)
$\overline{V_{60\frac{1}{2}}}$	average water consumption for treatment 60½ (l)
V_{total}	average value for the total water consumption for the combined test series (l)
$\overline{x}$	average value per treatment
x_i	value for each test run of the treatment
$\overline{x_{40\frac{1}{2},60\frac{1}{2},60}}$	average value per treatment
Y	value per test series
W_{et}	is the total electrical energy metered during the test (kWh)

$\overline{W}_z$	average value for the total energy consumption for the treatments 40½ and 60½ with partial load (kWh)
$W_{z,i}$	total energy consumption for test run i with treatment type z (z = 40½, 60½) (kWh)
W_i	total energy consumption for test run i with treatment type z (z = 60) (kWh)
$\overline{W}_{60}$	average value for energy consumption for treatment 60 (kWh)
$\overline{W}_{40\frac{1}{2}}$	average value for energy consumption for treatment 40½ (kWh)
$\overline{W}_{60\frac{1}{2}}$	average value for energy consumption for treatment 60½ (kWh)
$W_{total,cold}$	average value for total energy consumption without hot water (kWh)
W_{total}	average value for total energy consumption for the combined test series (kWh)
$W_{LU,z}$	energy consumption during post programme phase LU per treatment (Wh)
$W_{LO,z}$	energy consumption during post programme phase LO per treatment (Wh)
$W_{O,z}$	energy consumption in off mode per treatment (Wh)
z	treatment type

4 Requirements

4.1 General

This document describes test methods for the measurement of following performance parameters:

- Washing performance
- Rinsing performance
- Water extraction performance
- Water consumption
- Energy consumption
- Off mode power and left on mode power
- Cycle time
- Wool shrinkage performance

Any claims of performance referring to this document for these parameters shall be measured in accordance with the requirements of this document (refer to Clause 7 for details).

NOTE Methods for the determination of mechanical action on the clothes load are under consideration for inclusion in this document. Methods under consideration are available as a publicly available specification – see IEC/PAS 62473.

This document does not specify minimum performance requirements for clothes **washing machines**.

4.2 Rated capacity

Either the manufacturer or supplier shall declare the **rated capacity** at 0,5 kg intervals for each relevant textile type. Relevant textile types are cotton, synthetic/blends and wool.

NOTE For different textile types the **rated capacity** of a **washing machine** is usually different.

The **rated capacity** for any textile type shall not exceed the maximum mass of dry laundry, in kilograms, to be used in the **test washing machine** in accordance with IEC 60335-2-7.

When the manufacturer or supplier gives a range of values for the **rated capacity** for a particular textile type, the highest value shall be used.

Where information on the **rated capacity** is not available, the test load mass shall be determined according to Annex N.

If the **rated capacity** for synthetics/blends and wool is not specified by the manufacturer or supplier, the **test load** shall be respectively 40 % and 20 % of that for cotton.

4.3 Dimensions

Where a manufacturer declares dimensions, these shall be in accordance with the following requirements, as applicable. The dimensions shall be given in centimetres and shall be rounded to the nearest whole centimetre.

- Height a_1 = vertical dimension measured from the floor to a horizontal plane at the maximum height of the **washing machine**, with the door/lid closed. If adjustable levelling feet are provided, they shall be moved up and down to determine minimum and maximum possible heights.
- Height a_2 = maximum vertical dimension measured from the floor to a horizontal plane at the maximum height of the **washing machine** with the door/lid open (generally when at right angles to the machine top). If adjustable levelling feet are provided, they shall be moved up and down to determine minimum and maximum possible heights.
- Width b = horizontal dimension, between the sides, as measured between two parallel vertical planes against the sides of the **washing machine** including all projections.
- Depth c_1 = horizontal dimension as measured from a vertical rear plane against the back of the **washing machine** and the most prominent part of the front fascia, with the door/lid closed. For this measurement, the door thickness, knobs and handles are generally not included in the measurement.
- Depth c_2 = horizontal dimension as measured from a vertical rear plane against the **washing machine** and the most prominent part of the front, knobs and handles also being taken into account, with the door/lid open (generally when at right angles to the machine front).
- Drum volume = the volume of a **washing machine** or **spin extractor**, where required, shall be determined in accordance with Annex N.

NOTE 1 Dimension c_1 is intended to provide an indication of the required depth for the **washing machine** where the fascia is intended to be flush with adjacent furniture or appliances.

NOTE 2 Dimension a_2 is generally only applicable to top access **washing machines** while dimension c_2 is generally only applicable to front access **washing machines**.

5 Test conditions, materials, equipment and instrumentation

5.1 General

The tolerances specified for parameters within this document, using the symbol " $\pm$ ", indicate the allowable limits of variation from the specified parameter outside which the test or results shall be invalid. The statement of tolerance does not permit the deliberate variation of these specified parameters.

Rounding shall only be applied to reported values in Annex S. If numbers have to be rounded, they shall be rounded to the nearest number according to ISO 31-0, Clause B.3 Rule B. If the rounding takes place to the right of the comma, the omitted places shall not be filled with zeros.

Unless otherwise specified, the **reference machine** shall be considered a **test washing machine** with respect to conditions, materials and equipment specified.

For measurement of **off-mode** power and **left-on mode** power, additional requirements may apply – refer to IEC 62301.

5.2 Ambient conditions

5.2.1 Electricity supply

~~The supply voltage to each **test washing machine** shall be maintained at the rated voltage $\pm 2\%$ throughout the test. If a voltage range is indicated, then the supply voltage shall be the nominal voltage of the country in which the appliance is intended to be used.~~

~~The supply frequency to each **test washing machine** shall be maintained at the rated frequency $\pm 1\%$ throughout the test. If a frequency range is indicated, the test frequency shall be the nominal frequency of the country in which the machine is intended to be used.~~

The supply voltage to each **test washing machine** shall be maintained throughout the test at 230 V $\pm 1\%$ or at 400 V $\pm 1\%$ as defined by the manufacturer's installation guide. If more than one option for installation is available and no clear indication for testing is given, the supply voltage shall be 230 V $\pm 1\%$. The supply voltage measured during the tests shall be recorded.

NOTE Z1 In the case of a fixed cable, the plug (or the end of the cable) is the reference point at which the supply voltage shall be maintained.

The supply frequency to each **test washing machine** shall be maintained at 50 Hz $\pm 1\%$ throughout the test.

NOTE Voltage stabilisers should be designed such that the normal operation of the **test washing machine** does not cause undue distortion of the voltage waveform.

5.2.2 Water supply

5.2.2.1 General

The measured total water hardness, water temperature and water pressure of water supplied to **test washing machines** shall comply with the following requirements and shall be reported. This water is generally referred to as laboratory supply water in this document.

5.2.2.2 Water hardness

For all treatments of the **test load** prior to a **test series** and all **washing machine test runs** in accordance with this document either hard water or soft water may be used. If hard water is used it shall have a total water hardness of (2,5 $\pm$ 0,2) mmol/l. If soft water is used it shall have a total water hardness of (0,5 $\pm$ 0,2) mmol/l.

For the combined **test series** according to Annex ZA water with a total hardness of $(2,5 \pm 0,2)$ mmol/l (hard water) shall be used.

Normalization of a **base load** prior to use in a **test series** (refer to 6.4.4) shall always be done using laboratory supply water with the same total water hardness as that used for the subsequent **test series**.

Total water hardness is determined and expressed in mmol/l of CaCO_3 equivalent.

If total water hardness needs to be adjusted, it shall be prepared according to IEC 60734.

Measurements of total water hardness shall be undertaken on water that is representative of the laboratory supply water used for tests.

5.2.2.3 Water temperature

The temperature of the laboratory supply water to each **test washing machine** shall be measured and recorded to the nearest 0,1 °C. It shall be:

- for cold water (15 ± 2) °C for all reference **programmes** except Cotton 20 °C;
- for cold water (20 ± 2) °C is the recommended option when using the Cotton 20°C reference **programme**. This is recommended for **test washing machine programmes** with no internal heating and cold fill only (cold water wash). The cold water supply temperature to the **reference machine** in this case may be the same as the **test washing machine** or it may be 15 °C as specified above.
- for hot water the temperature indicated by the manufacturer ± 2 K, or (60 ± 2) °C, if no value is given.

NOTE 1 The results for a water supply temperature of 15 °C and 20 °C to the **reference machine** may not be directly comparable.

For the combined **test series** according to Annex ZA the temperature of the hot water supply (if applicable) shall be set according to declaration given by the manufacturer (± 2 K) in the instruction manual. If no clear indication is given, the hot water supply temperature shall be set at (60 ± 2) °C.

When the manufacturer specifies a hot water temperature range, which includes (60 ± 2) °C, the hot water temperature shall be set at (60 ± 2) °C. When the manufacturer specifies a hot water temperature range, which does not include (60 ± 2) °C, the hot water temperature shall be set at the end of the temperature range which is closest to (60 ± 2) °C. When the manufacturer specifies a single temperature with a tolerance, then that temperature shall be used.

The hot and cold water inlet supply temperature (as applicable) shall be determined as close as possible to the point of connection of each **test washing machine** to the laboratory water supply system.

For the combined **test series** according to Annex ZA the water supply system shall be configured so that the temperature of all water entering the inlet hose of the **test washing machine** is within specified tolerance with the exception of up to 250 ml of each increment. A temperature recording system shall record inlet water temperature at intervals of no less than once per second.

NOTE 2 ~~It is recommended that temperature be the last parameter measured before the supply point to the washing machine.~~ Clause 8 requires water temperatures and volumes to be recorded on a continuous basis during filling in order to determine weighted average temperature. ~~The use of alternative cold water supply temperatures is under consideration.~~

5.2.2.4 Water pressure

The static (gauge) pressure of the laboratory supply water at the inlet to each **test washing machine** shall be maintained at (240 ± 50) kPa throughout the test, including during filling operations. The water supply to the reference machines shall be in accordance with D.1.5.1 or D.1.6.1 (as applicable).

The hot and cold water pressure (as applicable) shall be determined as close as practicable to the point of connection of each **test washing machine** to the laboratory water supply system. The measured pressure shall be rounded to the nearest whole 10 kPa to compare with the allowed range.

5.2.3 Ambient temperature and humidity

5.2.3.1 Ambient temperature and humidity for washing machine testing

The ambient temperature of the test room shall be maintained at (23 ± 2) °C throughout the **washing machine** test. The measured ambient temperature for **washing machine** testing shall be reported, it shall be rounded to the nearest 0,5 °C.

The ambient humidity is not specified for **washing machine** testing.

5.2.3.2 Ambient temperature and ambient relative humidity for conditioning of base load items

Where an ambient controlled room or chamber is used for conditioning the **base load**, the following conditions shall be maintained:

- ambient temperature: (20 ± 2) °C
- ambient relative humidity: (65 ± 5) %.

The measured ambient temperature and relative humidity for conditioning **base load** items shall be reported. The ambient temperature shall be rounded to the nearest 0,5 °C, the ambient relative humidity shall be rounded to the nearest whole percentage.

NOTE Specific requirements regarding conditioning of the **base load** are specified in Subclause 6.4.5.2. As an alternative to using a controlled room or chamber for conditioning the **base load**, the bone dry method may be used. Refer to 6.4.5.3.

5.3 Test materials

5.3.1 General

This section sets out the specifications for test materials required for **washing machine** testing to this document, including

- base loads (load items);
- stain test strips;
- wool shrinkage specimens;
- detergent.

NOTE Suitable sources of test materials are given in Annex U.

5.3.2 Base loads

5.3.2.1 Cotton base load

Where a cotton load is specified for testing, the cotton **base load** shall consist of sheets, pillowcases and towels as specified in Annex C.

5.3.2.2 Synthetics/blends base load

Where a synthetics/blends load is specified for testing, the synthetics/blends **base load** shall consist of men's shirts and pillowcases as defined in Annex C.

5.3.2.3 Polyester base load for the wool programme

For testing the wool programmes the **base load** shall consist of double knitted polyester test pieces as defined in Annex C.

5.3.3 Stain test strips

Stain test strips are attached to the **base load** prior to testing to assess the washing performance of a **test washing machine**. Different soil types are used in order to assess the following washing characteristics:

- the scouring effect, chiefly due to mechanical action, the first test piece used being soiled with sebum and the second with a mixture of carbon black and mineral oil;
- the removal of protein pigments, the test piece used being soiled with blood;
- the removal of organic pigments, the test piece used being soiled with cocoa;
- the bleaching effect, the test piece used being soiled with red wine.

Stain test strips consist of square pieces with individual soil types measuring (120 ± 5) mm $\times$ (120 ± 5) mm each which are joined together into a strip with the different kinds of soil in the following order:

- unsoiled piece;
- sebum;
- carbon black/mineral oil;
- blood;
- cocoa;
- red wine.

NOTE 1 The red wine is an altered specification from Edition 4 of this document. Sebum is a new stain in Edition 5. The size of the square pieces for each soil type in the stain test strip has been reduced in Edition 5.

The specifications of test pieces with standardized soiling for each soil type which are used to make a stain test strip are given in Annex A.

NOTE 2 Information about the compliance of stains used in stain test strips with respect to importation regulations of particular countries can be obtained from the supplier.

5.3.4 Wool shrinkage specimens

Wool shrinkage specimens are as specified in Annex T.

Three wool shrinkage specimens are always used for the wool shrinkage test, irrespective of **rated capacity**. Each of the wool shrinkage specimens shall be prepared as specified in 10.3.1. prior to use in the wool shrinkage **test runs**.

5.3.5 Detergents

The specification for the IEC 60456 reference detergent A* is given in Annex B.

The reference detergent is distributed in three separate components:

- base powder (with enzyme and foam inhibitor);
- sodium perborate tetrahydrate;
- bleach activator (TAED).

It is recommended that the three components shall be stored separately and be used within a limited time. The date of manufacture for each component shall be marked by the supplier on the container. The life of each component for detergent A* and the storage conditions shall be as specified by the manufacturer. If no expiry date for the detergent components is specified by the manufacturer, the expiry date is deemed to be one year from the date of manufacture.

Mixing of detergent components, dosage and placement of detergent is specified in 6.3.

NOTE Base powder with neither perborate nor TAED shall be used in the preparation of wool shrinkage specimens.

5.4 Equipment

5.4.1 General

This section sets out the specifications for specialized test equipment required for **washing machine** testing to this document, including

- reference machine
- spectrophotometer
- equipment for conditioning the **base load**
- standard extractor
- iron
- titration equipment

A checklist of other laboratory equipment which may be required for **washing machine** testing is provided in 5.4.8.

5.4.2 Reference machine

A **reference machine** shall be run in parallel with the **test washing machine**, applying the same procedure to both machines to provide a measure of relative performance and reproducible results.

NOTE 1 For wool shrinkage tests, the **reference machine** is used to calibrate shrinkage of wool shrinkage specimens and is not normally operated in parallel with the **test washing machine**.

For the combined test series according to Annex ZA only type 1 shall be used.

Specifications for the **reference machine** are given in Annex D.

For the purposes of this document, the **test load mass** used in the **reference machine** shall always be

- 5,0 kg for cotton **programmes**
- 2,0 kg for synthetics/blends **programmes**
- 1,0 kg for the wool **programme**.

NOTE 2 When the **reference machine** is used to normalize the **base load** between **test series**, the maximum mass of dry **base load** which can be normalized in the **reference machine** is different to the **test load masses** above. Refer to Subclause 6.4.4.

5.4.3 Spectrophotometer

Optical measurements of each of the different stain test strip pieces after washing are performed using a spectrophotometer. The minimum instrument specification is provided below:

Measuring instrument	spectrophotometer that provides reflectance data at a minimum of 16 wavelengths spaced at 20 nm intervals, or closer, between 400 nm and 700 nm
Parameter	tristimulus value Y (CIE No 15.2, 1986)

Illuminant / observer	D65 / 10° – ISO/CIE 10526
Measuring geometry	d / 8°
UV-filter	The ultraviolet filter shall have a spectral transmittance of $\leq 0,01$ at wavelengths of 400 nm and less, and a spectral transmittance of $\geq 0,80$ at wavelengths in the range 450 nm to 700 nm
Measurement aperture	minimum 20 mm diameter

NOTE Where a measurement aperture is not circular, an aperture area of not less than 314 mm² is acceptable.

Gloss / specular excluded, i.e. measurement with open gloss / specular trap

Calibration The calibration process shall be performed at least once a day during continuous use or after any restart of the device using:

- white standard: barium sulphate tablet or certified white ceramic tile; and
- black standard: black body or light trap or certified black ceramic tile; or
- using procedures as specified by the instrument manufacturer.

The spectrophotometer shall be checked for its spectral performance and measurement accuracy at least once a year.

General handling of the spectrophotometer and its use and calibration shall be in accordance with the supplier operating instructions.

5.4.4 Equipment for conditioning the base load

This document requires **base load** items to be treated in a controlled manner prior to their use in performance tests in order to determine their mass under standardised ambient conditions. The alternative methods of conditioning the **base load** items are as follows:

- leaving the **base load** items in a room or chamber with a controlled ambient temperature and humidity (refer to 5.2.3.2) until their **remaining moisture content** is in equilibrium. Refer to 6.4.5.2 for details;
- treating the **base load** items in a clothes dryer of specified performance to ensure that the **base load** items are in a “bone dry” state. Refer to 6.4.5.3 for details. Annex G sets out the method and the specifications for a tumble dryer which is used for this method.

5.4.5 Standard extractor

A **standard extractor** meeting the following specific performance requirements shall be used where a rinse performance measurement is required (refer to 8.5).

The nominal inner drum diameter and nominal **spin speed** of the standard extractor used shall be reported.

The standard extractor shall have a G-force with a water extraction performance which results in a **remaining moisture content** determined in accordance with 8.5 as follows:

- $(39 \pm 3)\%$ for a cotton **base load** when operated with a spinning time not more than 10 min; and
- $(17 \pm 3)\%$ for a synthetic/blend **base load** when operated with a spinning time not more than 5 min.

Any **spin extractors** may be used as a standard extractor if it can be demonstrated that they can achieve the water extraction performance requirements specified above. The extraction time or speed shall be adjusted to achieve the **remaining moisture content** specified above for the relevant load types and sizes, but this time may not exceed 10 min for cotton or 5 min for synthetic/blends. As re-loading of the **base load** after one **spin extraction operation** is not

permitted, a pre-test to determine the appropriate spin time is required for other **spin extractors**.

Experience has shown that use of a standard extractor with an inner drum diameter of between 240 mm and 250 mm and a spin speed of about 2 800 r/min using standard bundles defined in 8.5.2 for a period of 10 min will meet the specification above.

Where a standard extractor which is larger than the primary specification above is used, the standard extractor shall be loaded and used in accordance with Annex J. The maximum load size of any **base load** placed in a **standard extractor** shall not exceed the maximum load recommended by the manufacturer.

NOTE 1 A standard extractor should be of a design that allows the user to remove any retained water in the extractor between runs.

NOTE 2 A large extractor with a capacity of max. 10 kg is available commercially. See Annex U for manufacturer.

5.4.6 Iron for preparation of stain test strips after washing

Where an iron or ironing appliance is used to prepare stain test strips after washing and prior to reflectance readings, it shall have a surface temperature between 130 °C and 150 °C.

5.4.7 Titration equipment

The following equipment is required when an alkalinity measurement is required under 8.5.

All volumetric glassware should meet all “Class A” specifications, as defined by the American Society for Testing and Materials (ASTM) Standards E 287, E 288, and E 969 unless otherwise stated (e.g. DIN 12691, “Blaubrand”).

pH meter: accuracy least $\pm 0,05$ pH units (1 decimal place)

Glass beaker with stirrer: sufficient size to place the pH-electrode below the surface of the sample

Titration equipment:

- manual titration (additional): burette / burette stand, 10 ml burette calibrated in 0,01 ml divisions and stopcock; or
- automatic titration (additional): microprocessor controlled titration device. Burette size: preferably 10 ml calibrated in 0,01 ml divisions. Minimum rate: 25 μ l / min or less.

Reagents: all reagents used are ACS reagent grade unless otherwise stated (e.g. puriss p.a.):

- 0,1 N hydrochloric acid: accurately standardised to four decimal places;
- water: wherever “water” is applicable, use either reverse osmosis (RO), demineralised or distilled water.

The pH meter shall be calibrated at least once a day during continuous use or after any restart of the device.

The calibration of the pH meter shall be performed at pH 7 and then at pH 4 with commercially available pH buffers.

Precautions should be initiated to avoid temperature differences between calibration and measurement phase (optimal: 23 °C). The stirring rate should also be kept equal for calibration and measurement phase. For calibration follow the instruction manual of your pH meter.

5.4.8 Other equipment

Testing of **washing machines** according to this document requires equipment for the measurement of a range of parameters. These parameters include the following:

- mass
- volume of water and other liquids
- length and dimensions
- electrical parameters (voltage, energy, frequency)
- temperature of water and air and humidity of air
- water pressure supplied to the **washing machine**
- total water hardness of the laboratory supply water supplied to the **washing machine**
- pH of the laboratory supply water and various liquors extracted from the **washing machine** and the **test load** during the test
- time

For some of the above measurements, the specifications of instruments used to take these measurements are not explicitly defined in this document, except that the accuracy of measurement as specified in the following section shall be achieved.

Note that several different instruments for the measurement of mass are likely to be required for determining mass of load items and the whole **base load**, mass of titration liquids and mass of detergent (refer to 5.5.2).

Determination of wool shrinkage (refer to Clause 10) also requires the following equipment:

- tray with flat bottom about 50 cm × 50 cm and with sides approximately 5 cm high – for preparation of wool shrinkage specimens;
- ruler accurate to ± 0,5 mm for measurement of wool shrinkage specimens.

5.5 Instrumentation and accuracy

5.5.1 General

Instruments used and measurements made for this document shall comply with the following specifications.

5.5.2 Instruments

Parameter	Unit	Minimum resolution	Minimum accuracy	Additional requirements
Mass				
Full test load mass or base load mass above 3 kg	g	2 g	± 5 g	-
Individual load items, full test load mass or base load mass less than or equal to 3 kg	g	0,5 g	± 1 g	-
Detergent mass	g	0,05 g	± 0,1 g	-
Titration mass	g	0,005 g	± 0,01 g	-
Temperature				
Ambient temperature	°C	0,1 °C	± 1 K	

Parameter	Unit	Minimum resolution	Minimum accuracy	Additional requirements
Water temperature	°C	0,1 °C	± 0,6 K	-
Ambient humidity	% (RH)	1 % (RH)	± 3 % (RH)	The specifications shall be met over a temperature range of 15 °C to 25 °C.
Water volume (water inlet)	L	0,1 L	± 2 %	Separate metering for hot and cold inlets, where applicable NOTE Devices using viscosity should be calibrated at the actual nominal temperature ± 5 °C, and the nominal flow rate. Liquid volumes for titration are covered by the specification for mass in Subclause 5.4.1.
Water pressure	kPa	10 kPa	± 5 %	-
Time	s	5 s	± 1 %	-
Spin speed	rpm	1 rpm	± 1 %	-

5.5.3 Measurements

Parameter	Unit	Minimum accuracy	Additional requirements
Total water hardness	mmol/L	± 2 %	-
Electrical energy			
Programme energy	kWh	± 1 %	Due to distortion of the voltage and current wave forms caused by inductive devices such as motor controls specific requirements for energy meters are necessary. See e.g. IEC 62053-21 for more information.
Off mode and left on mode power	~~kWh~~ W	Measurement instrumentation for off mode and left on mode power are described in IEC 62301	
pH	-	± 0,05	The accuracy requirement shall be met over a temperature range of 15 °C to 25 °C.

6 Preparation for testing

6.1 General

This section sets out the requirements for the preparation of the **test washing machine** and **reference machine** prior to testing. It also specifies the requirements for the preparation of **test loads** for **test washing machine** and the **reference machine**.

6.2 Test washing machine and reference machine preparation

6.2.1 Test washing machine

6.2.1.1 General

The measurements shall generally be carried out on a new **washing machine** which is installed and used in accordance with the manufacturer's instructions, except as required by this document. Where there is more than one option for installation, the option chosen for testing shall be documented in the test report.

6.2.1.2 Preparation of the test washing machine after installation

After installation, the **test washing machine** shall be run for two complete cleaning runs on a cotton **programme** with the maximum wash temperature set and setting maximum main wash water level if applicable, the first run without load and with 50 g of the reference detergent and the second run without load and without detergent. No additional runs or cycles of any type (loaded or empty) shall be undertaken on the **test washing machine** between **test runs** within a **test series**.

6.2.1.3 Preparation of the test washing machine for a test series

Before a **test series** is commenced the **test washing machine** shall be checked to confirm that it has no operating defects that may affect the operation of the unit. Where separate inlets are supplied for both hot and cold water, they shall each be connected to an appropriate laboratory water supply system for testing (refer to 5.2.2).

~~Any filters shall be thoroughly cleaned before each **test series**. Prior to the **test series** (not more than one day in advance) a cleaning run shall be undertaken on a **programme** with the maximum wash temperature set and setting maximum main wash water level if applicable without load and without detergent.~~

Any filters shall be thoroughly cleaned before each **test series**. Prior to the **test series** (not less than one day in advance but not more than two week in advance and without any other run before the **test series** is started) a cleaning run shall be undertaken on a **programme** with the maximum wash temperature set and setting maximum main wash water level if applicable without load and without detergent. After the cleaning run the machine shall stay standing at the stable laboratory ambient temperature until the **test series** is finished.

6.2.1.4 Preparation of the test machine for a test run

Before each **test run**, any detergent dispenser shall be clean and dry prior to the addition of detergent.

~~The **test washing machine** shall be at laboratory ambient temperature at the beginning of each **test run**. It shall be accepted that this requirement has been met if the internal surface temperature of the **test washing machine** drum is within 2 °C of the ambient air temperature, or if the **test washing machine** has been left open and standing at the stable laboratory ambient temperature for not less than 2 h.~~

The **test washing machine** shall be at laboratory ambient temperature at the beginning of each **test run**. It shall be accepted that this requirement has been met if the internal surface temperature of the **test washing machine** drum is at ambient air temperature of the test room, or if the **test washing machine** has been left open and standing at the stable laboratory ambient temperature for not less than 2 h.

NOTE Z1: Refer to Annex ZA for the exact order and timing of the combined test series.



Where the **test washing machine** is equipped with a temperature sensor to determine the water temperature in the sump during the wash **operation**, the temperature measured by this sensor may be taken as an alternative to the drum temperature to assess whether the **test washing machine** is at ambient temperature.

6.2.2 Reference machine

The reference machine shall be checked in accordance with the requirements of Annex E prior to a **test series**. The reference machine start up **programme** shall be run immediately (not more than 30 min) prior to the commencement of any **test run** (refer to E.4).

The **reference machine** shall meet the requirements of 6.2.1.4 before the start up **programme** is started prior to the commencement of each **test run**.

Lint blocking the drain valve shall be removed completely before starting a **test series**. The water filter of the supply valve shall be cleaned. A cotton 60 °C **programme** without load and detergent shall be run to remove residuals.

NOTE Z1 It is recommended not to use the reference machine for any other purpose (e.g. rinsing loads) between the test runs of a reference test series.

Before each **test run**, any detergent dispenser shall be clean and dry prior to the addition of detergent.

At each run it shall be checked that no detergent remains in the detergent dispenser. It shall be ensured that in the **reference machine** the detergent is totally dispensed during the water intake for the main wash. If detergent remains in the dispenser after the initial fill, then that **test run** shall not be valid.

6.3 Detergent

6.3.1 General

The detergent used for all **test runs** shall be as specified in 5.3.5. The **reference machine** and all **test washing machines** run in parallel shall use detergent from the same batch for every **test run** in the **test series**.

This document may also be used for assessment of all performance measures (except rinsing) on **test washing machines** where the manufacturer recommends the use of no detergent and where no other consumable material is added by the user during normal use. In such cases tests on the **test washing machine** shall be performed without the addition of any consumable material (i.e. detergent) and with a connection to an electricity supply (refer to 5.2.1) and a standard laboratory water supply system (refer 5.2.2).

NOTE 1 In all cases the **reference machine** is tested using the detergent dose specified in 6.3.2 irrespective of whether detergent is used in the **test washing machine** or not.

NOTE 2 Base powder with neither perborate nor TAED shall be used in the preparation of wool shrinkage specimens. However full detergent A* is used for a wool shrinkage test.

6.3.2 Detergent dose

The detergent dose for the **reference machine** and the **test washing machine** shall be determined from the selected reference **programme** and the **test load** as set out in Table 1.

Table 1 – Detergent dose

Load type and reference programme	Test washing machine-dose hard water	Reference-machine-dose hard water	Test washing machine-dose soft water	Reference-machine-dose soft water
-----------------------------------	--------------------------------------	-----------------------------------	--------------------------------------	-----------------------------------

	(refer to 5.2.2.2)	(refer to 5.2.2.2)	(refer to 5.2.2.2)	(refer to 5.2.2.2)
Cotton — all reference programmes except Cotton 20 °C and Cotton 30 °C	54 g + 16 g/kg	180 g	36 g + 10,7 g/kg	120 g
Cotton — Cotton 20 °C and Cotton 30 °C only	54 g + 8 g/kg	78 g	36 g + 5,3 g/kg	52 g
Synthetic/Blends	54 g + 16 g/kg	150 g	36 g + 10,7 g/kg	100 g
Wool	54 g + 16 g/kg	70 g	36 g + 10,7 g/kg	46,7 g

Load type and programme	Test washing machine dose hard water (refer to 5.2.2.2)	Reference machine dose hard water (refer to 5.2.2.2)	Test washing machine dose soft water (refer to 5.2.2.2)	Reference machine dose soft water (refer to 5.2.2.2)
Cotton, Synthetics/Blends	40 g + 12 g/kg	110 g	27 g + 8 g/kg	74 g
Wool	54 g + 16 g/kg	70 g	36 g + 11 g/kg	47 g

NOTE 1 g/kg grams of detergent is per kg of **nominal test load mass**. Dosage for **reference machine** is fixed by **programme** and load type and is a different dose to the **test washing machine**. The **reference machine** is always operated at a fixed load size, refer to 5.4.2.

NOTE Z1 The detergent dose applies for tests with **full test load** and **partial test load**.

If a pre-wash is to be included, the total quantity of detergent used shall be 1,25 times the figures above. The total detergent quantity is to be split between pre-wash and main wash in accordance with the manufacturer's instructions. If there are no instructions, the split shall be 1:2 for pre-wash: main wash.

NOTE 2 The quantity of detergent specified in this document is fixed by the **nominal test load mass** and water hardness. The reference detergent and the quantity specified may not be reflective of some commercial detergents.

6.3.3 Mixing detergent

Weigh the quantity of detergent components specified in Annex B to make up the detergent dose required for each single **test run**. The components shall be thoroughly mixed together prior to use. Mixed detergent shall be stored in a sealed container if not used immediately. The maximum storage time prior to use of reference detergent after mixing of detergent components is fourteen days. All detergent components shall be within their expiry date at the time of use.

6.3.4 Detergent placement

Where a detergent dispenser is present, the detergent dose specified in 6.3.2 shall be placed as follows:

- where dispenser is large enough to hold the whole dose, place all detergent in the dispenser; or
- where the dispenser is not large enough to hold the whole dose, fill the dispenser to the maximum level indicated and place any excess detergent for the **test run** into the base of the drum before the load is added.

Only in the case of **vertical axis washing machines**, where the manufacturer recommends in the user guide that the detergent dispenser only be used when using a delay start option on the machine (e.g. to avoid damage to fabrics which are in contact with the detergent), then the detergent shall be placed in the base of the drum as if the dispenser is not present.

Where there is no detergent dispenser, follow the manufacturer's instructions for detergent placement. If no instructions are given, all of the detergent is added to the base of the drum before the load is added.

6.4 Test loads


6.4.1 General

This section sets out requirements for the preparation of the **test loads** used in the **test washing machine** and the **reference machine**. Refer to Clause 7 regarding the selection of the required **test load mass** and requirements for tests at **rated capacity**. This section sets out

- the determination of **test load mass**,
- the average age requirements for **base load** items used in a **test series**,
- the pre-treatment of new **base load** items prior to use in testing,
- the normalization of the **base load** items between **test series**,
- the conditioning of **base load** items to determine the **base load** mass at a known **remaining moisture content** prior to the commencement of a **test series**,
- the fixing stain test strips to the **base load** to make up the appropriate **test load** prior to each **test run**.


The same **base load** shall be used for all **test runs** in a **test series**. No normalization runs shall occur between **test runs** in a **test series**. The **base load** is dried in a dryer between **test runs** within a **test series** but the **base load** does not have to be conditioned prior to the next test run. Subclause 8.2.5 specifies requirements for checking the **base load** between **test runs** in a **test series**.

A schematic flow diagram showing the preparation of load items prior to a test series is shown in Figure 1. A schematic flow diagram showing the selection of load items to meet age requirements for a **test series** is shown in Figure 2.

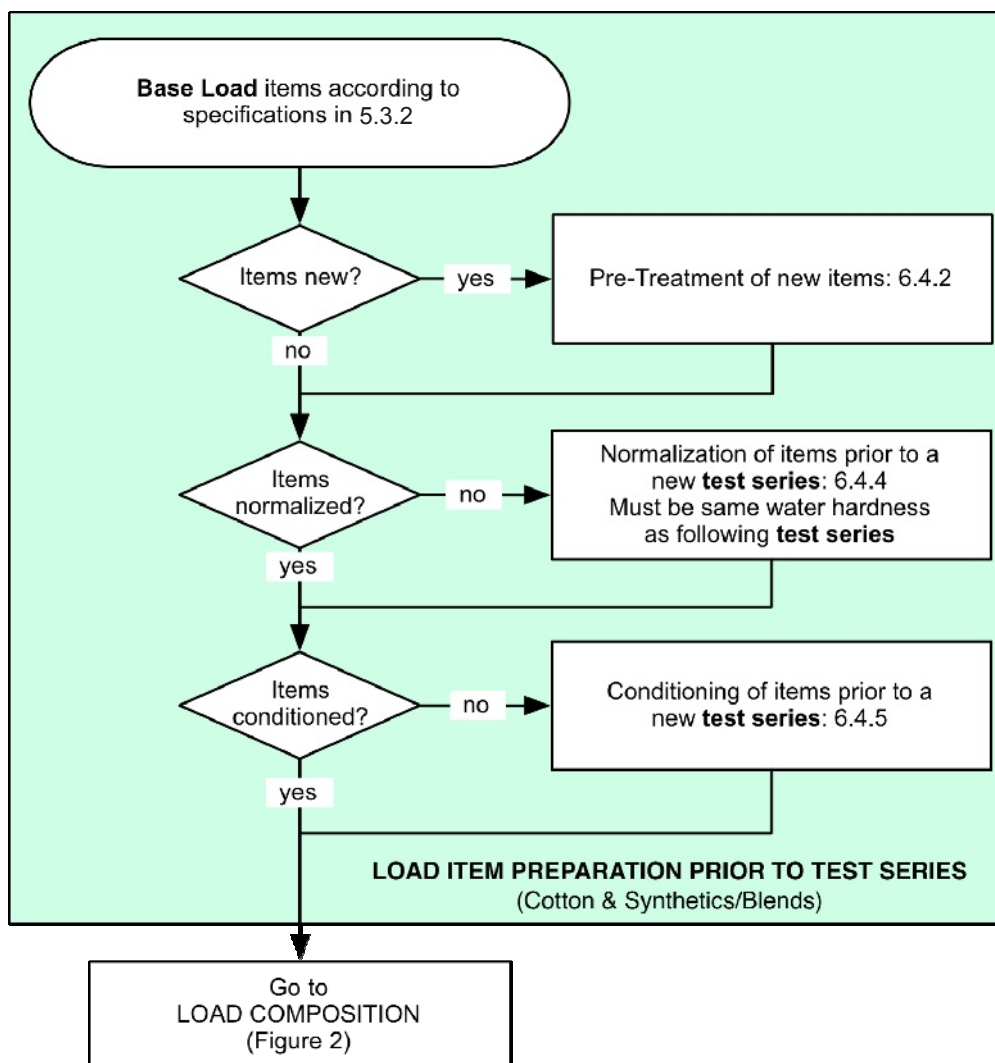

IEC 216/10

Figure 1 – Load item preparation prior to a test series

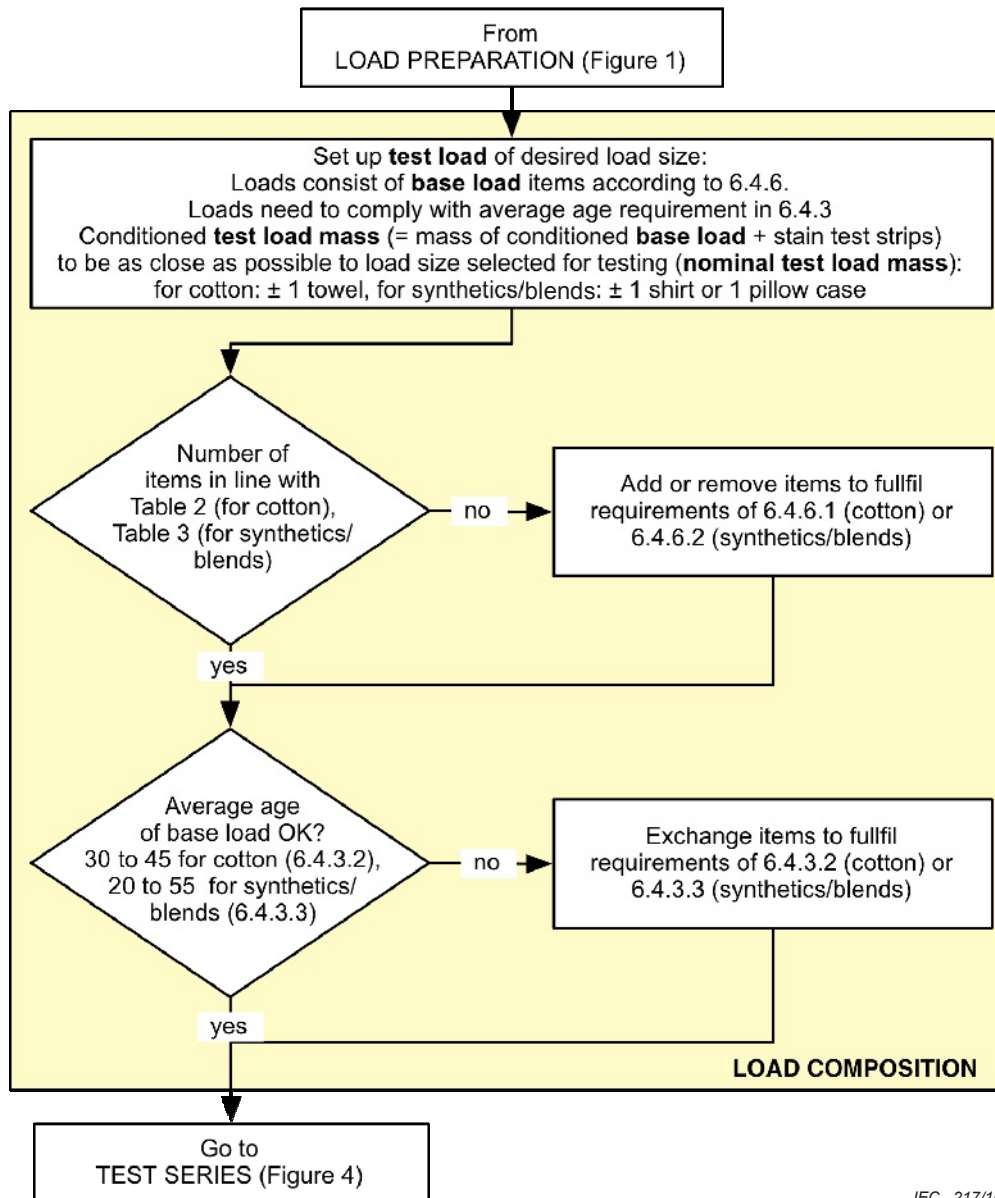

IEC 217/10

Figure 2 – Load composition and age requirements

For the combined **test series** according to Annex ZA Figure 2 applies except that there are 7 valid **test runs** within a **test series**.

NOTE Z1 The aging of **test loads** is not different for the combined test procedure (a test series consisting of 7 test runs) as described in Annex ZA compared to a test series consisting of 5 test runs due to the fact that each item of the base load is used 5 times.

6.4.2 Pre-treatment of new base load items prior to use

New cotton and synthetics/blend **base load** items shall be treated before their first use by undergoing a normalization wash process five times, as defined in 6.4.5 but without intermediate drying and using 15 g /kg of the reference detergent A*. This is followed by normalization according to 6.4.4 and by conditioning according to 6.4.5.

The polyester **base load** (for use with wool programmes) does not require any pre-treatment prior to use in tests.

6.4.3 Requirements regarding the age of base load items

6.4.3.1 General

Any individual cotton or synthetic/blend **base load** item shall not be used for more than 80 **test runs**, excluding pre-treatment runs prior to initial use (refer to 6.4.2) and the normalization runs between each **test series** (refer to 6.4.4).

NOTE To meet the age requirements specified in this document, a system of tracking the number of **test runs** for each load item is required.

6.4.3.2 Average age requirements for cotton base load items

To minimise the influence of changes in the characteristics of the **base load** items with increasing age, the cotton **base load** for each **test run** shall consist of load items that are well distributed in age for each different item type to give a weighted average age of the **base load** between 30 and 50 **test runs**. That means the weighted average age of the **base load** before starting a **test series** shall be between 30 and 45 **test runs**. The number of items or average age shall not be adjusted during a test series.

The weighted average age of the test load is calculated according to Annex I.

For the combined **test series** according to Annex ZA the weighted average age limitations for the **base load** apply only for **full load** and not for **partial load**. Annex I applies only for **full load** and not for **partial load**.

6.4.3.3 Average age requirements for synthetics/blends base load items

To minimise the influence of changes in the characteristics of the **base load** items with increasing age, half of the synthetics/blends **base load** shall consist of items used up to 40 **test runs** and the other half more than 40 **test runs**. The synthetics/blends **base load** shall consist of shirts and pillowcases that are well distributed in age to give a weighted average age of the **base load** between 20 and 60 **test runs**. That means the weighted average age of the **base load** before starting a **test series** shall be between 20 and 55 **test runs**. The number of items or average age shall not be adjusted during a test series.

6.4.3.4 Average age requirements for polyester base load items for wool programmes

There are no weighted average age requirements for polyester **base load** items for wool programmes.

6.4.4 Normalization of base load items before a new test series

6.4.4.1 General

Normalization is the process of washing the **base load** in the **reference machine** using a specified **programme** in order to bring the **base load** back into a standardized state prior to commencing the next **test series**.

NOTE Z1 It is not recommended to use the same reference machine for pre-treatment / normalization of **test loads** and for reference test series. Other washing machines of equivalent characteristics maybe used instead of the reference machine for pre-treatment and normalization of the **test loads** after correlation tests.

Before a new **test series** the **base load** shall be normalized as specified below for each load type. Normalization of the **base load** is followed by conditioning according to 6.4.5 in order to determine the load item mass in a standardized state prior to commencement of the next **test series**. Normalization of a **base load** prior to use in a **test series** shall always be done using a laboratory supply water with the same total water hardness (refer to 5.2.2.2) as that is to be used for the subsequent **test series**.

NOTE Typical laboratory practice would be to normalize the **base load** at the completion of a **test series** and then dry the **base load** as specified and place it in a conditioning room/chamber until the next **test series**. However, knowledge of the water hardness for the next likely **test series** would be useful.

6.4.4.2 Normalization of cotton base load items before a new test series

All cotton **base load** items shall be treated once in a **reference machine** without detergent and using the 60 °C cotton reference **programme**. On completion of the **programme** the **base load** items shall then be dried in a tumble dryer.

If the **base load** is to be conditioned in a room/chamber in accordance with 6.4.5.2 after normalization, then the **remaining moisture content** on removal from the dryer must be less than 0 %.

For normalization purposes up to 6,5 kg can be washed in the **reference machine**. Where the **base load** to be normalized is more than 6,5 kg, the **base load** shall be split into two even parts (as far as is possible, with a mix of items in each part) for the normalization process.

6.4.4.3 Normalization of synthetics/blend base load items before a new test series

All synthetics/blends **base load** items shall be treated in a **reference machine** without detergent and using the 60 °C synthetics/blends reference **programme**. On completion of the **programme** the **base load** items shall then be dried in a tumble dryer.

If the **base load** is to be conditioned in a room/chamber in accordance with 6.4.5.2 after normalization, then the **remaining moisture content** on removal from the dryer must be less than 0 %.

For normalization purposes up to 4 kg can be washed in the **reference machine**. Where the **base load** to be normalized is more than 4 kg, the **base load** shall be split into two even parts (as far as is possible, with a mix of items in each part) for the normalization process.

6.4.4.4 Normalization of polyester base load items for wool programmes before a new test series

The polyester **base load** does not have to be normalized after a **test series**, but the **base load** items shall be dried in a tumble dryer.

6.4.5 Conditioning of base load items before a new test series

6.4.5.1 General

Conditioning is the process of bringing the **base load** to reach a known **remaining moisture content** after normalisation and drying at the completion of a **test series** in order to check the standardized mass of each load item prior to commencing the next **test series**.

Conditioning may be done in an ambient controlled room/chamber or using the bone dry method. The method used shall be reported.

NOTE The **base load** does not have to be conditioned between **test runs** within a **test series**. However, the **base load** is to be dried in a tumble dryer and some checks on the **base load** mass between **test runs** are specified in 8.2.5.

6.4.5.2 Conditioning of base load items in an ambient controlled room/chamber

In this method, the **base load** items are dried in a tumble dryer to a **remaining moisture content** of each single item of less than 0 % and are then stretched or flattened by hand before conditioning. They are then allowed to reach an equilibrium **remaining moisture content** when placed in a room/chamber with an ambient temperature and humidity which is maintained in accordance with 5.2.3.2. Under this method, two options are available as follows:

- the **base load** items shall be hung singly and separately so that air can freely circulate between individual load items. The load is left for a period of not less than 15 h;
- the **base load** items shall be left until their mass has changed by less than 0,5 % for two successive measurements which are taken at intervals of 2 h or more.

6.4.5.3 Conditioning of base load items using the bone dry method

In this method, the **base load** items are dried continually in a tumble dryer of known performance until the **remaining moisture content** has been reduced to a level that is known as the “bone dry” condition, where very little free moisture is present. The conditioned mass of each load item is then determined by taking the bone dry mass and multiplying it by factor which is determined by the dryer performance characteristics.

The specification for the tumble dryer used and the method to prepare the **base load** to the bone dry condition prior to a test series and the calculation of conditioned mass is specified in Annex G.

6.4.6 Test load composition

6.4.6.1 Cotton test load composition

The **test load** consists of the **base load** as specified in 5.3.2.1 and the stain test strips as specified in 5.3.3. Affixing stain test strips is specified in 6.4.7. Subclauses 6.4.2 to 6.4.5 set out requirements regarding the preparation, maintenance and selection of a **base load** for a **test series**.

The **test load mass** is adjusted so that it corresponds to the required **test load mass** for the specified **programme** of the test machine. The numbers of sheets, pillowcases and towels in the cotton **base load** for various required **test load masses** are specified in Table 2. The number of stain test strips are also specified in Table 2. Final adjustment of the **test load mass**, which includes the weight of the stain test strips, is made by adding or removing towels so that the total mass is as close as possible (± 60 g) to the nominal required **test load mass**.

For the combined **test series** according to Annex ZA Table 2 applies to define the full **base load** for a **test series**. Refer to Annex ZA regarding the splitting of the full **base load** for the tests with **partial load** and for the related number of strips and the number of sheets, pillowcases and towels to be used for part A and part B of the **partial loads**.

Table 2 – Number of items in the cotton test load for various test load masses

Required test load mass kg ^{a, b}	Approximate base load mass kg ^b	Number of stain test strips	Number of sheets	Number of pillowcases	Number of towels ^c
1	0,96	2	0	2	4
1,5	1,46	2	0	3	7
2	1,96	2	0	4	9
2,5	2,44	3	0	5	11
3	2,94	3	2	4	5
3,5	3,42	4	2	4	9
4	3,92	4	2	4	14
4,5	4,40	5	2	6	14
5	4,90	5	2	6	18
5,5	5,38	6	2	8	18
6	5,88	6	2	8	23
6,5	6,36	7	2	10	23
7	6,86	7	2	12	23
7,5	7,34	8	3	12	21
8	7,84	8	3	12	25
8,5	8,32	9	3	14	25
9	8,82	9	4	14	23
9,5	9,30	10	4	14	28
10	9,80	10	4	16	28
10,5	10,28	11	5	15	28
11	10,78	11	5	15	32
11,5	11,26	12	5	16	35
12	11,76	12	6	17	30
12,5	12,24	13	6	17	35
13	12,74	13	6	18	37
13,5	13,22	14	6	19	39
14	13,72	14	6	19	44
14,5	14,20	15	7	20	39
15	14,70	15	7	21	42

^a For **test load masses** to the whole or half kilogram rating which are greater than those specified in the table, the number of stain test strips is equal to the **nominal test load mass** (rounded to the nearest kilogram), the number of sheets is the **nominal test load mass** divided by (3 × 0,725) (rounded to the nearest whole sheet) and the number of pillowcases is the **nominal test load mass** divided by (3 × 0,24) (rounded to the nearest whole pillow case). The balance of the required **nominal test load mass** is made up of towels as required. The mass of all **base load** items can be expected to decline slightly with increasing age.

^b Difference between **base load** mass and **test load mass** is due to the mass of the test strips, see definitions 3.1.18 / 3.1.19.

^c The actual number of towels may differ from the number indicated above (which is intended to be indicative).

6.4.6.2 Synthetics/blends test load composition

The **test load** consists of the **base load** as specified in 5.3.2.2 and the stain test strips as specified in 5.3.3. Affixing stain test strips is specified in 6.4.7. Subclauses 6.4.2 to 6.4.5 set out requirements regarding the preparation, maintenance and selection of a **base load** for a **test series**.

The **test load mass** is adjusted so that it corresponds to the required **test load mass** for the specified **programme** of the test machine. The numbers of pillowcases and shirts in the syn-

thetics/blends **base load** for various required **test load masses** are specified in Table 3. The number of stain test strips are also specified in Table 3. The synthetic/blends **base load** is set up first with an equal number of shirts and pillowcases. Final adjustment of the **test load mass**, which includes the weight of the stain test strips, is made by adding or subtracting one shirt or one pillowcase, whichever brings the **test load mass** to be closest to the nominal required **test load mass**.

Table 3 – Number of items in the synthetics/blends test load for various test load masses

Required test load mass kg a, b	Approximate base load mass kg b	Number of stain test strips	Number of shirts c	Number of pillowcases c
1	0,96	2	2	3
1,5	1,46	2	4	4
2	1,96	2	5	6
2,5	2,44	3	7	6
3	2,94	3	8	7
3,5	3,42	4	9	9
4	3,92	4	11	10
4,5	4,40	5	12	12
5	4,90	5	13	13

a For **test load masses** greater than 5 kg, the number of items is specified as follows: the **base load** consists of an equal number of shirts and pillowcases. Adjustment of the **test load mass** is made after adding the stain test strips, by adding or subtracting one shirt or one pillowcase whichever adjusts the **test load mass** to be closest to the required **nominal test load mass**. The number of stain test strips is equal to the required **nominal test load mass** rounded to the nearest whole kilogram.

b Difference between **base load** mass and **test load mass** is due to the mass of the test strips, see definitions 3.1.18 / 3.1.19.

c The actual number of items above are indicative only. The difference between the number of shirts and pillowcases for any **test load** shall be not more than one. The mass of all **base load** items can be expected to decline slightly with increasing age.

6.4.6.3 Polyester test load mass for wool programmes

The **test load** consists of the **base load** as specified in 5.3.2.3 and three wool shrinkage specimens as specified in 5.3.4. Wool shrinkage specimens are not affixed to polyester **base load** items but are distributed through the **base load** as specified in Clause 10. Subclauses 6.4.2 to 6.4.5 set out requirements regarding the preparation, maintenance and selection of a **base load** for a **test series**.

The **test load mass** is adjusted so that it corresponds to the required **test load mass** for the specified programme of the test machine. The estimated number of **base load** items for various required **test load masses** is specified in Table 4. The **test load mass** shall be adjusted by adding or subtracting **base load** items to be closest to the nominal **test load mass**.

Table 4 – Number of items in the wool programme test load for various test load masses

Required test load mass kg	Approximate base load mass kg	Number of wool shrinkage specimens	Number of polyester base load items ^a
1	0,95	3	27
1,5	1,45	3	42
2	1,95	3	56
2,5	2,45	3	70
3	2,95	3	94
3,5	3,45	3	98
4	3,95	3	113
4,5	4,45	3	127
5	4,95	3	141

^a Number shall be adjusted to make the **base load** mass as close as possible to the required **base load** mass. The mass of **base load** items can be expected to decline slightly with increasing age.

6.4.7 Addition of stain test strips or wool shrinkage specimens to the base load

6.4.7.1 General

Stain test strips are attached to cotton and synthetic/blend base loads in order to assess washing performance as set out in 6.4.7.2. Wool shrinkage specimens are used with a polyester base load to assess wool shrinkage performance as set out in 6.4.7.3.

6.4.7.2 Attachment of stain test strips to cotton and synthetic/blend base loads

Stain test strips specified in 5.3.3 shall be affixed to specified **base load** items for each load type as follows:


- cotton **base load** – stain test strips are attached to towels;
- synthetics/blends **base load** – stain test strips are attached to pillowcases;

The number of stain test strips used for a performance test shall be as shown in Table 2 for a cotton **base load** (refer to 6.4.6.1) or Table 3 for a synthetics/blends **base load** (refer to 6.4.6.2).

The orientations described in the following text refer to a plan view of the towel or pillowcase and stain test strip in Figure 3.

Towels or pillowcases to which stain test strips are attached for a washing performance test shall be flattened by hand or iron prior to attachment. Attach the stain test strips to towels or pillowcases as follows:

- place the stain test strip on top of the towel or pillowcase so that the unsoiled piece of the strip is at the top and with serial number or other manufacturers marking facing up, as shown in Figure 3;
- move the stain test strip so that the right hand edge of the strip aligns with the right hand edge of the towel or pillowcase without overlap and that the strip is located centrally from top to bottom;
- Sew or fasten the right-hand edge of the stain test strip onto the right-hand edge of the towel or pillowcase in this position along a line that is a distance of (10 ± 5) mm from the right-hand edge of towel or pillowcase and strip. Where non-metallic fasteners are used, a sufficient number shall be used to ensure that the strip is adequately secured along its length. Metallic fasteners of any type are not permitted.

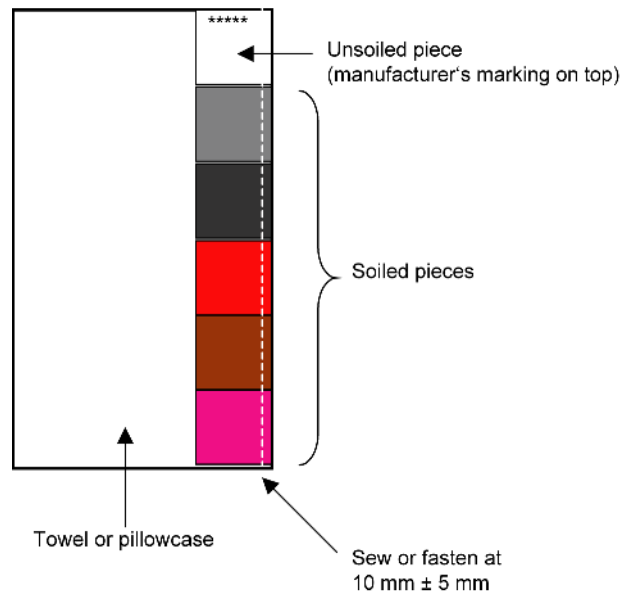

IEC 218/10

Figure 3 – Attached test strip

6.4.7.3 Wool shrinkage specimens

In the case of assessment of wool **programmes** for shrinkage performance, wool shrinkage specimens are not attached to polyester base load items but are placed throughout the **base load**. Only 3 wool shrinkage specimens are used, irrespective of the **test load** size (refer to 6.4.6.3). Refer to Clause 9 for details of the wool shrinkage test.

7 Performance measurements – general requirements

This clause sets out the main performance test methods specified in this document.

The following performance parameters are intended to be measured using a common single **test series** as set out in Clause 8:

- washing performance
- water extraction performance
- rinsing performance (soluble components)
- energy consumption
- water consumption
- programme time

The evaluation of these measured parameters is specified in Clause 9.

The measurement and evaluation of wool shrinkage performance is specified in Clause 10. The assessment of wool performance shrinkage requires the use of a separate **base load** and **test series**.

NOTE 1 Other performance parameters (washing, rinsing, water extraction, energy and water) are not normally determined for a wool shrinkage test.

NOTE 2 Increased alkalinity is used in this document as a tracer to detect soluble residues from detergent and soil in the **base load**. Other residues, such as non-soluble or surface active components, are not part of this assessment. A method for the assessment of rinse performance for insoluble detergent components is under consideration.

NOTE 3 The measurement of energy consumption in low power modes are set out in Annex L. Alternative evaluation options are set out in Annex O.

Prior to performing a **test series**, the following parameters need to be selected:

- load type (e.g. cotton, synthetics/blends, polyester load for wool shrinkage tests)
- performance tests required (washing performance, water extraction performance, rinsing performance, water and energy consumption, programme time)
- **programme** to be tested on the **test washing machine** and the relevant reference **programme** on the **reference machine**
- test load mass (rated capacity or part load)
- water hardness (soft or hard)

The primary requirement of this document is for determination performance at **rated capacity** for each relevant load type and set of test conditions. Any claim of performance to this document without a statement of load size shall be determined on the basis of tests at **rated capacity**. However, additional tests may be conducted at other capacities. Any claims of performance for such test results shall be qualified with the **test load mass** used.

For the combined **test series** according to Annex ZA the following parameters shall be selected:

The load type shall be cotton.

The following parameters shall be measured for the **test washing machine** using a combined **test series** consisting of 7 runs and using two load sizes (**full load** and **partial load**) as set out in Annex ZA:

- washing performance;
- water extraction performance;
- spin speed;
- programme time;
- energy consumption and water consumption.

NOTE Z1 A measurement procedure including rinsing performance (soluble components) for a combined test series as set out in Annex ZA is currently not available.

The same parameters shall be measured for the **reference washing machine** using a common single **test series** consisting of 5 runs as set out in Clause 8 and using a 5 kg cotton **test load** as defined for the **reference washing machine**.

The evaluation of these parameters for the **test washing machine** is specified in Annex ZA. The evaluation of these parameters for the **reference washing machine** is specified in Clause 9.

Programmes to be tested on the **test washing machine**:

A standard 60 °C cotton **programme** and a standard 40 °C cotton **programme** for normally soiled load shall be used in accordance with the manufacturers' instruction. Exactly the same **programme** setting for the standard 60 °C cotton **programme** shall be used for the tests with **full load** and for the tests with **partial load**.

Relevant reference **programme** on the **reference machine** shall be cotton 60 °C. Ready made **programme** memory card including the cotton 60 °C reference **programme** shall be obtained from the manufacturer of the new **reference machine** and be labelled EN 60456:2011.

Selected water hardness shall be hard water – refer to 5.2.2.2.

8 Tests for performance

8.1 General

This section sets out the test procedure for the determination of the following parameters for a cotton load or a synthetic/blend load:

- washing performance
- water extraction performance
- rinsing performance (soluble components)
- energy consumption
- water consumption
- programme time

For the assessment of washing performance and rinsing performance the result from the **test washing machine** is compared to the result from the **reference machine** which is operated in parallel.

For the combined **test series** additional requirements for the test procedure of the **test washing machine** are included in Annex ZA.

NOTE The measurement and evaluation of wool shrinkage performance is specified in Clause 10.

While the text in this document is written from the perspective of a single **test washing machine** operating in parallel with the **reference machine**, more than one **test washing machine** may be operated in parallel with the **reference machine** during a **test run** or **test series**.

8.2 Test procedure for performance tests

8.2.1 Test conditions, materials and preparation for testing

For each **test run** the **reference machine** and **test washing machine** shall be conducted as follows:

- connected to an electricity supply specified in 5.2.1
- connected to a laboratory water supply system specified in 5.2.2
- in ambient conditions as specified in 5.2.3
- with the **test washing machine** and the **reference machine** prepared in accordance with 6.2
- using a **base load** specified in 5.3.2 and a **test load** that has been prepared in accordance with the requirements of 6.4
- using the detergent specified in 5.3.5 and with the detergent dose and placement specified in 6.3.

Stain test strips and detergent (as applicable) used in the **test washing machine** and the **reference machine** shall be from the same batch for all **test runs** within a **test series**. **Test loads** shall have new stain test strips attached for each **test run** irrespective of whether a washing performance test is being conducted. Detergent shall be used in all performance tests except where otherwise specified (refer to 6.3).

8.2.2 Test load and loading

The **base load** type (refer to 5.3.2) and nominal **test load mass** shall be selected for each **test series**.

Prior to a **test series**, separate conditioned **base loads** to achieve the required **test load mass** (refer 6.4.6) shall be prepared for the **reference machine** and the **test washing machine**. The same **base load** shall be used in each **test washing machine** for all **test runs** in a **test series**.

Each **test washing machine** and the **reference machine** shall be loaded in accordance with the requirements of Annex H.

The loading sequence to be used for the combined **test series** according to Annex ZA shall be in accordance with the requirements of Annex H; the loading sequence table relevant for **partial loads** is given in Annex ZA.

8.2.3 Programme

The **programme** selected on the **test washing machine** and any associated settings shall be in accordance with the manufacturer's instructions. The **programme** selected for the **reference machine** shall be the one recommended in Annex F.

In the case of a **manual washing machine**, the manufacturer's instructions regarding the settings and operation of the **washing machine** shall be followed. Where no specific instructions are provided, the test procedure for a manual washing machine in Annex M shall be followed.

The **programme** selected on the **test washing machine** (with any associated settings) and the **reference machine** shall be reported.

NOTE In order to minimise the influence of laboratory conditions and test materials, a reference **programme** should be selected that is intended for a similar purpose when compared to the **programme** on the **test washing machine** (load type, claimed wash temperature) – refer to Annex F for guidance.

8.2.4 Test procedure

This procedure applies to the **test washing machine** and the **reference machine** which shall be run in parallel.

For the combined **test series** refer to Annex ZA regarding the sequence and order of parallel runs of **test washing machine** and **reference machine**.

NOTE The intent of "parallel" is to ensure that **test washing machines** are subjected to comparable variations in normal laboratory conditions as the **reference machine**.

Operate the **test washing machine** and the **reference machine** in parallel on the relevant **programmes** ensuring that no user selected delay is incorporated. Monitor and record all required parameters during the **programme**.

Any adverse warning indicators (eg. warnings or faults) shall be noted and considered when assessing test run validity.

Within 10 min of the completion of the **programme**, remove the **test load**. The stain test strips shall be carefully removed as quickly as possible. Proceed to follow the relevant requirements of each of the performance tests being performed in the **test series**. Assessment of water extraction performance and alkalinity can be affected by delays in subsequent measurements, so specific requirements regarding measurement (and where necessary, storage) of the **base load** after the completion of the **programme** and timing of measurements are specified for these tests.

8.2.5 Test series

A **test series** of five tests is carried out on the **test washing machine** and the **reference machine** in parallel. The first **test run** in a **test series** shall be done with a normalized and conditioned **base load** (refer 6.4.4 and 6.4.5).

The combined **test series** consisting of seven complete **test runs** in the order as defined in Annex ZA shall be carried out on the **test washing machine** using the selected **programmes**. A **test series** of five **test runs** is carried out on the **reference machine** using cotton 60 °C as reference **programme**.

After drying the load shall be left at ambient conditions for at least 5 hours before loading the machine for the next **test run**.

At the completion of measurements for a **test run**, the **base load** shall be dried in a tumble dryer to a **remaining moisture content** of $(0 \pm 3) \%$. Do not adjust number of items or average age during a **test series**. Care is required to ensure that no **base load** items are lost or gained between **test runs**, so a system of accounting for all **base load** items should be used. After the last **test run** of a **test series** the **base load** may be normalized directly without drying in between.

In circumstances where one of the five **test runs** on either the **test washing machine** or the **reference machine** is invalid (e.g. power failure, **test washing machine** or **reference machine** breaks down, instrumentation or control gear fault or failure), it is permitted to conduct a sixth **test run** on the **test washing machine(s)** and the **reference machine** (as required) in the **test series** under identical conditions. Similarly if evidence is provided that one of the **test runs** in the **test series** had problems due to abnormal conditions, a sixth **test run** may be added under identical conditions. The reason for the extra **test run** shall be reported. The incorrect **test run** is eliminated completely from any subsequent evaluation.

For the combined **test series** in case of invalid runs for the **test washing machine** the number of **test runs** permitted is 8 or 9 under specific conditions as set out in Annex ZA.

NOTE Refer to 9.1 regarding evaluation of results where more than 5 **test runs** are undertaken in a **test series**. The reason for rejection of a **test run** from a **test series** should be explained in the test report. Where an additional **test run** is required on a **test washing machine**, only the **test washing machine** of interest and the **reference machine** need be operated for a sixth **test run**. Where an additional **test run** is required on the **reference machine**, the **reference machine** and all **test washing machines** which were operated in parallel for the **test series** shall be subjected to a sixth **test run**. Only washing performance and rinsing performance requires results from both the **test washing machine** and the **reference machine**.

If more than one **test run** is invalid in a **test series**, then the whole **test series** is invalid, irrespective of the reason. In that case, the test runs completed shall be counted on load life and then the load is normalised as per 6.4.4 for use in the next test series.

For the combined **test series** specific validity criteria for **test runs** and the whole **test series** of the **test washing machine** are set out in Annex ZA.

A schematic representation of a **test series** is set out in Figure 4.

For the combined **test series** a schematic representation of a **test series** consisting of 7 **test runs** for the **test washing machine** is set out in Figure ZA.2.