

Cable networks for television signals, sound signals and interactive services —

Part 7-3: Hybrid Fibre Coax Outside Plant Status Monitoring — Power supply to Transponder Interface Bus (PSTIB) Specification

The European Standard EN 60728-7-3:2005 has the status of a
British Standard

ICS 33.100.20; 33.160; 33.040

National foreword

This British Standard is the official English language version of EN 60728-7-3:2005. It is identical with IEC 60728-7-3:2003.

The UK participation in its preparation was entrusted to Technical Committee EPL/100, Audio, video and multimedia systems and equipment, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 29 and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 22 March 2005

© BSI 22 March 2005

ISBN 0 580 45596 3

**Cable networks for television signals,
sound signals and interactive services**
**Part 7-3: Hybrid Fibre Coax Outside Plant Status Monitoring –
Power supply to Transponder Interface Bus (PSTIB) Specification**
(IEC 60728-7-3:2003)

Réseaux de distribution par câbles
pour signaux de télévision, signaux
de radiodiffusion sonore et services
interactifs
Partie 7-3: Surveillance de l'état
des installations extérieures des réseaux
hybrides à fibre optique et câble coaxial –
Spécification de l'alimentation du bus
d'interface du répéteur
(CEI 60728-7-3:2003)

Kabelnetze für Fernsehsignale,
Tonsignale und interaktive Dienste
Teil 7-3: Zustandsüberwachung
Hybrid-Faser-Koax-Netze (HFC) –
Festlegung Schnittstellenbus
von Fernspeise-Stromversorgung
zu Transponder (PSTIB)
(IEC 60728-7-3:2003)

This European Standard was approved by CENELEC on 2004-12-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in one official version (English). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

Foreword

The text of the International Standard IEC 60728-7-3:2003, prepared by technical area 5: Cable networks for television signals, sound signals and interactive services, of IEC TC 100, Audio, video and multimedia systems and equipment, was submitted to the formal vote and was approved by CENELEC as EN 60728-7-3 on 2004-12-01 without any modification.

The following dates were fixed:

- latest date by which the EN has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2005-12-01
- latest date by which the national standards conflicting
with the EN have to be withdrawn (dow) 2007-12-01

Annex ZA has been added by CENELEC.

Endorsement notice

The text of the International Standard IEC 60728-7-3:2003 was approved by CENELEC as a European Standard without any modification.

CONTENTS

INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	7
3 Terms, definitions and abbreviations	7
3.1 Terms and definitions	7
3.7 Abbreviations	7
4 Reference architecture forward and return channel specifications	8
5 Power supply to transponder interface bus specification overview	8
5.1 Interface compliance	9
5.2 Implementation compliance	9
5.3 Revision control	9
6 Power supply to transponder interface bus – Physical layer specification	9
6.1 Interface requirements	9
6.2 Interface diagram	11
7 Power supply to transponder interface bus – Data link layer specification.....	12
7.1 DLL packet structure	12
7.2 DLE sequence	14
7.3 Interface timing	14
7.4 DLL datagrams.....	16
Figure 1 – Reference architecture diagram	8
Figure 2 – Sample PSTIB RS-485 interface	12
Figure 3 – DLL packet structure	13
Figure 4 – PSTIB Data and timing diagram	15
Figure 5 – DLL datagram structure.....	16
Figure 6 – Battery string naming conventions.....	26
Table 1 – Transponder type classifications	6
Table 2 – RJ-45 Connector pin assignment.....	10
Table 3 – Sample PSTIB RS-485 interface – Reference signals	12
Table 4 – Generic DLL packet structure	13
Table 5 – Reserved destination address ranges.....	13
Table 6 – PSTIB Timing specifications	15
Table 7 – Generic DLL datagram structure.....	17
Table 8 – DLL datagrams.....	18
Table 9 – Command: Get_Configuration datagram.....	19
Table 10 – Response: Get_Configuration datagram	19
Table 11 – Response: Get_Configuration datagram ¹ variable binding (General).....	19
Table 12 – Response: Get_Configuration datagram ^{1,2} variable binding (Power supply)	20
Table 13 – Response: Get_Configuration Datagram ¹ Variable Binding (Generator).....	23
Table 14 – Command: Get_Power_Supply_Data datagram	24

Table 15 – Response: Get_Power_Supply_Data datagram 24

Table 16 – Response: Get_Power_Supply_Data Datagram variable binding 24

Table 17 – Command: Power_Supply_Control datagram 26

Table 18 – Command: Get_Generator_Data datagram 27

Table 19 – Response: Get_Generator_Data datagram 27

Table 20 – Response: Get_Generator_Data Datagram variable binding 27

Table 21 – Command: Generator_Control datagram 28

Table 22 – Response: Invalid_Request datagram 28

Table 23 – Response: Request_Processed datagram 28

Annex ZA (normative) Normative references to international publications with their
corresponding European publications 29

INTRODUCTION

Standards of the IEC 60728 series deal with cable networks for television signals, sound signals and interactive services including equipment, systems and installations for

- head-end reception, processing and distribution of television and sound signals and their associated data signals, and
- processing, interfacing and transmitting all kinds of signals for interactive services

using all applicable transmission media.

All kinds of networks like

- CATV-networks,
- MATV-networks and SMATV-networks,
- individual receiving networks

and all kinds of equipment, systems and installations installed in such networks, are within this scope.

The extent of this standardization work is from the antennas, special signal source inputs to the head-end or other interface points to the network up to the system outlet or the terminal input, where no system outlet exists.

The standardization of any user terminals (i.e. tuners, receivers, decoders, multimedia terminals, etc.) as well as of any coaxial and optical cables and accessories therefore is excluded.

CABLE NETWORKS FOR TELEVISION SIGNALS, SOUND SIGNALS AND INTERACTIVE SERVICES –

Part 7-3: Hybrid Fibre Coax Outside Plant Status Monitoring – Power Supply to Transponder Interface Bus (PSTIB) specification

1 Scope

This part of IEC 60728 specifies requirements for the Hybrid Fibre Coax (HFC) Outside Plant (OSP) Power Supplies (PS). This standard is part of a series developed to support the design and implementation of interoperable management systems for evolving HFC cable networks. The purpose of the standards is to support the design and implementation of interoperable management systems for evolving HFC cable networks. The Power Supply to Transponder Interface Bus (PSTIB) specification describes the physical (PHY) interface and related messaging and protocols implemented at the Data Link Layer (DLL), layers 1 and 2 respectively in the 7-layer ISO-OSI reference model, that support communications between compliant transponders and the managed OSP power supplies and other related power equipment to which they interface.

This standard describes the PSTIB PHY and DLL layer requirements and protocols that must be implemented to support reliable communications between all *type 2* and *type 3* compliant OSP transponders on the HFC plant and managed OSP power supplies and related hardware. Any exceptions to compliance with this standard will be specifically noted as necessary. Refer to Table 1 for a full definition of the type classifications.

Transponder type classifications referenced within the HMS series of standards are defined in Table 1.

Table 1 – Transponder type classifications

Type	Description	Application
<i>Type 0</i>	Refers to legacy transponder equipment which is incapable of supporting the specifications	- This transponder interfaces with legacy network equipment through proprietary means. - This transponder could be managed through the same management applications as the other types through proxies or other means at the head-end
<i>Type 1</i>	Refers to stand-alone transponder equipment (legacy or new), which can be upgraded to support the specifications	- This transponder interfaces with legacy network equipment through proprietary means. - Type 1 is a standards-compliant transponder (either manufactured to the standard or upgraded) that connects to legacy network equipment via a proprietary interface
<i>Type 2</i>	Refers to a stand-alone, compliant transponder	- This transponder interfaces with network equipment designed to support the electrical and physical specifications defined in the standards. - It can be factory or field-installed. - Its RF connection is independent of the monitored NE
<i>Type 3</i>	Refers to a stand-alone or embedded, compliant transponder	- This transponder interfaces with network equipment designed to support the electrical specifications defined in the standards. - It may or may not support the physical specifications defined in the standards. - It can be factory-installed. It may or may not be field-installed. - Its RF connection is through the monitored NE

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EIA RS-485, Electrical Characteristics of Generators and Receivers for Use in Balanced Digital Multipoint Systems

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the following definitions apply.

3.2

data link layer (DLL)

layer 2 in the Open System Interconnection (OSI) architecture; the layer that provides services to transfer data over the physical transmission link between open systems

3.3

network element (NE)

an active element in the outside plant (OSP) that is capable of receiving commands from a head-end element (HE) in the head-end and, as necessary, providing status information and alarms back to the HE

3.4

open system interconnection (OSI)

framework of International Organization for Standardization (ISO) standards for communication between multi-vendor systems that organizes the communication process into seven different categories that are placed in a layered sequence based on the relationship to the user. Each layer uses the layer immediately below it and provides services to the layer above. Layers 7 through 4 deal with end-to-end communication between the message source and destination, and layers 3 through 1 deal with network functions

3.5

physical (PHY) layer

layer 1 in the Open System Interconnection (OSI) architecture; the layer that provides services to transmit bits or groups of bits over a transmission link between open systems and which entails electrical, mechanical and handshaking procedures

3.6

transponder

device that interfaces to outside plant (OSP) NEs and relays status and alarm information to the HE. It can interface with an active NE via an arrangement of parallel analogue, parallel digital and serial ports


3.7 Abbreviations

DLL	Data Link Layer
EMS	Element Management System
Gnd	Grund
HE	Head-end Element
HFC	Hybrid Fibre Coax
ISO	International Organization for Standardization

ISO	International Organization for Standardization
LED	Light Emitting Diode
MAC	Media Access Control
NE	Network Element
OSI	Open System Interconnection
OSP	Outside Plant
PHY	Physical
PSTIB	Power Supply to Transponder Interface Bus
RF	Radio Frequency
Rx	Receive
SNMP	Simple Network Management Protocol
Tx	Transmit
Tx En	Transmit Enable
xpndr	Transponder

4 Reference architecture forward and return channel specifications

The reference architecture for the series of specifications is illustrated in Figure 1.

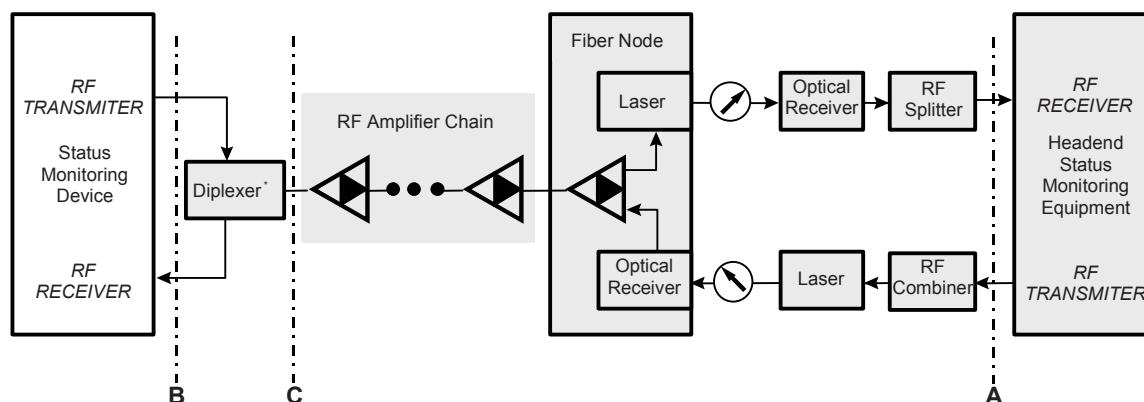

* The diplexer filter may be included as part of the network element to which the transponder interfaces, or it may be added separately by the network operator.

IEC 2293/03

Figure 1 – Reference architecture diagram

All quantities relating to forward channel transmission or reverse channel reception are measured at point A in Figure 1. All quantities relating to forward channel reception or reverse channel transmission are measured at point B for two-port devices and point C for single-port devices as shown in Figure 1.

5 Power supply to transponder interface bus specification overview

PSTIB specification defines a status monitoring topology intended to replace existing analog, discrete status monitoring interfaces used today for monitoring power supplies and other power-related equipment deployed in HFC networks. In this topology, the transponder is simplified by moving all measurements and sensors to the monitored equipment, i.e. power supply or other power equipment. The transponder interfaces to the monitored equipment