



BSI Standards Publication

Industrial communication networks - Fieldbus specifications

Part 3-2: Data-link layer service definition - Type 2 elements

National foreword

This British Standard is the UK implementation of EN 61158-3-2:2014+A1:2019. It is identical to IEC 61158-3-2:2014, incorporating amendment 1:2019. It supersedes BS EN 61158-3-2:2014, which will be withdrawn on 23 May 2022.

The start and finish of text introduced or altered by amendment is indicated in the text by tags. Tags indicating changes to IEC text carry the number of the IEC amendment. For example, text altered by IEC amendment A1 is indicated by A1 A1.

The UK participation in its preparation was entrusted to Technical Committee GEL/65/3, Industrial communications: process measurement and control, including fieldbus.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2019
Published by BSI Standards Limited 2019

ISBN 978 0 539 04846 9

ICS 25.040.40; 35.100.20; 35.240.50; 35.110

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2014.

Amendments/corrigenda issued since publication

Date	Text affected
31 July 2019	Implementation of IEC amendment 1:2019 with CENELEC endorsement A1:2019

English Version

**Industrial communication networks - Fieldbus specifications -
Part 3-2: Data-link layer service definition - Type 2 elements**

Réseaux de communication industriels - Spécifications des
bus de terrain - Partie 3-2: Définition des services de la
couche liaison de données - Eléments de type 2

Industrielle Kommunikationsnetze - Feldbusse - Teil 3-2:
Dienstfestlegungen des Data Link Layer
(Sicherheitsschicht) - Typ 2-Elemente

This European Standard was approved by CENELEC on 2014-09-17. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 65C/759/FDIS, future edition 2 of IEC 61158-3-2, prepared by SC 65C "Industrial networks" of IEC/TC 65 "Industrial-process measurement, control and automation" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 61158-3-2:2014.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2015-06-17
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2017-09-17

This document supersedes EN 61158-3-2:2008.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association.

Endorsement notice

The text of the International Standard IEC 61158-3-2:2014 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 61158-1:2014	NOTE	Harmonized as EN 61158-1:2014 (not modified).
IEC 61158-2:2014	NOTE	Harmonized as EN 61158-2:2014 (not modified).
IEC 61158-5-2:2014	NOTE	Harmonized as EN 61158-5-2:2014 (not modified).
IEC 61158-6-2:2014	NOTE	Harmonized as EN 61158-6-2 ¹⁾ (not modified).
IEC 61784-1:2014	NOTE	Harmonized as EN 61784-1 ¹⁾ (not modified).
IEC 61784-2:2014	NOTE	Harmonized as EN 61784-2:2014 (not modified).

1) To be published.

Foreword to amendment A1

The text of document 65C/945/FDIS, future IEC 61158-3-2/Amd 1, prepared by SC 65C "Industrial networks" of IEC/TC 65 "Industrial-process measurement, control and automation" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 61158-3-2:2014/A1:2019.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2020-02-23
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2022-05-23

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 61158-3-2:2014/Amd 1:2019 was approved by CENELEC as a European Standard without any modification.

Replace the Bibliography of EN 61158-3-2:2014 by:

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 61158-1:2019 NOTE Harmonized as EN IEC 61158-1:2019 (not modified)
IEC 61158-2:2014 NOTE Harmonized as EN 61158-2:2014 (not modified)
IEC 61158-5-2:2019 NOTE Harmonized as EN IEC 61158-5-2:2019 (not modified)
IEC 61784-1:2019 NOTE Harmonized as EN IEC 61784-1:2019 (not modified)
IEC 61784-2:2019 NOTE Harmonized as EN IEC 61784-2:2019 (not modified)

Annex ZA
(normative)

**Normative references to international publications
with their corresponding European publications**

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61158-4-2	2019	Industrial communication networks - Fieldbus specifications - Part 4-2: Data-link layer protocol specification - Type 2 elements	EN IEC 61158-4-2	2019
ISO/IEC 7498-1	-	Information technology - Open Systems Interconnection - Basic Reference Model: The Basic Model	-	-
ISO/IEC 7498-3	-	Information technology - Open Systems Interconnection - Basic Reference Model: Naming and addressing	-	-
ISO/IEC 8886	-	Information technology - Open Systems Interconnection - Data link service definition	-	-
ISO/IEC 10731	1994	Information technology - Open Systems Interconnection - Basic Reference Model - Conventions for the definition of OSI services	-	-

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
INTRODUCTION to the Amendment	6
1 Scope.....	7
1.1 General.....	7
1.2 Specifications	7
1.3 Conformance	7
2 Normative references	8
3 Terms, definitions, symbols, abbreviations and conventions	8
3.1 Reference model terms and definitions	8
3.2 Service convention terms and definitions	10
3.3 Common data-link service terms and definitions	11
3.4 Additional Type 2 data-link specific definitions	12
3.5 Common symbols and abbreviations	14
3.6 Additional Type 2 symbols and abbreviations.....	15
3.7 Common conventions.....	15
4 Connection-mode and connectionless-mode data-link service	16
4.1 Overview	16
4.2 Facilities of the data-link service	20
4.3 Model of the data-link service	21
4.4 Sequence of primitives.....	23
4.5 Connection-mode data transfer	25
4.6 Connectionless-mode data transfer.....	27
4.7 Queue maintenance	30
4.8 Tag filter	32
5 DL-management services	33
5.1 Sequence of primitives.....	33
5.2 Link synchronization	34
5.3 Synchronized parameter change.....	35
5.4 Event reports	37
5.5 Bad FCS	39
5.6 Current moderator	39
5.7 Enable moderator	40
5.8 Power-up and online	41
5.9 Listen only	42
5.10 Time distribution	43
Bibliography.....	45
Figure 1 – Relationships of DLSAPs, DLSAP-addresses and group DL-addresses	11
Figure 2 – NUT structure	17
Figure 3 – Medium access during scheduled time	18
Figure 4 – Medium access during unscheduled time	19
Figure 5 – Queue model for the peer and multipoint DLS, DLSAPs and their DLCEPs	20
Figure 6 – Queue model of a multipoint DLS between a sending DLS-user and one or more receiving DLS-users.....	22

Figure 7 – DLS primitive time-sequence diagram	24
Figure 8 – State transition diagram for sequences of DLS primitives at one DLSAP	25
Figure 9 – Sequence of primitives for a successful connection-mode transfer	27
Figure 10 – Sequence of primitives for an unsuccessful connection-mode transfer	27
Figure 11 – Sequence of primitives for a successful connectionless-mode transfer	30
Figure 12 – Sequence of primitives for an unsuccessful connectionless-mode transfer	30
Figure 13 – Sequence of primitives for a queue maintenance request	32
Figure 14 – Sequence of primitives for a tag filter request	33
Figure 15 – Sequence of primitives for a local link synchronization	35
Figure 16 – Sequence of primitives for a DLM-get/set parameters request	37
Figure 17 – Sequence of primitives for a DLM-tMinus change request	37
Figure 18 – Sequence of primitives for a DLM-event indication	39
Figure 19 – Sequence of primitives for a DLM-bad-FCS indication	39
Figure 20 – Sequence of primitives for a DLM-current-moderator indication	40
Figure 21 – Sequence of primitives for a DLM-enable-moderator request	41
Figure 22 – Sequence of primitives for a DLM-power-up indication	42
Figure 23 – Sequence of primitives for a DLM-online request	42
Figure 24 – Sequence of primitives for a DLM-listen-only request	42
Table 1 – Summary of connection-mode and connectionless-mode primitives and parameters	24
Table 2 – DL-connection-mode transfer primitives and parameters	26
Table 3 – DL-connectionless-mode transfer primitives and parameters	28
Table 4 – Fixed tag services available to the DLS-user	29
Table 5 – DL-queue maintenance primitives and parameters	31
Table 6 – DL-connectionless-mode tag filter primitives and parameters	32
Table 7 – Summary of DL-management primitives and parameters	34
Table 8 – Link synchronization primitives and parameters	35
Table 9 – Synchronized parameter change primitives and parameters	36
Table 10 – DLMS-configuration-data	36
Table 11 – Event report primitives and parameters	38
Table 12 – DLMS events being reported	38
Table 13 – Bad FCS primitives and parameters	39
Table 14 – Current moderator primitives and parameters	40
Table 15 – Enable moderator primitives and parameters	40
Table 16 – Power-up and online primitives and parameters	41
Table 17 – Listen-only primitives and parameters	42
Table 18 – DLMS time and time quality parameters	43
Table 19 – Time distribution source quality	44

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INDUSTRIAL COMMUNICATION NETWORKS –
FIELDBUS SPECIFICATIONS –****Part 3-2: Data-link layer service definition –
Type 2 elements**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

Attention is drawn to the fact that the use of the associated protocol type is restricted by its intellectual-property-right holders. In all cases, the commitment to limited release of intellectual-property-rights made by the holders of those rights permits a layer protocol type to be used with other layer protocols of the same type, or in other type combinations explicitly authorized by its intellectual-property-right holders.

NOTE Combinations of protocol types are specified in IEC 61784-1 and IEC 61784-2.

International Standard IEC 61158-3-2 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial-process measurement, control and automation.

This second edition cancels and replaces the first edition published in 2007. This edition constitutes a technical revision.

The main changes with respect to the previous edition are listed below.

- Correction of references for fixed tag usage in 4.6.3.6.
- Update of core bibliographic references (original source documents from consortium).
- Miscellaneous editorial corrections.

The text of this standard is based on the following documents:

FDIS	Report on voting
65C/759/FDIS	65C/769/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with ISO/IEC Directives, Part 2.

A list of all the parts of the IEC 61158 series, under the general title *Industrial communication networks – Fieldbus specifications*, can be found on the IEC web site.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under <http://webstore.iec.ch> in the data related to the specific publication. At this date, the publication will be:

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

INTRODUCTION

This standard is one of a series produced to facilitate the interconnection of automation system components. It is related to other standards in the set as defined by the “three-layer” fieldbus reference model described in IEC 61158-1.

Throughout the set of fieldbus standards, the term “service” refers to the abstract capability provided by one layer of the OSI Basic Reference Model to the layer immediately above. Thus, the data-link layer service defined in this standard is a conceptual architectural service, independent of administrative and implementation divisions.

INTRODUCTION to the Amendment

Source documents referenced by this standard have been updated, this needs to be reflected in the corresponding sections of the document.

INDUSTRIAL COMMUNICATION NETWORKS – FIELDBUS SPECIFICATIONS –

Part 3-2: Data-link layer service definition – Type 2 elements

1 Scope

1.1 General

This part of IEC 61158 provides common elements for basic time-critical messaging communications between devices in an automation environment. The term “time-critical” is used to represent the presence of a time-window, within which one or more specified actions are required to be completed with some defined level of certainty. Failure to complete specified actions within the time window risks failure of the applications requesting the actions, with attendant risk to equipment, plant and possibly human life.

This standard defines in an abstract way the externally visible service provided by the Type 2 fieldbus data-link layer in terms of:

- a) the primitive actions and events of the service;
- b) the parameters associated with each primitive action and event, and the form which they take; and
- c) the interrelationship between these actions and events, and their valid sequences.

The purpose of this standard is to define the services provided to:

- the Type 2 fieldbus application layer at the boundary between the application and data-link layers of the fieldbus reference model;
- systems management at the boundary between the data-link layer and systems management of the fieldbus reference model.

Type 2 DL-service provides both a connected and a connectionless subset of those services specified in ISO/IEC 8886.

1.2 Specifications

The principal objective of this standard is to specify the characteristics of conceptual data-link layer services suitable for time-critical communications and thus supplement the OSI Basic Reference Model in guiding the development of data-link protocols for time-critical communications. A secondary objective is to provide migration paths from previously-existing industrial communications protocols.

This specification may be used as the basis for formal DL-Programming-Interfaces. Nevertheless, it is not a formal programming interface, and any such interface will need to address implementation issues not covered by this specification, including:

- a) the sizes and octet ordering of various multi-octet service parameters;
- b) the correlation of paired request and confirm, or indication and response, primitives.

1.3 Conformance

This standard does not specify individual implementations or products, nor does it constrain the implementations of data-link entities within industrial automation systems.

There is no conformance of equipment to this data-link layer service definition standard. Instead, conformance is achieved through implementation of the corresponding data-link protocol that fulfills the Type 1 data-link layer services defined in this standard.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE All parts of the IEC 61158 series, as well as IEC 61784-1 and IEC 61784-2 are maintained simultaneously. Cross-references to these documents within the text therefore refer to the editions as dated in this list of normative references.

[A1] IEC 61158-4-2:2019, *Industrial communication networks – Fieldbus specifications – Part 4-2: Data-link layer protocol specification – Type 2 elements* **[A1]**

ISO/IEC 7498-1, *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model*

ISO/IEC 7498-3, *Information technology – Open Systems Interconnection – Basic Reference Model: Naming and addressing*

ISO/IEC 8886, *Information technology – Open Systems Interconnection – Data link service definition*

ISO/IEC 10731:1994, *Information technology – Open Systems Interconnection – Basic Reference Model – Conventions for the definition of OSI services*

3 Terms, definitions, symbols, abbreviations and conventions

For the purposes of this document, the following terms, definitions, symbols, abbreviations and conventions apply.

3.1 Reference model terms and definitions

This standard is based in part on the concepts developed in ISO/IEC 7498-1 and ISO/IEC 7498-3, and makes use of the following terms defined therein:

3.1.1	DL-address	[ISO/IEC 7498-3]
3.1.2	DL-address-mapping	[ISO/IEC 7498-1]
3.1.3	called-DL-address	[ISO/IEC 7498-3]
3.1.4	calling-DL-address	[ISO/IEC 7498-3]
3.1.5	centralized multi-end-point-connection	[ISO/IEC 7498-1]
3.1.6	DL-connection	[ISO/IEC 7498-1]
3.1.7	DL-connection-end-point	[ISO/IEC 7498-1]
3.1.8	DL-connection-end-point-identifier	[ISO/IEC 7498-1]
3.1.9	DL-connection-mode transmission	[ISO/IEC 7498-1]
3.1.10	DL-connectionless-mode transmission	[ISO/IEC 7498-1]

3.1.11	correspondent (N)-entities correspondent DL-entities (N=2) correspondent Ph-entities (N=1)	[ISO/IEC 7498-1]
3.1.12	DL-duplex-transmission	[ISO/IEC 7498-1]
3.1.13	(N)-entity DL-entity (N=2) Ph-entity (N=1)	[ISO/IEC 7498-1]
3.1.14	DL-facility	[ISO/IEC 7498-1]
3.1.15	flow control	[ISO/IEC 7498-1]
3.1.16	(N)-layer DL-layer (N=2) Ph-layer (N=1)	[ISO/IEC 7498-1]
3.1.17	layer-management	[ISO/IEC 7498-1]
3.1.18	DL-local-view	[ISO/IEC 7498-3]
3.1.19	DL-name	[ISO/IEC 7498-3]
3.1.20	naming-(addressing)-domain	[ISO/IEC 7498-3]
3.1.21	peer-entities	[ISO/IEC 7498-1]
3.1.22	primitive name	[ISO/IEC 7498-3]
3.1.23	DL-protocol	[ISO/IEC 7498-1]
3.1.24	DL-protocol-connection-identifier	[ISO/IEC 7498-1]
3.1.25	DL-protocol-data-unit	[ISO/IEC 7498-1]
3.1.26	DL-relay	[ISO/IEC 7498-1]
3.1.27	reset	[ISO/IEC 7498-1]
3.1.28	responding-DL-address	[ISO/IEC 7498-3]
3.1.29	routing	[ISO/IEC 7498-1]
3.1.30	segmenting	[ISO/IEC 7498-1]
3.1.31	(N)-service DL-service (N=2) Ph-service (N=1)	[ISO/IEC 7498-1]
3.1.32	(N)-service-access-point DL-service-access-point (N=2) Ph-service-access-point (N=1)	[ISO/IEC 7498-1]
3.1.33	DL-service-access-point-address	[ISO/IEC 7498-3]
3.1.34	DL-service-connection-identifier	[ISO/IEC 7498-1]
3.1.35	DL-service-data-unit	[ISO/IEC 7498-1]
3.1.36	DL-simplex-transmission	[ISO/IEC 7498-1]
3.1.37	DL-subsystem	[ISO/IEC 7498-1]

3.1.38 systems-management [ISO/IEC 7498-1]

3.1.39 DLS-user-data [ISO/IEC 7498-1]

3.2 Service convention terms and definitions

This standard also makes use of the following terms defined in ISO/IEC 10731 as they apply to the data-link layer:

3.2.1 acceptor

3.2.2 asymmetrical service

**3.2.3 confirm (primitive);
requestor.deliver (primitive)**

3.2.4 deliver (primitive)

3.2.5 DL-confirmed-facility

3.2.6 DL-facility

3.2.7 DL-local-view

3.2.8 DL-mandatory-facility

3.2.9 DL-non-confirmed-facility

3.2.10 DL-provider-initiated-facility

3.2.11 DL-provider-optional-facility

**3.2.12 DL-service-primitive;
primitive**

3.2.13 DL-service-provider

3.2.14 DL-service-user

3.2.15 DLS-user-optional-facility

**3.2.16 indication (primitive);
acceptor.deliver (primitive)**

3.2.17 multi-peer

**3.2.18 request (primitive);
requestor.submit (primitive)**

3.2.19 requestor

**3.2.20 response (primitive);
acceptor.submit (primitive)**

3.2.21 submit (primitive)

3.2.22 symmetrical service

3.3 Common data-link service terms and definitions

For the purposes of this standard, the following terms and definitions apply.

NOTE Many definitions are common to more than one protocol Type; they are not necessarily used by all protocol Types.

3.3.1

DL-segment link

local link


single DL-subnetwork in which any of the connected DLEs may communicate directly, without any intervening DL-relaying, whenever all of those DLEs that are participating in an instance of communication are simultaneously attentive to the DL-subnetwork during the period(s) of attempted communication

3.3.2

DLSAP

distinctive point at which DL-services are provided by a single DL-entity to a single higher-layer entity

Note 1 to entry: This definition, derived from ISO/IEC 7498-1, is repeated here to facilitate understanding of the critical distinction between DLSAPs and their DL-addresses.

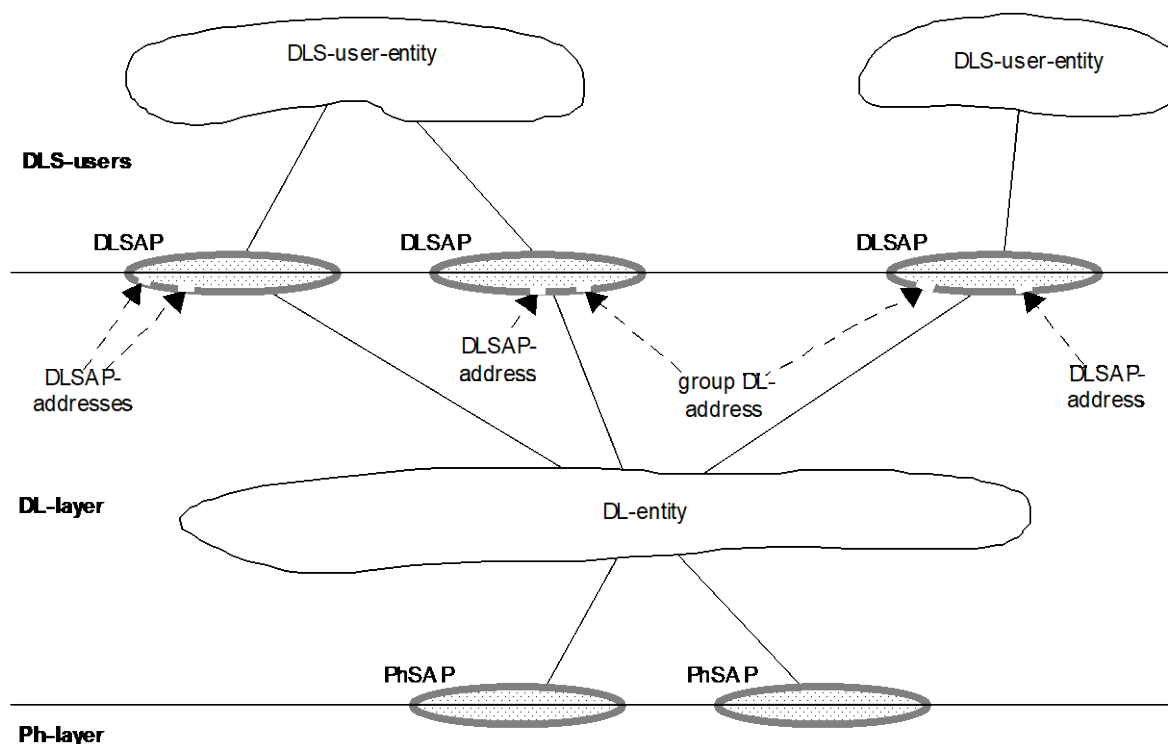

NOTE 1 DLSAPs and PhSAPs are depicted as ovals spanning the boundary between two adjacent layers.

NOTE 2 DL-addresses are depicted as designating small gaps (points of access) in the DLL portion of a DLSAP.

NOTE 3 A single DL-entity can have multiple DLSAP-addresses and group DL-addresses associated with a single DLSAP.

Figure 1 – Relationships of DLSAPs, DLSAP-addresses and group DL-addresses

3.3.3

DL(SAP)-address

either an individual DLSAP-address, designating a single DLSAP of a single DLS-user, or a group DL-address potentially designating multiple DLSAPs, each of a single DLS-user