

Adjustable speed electrical power drive systems —

Part 7-1: Generic interface and use of profiles for power drive systems — Interface definition

ICS 29.200; 35.100.05

National foreword

This British Standard is the UK implementation of EN 61800-7-1:2008. It is identical to IEC 61800-7-1:2007.

The UK participation in its preparation was entrusted to Technical Committee PEL/22, Power electronics.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2008

© BSI 2008

ISBN 978 0 580 56071 2

Amendments/corrigenda issued since publication

Date	Comments

**Adjustable speed electrical power drive systems -
Part 7-1: Generic interface and use of profiles for power drive systems -
Interface definition
(IEC 61800-7-1:2007)**

Entraînements électriques de puissance
à vitesse variable -
Partie 7-1: Interface et utilisation
génériques de profils pour les
entraînements électriques de puissance -
Définition de l'interface
(CEI 61800-7-1:2007)

Elektrische Leistungsantriebssysteme
mit einstellbarer Drehzahl -
Teil 7-1: Generisches Interface
und Nutzung von Profilen
für Leistungsantriebssysteme (PDS) -
Schnittstellendefinition
(IEC 61800-7-1:2007)

This European Standard was approved by CENELEC on 2008-02-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

Foreword

The text of document 22G/183/FDIS, future edition 1 of IEC 61800-7-1, prepared by SC 22G, Adjustable speed electric drive systems incorporating semiconductor power converters, of IEC TC 22, Power electronic systems and equipment, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 61800-7-1 on 2008-02-01.

This European Standard, together with its companion parts for Profile type 4 (SERCOS), partially replaces EN 61491:1998 which is at present being revised (to be issued as a Technical Report).

The following dates were fixed:

- latest date by which the EN has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2008-11-01
- latest date by which the national standards conflicting
with the EN have to be withdrawn (dow) 2011-02-01

Annex ZA has been added by CENELEC.

Endorsement notice

The text of the International Standard IEC 61800-7-1:2007 was approved by CENELEC as a European Standard without any modification.

CONTENTS

INTRODUCTION.....	8
1 Scope.....	11
2 Normative references	11
3 Terms, definitions and abbreviated terms	12
3.1 Preamble.....	12
3.2 General definitions	12
3.3 Specific definitions	16
3.3.1 Common definitions	16
3.3.2 Definitions for Annex A	16
3.3.3 Definitions for Annex B	17
3.3.4 Definitions for Annex C	18
3.3.5 Definitions for Annex D	19
3.4 Abbreviated terms	21
3.4.1 Common abbreviations	21
3.4.2 Abbreviations for Annex A	21
3.4.3 Abbreviations for Annex B	21
3.4.4 Abbreviations for Annex C	21
3.4.5 Abbreviations for Annex D	21
3.5 Conventions	22
4 General architecture.....	22
4.1 Generic PDS interface.....	22
4.2 Typical structure of automation systems.....	26
4.3 Structure of the logical PDS	27
4.4 Use cases of the PDS	29
4.4.1 General	29
4.4.2 Use case engineering	30
4.4.3 Use case operation-control.....	30
5 Functional elements	31
5.1 Device identification FE.....	31
5.1.1 General	31
5.1.2 Parameters.....	31
5.2 Device Control FE	32
5.2.1 General	32
5.2.2 I/O data	32
5.2.3 States.....	33
5.2.4 Parameters.....	34
5.3 Communication FE	34
5.3.1 General	34
5.3.2 I/O data	35
5.3.3 States.....	35
5.3.4 Parameters.....	37
5.4 Basic drive FE	37
5.4.1 General	37
5.4.2 I/O data	38
5.4.3 States.....	39
5.4.4 Parameters.....	40
5.5 Optional application FE	41

6	Application modes	41
6.1	General	41
6.2	Torque control	42
6.3	Velocity control	43
6.4	Position control	44
7	Profile specific extensions	45
8	Structure for annexes	45
8.1	General	45
8.2	Structure of the annexes	46
Annex A (normative) Mapping to Profile CiA 402 drive and motion control		49
Annex B (normative) Mapping to profile CIP Motion™		61
Annex C (normative) Mapping to profile PROFIdrive		73
Annex D (normative) Mapping to Profile SERCOS		86
Annex ZA (normative) Normative references to international publications with their corresponding European publications		100
Bibliography		98
Figure 1 – Structure of IEC 61800-7		10
Figure 2 – Definition of power drive system		22
Figure 3 – Example of system structures for position-control applications		23
Figure 4 – Examples of system structures for velocity-control applications		24
Figure 5 – Examples of system structures for torque-control applications		25
Figure 6 – Typical structure of automation systems (adapted from IEC/TR 62390)		26
Figure 7 – Structure of the PDS with functional elements		28
Figure 8 – Functional Elements (FE) in the logical PDS		29
Figure 9 – Use case for the generic PDS interface		30
Figure 10 – The generic interface in the use case operation		31
Figure 11 – Device control FE state-chart diagram		33
Figure 12 – Device control FE state transition table		34
Figure 13 – Communication FE state-chart diagram		36
Figure 14 – Communication FE state transition table		36
Figure 15 – Optional communication FE state-chart diagram		37
Figure 16 – Optional communication FE state transition table		37
Figure 17 – Basic drive FE state-chart diagram		39
Figure 18 – Basic drive FE state transition table		39
Figure 19 – Optional basic drive FE state-chart diagram		40
Figure 20 – Optional basic drive FE state transition table		40
Figure 21 – Torque control application mode		42
Figure 22 – Torque control with velocity feedback application mode		42
Figure 23 – Velocity preset application mode		43
Figure 24 – Velocity control application mode		43

Figure 25 – Velocity control with position feedback application mode.....	44
Figure 26 – Position preset application mode.....	44
Figure 27 – Position control application mode.....	45
Figure A.1 – CiA 402 logical power drive system model	50
Figure B.1 – Object structure of the logical PDS	62
Figure B.2 – Object structure of the logical PDS	62
Figure B.3 – Motion Axis Object state machine	65
Figure C.1 – Overview of communication devices and services in PROFIdrive	74
Figure C.2 – Structure of the PROFIdrive device.....	75
Figure C.3 – PROFIdrive Axis type Drive Object	76
Figure C.4 – Functional block diagram of the PROFIdrive Axis type DO	77
Figure C.5 – Mapping of communication FE states.....	80
Figure D.1 – Topology example	87
Figure D.2 – State machine of Basic Drive FE	92
Table 1 – Structures within the scope of this part of IEC 61800-7	26
Table 2 – Parameters in the device identification FE.....	32
Table 3 – Status values for the device control FE	33
Table 4 – Command values for the device control FE.....	33
Table 5 – Parameters in the device control FE.....	34
Table 6 – Status values for the communication FE (see Figure 13)	35
Table 7 – Command values for the communication FE (see Figure 13)	35
Table 8 – Status values for the optional communication FE (see Figure 15).....	35
Table 9 – Command values for the optional communication FE (see Figure 15)	35
Table 10 – Status values of the basic drive FE.....	38
Table 11 – Optional status values for the basic drive FE	38
Table 12 – Command values for basic drive FE	38
Table 13 – Optional command values for the basic drive FE	39
Table 14 – Possible generic application modes.....	41
Table 15 – Set-point values for generic application modes.....	41
Table 16 – Mapping of names to profiles.....	45
Table 17 – Structure of annexes	46
Table 18 – Profile specific terms	47
Table 19 – Supported application modes	47
Table 20 – I/O data for profile torque mode.....	47
Table 21 – I/O data for profile velocity mode.....	48
Table 22 – I/O data for profile position mode	48
Table A.1 – Profile specific terms.....	49
Table A.2 – Drive device identification parameters.....	51
Table A.3 – Status values for the device control FE	51
Table A.4 – Command values for the device control FE	51
Table A.5 – Parameters in the device control FE.....	52
Table A.6 – Status values for the communication FE	52

Table A.7 – Command values for the communication FE	52
Table A.8 – Status values for the basic drive FE	53
Table A.9 – Command values for the basic drive FE	53
Table A.10 – Basic drive FE parameters	54
Table A.11 – Optional application functions FE parameters	54
Table A.12 – Supported application modes	55
Table A.13 – I/O data for profile torque mode	55
Table A.14 – Parameter for profile torque mode	55
Table A.15 – I/O data for cyclic sync torque mode	56
Table A.16 – Parameter for cyclic sync torque mode	56
Table A.17 – I/O data for velocity mode	56
Table A.18 – Parameter for velocity mode	56
Table A.19 – I/O data for profile velocity mode	57
Table A.20 – Parameter for profile velocity mode	57
Table A.21 – I/O data for cyclic sync velocity mode	57
Table A.22 – Parameter for cyclic sync velocity mode	57
Table A.23 – I/O data for profile position mode	58
Table A.24 – Parameter for profile position mode	58
Table A.25 – I/O data for interpolated position mode	59
Table A.26 – Parameter for interpolated position mode	59
Table A.27 – I/O data for cyclic sync position mode	59
Table A.28 – Parameter for cyclic sync position mode	60
Table B.1 – Profile specific terms	61
Table B.2 – Mapping of parameters for the device identification FE	64
Table B.3 – Mapping of status values for the device control FE	64
Table B.4 – Mapping of command values for the device control FE	64
Table B.5 – Mapping of parameters for the device control FE	66
Table B.6 – Mapping of status values for the communication FE	66
Table B.7 – Mapping of command values for the communication FE	67
Table B.8 – Mapping of status values for the optional communication FE	67
Table B.9 – Mapping of command values for the optional communication FE	67
Table B.10 – Status values for the basic drive FE	68
Table B.11 – Command values for the basic drive FE	68
Table B.12 – Drive Control Mode values for the basic drive FE	68
Table B.13 – Command Data Set values for the basic drive FE	69
Table B.14 – Actual Data Set values for the basic drive FE	69
Table B.15 – Status Data Set values for the basic drive FE	70
Table B.16 – Supported application modes	71
Table B.17 – Set-point values for the generic application modes	71
Table B.18 – I/O data for profile torque mode	71
Table B.19 – I/O data for profile velocity mode	72
Table B.20 – I/O data for profile position mode	72
Table C.1 – Profile specific terms	73

Table C.2 – Parameters for device identification	78
Table C.3 – Status values for the device control FE	79
Table C.4 – Command values for the device control FE	79
Table C.5 – Device control parameters	79
Table C.6 – Status values of the basic drive FE	81
Table C.7 – Command values of the basic drive FE	81
Table C.8 – Status values for the optional basic drive FE	82
Table C.9 – Command values for the optional basic drive FE	82
Table C.10 – Device control parameters	82
Table C.11 – Supported application modes	83
Table C.12 – I/O data for profile velocity mode	84
Table C.13 – I/O data for profile velocity control mode with position feedback	84
Table C.14 – I/O data for profile velocity control mode (process technology)	85
Table C.15 – I/O data for profile position preset	85
Table C.16 – I/O data for profile position mode	85
Table D.1 – Profile specific terms	86
Table D.2 – Device identification parameters	89
Table D.3 – Status values for the device control FE	89
Table D.4 – Command values for the device control FE	90
Table D.5 – Parameters for the device control FE	90
Table D.6 – Status values for the basic drive and communication FE	92
Table D.7 – Command values for the basic drive and communication FE	93
Table D.8 – IDN for operation modes	93
Table D.9 – Supported application modes	94
Table D.10 – Additional application modes	95
Table D.11 – I/O data for profile torque mode	95
Table D.12 – Configuration data for torque control	95
Table D.13 – I/O data for profile velocity mode	96
Table D.14 – Configuration data for velocity control	96
Table D.15 – I/O data for profile position mode	97
Table D.16 – Configuration data for position control	97

INTRODUCTION

The IEC 61800 series is intended to provide a common set of specifications for adjustable speed electrical power drive systems.

IEC 61800-7 describes a generic interface between control systems and power drive systems. This interface can be embedded in the control system. The control system itself can also be located in the drive (sometimes known as "smart drive" or "intelligent drive").

A variety of physical interfaces is available (analogue and digital inputs and outputs, serial and parallel interfaces, fieldbuses and networks). Profiles based on specific physical interfaces are already defined for some application areas (e.g. motion control) and some device classes (e.g. standard drives, positioner). The implementations of the associated drivers and application programmers interfaces are proprietary and vary widely.

IEC 61800-7 defines a set of common drive control functions, parameters, and state machines or description of sequences of operation to be mapped to the drive profiles.

IEC 61800-7 provides a way to access functions and data of a drive that is independent of the used drive profile and communication interface. The objective is a common drive model with generic functions and objects suitable to be mapped on different communication interfaces. This makes it possible to provide common implementations of motion control (or velocity control or drive control applications) in controllers without any specific knowledge of the drive implementation.

There are several reasons to define a generic interface:

For a drive device manufacturer

- Less effort to support system integrators
- Less effort to describe drive functions because of common terminology
- The selection of drives does not depend on availability of specific support

For a control device manufacturer

- No influence of bus technology
- Easy device integration
- Independent of a drive supplier

For a system integrator

- Less integration effort for devices
- Only one understandable way of modeling
- Independent of bus technology

Much effort is needed to design a motion control application with several different drives and a specific control system. The tasks to implement the system software and to understand the functional description of the individual components may exhaust the project resources. In some cases, the drives do not share the same physical interface. Some control devices just support a single interface which will not be supported by a specific drive. On the other hand, the functions and data structures are often specified with incompatibilities. This requires the system integrator to write special interfaces for the application software and this should not be his responsibility.


Some applications need device exchangeability or integration of new devices in an existing configuration. They are faced with different incompatible solutions. The efforts to adopt a solution to a drive profile and to manufacturer specific extensions may be unacceptable. This will reduce the degree of freedom to select a device best suited for this application to the selection of the unit which will be available for a specific physical interface and supported by the controller.

This part of IEC 61800-7 is divided into a generic part and several annexes as shown in Figure 1. The drive profiles types for CiA 402¹, CIP Motion^{TM2}, PROFIdrive³ and SERCOS interface^{TM4} are mapped to the generic interface in the corresponding annex. The annexes have been submitted by open international network or fieldbus organizations which are responsible for the content of the related annex and use of the related trademarks.

The different profile types 1, 2, 3 and 4 are specified in IEC 61800-7-201, IEC 61800-7-202, IEC 61800-7-203 and IEC 61800-7-204.

IEC 61800-7-301, IEC 61800-7-302, IEC 61800-7-303 and IEC 61800-7-304 specify how the profile types 1, 2, 3 and 4 are mapped to different network technologies (such as CANopen⁵, EtherCAT^{TM6}, Ethernet Powerlink^{TM7}, DeviceNet^{TM8}, ControlNet^{TM9}, EtherNet/IP^{TM10}, PROFIBUS¹¹, PROFINET¹² and SERCOS interface).

-
- 1 CiA 402 is a trade name of CAN in Automation, e.V. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name CiA 402.
 - 2 CIP MotionTM is a trade name of Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name CIP MotionTM. Use of the trade name CIP MotionTM requires permission of Open DeviceNet Vendor Association, Inc.
 - 3 PROFIdrive is a trade name of PROFIBUS International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIdrive. Use of the trade name PROFIdrive requires permission of PROFIBUS International.
 - 4 SERCOSTM and SERCOS interfaceTM are trade names of SERCOS International e.V. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade names SERCOS or SERCOS interface. Use of the trade names SERCOS and SERCOS interface requires permission of the trade name holder.
 - 5 CANopen is an acronym for Controller Area Network *open* and is used to refer to EN 50325-4.
 - 6 EtherCATTM is a trade name of Beckhoff, Verl. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name EtherCATTM. Use of the trade name EtherCATTM requires permission of the trade name holder.
 - 7 Ethernet PowerlinkTM is a trade name of B&R, control of trade name use is given to the non profit organization EPSG. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name Ethernet PowerlinkTM. Use of the trade name Ethernet PowerlinkTM requires permission of the trade name holder.
 - 8 DeviceNetTM is a trade name of Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name DeviceNetTM. Use of the trade name DeviceNetTM requires permission of Open DeviceNet Vendor Association, Inc.
 - 9 ControlNetTM is a trade name of ControlNet International, Ltd. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name ControlNetTM. Use of the trade name ControlNetTM requires permission of ControlNet International, Ltd.
 - 10 EtherNet/IPTM is a trade name of ControlNet International, Ltd. and Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name EtherNet/IPTM. Use of the trade name EtherNet/IPTM requires permission of either ControlNet International, Ltd. or Open DeviceNet Vendor Association, Inc.
 - 11 PROFIBUS is a trade name of PROFIBUS International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIBUS. Use of the trade name PROFIBUS requires permission of PROFIBUS International.
 - 12 PROFINET is a trade name of PROFIBUS International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFINET. Use of the trade name PROFINET requires permission of PROFIBUS International.

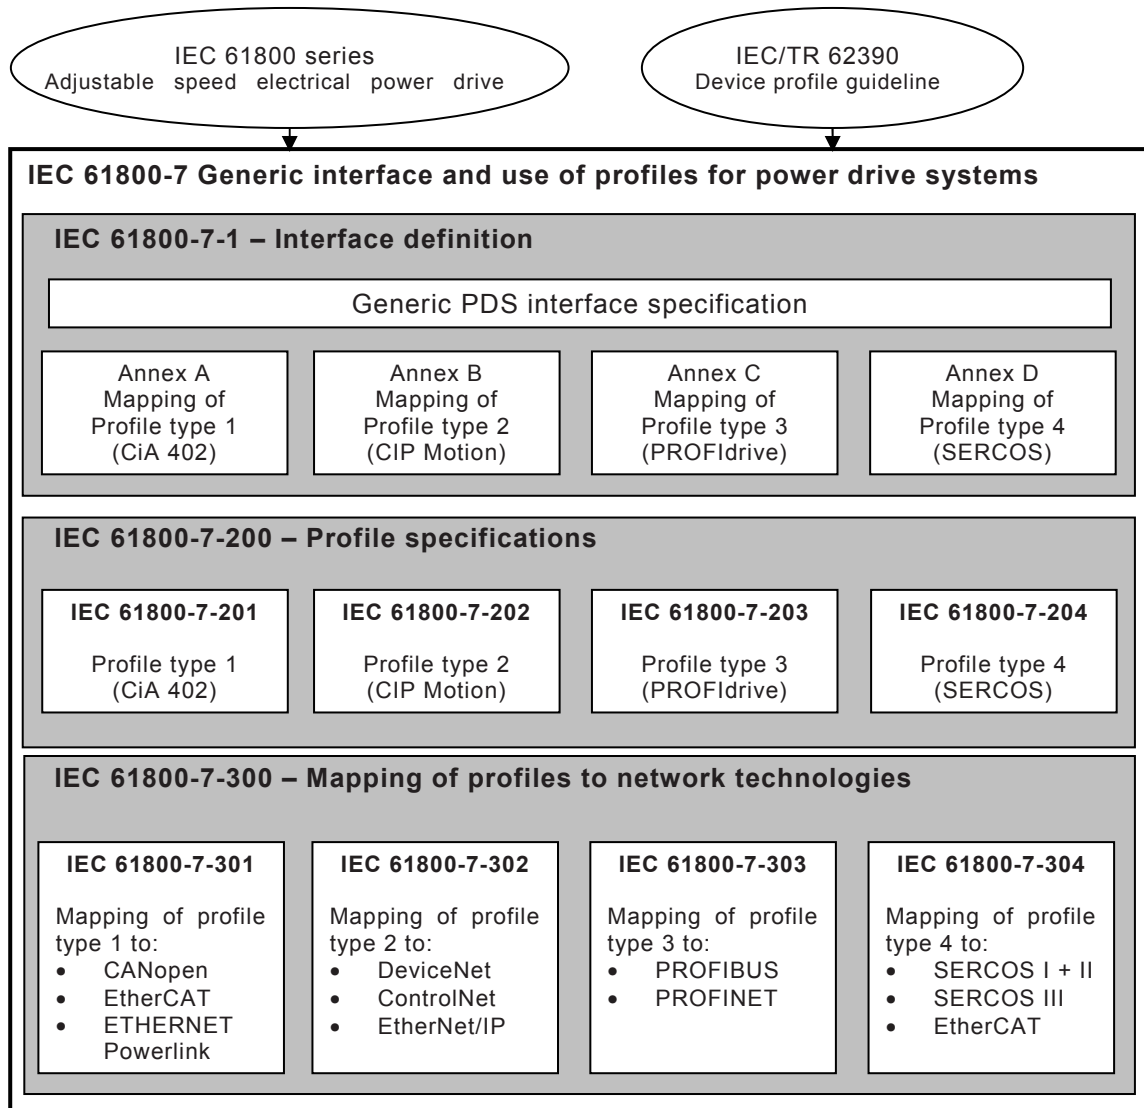

IEC 2106/07

Figure 1 – Structure of IEC 61800-7

ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –

Part 7-1: Generic interface and use of profiles for power drive systems – Interface definition

1 Scope

IEC 61800-7 specifies profiles for power drive systems (PDS) and their mapping to existing communication systems by use of a generic interface model.

The functions specified in this part of IEC 61800-7 are not intended to ensure functional safety. This requires additional measures according to the relevant standards, agreements and laws.

This part of IEC 61800-7 specifies a generic interface between power drive system(s) (PDS) and the application control program in a controller. The generic PDS interface is not specific to any particular communication network technology. Annexes of this part of IEC 61800-7 specify the mapping of the different drive profiles types onto the generic PDS interface.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61158-5-2, *Industrial communication networks – Fieldbus specifications – Part 5-2: Application layer service definition – Type 2 elements*

IEC 61158-5-3, *Industrial communication networks – Fieldbus specifications – Part 5-3: Application layer service definition – Type 3 elements*

IEC 61158-5-10, *Industrial communication networks – Fieldbus specifications – Part 5-10: Application layer service definition – Type 10 elements*

IEC 61158-6-2, *Industrial communication networks – Fieldbus specifications – Part 6-2: Application layer protocol specification – Type 2 elements*

IEC 61158-6-3, *Industrial communication networks – Fieldbus specifications – Part 6-3: Application layer protocol specification – Type 3 elements*

IEC 61158-6-10, *Industrial communication networks – Fieldbus specifications – Part 6-10: Application layer protocol specification – Type 10 elements*

IEC 61800-7 (all parts), *Adjustable speed electrical power drive systems – Generic interface and use of profiles for power drive systems*

IEC 61800-7-1, *Adjustable speed electrical power drive systems – Part 7-1: Generic interface and use of profiles for power drive systems – Interface definition*

IEC 61800-7-201, *Adjustable speed electrical power drive systems – Part 7-201: Generic interface and use of profiles for power drive systems – Profile type 1 specification*

IEC 61800-7-202, *Adjustable speed electrical power drive systems – Part 7-202: Generic interface and use of profiles for power drive systems – Profile type 2 specification*

IEC 61800-7-203, *Adjustable speed electrical power drive systems – Part 7-203: Generic interface and use of profiles for power drive systems – Profile type 3 specification*

IEC 61800-7-204, *Adjustable speed electrical power drive systems – Part 7-204: Generic interface and use of profiles for power drive systems – Profile type 4 specification*

IEC 61800-7-301, *Adjustable speed electrical power drive systems – Part 7-301: Generic interface and use of profiles for power drive systems – Mapping of profile type 1 to network technologies*

IEC 61800-7-302, *Adjustable speed electrical power drive systems – Part 7-302: Generic interface and use of profiles for power drive systems – Mapping of profile type 2 to network technologies*

IEC 61800-7-303, *Adjustable speed electrical power drive systems – Part 7-303: Generic interface and use of profiles for power drive systems – Mapping of profile type 3 to network technologies*

IEC 61800-7-304, *Adjustable speed electrical power drive systems – Part 7-304: Generic interface and use of profiles for power drive systems – Mapping of profile type 4 to network technologies*

IEC/TR 62390:2005, *Common automation device – Profile guideline*

EN 50325-4, *Industrial communications subsystem based on ISO 11898 (CAN) for controller-device interfaces – Part 4: CANopen*

3 Terms, definitions and abbreviated terms

3.1 Preamble

A Power Drive System (PDS) consists of a motor and the Complete Drive Module (CDM). The complete drive module may include converter, control and self-protection functions and also some auxiliaries (for example ventilation). The PDS does not include the equipment driven by the motor.

NOTE This definition is adapted from IEC 61800-1, IEC 61800-2, IEC 61800-3 and IEC 61800-4.

A logical power drive system consists of the PDS and an interface (e.g. communication network, fieldbus or software interface) and is accessed by an application control program over the generic PDS interface as described in Figure 3 to Figure 5.

3.2 General definitions

For the purposes of this document, the following terms and definitions apply.

3.2.1

algorithm

completely determined finite sequence of operations by which the values of the output data can be calculated from the values of the input data

[IEV 351-21-37, modified]

3.2.2

application

software functional element specific to the solution of a problem in industrial-process measurement and control

NOTE An application may be distributed among resources, and may communicate with other applications.

[IEC/TR 62390:2005, 3.1.2, modified]

3.2.3

attribute

property or characteristic of an entity

[IEC/TR 62390:2005, 3.1.3]

3.2.4

axis

logical element inside an automation system (e.g. a motion control system) that represents some form of movement

NOTE Axes can be rotary or linear, physical or virtual, controlled or simply observed.

3.2.5

class

description of a set of objects that share the same attributes, operations, methods, relationships, and semantics

[ISO/IEC 19501, modified]

3.2.6

control

purposeful action on or in a process to meet specified objectives

[IEV 351-21-29]

3.2.7

control device

physical unit that contains – in a module/subassembly or device – an application program to control the PDS

3.2.8

data type

set of values together with a set of permitted operations

[ISO/IEC 2382-15, 15.04.01, modified]

3.2.9**device**

field device

networked independent physical entity of an industrial automation system capable of performing specified functions in a particular context and delimited by its interfaces

[IEC 61499-1, 3.30, modified]

entity that performs control, actuating and/or sensing functions and interfaces to other such entities within an automation system

[ISO 15745-1, 3.11]

3.2.10**device profile**

representation of a device in terms of its parameters and behaviour according to a device model that describes the device's data and behaviour as viewed through a network, independent from any network technology

NOTE This is a definition from IEC/TS 61915 which is extended by the addition of the device functional structure.

[IEC/TR 62390:2005, 3.1.9, modified]

3.2.11**feedback variable**

variable which represents a controlled variable and which is returned to a comparing element

[IEV 351-27-03]

3.2.12**functional element**

entity of software or software combined with hardware, capable of accomplishing a specified function of a device

NOTE 1 A functional element has an interface, associations to other functional elements and functions.

NOTE 2 A functional element can be made out of function block(s), object(s) or parameter list(s).

[IEC/TR 62390:2005, 3.1.12]

3.2.13**input data**

data transferred from an external source into a device, resource or functional element

[IEC/TR 62390:2005, 3.1.14]

3.2.14**interface**

shared boundary between two entities defined by functional characteristics, signal characteristics, or other characteristics as appropriate

[IEV 351-21-35, modified]

3.2.15**logical power drive system**

model which includes PDS and communication network accessible through the generic PDS interface

**3.2.16
model**

mathematical or physical representation of a system or a process, based with sufficient precision upon known laws, identification or specified suppositions

[IEV 351-21-36]

**3.2.17
operating mode**

characterization of the way and the extent to which the human operator intervenes in the control equipment

[IEV 351-31-01]

**3.2.18
output data**

data originating in a device, resource or functional element and transferred from them to external systems

[IEC/TR 62390:2005, 3.1.21]

**3.2.19
parameter**

data element that represents device information that can be read from or written to a device, for example through the network or a local HMI

NOTE 1 Adapted from IEC/TS 61915.

NOTE 2 A parameter is typically characterized by parameter name, data type, physical unit and access direction.

[IEC/TR 62390:2005, 3.1.22]

**3.2.21
profile**

representation of a PDS interface in terms of its parameters, parameter assemblies and behaviour according to a communication profile and a device profile

NOTE Used in this part of IEC 61800 as a synonym for the specifications referenced in the annexes.

**3.2.22
reference variable**

input variable to a comparing element in a controlling system which sets the desired value of the controlled variable and is deducted from the command variable

[IEV 351-27-02]

**3.2.23
type**

hardware or software element which specifies the common attributes shared by all instances of the type

[IEC/TR 62390:2005, 3.1.25]

**3.2.24
use case**

class specification of a sequence of actions, including variants, that a system (or other entity) can perform, interacting with actors of the system

[IEC/TR 62390:2005, 3.1.26]

3.2.25**variable**

software entity that may take different values, one at a time

[IEC/TR 62390:2005, 3.1.27]

NOTE The values of a variable as well as of a parameter are usually restricted to a certain data type.

3.3 Specific definitions**3.3.1 Common definitions**

For the purposes of this document, the following terms and definitions apply and should be mapped by the different profiles to their specific terms.

3.3.1.1**actual value**

value of a variable at a given instant

[IEV 351-21-02]

NOTE Actual value are used in this document as input data of the application control program to monitor variables of the PDS (e.g. feedback variables).

3.3.1.2**application mode**

type of application that can be requested from a PDS

NOTE The different application modes reflect the control loop for torque control, velocity control, position control or other applications such as homing.

3.3.1.3**commands**

set of commands from the application control program to the PDS to control the behaviour of the PDS or functional elements of the PDS

NOTE 1 The behaviour is reflected by states or operating modes.

NOTE 2 The different commands may be represented by one bit each.

3.3.1.4**I/O data**

input data and output data that would typically need to be updated on a regular basis (e.g. periodic change of state), such as commands, set-points, status and actual values

3.3.1.5**set-point**

value or variable used as output data of the application control program to control the PDS

3.3.1.6**status**

set of information from the PDS to the application control program reflecting the state or mode of the PDS or a functional element of the PDS

NOTE The different status information may be coded with one bit each.

3.3.2 Definitions for Annex A

For the purposes of Annex A, the following terms and definitions apply.

3.3.2.1

CANopen

application layer protocol as defined in EN 50325-4

3.3.2.2

object dictionary

list of objects with unique 16-bit index and 8-bit sub-index as defined in EN 50325-4

3.3.2.3

process data object

communication object with real-time capability

3.3.3 Definitions for Annex B

For the purposes of Annex B, the terms and definitions given in IEC 61158 and referenced in IEC 61784-1 CPF 2 and the following apply.

3.3.3.1

CIP Motion™¹³

extensions to the CIP services and protocol to support motion control over CIP networks

3.3.3.2

CIP Motion drive

any CIP compliant drive device containing one or more Motion Axis Object instances that can communicate to a CIP controller via a CIP Motion I/O connection

3.3.3.3

CIP Motion I/O connection

periodic bi-directional, class 1, CIP connection between a controller and a drive defined as part of the CIP Motion specification, and that is dynamic both in size and content and consists of three prioritised data channels for transfer of cyclic, event, and service data

3.3.3.4

CIP Sync™¹³

extensions to the CIP services and protocol to encapsulate IEC 61588:2004 time synchronization functionality over a CIP Network (see Time Sync Object in IEC 61158-5-2 and IEC 61158-6-2)

3.3.3.5

CIP controller

any CIP compliant controller containing a Motion Control Axis object that can interface to a CIP Motion drive via a CIP Motion I/O connection.

NOTE A description of the Motion Control Axis object is beyond the scope of IEC 61800-7.

3.3.3.6

cyclic data

high priority real-time data that is transferred by a CIP Motion connection on a periodic basis

NOTE This data would be considered I/O Data as defined in IEC 61800-7.

¹³ CIP Motion™ and CIP Sync™ are trade names of Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade names CIP Motion™ or CIP Sync™. Use of the trade names CIP Motion™ or CIP Sync™ requires permission of Open DeviceNet Vendor Association, Inc.

3.3.3.7**event data**

medium priority real-time data that is transferred by a CIP Motion connection only after a specified event occurs

NOTE Registration and marker input transitions are typical drive events.

3.3.3.8**motion**

any aspect of the dynamics of an axis

NOTE In the context of this part of IEC 61800, it is not limited to servo drives but encompasses all forms of drive based motor control.

3.3.3.9**Motion Axis Object**

object that defines the attributes, services, and behaviour of a motion device based axis (or PDS) according to the CIP Motion specification, including Communications, Device Control, and Basic Drive FE elements as defined in IEC 61800-7

3.3.3.10**service data**

lower priority real-time data associated with a service message from the controller that is transferred by a CIP Motion connection on a periodic basis

NOTE Service data includes service request messages to access Motion Axis Object attributes or perform various drive diagnostics.

3.3.3.11**synchronised**

condition where the local clock value on the drive is locked onto the master clock of the distributed System Time

NOTE When synchronised, the drive and controller devices may utilise time stamps associated with CIP Motion connection data.

3.3.3.12**System Time**

absolute time value as defined in the CIP Sync specification in the context of a distributed time system where all devices have a local clock that is synchronised with a common master clock

NOTE In the context of CIP Motion, System Time is a 64-bit integer value in units of nanoseconds with a value of 0 corresponding to the date 1970-01-01.

3.3.3.13**time stamp**

System Time stamp value associated with the CIP Motion connection data that conveys the absolute time when the associated data was captured, or that can also be used to determine when the associated data shall be applied

NOTE CIP time stamps are always in the context of a distributed time system where all nodes on the CIP control network have clocks that are synchronized with a master clock source using CIP Sync.

3.3.4 Definitions for Annex C

For the purposes of Annex C, the following terms and definitions apply.

3.3.4.1**application class**

configuration of a Drive Object with a set of functional objects and supported by standard telegrams.

3.3.4.2

controller

controlling device which is associated with one or more drives (axes) a host for the overall automation

3.3.4.3

Drive Object

functional element of a Drive Unit

3.3.4.4

Drive Unit

logical device which comprises all functional elements related to one central processing unit

3.3.4.5

host

device that covers the automation functionality of an automation device

3.3.4.6

P-Device

field device and the host for the Drive Objects

3.3.4.7

standard telegram

set of input data and output data for an application mode

3.3.4.8

supervisor

engineering device which manages provisions of configuration data (parameter sets) and collections of diagnosis data from P-Devices and/or controllers

3.3.5 Definitions for Annex D

For the purposes of Annex D, the following terms and definitions apply.

3.3.5.1

acknowledge telegram

AT

telegram, in which each slave inserts its data

3.3.5.2

communication cycle

accumulation of all telegrams between two master synchronization telegrams

3.3.5.3

control unit

control device

3.3.5.4

control word

two adjacent bytes inside the master data telegram containing commands for the addressed drive

3.3.5.5

cycle time

time span between two consecutive cyclically recurring events

3.3.5.6**cyclic data**

part of the telegram which does not change its meaning during cyclic operation of the interface

3.3.5.7**data exchange**

demand dependent; non cyclic transmission (service channel)

3.3.5.8**feed forward**

command value used to compensate the lag in the control loop

3.3.5.9**identification number****IDN**

designation of operating data under which a data block is preserved with its attribute, name, unit, minimum and maximum input values, and the data

3.3.5.10**master**

node, which assigns the other nodes the right to transmit

3.3.5.11**master data telegram****MDT**

telegram, in which the master inserts its data

3.3.5.12**operating cycle**

period of the control loop within the drive or the control unit

3.3.5.13**protocol**

convention about the data formats, time sequences, and error correction in the data exchange of communication systems

3.3.5.14**slave**

node, which is assigned the right to transmit by the master

3.3.5.15**status word**

two adjacent bytes inside the drive telegram containing status information

3.3.5.16**telegram**

message

3.3.5.17**topology**

physical network architecture with respect to the connection between the stations of the communication system

3.4 Abbreviated terms

3.4.1 Common abbreviations

CDM	Complete Drive Module
DCS	Distributed Control System
ERP	Enterprise Resource Planning
FE	Functional Element
HMI	Human Machine Interface
I/O	Input/Output
ID	Identifier
MES	Manufacturing Execution System
NC	Numerical control system with a numeric control command set
PDS	Power Drive System
PLC	Programmable logic controller without a motion control command set
SCADA	Supervisory Control And Data Acquisition
UML	Unified Modeling Languages
URL	Universal Resource Locator

3.4.2 Abbreviations for Annex A

CiA	CAN in Automation
FSA	Finite State Automaton
NMT	Network Management
PDO	Process Data Object

3.4.3 Abbreviations for Annex B

Attr ID	Attribute Identifier
CIP™	Common Industrial Protocol (see IEC 61158 Type 2, IEC 61784-1 and IEC 61784-2 CPF2)

3.4.4 Abbreviations for Annex C

AC x	Application Class x, where x is the number of the AC
DO	Drive Object
DU	Drive Unit
I&M	Identification and maintenance functions
P-Device	Peripheral Device
PROFIdrive	PROcess FieLdbus for drives
STW	Control word
ZSW	Status word

3.4.5 Abbreviations for Annex D

AT	Acknowledge Telegram
C1D	Class 1 Diagnostic
C2D	Class 2 Diagnostic
C3D	Class 3 Diagnostic

CP	Communication Phase (CP0 ... to CP6 – communication phases 0 ... 6)
IDN	Identification Number
MDT	Master Data Telegram
SERCOS	SERial Real time COmmunication System
SVC	Service Channel


3.5 Conventions

Hexadecimal numbers shall be represented by 0xnn, nn_{hex} or nn_h.

4 General architecture

4.1 Generic PDS interface

This part of IEC 61800-7 specifies a generic interface between power drive systems (PDS) and the application control program in a controller. The generic PDS interface is not specific to any particular communication network technologies. The generic PDS interface supports only single axis control. Any functions for coordination of multiple axis are outside the scope of this part of IEC 61800-7. This might be a part of the logical controller.

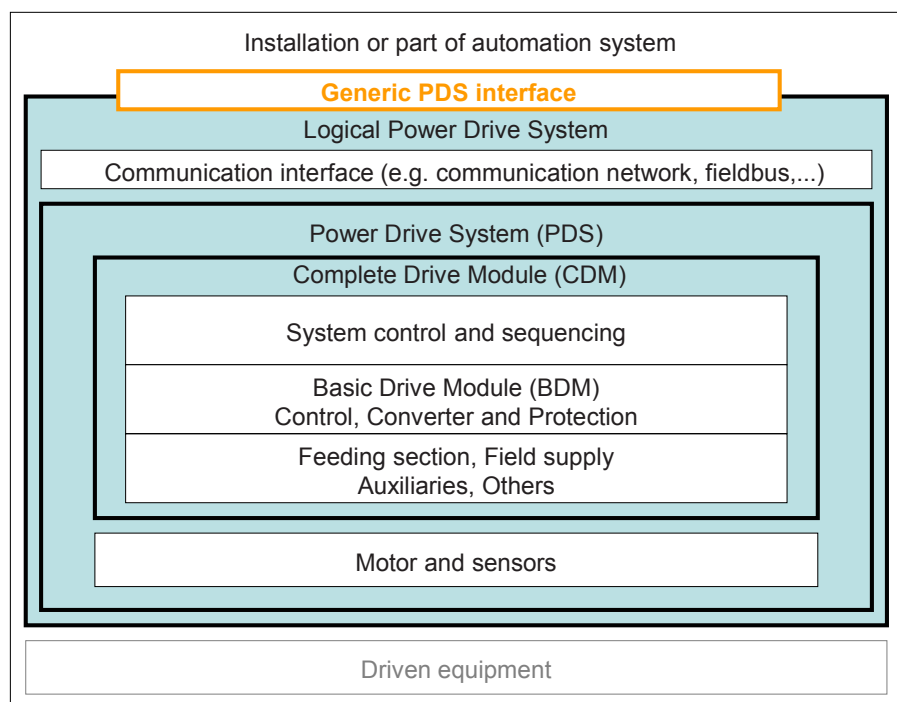

IEC 2107/07

NOTE In this part of IEC 61800-7, the drive device corresponds to the Complete Drive Module (CDM).


Figure 2 – Definition of power drive system

The PDS includes the drive device (or complete drive module) and the motor and sensors as shown in Figure 2.

The logical PDS is controlled by one or more logical controllers. The functions of the logical controller are performed by the application control program. The functionality of the logical PDS may be differentiated by position-control, velocity-control and torque-control applications. Figure 3 shows a subset of possible structures for position-control, Figure 4 shows a subset of possible structures for velocity-control and Figure 5 shows a subset of possible structures for torque-control applications.

NOTE 1 Possible velocity control types are listed in IEC 61800-4 Annex B, and not covered by this part of IEC 61800-7.

NOTE 2 “Velocity” is used throughout this part of IEC 61800 to mean speed (e.g. movement of a motor) as well as velocity (e.g. movement of mechanical equipment). However “speed” is retained in the title to be consistent with common usage.

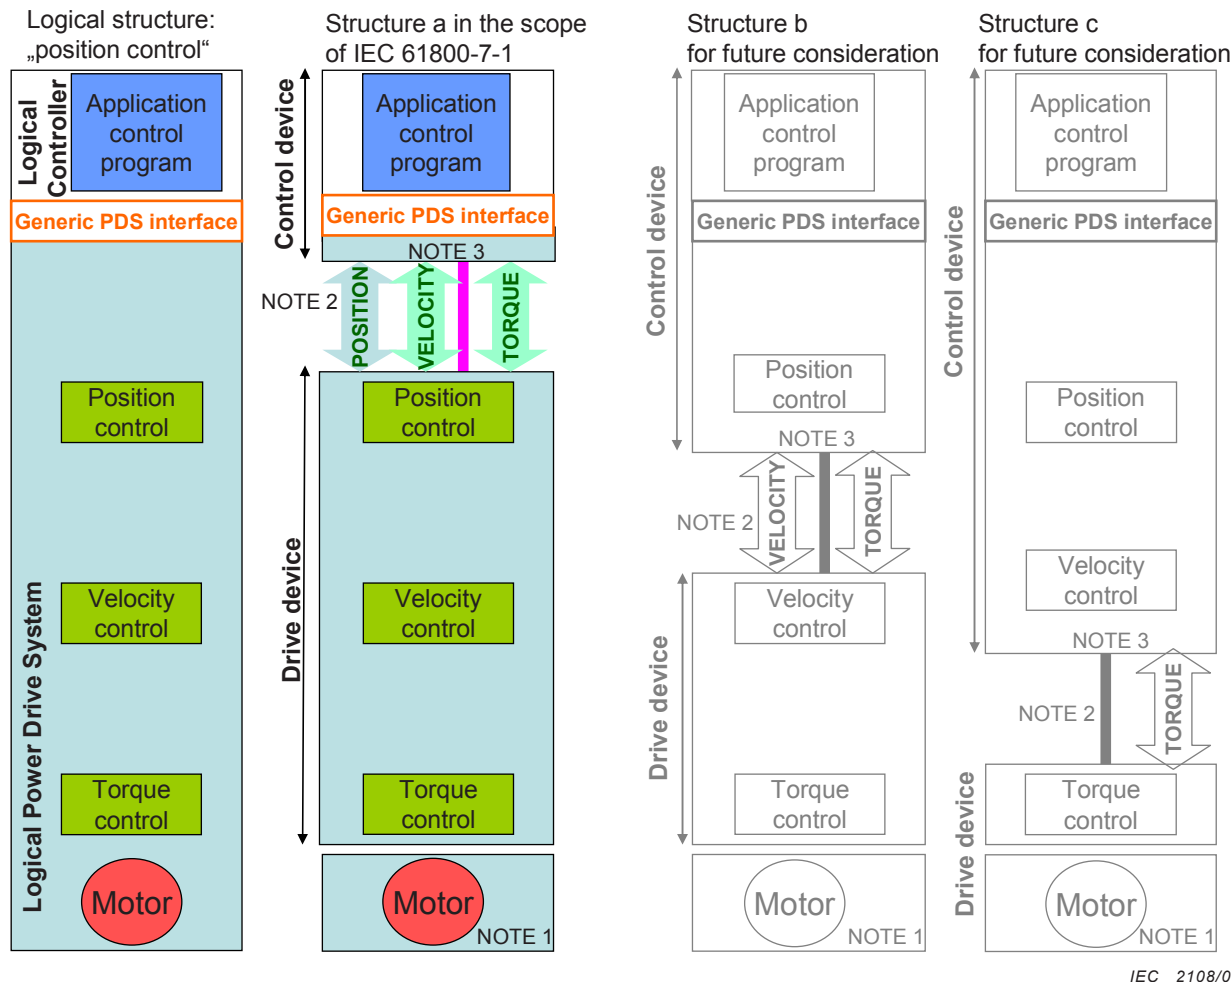

IEC 2108/07

NOTE 1 In general, the PDS model includes the motor.

NOTE 2 Between the control device and the drive device is a network or fieldbus to transmit the data values such as position, velocity and torque.

NOTE 3 Mapping or adaptation as needed for specific network or fieldbus technology.

Figure 3 – Example of system structures for position-control applications

Structure a in Figure 3 shows a position-control application where all three control loops are implemented inside the drive device. In structure b, the velocity- and torque-control loops are inside the drive device and the position-control loop is in the control device. In structure c, only the torque-control is inside the drive device and the other control loops of the complete logical PDS are implemented inside the control device. In all three examples, the generic PDS interface is identical.


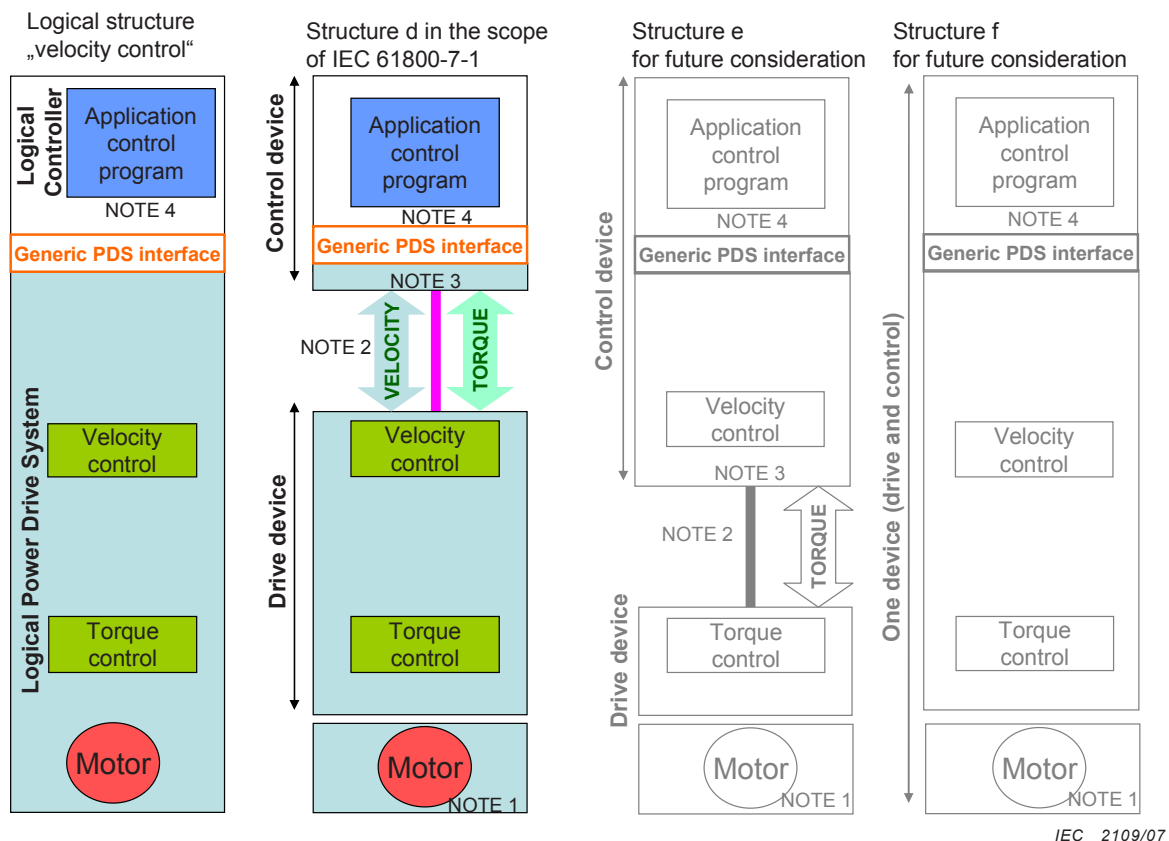


Figure 4 – Examples of system structures for velocity-control applications

Structure d in Figure 4 shows a velocity-control application where all the control loops are implemented in the drive device. In structure e, the velocity-control loop is implemented in the control device and the torque-control in the drive device. Structure f shows an implementation where all the functionality is implemented in one single device. In fact, in structure f, the network or fieldbus is missing. In all three structures of Figure 4, the generic PDS interface is identical.

It is possible that the generic PDS interface be used in velocity-control and the application control program includes also position-control functionality.

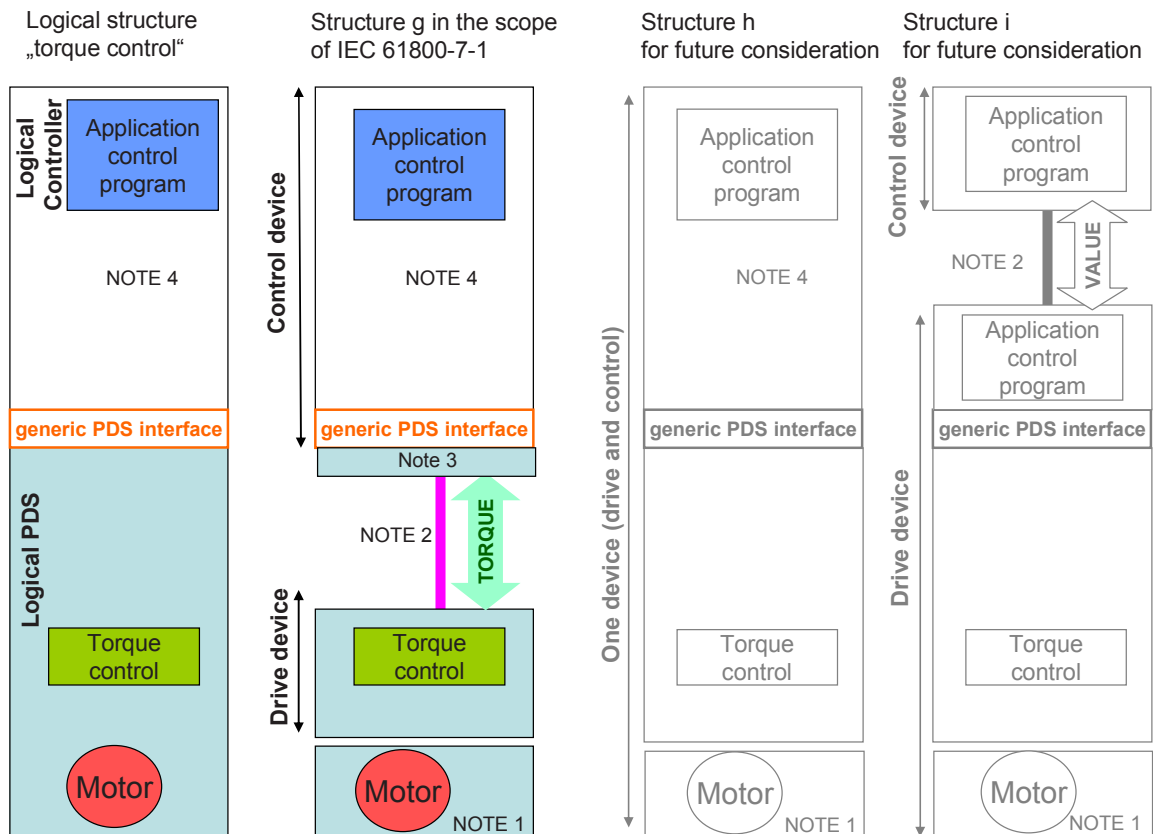

IEC 2110/07

NOTE 1 In general, the PDS model includes the motor.

NOTE 2 Between the control device and the drive device is a network or fieldbus to transmit the data values for torque.

NOTE 3 Mapping or adaptation as needed for specific network or fieldbus technology.

NOTE 4 The application control program may include also position control and velocity control functionality.

Figure 5 – Examples of system structures for torque-control applications

In Figure 5, possible implementations of torque-control applications are listed. The torque-control may be in the control device as in structure g. In structure h, all the functionality is in one device and the network or fieldbus is missing. It is always possible that the generic PDS interface be used for torque-control and the application program includes velocity-control and position-control functionality. In structure i, this generic interface is inside the “smart” drive device.


The specification of functionalities for the control device is beyond the scope of this part of IEC 61800-7. Table 1 lists the structures within the scope of this part of IEC 61800-7.

Table 1 – Structures within the scope of this part of IEC 61800-7

Structure	Application	In the Scope of the document
a	Position control	Yes
b	Position control	No, for future consideration
c	Position control	No, for future consideration
d	Velocity control	Yes
e	Velocity control	No, for future consideration
f	Velocity control	No, for future consideration
g	Torque control	Yes
h	Torque control	No, for future consideration
i	Torque control	No, for future consideration

4.2 Typical structure of automation systems

The modelling of a device is done according to IEC device profile guideline (see IEC/TR 62390). An automation system including PDS typically has the structure defined in Figure 6.

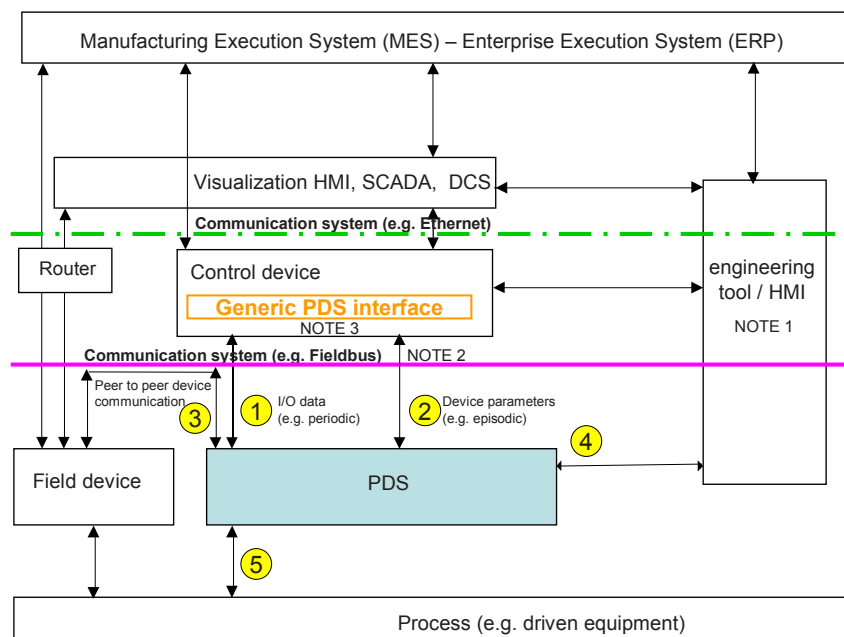

IEC 2111/07

NOTE 1 The engineering tool may be one tool connected to one of the different communication networks or three different tools depending on the type of communication network connected to.

NOTE 2 Communication systems may be redundant as required; this has no influence to the generic PDS interface.

NOTE 3 Mapping or adaptation as needed for specific network or fieldbus technology.

Figure 6 – Typical structure of automation systems (adapted from IEC/TR 62390)

The PDS has different logical interfaces to the outside world numbered 1) to 5) in Figure 6.

1) I/O data (generic PDS interface)

This interface is part of the generic PDS interface. It provides the control and monitoring interface between the control device and the PDS (see 3.3.1.4).

2) Device parameters (generic PDS interface)

This interface provides parameter access to the control device and remote engineering tools for identification, configuration, adjustment, monitoring or data logging. The device parameters are available for transfer via the communication system through the generic PDS interface.

3) Peer to peer device communication

The use of peer to peer communication service among other devices is a function of specific fieldbus technology and is not covered by the generic PDS interface.

4) Device parameters (local or other interface)

The local access and interface of an engineering tool or HMI to the PDS is not covered in this part of IEC 61800-7.

NOTE HMI or engineering tools may use the generic PDS interface or the fieldbus communication services which support the PDS interface. If any HMI sharing of the fieldbus results in changes to performance of PDS data, this should be notified to the application.

5) Interface to the process

The interface to the process – the driven equipment – is not covered by this part of IEC 61800-7.

4.3 Structure of the logical PDS

A logical PDS is composed of different Functional Elements (FE) according to Figure 7.

Each FE has parameters and algorithms or functions to describe the behavior.

The parameters are used to define

- a unique name and identifier,
- state of operation,
- one or several inputs and output variables, and
- the behavior on algorithms and/or functions

of the FE.

The relation of the different states is described in a state-chart diagram.

Parameters may be structured in additional parameter lists depending on the operating mode of the FE or the application mode of the PDS.

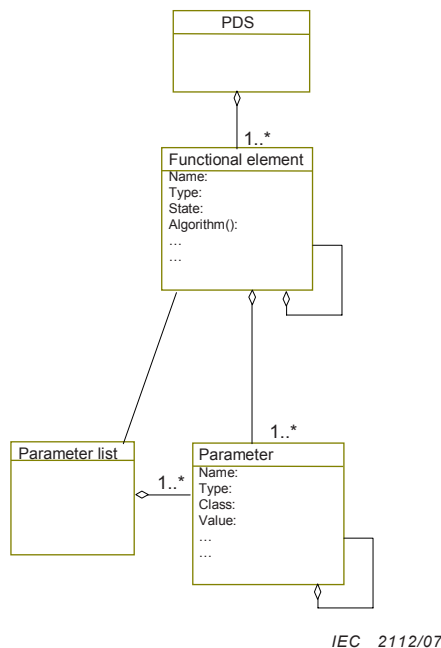


Figure 7 – Structure of the PDS with functional elements

For a logical PDS, the following FE are recognized (see Figure 8):

Device identification FE

The device identification FE contains the parameters needed to identify the physical device(s). Possible devices are drive device and control device according to Clause 1.

The device identification FE is defined in 5.1.

Device control FE

The device control FE includes the state machine for the control of the drive device.

The device control FE is defined in 5.2.

Communication FE

The communication FE of the logical PDS is composed of the communication specific parameters of the network between the control device and the drive device. It includes the communication state machine of the connected devices.

NOTE 1 Most of these parameters and states of the communication FE are network or fieldbus specific.

NOTE 2 One profile can use different communication FE's.

The generic communication FE is defined in 5.3.

Basic drive FE

The different control loop functions like position-control, velocity-control and torque-control are the basic drive functions.


The basic drive FE's are defined in 5.4.

Optional application FE

The possibility exists for the logical PDS to include additional – optional – application functions. A typical optional application FE is the management of additional inputs or outputs for example the connections to a separated encoder device, brake control, limit switch etc. These functions are not further specified in this part of IEC 61800-7.

Other interface FE

The possibility exists for the logical PDS to have local interfaces or to support other protocols over the network to HMI or tools. These functions are not further specified in this part of IEC 61800-7.

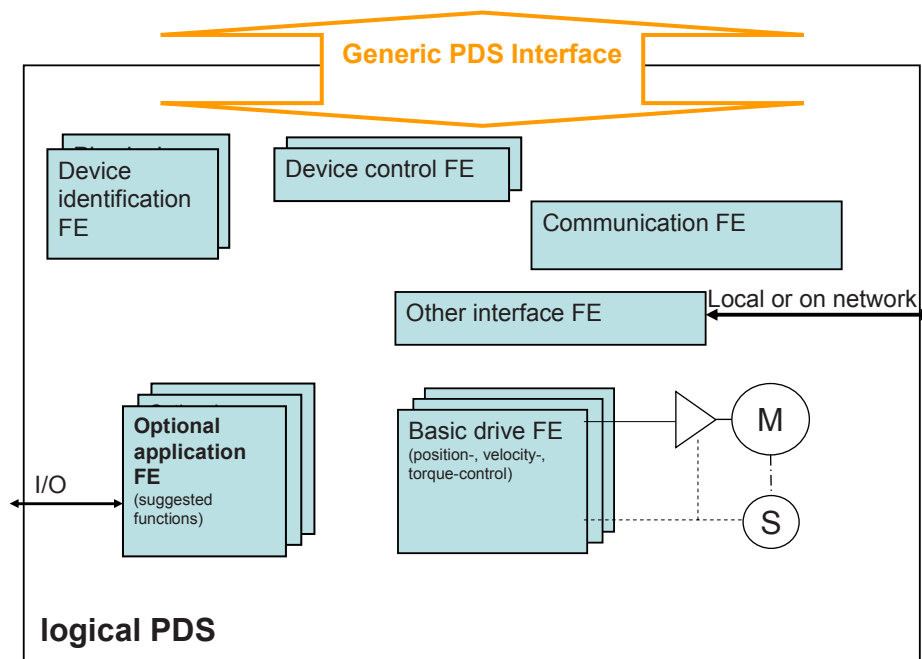

IEC 2113/07

Figure 8 – Functional Elements (FE) in the logical PDS

The detailed characteristics of the parameters in the different FE's in the PDS should be described according to IEC/TR 62390:2005, Annex B.

Data flow and timing


Commands and set-points are outputs from an application program and inputs to a logical PDS. Status information and actual values are outputs from a logical PDS and inputs to an application program.

One of the characteristics of a parameter or a parameters list is the access timing (see IEC/TR 62390:2005, Annex B). This access timing depends on the need of the application program and the capabilities of the technology solutions.

4.4 Use cases of the PDS

4.4.1 General

The generic PDS interface is used by two different actors: the access by an application control program and the access by an engineering tool. The application control program uses the PDS for control-operation and the engineering tool uses the PDS for engineering. Local or other access methods to the PDS are beyond the scope of this part of IEC 61800-7. This relation is shown in Figure 9.

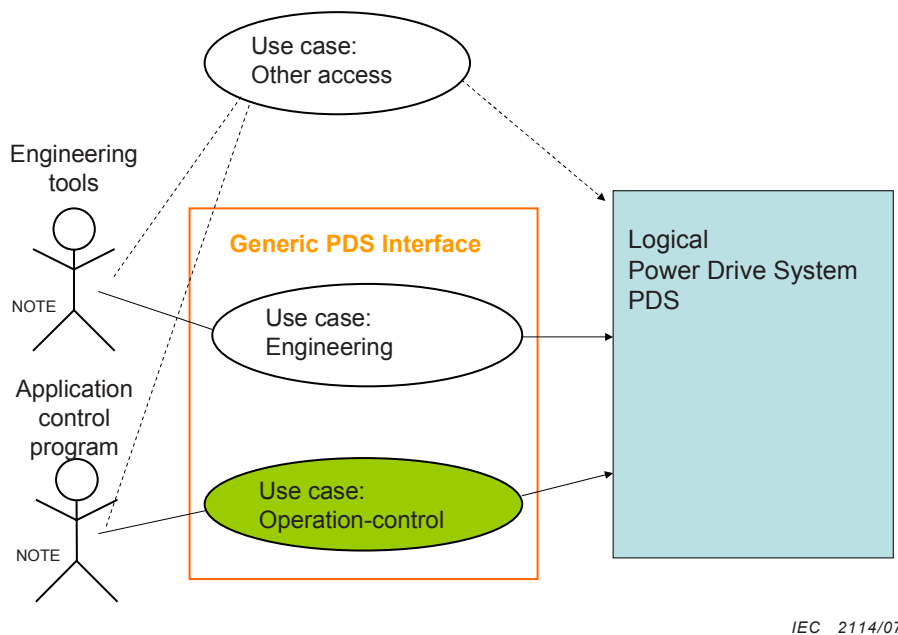

NOTE This UML symbol represents an “actor”. It can be an operator or a device.

Figure 9 – Use case for the generic PDS interface

4.4.2 Use case engineering

The use case engineering occurs in different phases of the life cycle of the system.

- Commissioning
- Maintenance

In this use case, different types of operation are needed.

- Identification
- Configuration
- Adjustment
- Command
- Give set-point(s)
- Monitoring
- Read data logging

4.4.3 Use case operation-control

In the use case operation-control, the generic PDS interface for I/O data is used as follows.

- The application control program issues the commands (see 3.3.1.3) to the PDS.
- The application control program sets the set-point(s) (see 3.3.1.5) to the PDS.
- The PDS signals its status (see 3.3.1.6) to the application control program.
- The PDS may signal actual values (see 3.3.1.1) to the application control program.

The commands, the set-points, the status and the actual values form the I/O data of the PDS.