

BS EN 62379-5-2:2014



BSI Standards Publication

Common control interface for networked digital audio and video products

Part 5-2: Transmission over networks —
Signalling (TA4)

bsi.

...making excellence a habit.
AVA Documents™
Document Sharing Hub

National foreword

This British Standard is the UK implementation of EN 62379-5-2:2014. It is identical to IEC 62379-5-2:2014.

The UK participation in its preparation was entrusted to Technical Committee EPL/100, Audio, video and multimedia systems and equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014.
Published by BSI Standards Limited 2014

ISBN 978 0 580 79812 2
ICS 33.160.01; 35.100.01

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 May 2014.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 62379-5-2

May 2014

ICS 33.160; 35.100

English Version

Common control interface for networked digital audio and video
products - Part 5-2: Transmission over networks - Signalling
(TA4)
(IEC 62379-5-2:2014)

Interface de contrôle commune pour produits audio et vidéo
numériques en réseau - Partie 5-2: Transmission sur les
réseaux - Signalisation (TA4)
(CEI 62379-5-2:2014)

Gemeinsame Steuerschnittstelle für netzwerkbetriebene
digitale Audio- und Videogeräte - Teil 5-2: Übertragung über
Netzwerke - Signalisierung
(IEC 62379-5-2:2014)

This European Standard was approved by CENELEC on 2014-04-11. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

© 2014 CENELEC All rights of exploitation in any form and by any means reserved worldwide for CENELEC Members.

Foreword

The text of document 100/2050/CDV, future edition 1 of IEC 62379-5-2, prepared by IEC/TC 100, "Audio, video and multimedia systems and equipment" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 62379-5-2:2014.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2015-01-11
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2017-04-11

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 62379-5-2:2014 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60958-4	NOTE	Harmonised as EN 60958-4.
IEC 61883 (Series)	NOTE	Harmonised as EN 61883 (Series).
IEC 61937 (Series)	NOTE	Harmonised as EN 61937 (Series).

Annex ZA

(normative)

**Normative references to international publications
with their corresponding European publications**

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here:

www.cenelec.eu

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60958	-	Digital audio interface	EN 60958	-
IEC 62365	2009	Digital audio - Digital input-output interfacing	EN 62365	2009
		- Transmission of digital audio over asynchronous transfer mode (ATM) networks		
IEC 62379	series	Common control interface for networked digital audio and video products	EN 62379	series
IEC 62379-2	2008	Common control interface for networked digital audio and video products -- Part 2: Audio	EN 62379-2	2009
IEC 62379-5-1	-	Common control interface for networked digital audio and video products -- Part 5-1: Transmission over networks - General	FprEN 62379-5-1	-
AES53	-	AES standard for digital audio - Digital input-output interfacing - Sample-accurate timing in AES47		-
ITU-T recommendation Q.850	-	Usage of cause and location in the Digital Subscriber Signalling System No. 1 and the Signalling System No. 7 ISDN user part	-	-

CONTENTS

INTRODUCTION.....	7
1 Scope.....	8
2 Normative references	8
3 Terms and definitions	8
4 Identification.....	10
4.1 Byte order	10
4.2 Unit identification	10
4.3 Flow identifiers	10
4.4 Address format.....	11
5 Message format.....	12
5.1 General.....	12
5.2 Header	13
5.3 Variable part	14
5.3.1 General	14
5.3.2 Information element format	14
5.3.3 Order of occurrence of information elements	15
5.4 Data formats	16
5.5 Contents of fixed and variable parts	16
5.5.1 FindRoute messages	16
5.5.2 ClearDown messages	16
5.5.3 AddFlow messages	16
5.5.4 NetworkData and EndToEndData messages	16
5.5.5 AsyncSetup messages	17
5.5.6 Extended message types.....	17
5.6 Information element types	17
5.6.1 Coding of “type” field	17
5.6.2 Called address	18
5.6.3 Flow descriptor	18
5.6.4 Data format or protocol	19
5.6.5 Start time.....	19
5.6.6 End time.....	19
5.6.7 Call importance	19
5.6.8 Service (or programme) name	19
5.6.9 Source name	19
5.6.10 Destination name.....	20
5.6.11 Privilege level.....	20
5.6.12 Password	20
5.6.13 Charge for call.....	20
5.6.14 Calling address.....	20
5.6.15 Route metric.....	20
5.6.16 Synchronous service parameters	21
5.6.17 Asynchronous service parameters	21
5.6.18 Link-specific resource allocations	22
5.6.19 End-to-end delay	22

5.6.20	Route identifier of multicast	22
5.6.21	Cause	23
5.6.22	Route and flow selection	23
5.6.23	Alternatives	23
5.6.24	Group	23
5.6.25	Interim offer	24
5.6.26	Path MTU	24
5.6.27	Number of destinations	25
5.6.28	Selector for an individual destination	25
5.6.29	User data	25
5.6.30	Extended IE types	25
6	Protocols	26
6.1	General	26
6.2	Establishing a route	27
6.2.1	Connection of flows	27
6.2.2	Request message	27
6.2.3	Action on receiving a FindRoute request	29
6.2.4	Action on receiving on a FindRoute response	31
6.2.5	Passing on a FindRoute confirmation	33
6.2.6	Action of the responder on receiving a FindRoute confirmation	33
6.2.7	FindRoute completion message	33
6.3	Disconnection of routes and flows	34
6.3.1	General	34
6.3.2	ClearDown request message	34
6.3.3	Action on receiving a ClearDown request message	35
6.4	Adding new flows to an existing route	35
6.5	Information messages related to a route	35
6.5.1	General	35
6.5.2	Notification of the number of destinations	36
6.5.3	Changing service parameters	36
6.5.4	Out-of-band data	36
6.6	Quasi-connectionless service	36
6.6.1	General	36
6.6.2	Request message	36
6.6.3	Action on receiving request	37
7	Media formats	37
7.1	Identification	37
7.2	Packet data	37
7.2.1	General packet data	37
7.2.2	Other packet formats	38
7.3	Pulse-code modulated audio	38
7.3.1	Rationale	38
7.3.2	Sequencing octet	38
7.3.3	Subframe format	39
7.3.4	Frame format	39
7.3.5	Transport	40
7.3.6	Signalling of format	40
8	Cause codes	42
8.1	ITU-T standard cause codes	42

8.2 Other cause codes	42
Annex A (informative) Background	43
Bibliography	52
Figure 1 – Structure of flow identifier	10
Figure 2 – Signalling message format	13
Figure 3 – Signalling message header	13
Figure 4 – Information element header	15
Figure 5 – Information element with a nonempty fixed part and a variable part	15
Figure 6 – Fixed part of FlowDescriptor IE	18
Figure 7 – Fixed part of multicast route identifier IE	22
Figure 8 – Sequencing octet	38
Figure 9 – “Short” bit string value	38
Figure 10 – “Long” bit string value	39
Table 1 – Address type codes	12
Table 2 – Message class	13
Table 3 – Message type	14
Table 4 – Information element types	17

INTRODUCTION

IEC 62379 specifies the Common Control Interface, a protocol for managing networked audiovisual equipment. The following parts exist or are planned:

- 1 General
- 2 Audio
- 3 Video
- 4 Data
- 5 Transmission over networks
- 6 Packet transfer service
- 7 Measurement

IEC 62379-1:2007 specifies aspects which are common to all equipment, and it includes an introduction to the Common Control Interface.

IEC 62379-2:2008, IEC 62379-3 (under consideration) and IEC 62379-4 (under consideration) specify control of internal functions specific to equipment carrying particular types of live media. IEC 62379-4 refers to time-critical data such as commands to automation equipment, but not to packet data such as the control messages themselves.

IEC 62379-5 specifies control of transmission of these media over each individual network technology. It includes network specific management interfaces along with network specific control elements that integrate into the control framework.

IEC 62379-5-1 specifies management of aspects which are common to all network technologies. IEC 62379-5-3 onwards specify management of aspects which are particular to individual networking technologies.

IEC 62379-5-2 (this standard) specifies protocols which can be used between networking equipment to enable the setting up of calls which are routed across different networking technologies.

IEC 62379-6 specifies carriage of control and status messages and non-audiovisual data over transports that do not support audio and video, such as RS232 serial links, with (as for IEC 62379-5) a separate subpart for each technology.

IEC 62379-7 specifies aspects that are specific to the measurement of the service experienced by audio and video streams and in particular to the requirements of EBU ECN-IPM Measurements Group.

COMMON CONTROL INTERFACE FOR NETWORKED DIGITAL AUDIO AND VIDEO PRODUCTS –

Part 5-2: Transmission over networks – Signalling

1 Scope

This part of IEC 62379 specifies protocols which can be used between networking equipment to enable the setting up of calls which are routed across different networking technologies.

It also specifies encapsulation of digital media within those calls.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60958 (all parts), *Digital audio interface*

IEC 62365:2009, *Digital audio – Digital input-output interfacing – Transmission of digital audio over asynchronous transfer mode (ATM) networks*

IEC 62379 (all parts), *Common control interface for networked digital audio and video products*

IEC 62379-1, *Common control interface for networked digital audio and video products – Part 1: General*

IEC 62379-2:2008, *Common control interface for networked digital audio and video products – Part 2: Audio*

IEC 62379-5-1, *Common control interface for networked digital audio and video products – Part 5-1: Transmission over networks – General*¹

ITU-T Recommendation Q.850, *Usage of cause and location in the digital subscriber signalling system No. 1 and the signalling system No.7 ISDN used part*

AES53, *AES standard for digital audio – Digital input-output interfacing – Sample-accurate timing in AES47* (Audio Engineering Society, New York, NY, USA)

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62379-1 and the following apply.

¹ To be published.

3.1**adjacent**

<of two network elements> such that data can be sent from one to the other without passing through any other network element

3.2**asynchronous flow**

flow consisting of data units for which the time of arrival at the destination is less important

3.3**asynchronous service**

best-effort point-to-point service carrying asynchronous flows

3.4**call identifier**

first 12 octets of a flow identifier

Note 1 to entry: See 4.3.

3.5**connectionless data unit**

data unit which is not part of a flow

3.6**data unit**

sequence of one or more octets which is conveyed across the network as a single unit

3.7**end equipment**

equipment that is connected to the network and produces or consumes data units

3.8**extended unique identifier****EUI-64**

64-bit globally unique identifier, the first 24 or 36 bits of which are an organizationally unique identifier (OUI) administered by the Institute of Electrical and Electronics Engineers (IEEE)

Note 1 to entry: The extended unique identifier contains 64 bit.

3.9**flow**

sequence of data units

3.10**information element****IE**

element of a message, in tag-length-value format

3.11**link**

means by which data units are conveyed between adjacent network elements

3.12**network delay**

time from submission of a data unit to the network by the sender to its delivery to the recipient

3.13**network element**

piece of equipment which takes part in the process of conveying data and conforms to this Standard

EXAMPLES: Switches, gateways, and interfaces, but not equipment internal to legacy networks.

3.14**path**

sequence of links

3.15**route**

path from source to destination of a flow

3.16**route identifier**

first 13 octets of a flow identifier (see 4.3), excluding the least significant bit of the 13th octet

3.17**synchronous flow**

flow for which the network delay experienced by data units is required to be within specified limits

Note 1 to entry: The size of the units, and also the rate at which units are transmitted, may be fixed or may be variable with a defined upper limit.

3.18**synchronous service**

one-to-many service carrying synchronous flows

4 Identification**4.1 Byte order**

All multiple-octet quantities shall be coded with the most significant octet first.

4.2 Unit identification

Each switch or end equipment unit shall have assigned to it a globally unique EUI-64.

NOTE The EUI-64 can be derived from the MAC address of one of the unit's interfaces by concatenating the first three octets of the MAC address, hexadecimal FFFE, and the last three octets of the MAC address.

4.3 Flow identifiers

Each flow shall be identified by a 16-octet value formatted as shown in Figure 1.

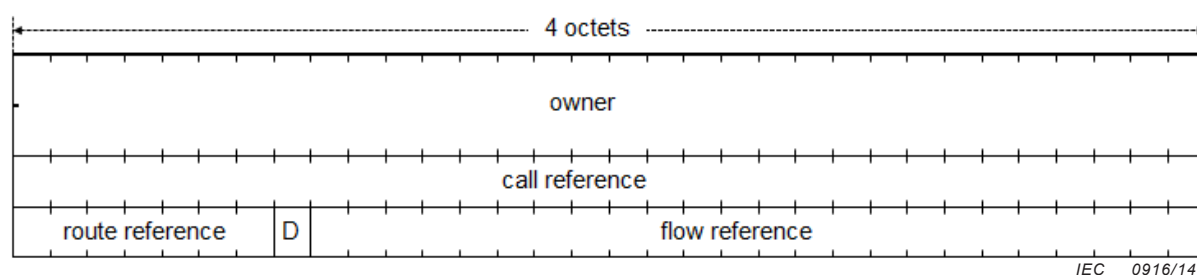


Figure 1 – Structure of flow identifier

The first 8 octets shall contain an EUI-64 identifying the unit which created the flow identifier. This unit is referred to in this standard as the “owner” of the flow identifier.

The next 4 octets shall contain a nonzero reference number, chosen by the owner, identifying the call of which the flow is a part. Call references should be chosen in a way that maximises the time from when a call ceases to exist until its reference is re-used for a new call.

The next octet shall contain, in its most significant seven bits, a nonzero reference number, chosen by the owner and unique within the call, selecting the route followed by the flow; and, in its least significant bit, a “direction” indicator which shall be 0 for a flow in the direction away from the owner and 1 for a flow in the direction towards it.

The remaining 3 octets shall contain a nonzero reference number, chosen by the owner, identifying the flow uniquely within the call. Where a pair of flows in opposite directions carries a two-way protocol such as TCP, the same flow reference value shall be used for each of them.

NOTE 1 The call reference distinguishes between different calls with the same owner. A call may be connected over several different routes (for instance, to give resilience in the event of failure) and the route reference distinguishes between them. The flow reference distinguishes between different flows within a call; for instance, a single call may carry video, programme audio, and talkback, and each of these streams will have its own flow reference.

NOTE 2 The flow reference is orthogonal to the route reference, so flows carrying the same content over different routes have the same flow reference, and flows carrying different content have different flow references even if they do not follow the same route. Different routes may carry different sets of flows, for instance a backup route might only carry the most important flows, or different kinds of flow may have different backup routes.

Zero in the route reference field shall indicate all routes for the call. Except where specified otherwise (e.g. in 5.6.3), zero in the “direction” bit and the flow reference field shall indicate all flows for the route(s), and zero in the flow reference with 1 in the “direction” bit is reserved.

NOTE 3 These identifiers are the same at all points in the system and there is just one set of call reference values for each owner. This contrasts with call references in ITU-T Recommendation Q.2931 where a call has a different reference on every link, and a switch can use the same call reference for different calls as long as they are on different links. See also Clause A.4.

In the case of a unicast call, the owner shall be the caller. In the case of a multicast, the owner shall be the sender or, in the case where for resilience the same content is transmitted by more than one unit, one of the senders. A caller wishing to join a multicast shall use a temporary call identifier (which it owns) until the identifier of the multicast (which may need to be created by the sender) has been discovered.

4.4 Address format

An address shall be represented as an octet string formatted as specified below.

NOTE It is thus a valid `TAddress` value (unless it is more than 255 o long).

The `TDomain` value identifying an address in the form specified in this subclause shall be

{ iso(1) standard(0) iec62379 network(5) signalling(2) address_format(2) }

The first octet of the address shall contain a “type” code; the format and interpretation of the remainder shall depend on the type and on the length of the octet string, as specified in Table 1.


Table 1 – Address type codes

Type	Remainder of octet string
0	second octet contains n , third to $(n+2)$ th inclusive are an address (which shall not be of type 0) which acts as the locator, remainder is another address (the "local" address, which may be of type 0), which is to be interpreted at the specified location ^a
1	second octet contains n , third to $(n+2)$ th inclusive are an OID, remainder is a value ^{b, c, d}
2	second octet contains n , third to $(n+2)$ th inclusive are an OID, remainder is a value ^{b, c, e}
3	second octet contains n , third to $(n+2)$ th inclusive are a TDomain value (which is an OID), remainder is an address within that domain ^{b, f}
4	IPv4 address if 4 octets, subnet address followed by subnet mask if 8 o
5	EUI-64 identifier
6	IPv6 address
7	URL
8	1 o containing a protocol identifier (as in IP headers, e.g. 6 for TCP and 17 for UDP) followed by a port number for the indicated protocol coded in 2 o as a 16-bit unsigned integer
9	IEC 62379 block identifier
10	service name coded as a UTF8 string
11	NetBIOS unique name
12	NetBIOS group name
13	NSAP address (20 o) or prefix
14	E.164 address
15-255	reserved
^a In the case of type 0, the locator may be the address of a gateway, or some other identification of a subnetwork (such as an NSAP prefix or an IPv4 subnetwork address). It may also identify end equipment. The locator is not allowed to be a type 0 address so that the sequence of locations will be "flat" rather than nested. ^b The OID in types 1-3 is coded in the same way as in ASN.1 Basic Encoding Rules (BER), including the compressed form for the first two arcs, but omitting the tag and length. These address types should only be used for address formats that cannot be supported by any of the other types. An IPv4 address, for instance, should use type 4 although it could also be expressed as a type 3 address or, if the target unit's MIB includes its IP address, as a type 1. An IPv4 address with a port number should be type 0, with a type 4 locator and a type 8 local address. ^c The value which follows the OID in types 1-2 is coded using ASN.1 Basic Encoding Rules (BER), including the tag and length. ^d Type 1 identifies a unit in whose MIB the object identified by the OID (such as unitName or unitLocation) has the specified value. In the case of scalar objects, the OID may omit the final zero arc. Units are not required to support all objects in their MIBs that could be used in this context, and switches are not required to remember any but the most obviously useful for the units connected to them. Objects in IEC 62379 should be used in preference to those in other MIBs, for instance unitLocation (1.0.62379.1.1.1.2) rather than sysLocation (1.3.6.1.2.1.1.5). ^e Type 2 identifies a port or other resource within a unit, by searching the unit's MIB, usually for a columnar object such as aPortName to select an audio port. The OID omits the index arcs. As with type 1, units are not required to support all objects in their MIBs that could be used in this context, so a management terminal which has discovered the port name (e.g. from a status broadcast) should use type 9 instead. ^f For types 3 onwards, the remainder of the value is an octet string containing the address in the appropriate format. Some codes are only valid in certain contexts, for instance an IEC 62379 block identifier would not be valid on a subnetwork and a NetBIOS name would only be valid within a subnetwork that supported NetBIOS protocols.	

5 Message format

5.1 General

All signalling messages shall consist of an octet string with the format shown in Figure 2.



IEC 0917/14


NOTE The header is specified in 5.2 and the variable part in 5.3. The format of the fixed part depends on the message type, and is specified in 5.5.

Figure 2 – Signalling message format

Encapsulation of the octet string for transmission on a link (see 6.1) depends on the technology used for the link, and is not specified in this standard. It should not place a limitation on the maximum length of a message.

5.2 Header

The header of a signalling message shall consist of two octets formatted as shown in Figure 3.



IEC 0918/14

Figure 3 – Signalling message header

The most significant bit of the first octet shall be 1 for an acknowledgement, 0 otherwise. The next two bits shall code the message class as specified in Table 2. The least significant five bits shall code the message type as specified in Table 3.

NOTE For the significance of the “acknowledgement” and “message class” fields, see also the definitions of “original” and “reply”, see 6.1.

The second octet shall contain the number of octets in the fixed part.

Table 2 – Message class

Code	Message class
0	request
1	response
2	confirmation
3	completion

Table 3 – Message type

Code	Message type
0-7	reserved for link management messages ^a
8	FindRoute
9	ClearDown
10	AddFlow
11	NetworkData
12	EndToEndData
13	AsyncSetup
14-15	reserved
16-19	reserved for link-specific resource management messages ^a
20-29	reserved
30-31	extended message types: see 5.5.6
^a Message types 0-7 and 16-19 may be used for carrying messages that are specific to a particular networking technology, on links that use that technology. Use of such message types should be negotiated when the link is established. Message types 14-15 and 20-29 may be specified in future versions of this standard, or in related standards, including for exchanging network topology information, and should not be used for other purposes.	

5.3 Variable part

5.3.1 General

The variable part of a signalling message shall consist of zero or more information elements (IEs), as specified in 5.3.2, which are referred to in this standard as being directly contained or its variable part in the message. The first IE shall begin in the octet immediately following the fixed part of the message, and each subsequent IE shall begin in the octet immediately following the IE that precedes it.

If the encapsulation of the message does not specify the number of octets it occupies, or the number of octets is greater than the length of the message, then the octet immediately following the last IE (or the fixed part if there are no IEs) shall contain zero and any further octets shall be ignored by the recipient of the message.

NOTE A zero in the IE type field is therefore interpreted as "end of message".

5.3.2 Information element format

Each IE shall begin with a 3-octet header with the format shown in Figure 4.




Figure 4 – Information element header


The most significant bit of the first octet shall be 1 if the IE includes a variable part, 0 otherwise.

The least significant seven bits of the first octet shall contain the IE type, coded as specified in 5.6.1.

The next two octets shall contain the number of further octets in the IE.

In the case of an IE with no variable part, the remaining octets shall contain the fixed part.

In the case of an IE with a variable part, the fourth octet shall contain the number of octets in the fixed part. If this number is nonzero, the fixed part shall begin in the fifth octet and the variable part shall begin in the octet immediately following the fixed part, as shown in Figure 5. Otherwise, the variable part shall begin in the fifth octet.



NOTE 1 The format of the fixed part (in either case) depends on the type, and is specified in 5.6.

NOTE 2 If there is a variable part, the fixed part cannot be longer than 255 o, whereas if there is no variable part the format allows the fixed part to be up to 65 535 o.

Figure 5 – Information element with a nonempty fixed part and a variable part

The variable part of an IE (if present) shall consist of zero or more IEs, which are referred to in this standard as being “directly contained” in the IE. The first directly contained or its variable part IE shall begin in the octet immediately following the fixed part, and each subsequent IE shall begin in the octet immediately following the IE that precedes it.

The length signalled in the IE header shall be exactly equal to the sum of the lengths of the fixed part and all the contained IEs.

5.3.3 Order of occurrence of information elements

An IE is “contained” in an IE or message if it is either directly contained in it or directly contained in another IE which is, in turn, contained in it.

An IE is “indirectly contained” in an IE or message if it is contained, but not directly contained, in it.

IEs of the same type that are directly contained within the same variable part shall be grouped together, i.e. there shall not be any directly contained IEs of a different type occurring between any two of them.

NOTE 1 This provision allows the recipient of a message to build a table showing the location of each IE type in the message or in the variable part of an IE, to simplify processing of the message or IE.

NOTE 2 There is no other restriction on the order of occurrence, except where specified in 5.6.23.