



BSI Standards Publication

3D display devices

Part 22-1: Measuring methods for
autostereoscopic displays — Optical

National foreword

This British Standard is the UK implementation of EN 62629-22-1:2013. It is identical to IEC 62629-22-1:2013.

The UK participation in its preparation was entrusted to Technical Committee EPL/47, Semiconductors.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2013

Published by BSI Standards Limited 2013

ISBN 978 0 580 67901 8

ICS 31.120; 31.260

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 May 2013.

Amendments issued since publication

Amd. No.	Date	Text affected
----------	------	---------------

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 62629-22-1

May 2013

ICS 31.120; 31.260

English version

**3D display devices -
Part 22-1: Measuring methods for autostereoscopic displays -
Optical
(IEC 62629-22-1:2013)**

Dispositifs d'affichage 3D -
Partie 22-1 : Méthodes de mesure des
écrans autostéréoscopiques -
Optique
(CEI 62629-22-1:2013)

3D-Anzeigen -
Teil 22-1: Messverfahren für auto-
stereoskopische Anzeigen -
Optisch
(IEC 62629-22-1:2013)

This European Standard was approved by CENELEC on 2013-03-13. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

© 2013 CENELEC - All rights of exploitation in any form and by any means reserved worldwide for CENELEC members.

Ref. No. EN 62629-22-1:2013 E

AVA Documents
Document Sharing Hub

Foreword

The text of document 110/428/FDIS, future edition 1 of IEC 62629-22-1, prepared by IEC/TC 110 "Electronic display devices" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 62629-22-1:2013.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2013-12-13
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2016-03-13

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 62629-22-1:2013 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 61747-6:2004	NOTE	Harmonised as EN 61747-6:2004 (not modified).
IEC 62341-6-1:2009	NOTE	Harmonised as EN 62341-6-1:2011 (not modified).
ISO 9241-302:2008	NOTE	Harmonised as EN ISO 9241-302:2008 (not modified).
ISO 9241-305:2008	NOTE	Harmonised as EN ISO 9241-305:2008 (not modified).
ISO 9241-306:2008	NOTE	Harmonised as EN ISO 9241-306:2008 (not modified).

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 62629-1-2 ¹⁾	-	3D Display devices - Part 1-2: Generic - Terminology and letter symbols	EN 62629-1-2 ¹⁾	-
CIE 15	2004	Colorimetry	-	-
CIE 69	1987	Methods of characterizing illuminance meters and luminance meters	-	-

¹⁾ At draft stage.

CONTENTS

1	Scope.....	7
2	Normative references	7
3	Terms, definitions and abbreviations	7
3.1	Terms and definitions	7
3.2	Abbreviations	7
4	Standard measuring conditions.....	8
4.1	Standard environmental conditions.....	8
4.1.1	Temperature, humidity and pressure conditions.....	8
4.1.2	Illumination conditions	8
4.2	Light measuring device.....	8
4.2.1	General	8
4.2.2	Aperture size	9
4.3	Measuring setup.....	9
4.3.1	Designed viewing distance	9
4.3.2	Measurement area.....	10
4.3.3	Measuring layout	10
4.4	Test signal	12
4.5	Standard measuring points.....	13
5	Measuring method for two-view/multi-view displays	14
5.1	Maximum luminance direction	14
5.1.1	General	14
5.1.2	Measuring equipment	14
5.1.3	Measuring conditions.....	15
5.1.4	Measuring procedure	15
5.1.5	Measurement report	15
5.2	Lobe angle and lobe angle variation on screen.....	16
5.2.1	General	16
5.2.2	Measuring equipment	16
5.2.3	Measuring conditions.....	16
5.2.4	Measuring procedure.....	16
5.2.5	Measurement report	16
5.3	Luminance, screen luminance uniformity, and angular luminance variation.....	17
5.3.1	Luminance and screen luminance uniformity.....	17
5.3.2	Angular luminance variation.....	19
5.4	White chromaticity, white chromaticity uniformity on screen, and white chromaticity variation in angle	20
5.4.1	White chromaticity and white chromaticity uniformity on screen	20
5.4.2	White chromaticity angular variation	21
5.5	3D crosstalk (luminance components ratio), 3D crosstalk variation on screen, and 3D crosstalk variation in angle	23
5.5.1	3D crosstalk (luminance components ratio) and 3D crosstalk variation on screen	23
5.5.2	3D crosstalk angular variation.....	25
6	Standard measuring method for integral imaging displays (1-D/2-D).....	26
6.1	General	26
6.2	Lobe angle and lobe angle variation on screen.....	27

6.3	Luminance, screen luminance uniformity, and angular luminance variation.....	27
6.3.1	Luminance and screen luminance uniformity.....	27
6.3.2	Angular luminance variation.....	27
6.4	White chromaticity, white chromaticity uniformity on screen, and white chromaticity variation in angle	27
6.4.1	White chromaticity and white chromaticity uniformity on screen	27
6.4.2	White chromaticity variation in angle.....	27
Annex A (informative)	Principle of autostereoscopic display.....	28
Annex B (informative)	Angular profile of luminance	32
Bibliography		33
Figure 1	– Measuring system	9
Figure 2	– Measuring layout for centre point measurement	10
Figure 3	– Measuring layout for multi-point measurement (side view).....	11
Figure 4	– Other measuring layout for multi-point measurement (side view).....	11
Figure 5	– Measuring layout for horizontal viewing direction dependency.....	12
Figure 6	– Measuring layout for vertical viewing direction dependency.....	12
Figure 7	– Two examples of the relation between pixel and lenslet in multi-view display (number of views is N)	13
Figure 8	– Measuring points for the centre and multi-point measurement	14
Figure 9	– Example of n by m measuring points	14
Figure 10	– Example of measurement results for angular luminance profile	15
Figure 11	– Example of lobe angle measurement.....	17
Figure 12	– Example of 3D crosstalk variation on screen	23
Figure 13	– Example of acquired images in multi-view display	24
Figure 14	– Spatial luminance data acquirement (left) and example of calculated spatial crosstalk graph (right).....	25
Figure A.1	– Structure of two-view display	28
Figure A.2	– Basic principle of two-view display.....	29
Figure A.3	– Structure of multi-view display	29
Figure A.4	– Basic principle of multi-view display.....	30
Figure A.5	– Basic principle of integral imaging display.....	31
Figure B.1	– Example of angular profile of luminance.....	32
Table 1	– Example of reported specification of two dimensional LMD.....	9
Table 2	– Example of measurement results for maximum luminance direction.....	16
Table 3	– Example of measurement results for lobe angle variation on screen	17
Table 4	– Example of measurement results for luminance and screen luminance non-uniformity.....	18
Table 5	– Example of measurement results for angular luminance variation	20
Table 6	– Example of measurement results for white chromaticity and white chromaticity uniformity on screen.....	21
Table 7	– Example of measurement results for white chromaticity variation in angle	23
Table 8	– Example of measurement results for 3D crosstalk variation on screen.....	25
Table 9	– Example of measurement results for 3D crosstalk angular variation	26

Table B.1 – Example of measurement results	32
--	----

3D DISPLAY DEVICES –

Part 22-1: Measuring methods for autostereoscopic displays – Optical

1 Scope

This part of IEC 62629-22 specifies optical measuring methods for autostereoscopic display devices. It defines general measuring procedures for optical characteristics of two-view and multi-view displays and integral imaging displays.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62629-1-2, *3D display devices – Part 1-2: Generic – Terminology and letter symbols*¹

CIE 15:2004, *Colorimetry*, 3rd Edition

CIE 69:1987, *Methods of characterizing illuminance meters and luminance meters*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purpose of this document, the terms and definitions given in IEC 62629-1-2 apply.

3.2 Abbreviations

For the purposes of this document, the following abbreviations apply.

Abbreviation	Definition
CCD	charge-coupled device
DVD	designed viewing distance
FWHM	full width half maximum
FWTQM	full width at three-quarter maximum
LMD	light measuring device

¹ To be published.

4 Standard measuring conditions

4.1 Standard environmental conditions

4.1.1 Temperature, humidity and pressure conditions

Standard environmental conditions shall be applied for the measurements of autostereoscopic display devices.

The standard environmental conditions for the measurements of autostereoscopic display devices are (25 ± 5) °C temperature, 45 % to 75 % relative humidity, and 86 kPa to 106 kPa pressure.

4.1.2 Illumination conditions

Standard dark room conditions shall be applied.

In standard dark room conditions, the illuminance at any position on the screen (the display device screen) is below 0,3 lx in all directions.

NOTE Illuminance is measured without the measured display or in conditions where the display is turned off.

4.2 Light measuring device

4.2.1 General

The LMD used for measurements of the displays shall be checked for the following criteria and specified accordingly:

- aperture size (window function of LMD) (see 4.2.2);
- sensitivity of the measured quantity;
- errors caused by veiling glare and lens flare (i.e. stray light in optical system);
- timing of data-acquisition, low-pass filtering and aliasing-effects;
- linearity of detection and data-conversion;
- resolution and moiré in the use of two-dimensional LMD.

A point-measurement LMD, such as a spot luminance meter, or a two-dimensional LMD such as a CCD area detector shall be used for these measurements. A conoscopic type LMD can be used for some measurements. When using a two-dimensional LMD and/or a conoscopic type LMD, they shall be calibrated, so that the measurement results correspond to those of the point-measurement LMD. The specification of the LMD used shall be noted in the report as in the example shown in Table 1.

NOTE 1 The point-measurement LMD measures the luminance and/or colour coordinate at each measurement point on the screen. A two-dimensional LMD measures the map of luminance and/or colour coordinate over the measurement area of the screen. A conoscopic type LMD measures the directional characteristics of luminance and/or colour coordinate at each measurement point on the screen.

NOTE 2 A point-measurement LMD usually has higher sensitivity than a two-dimensional LMD. A two-dimensional LMD measures the uniformity of the measuring area more easily than a point-measurement LMD.

Table 1 – Example of reported specification of two dimensional LMD

CCD resolution	4 096 × 2 048	
CCD A/D dynamic range	More than 12 bits = 4 096 gray scale levels	
Wavelength range	380 nm to 780 nm	
System accuracy	Luminance variation	± 3 %
	CIE 1931 chromaticity coordinates (x, y)	± 0,003
Colorimetric filters	CIE 1931 colour matching functions for a 2 ⁰ observer	

4.2.2 Aperture size

The aperture size (entrance pupil, see CIE 69) of an LMD including point measurement and two-dimensional type LMDs (smaller than the size of the object lens of the LMD) shall be equal to or smaller than 8 mm. When a larger aperture LMD is used, the measurement results shall be checked so that the results are equivalent to those of the smaller aperture LMD. The aperture size shall be reported by the supplier (the manufacturer of the 3D display device) in the relevant specification.

NOTE In the measurement of autostereoscopic displays, the aperture size of the LMD greatly affects the measurement results. So the LMD aperture size is defined in this document. The aperture size similar to the size of the pupil of an eye is ideal for the measurements (e.g. crosstalk), but smaller aperture decreases sensitivity. The size of 8 mm is small enough for the measurement and large enough for the sensitivity. The exact value of the aperture size of LMD used will be informed by the LMD supplier. The relation among the aperture size, measuring area size and measuring distance is shown in Figure 1 and explained in 4.3. When a larger aperture LMD is used, the measuring distance is increased as long as the measuring distance does not affect the measurement results by changing the measuring distance.

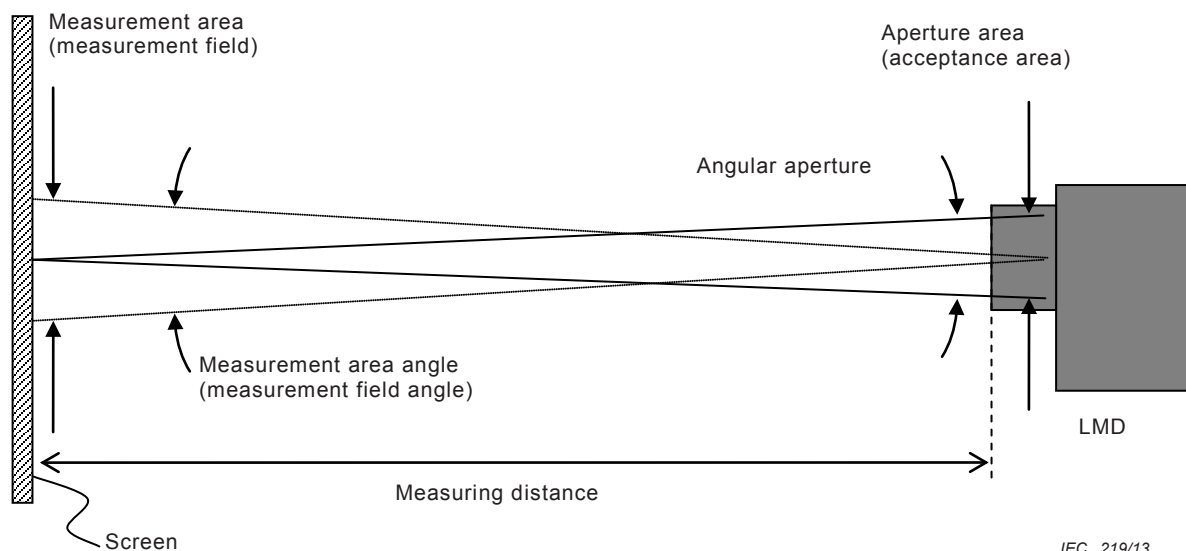


Figure 1 – Measuring system

4.3 Measuring setup

4.3.1 Designed viewing distance

A DVD shall be defined by the supplier in the relevant specification. The DVD is the distance from which proper stereoscopic views are intended to be observed, and/or the characteristics of an autostereoscopic display are measured accurately.

For the measurements, the designed viewing distance shall be applied as the measuring distance. The measuring distance shall be fixed when items planned to be evaluated are

measured. Only one designed viewing distance shall be defined and applied to an autostereoscopic display device.

4.3.2 Measurement area

The LMD shall be set at a proper measurement area angle (measurement field angle, see Figure 1) less than or equal to 2 degrees, and shall have a measurement area of at least 500 pixels whose diameter is less than 10 % of the screen height. This area corresponds to including a circular measurement area of at least 26 lines in diameter when the screen has a square pixel consisting of 3 subpixels. If the above conditions cannot be applied, the applied measurement area shall include as many pixels as possible. The applied measuring conditions shall be noted in the report.

NOTE Based on the information given by the supplier, such as number of views and lobe angle, the measurement field angle, aperture angle and measuring distance are determined. The aperture angle is small so that the angular luminance profile can be measured precisely. In general, the more the number of views increases, the smaller the required aperture angle is. In theory, when a smaller aperture is applied, a smaller field angle is desirable. In addition, some autostereoscopic displays are designed so that the screen produces different distribution of light rays to improve 3D observation. When considering these points, the field angle is introduced. The range of measuring distance is decided by the size of aperture and measurement field. The measuring distance and the field angle are adjusted to achieve a viewing area greater than 500 pixels, whose diameter is less than 10 % of the screen height, if it is difficult to set the field angle above.

4.3.3 Measuring layout

4.3.3.1 Centre point measurement

The measuring layout for a centre point measurement is shown in Figure 2. The aperture of LMD shall be set at the designed viewing distance.

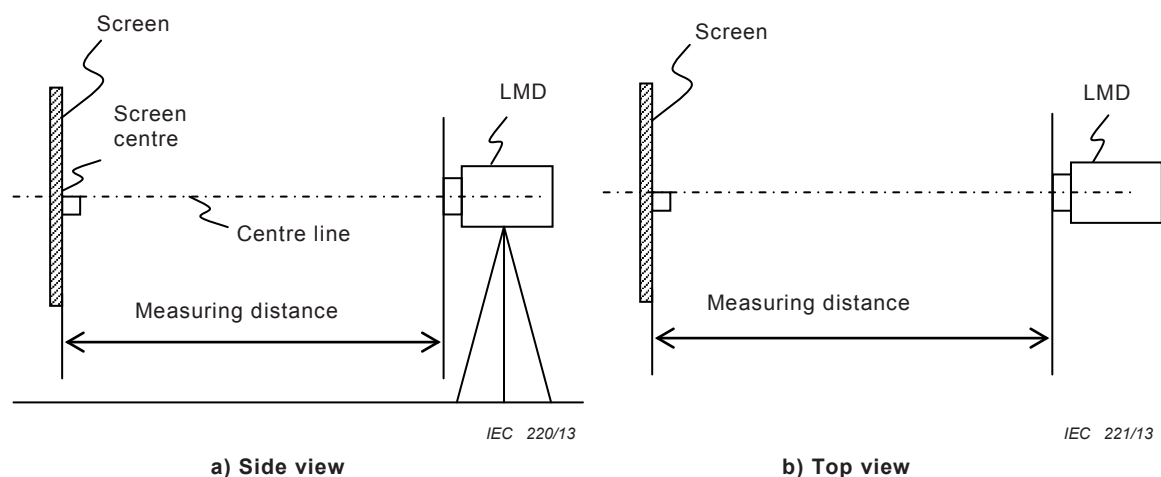


Figure 2 – Measuring layout for centre point measurement

4.3.3.2 Multi-point measurement

The measuring layout for a multi-point measurement is shown in Figure 3. When a multi-point measurement is carried out using the two-dimensional LMD, the measuring layout shown in Figure 2 shall be applied. In this case the measurement result shall be confirmed to be the same as that measured by the multi-point measurement shown in Figure 3.