



BSI Standards Publication

Connectors for electrical and electronic equipment — Product requirements

Part 2-010: Circular connectors — Detail specification for connectors with outer or inner push-pull locking mechanism, based on mating interfaces according to IEC 61076-2-101, IEC 61076-2-109, IEC 61076-2-111 and IEC 61076-2-113

National foreword

This British Standard is the UK implementation of EN IEC 61076-2-010:2021. It is identical to IEC 61076-2-010:2021.

The UK participation in its preparation was entrusted to Technical Committee EPL/48, Electromechanical components and mechanical structures for electronic equipment.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2021
Published by BSI Standards Limited 2021

ISBN 978 0 580 96609 5

ICS 31.220.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2021.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

English Version

Connectors for electrical and electronic equipment - Product requirements - Part 2-010: Circular connectors - Detail specification for connectors with outer or inner push-pull locking mechanism, based on mating interfaces according to IEC 61076-2-101, IEC 61076-2-109, IEC 61076-2-111 and IEC 61076-2-113 (IEC 61076-2-010:2021)

Connecteurs pour équipements électriques et électroniques
- Exigences de produit - Partie 2-010: Connecteurs circulaires - Spécification particulière relative aux connecteurs avec mécanisme de verrouillage de type pousser-tirer externe ou interne, basés sur des interfaces d'accouplement conformes à l'IEC 61076-2-101, l'IEC 61076-2-109, l'IEC 61076-2-111 et l'IEC 61076-2-113 (IEC 61076-2-010:2021)

Steckverbinder für elektrische und elektronische Einrichtungen - Produktanforderungen - Teil 2-010: Rundsteckverbinder- Bauartspezifikation für Push-pull-Steckverbinder mit äußerem Verriegelungsmechanismus, basierend auf Kontaktschnittstellen nach IEC 61076-2-101, IEC 61076-2-109, IEC 61076-2-111 und IEC 61076-2-113 (IEC 61076-2-010:2021)

This European Standard was approved by CENELEC on 2021-07-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 48B/2876/FDIS, future edition 1 of IEC 61076-2-010, prepared by SC 48B “Electrical connectors” of IEC/TC 48 “Electrical connectors and mechanical structures for electrical and electronic equipment” was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 61076-2-010:2021.

The following dates are fixed:

- latest date by which the document has to be implemented at national (dop) 2022-04-01 level by publication of an identical national standard or by endorsement
- latest date by which the national standards conflicting with the (dow) 2024-07-01 document have to be withdrawn

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

Endorsement notice

The text of the International Standard IEC 61076-2-010:2021 was approved by CENELEC as a European Standard without any modification.

Annex ZA

(normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60050-581	2008	International Electrotechnical Vocabulary -- Part 581: Electromechanical components for electronic equipment		-
IEC 60068-1	-	Environmental testing - Part 1: General and guidance	EN 60068-1	-
IEC 60512-1	-	Connectors for electrical and electronic equipment - Tests and measurements - Part 1: Generic specification	EN IEC 60512-1	-
IEC 60512-2-1	-	Connectors for electronic equipment - Tests and measurements - Part 2-1: Electrical continuity and contact resistance tests - Test 2a: Contact resistance - Millivolt level method	EN 60512-2-1	-
IEC 60512-3-1	-	Connectors for electronic equipment - Tests and measurements - Part 3-1: Insulation tests - Test 3a: Insulation resistance	EN 60512-3-1	-
IEC 60512-4-1	-	Connectors for electronic equipment - Tests and measurements - Part 4-1: Voltage stress tests - Test 4a: Voltage proof	EN 60512-4-1	-
IEC 60512-5-1	-	Connectors for electronic equipment - Tests and measurements - Part 5-1: Current-carrying capacity tests - Test 5a: Temperature rise	EN 60512-5-1	-
IEC 60512-6-3	-	Connectors for electronic equipment - Tests and measurements - Part 6-3: Dynamic stress tests - Test 6c: Shock	EN 60512-6-3	-
IEC 60512-6-4	-	Connectors for electronic equipment - Tests and measurements - Part 6-4: Dynamic stress tests - Test 6d: Vibration (sinusoidal)	EN 60512-6-4	-

EN IEC 61076-2-010:2021 (E)

IEC 60512-9-1	-	Connectors for electronic equipment -EN 60512-9-1 Tests and measurements - Part 9-1: Endurance tests - Test 9a: Mechanical operation	-
IEC 60512-13-1	-	Connectors for electronic equipment -EN 60512-13-1 Tests and measurements - Part 13-1: Mechanical operation tests - Test 13a: Engaging and separating forces	-
IEC 60512-13-2	-	Connectors for electronic equipment -EN 60512-13-2 Tests and measurements - Part 13-2: Mechanical operation tests - Test 13b: Insertion and withdrawal forces	-
IEC 60512-13-5	-	Connectors for electronic equipment -EN 60512-13-5 Tests and measurements - Part 13-5: Mechanical operation tests - Test 13e: Polarizing and keying method	-
IEC 60512-15-6	-	Connectors for electronic equipment -EN 60512-15-6 Tests and measurements - Part 15-6: Connector tests (mechanical) - Test 15f: Effectiveness of connector coupling devices	-
IEC 60529	1989	Degrees of protection provided by enclosures (IP Code)	1991
-	-	+ corrigendum May 1993	
+ A1	1999	+ A1	2000
+ A2	2013	+ A2	2013
IEC 60664-1	-	Insulation coordination for equipment within low-voltage supply systems - Part 1: Principles, requirements and tests	-
IEC 60998-2-1 (mod)	2002	Connecting devices for low-voltage circuits for household and similar purposes - Part 2-1: Particular requirements for connecting devices as separate entities with screw- type clamping units	2004
IEC 61076-1	2006	Connectors for electronic equipment -EN 61076-1 Product requirements - Part 1: Generic specification	2006
+ A1	2019	+ A1	2019
IEC 61076-2-012	-	Connectors for electrical and electronic equipment - Product Requirements - Part 2-012: Circular connectors - Detail specification for connectors with inner push-pull locking based on M12 connector interfaces according to IEC 61076-2-101, IEC 61076-2-109, IEC 61076-2-111 and IEC 61076-2-113	-
IEC 61076-2-101	2012	Connectors for electronic equipment -EN 61076-2-101 Product requirements - Part 2-101: Circular connectors - Detail specification for M12 connectors with screw-locking	2012

IEC 61076-2-109	2014	Connectors for electronic equipment -EN 61076-2-109 2014 Product requirements - Part 2-109: Circular connectors - Detail specification for connectors with M 12 × 1 screw- locking, for data transmission frequencies up to 500 MHz	
IEC 61076-2-111	2017	Connectors for electrical and electronicEN IEC 61076-2- 2018 equipment - Product requirements - Part111 2-111: Circular connectors - Detail specification for power connectors with M12 screw-locking	
IEC 61076-2-113	2017	Connectors for electronic equipment -EN 61076-2-113 2017 Product requirements - Part 2-113: Circular connectors - Detail specification for connectors with M12 screw locking with power and signal contacts for data transmission with frequency up to 100 MHz	
IEC 61984	-	Connectors - Safety requirements andEN 61984 tests	-

This page deliberately left blank

CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
1 Scope.....	10
2 Normative references	11
3 Terms and definitions	12
4 Technical information	13
4.1 System of levels.....	13
4.1.1 Performance levels	13
4.1.2 Compatibility levels, according to IEC 61076-1	13
4.2 Classification into climatic categories.....	13
4.3 Contact terminations	13
4.4 Available connector codings.....	13
4.5 Ratings	15
4.6 Marking.....	15
4.7 Safety aspects	15
5 Dimensional information	15
5.1 General.....	15
5.2 Survey of styles and variants	15
5.2.1 General	15
5.2.2 Fixed connectors	15
5.2.3 Free connectors.....	22
5.3 Interface dimension	31
5.3.1 General	31
5.3.2 Outer push-pull locking: male fixed connector side view	32
5.3.3 Outer push-pull locking: female fixed connector side view with details and engage-plane definition for male free cable connectors type 1 and 2	33
5.3.4 Inner push-pull locking: female fixed connector side view and male free connector side view with details for both.....	36
5.4 Gauges – Sizing gauges and retention force gauges	39
6 Characteristics	39
6.1 Classification into climatic category	39
6.2 Electrical characteristics	39
6.2.1 Voltage proof.....	39
6.2.2 Rated voltage – Rated impulse voltage – Pollution degree	39
6.2.3 Current-carrying capacity.....	40
6.2.4 Contact resistance	40
6.2.5 Insulation resistance.....	40
6.2.6 Transmission performance.....	40
6.3 Mechanical characteristics	40
6.3.1 Mating interface.....	40
6.3.2 Push-pull locking mechanism.....	41
6.4 Other characteristics	42
6.4.1 Vibration (sinusoidal)	42
6.4.2 Shock	42
6.4.3 Degree of protection provided by enclosures (IP code)	42
7 Test schedule	42
7.1 General.....	42

7.2	Test schedule	43
7.2.1	Test group P – Preliminary	43
7.2.2	Test group AP – Dynamic/climatic	43
7.2.3	Test group BP – Mechanical endurance	43
7.2.4	Test group CP – Electrical load	44
7.2.5	Test group DP – Chemical resistivity	44
7.2.6	Test group EP – Connection method tests	44
7.2.7	Test group FP – Electrical transmission requirements	44
Annex A	(informative) Diameter and position of the female connector body	45
A.1	Diameter of the female connector body	45
A.2	Position of female connector body for connectors with outer push-pull locking	45
A.3	Position of female connector body for connectors with inner push-pull locking	46
Annex B	(informative) Example for L-coded connector and comparison between screw- and inner push-pull-locking	48
Annex C	(informative) Styles of female free connectors to extend free male cable connectors	50
Figure 1	– Tube insert, male contacts, thread for M12 screw locking on tube	17
Figure 2	– Fixed connector, male contacts, with M12 screw locking and outer push-pull locking, square flange front mounting	17
Figure 3	– Fixed connector, male contacts, with M12 screw locking and outer push-pull locking, with wire ends, single hole front mounting thread M16 × 1,5	18
Figure 4	– Fixed connector, male contacts, with M12 screw locking and outer push-pull locking, with wire ends, single hole front mounting thread M20 × 1,5	18
Figure 5	– Fixed connector, female contacts, with M12 screw locking and outer push-pull locking, with wire ends, single hole front mounting thread M16 × 1,5	19
Figure 6	– Fixed connector, female contacts, with M12 screw locking and outer push-pull locking, with wire ends, single hole front mounting thread M20 × 1,5	19
Figure 7	– Fixed connector, female contacts, with M12 screw locking and outer push-pull locking, with wire ends, single hole front mounting thread M16 × 1,5 and mounting orientation	20
Figure 8	– Fixed connector, female contacts, with M12 screw locking and outer push-pull locking, with wire ends, single hole rear mounting thread M16 × 1,5	20
Figure 9	– Fixed connector, female contacts, with M12 screw locking and inner push-pull locking, with wire ends, single hole front mounting thread M16 × 1,5	21
Figure 10	– Fixed connector, female contacts, with M12 screw locking and inner push-pull locking, with wire ends, single hole front mounting thread M20 × 1,5	21
Figure 11	– Fixed connector, female contacts, with M12 screw locking and inner push-pull locking, with wire ends, single hole front mounting thread M16 × 1,5 and mounting orientation	22
Figure 12	– Fixed connector, female contacts, with M12 screw locking and inner push-pull locking, with wire ends, single hole rear mounting thread M16 × 1,5	22
Figure 13	– Rewirable connector, male contacts, straight version, with outer push-pull locking	23
Figure 14	– Rewirable connector, male contacts, angled version, with outer push-pull locking	24
Figure 15	– Non-rewirable connector, male contacts, straight version, with outer push pull locking	24

Figure 16 – Non-rewirable connector, male contacts, angled version, with outer push-pull locking	25
Figure 17 – Rewirable connector, female contacts, straight version, with outer push-pull locking	26
Figure 18 – Rewirable connector, female contacts, angled version, with outer push-pull locking	27
Figure 19 – Non-rewirable connector, female contacts, straight version, with outer push-pull locking	28
Figure 20 – Non-rewirable connector, female contacts, angled version, with outer push-pull locking	28
Figure 21 – Rewirable connector, male contacts, straight version, with inner push-pull locking	29
Figure 22 – Rewirable connector, male contacts, angled version, with inner push-pull locking	30
Figure 23 – Non-rewirable connector, male contacts, straight version, with inner push-pull locking	30
Figure 24 – Non-rewirable connector, male contacts, angled version, with inner push-pull locking	31
Figure 25 – Outer push-pull locking: male fixed connector side view	32
Figure 26 – Outer push-pull locking: female fixed connector side view with details and engage-plane definition for male free cable connector	34
Figure 27 – Inner push-pull-locking: female fixed connector side view and male free connector side view with details for both	37
Figure A.1 – Diameter of the female connector body	45
Figure A.2 – Position of the female insulating body for connectors with outer push-pull locking	46
Figure A.3 – Female fixed connector side view and position of insulating body	47
Figure B.1 – Dimensions for L-coded interface dimensions according to IEC 61076-2-111	48
Table 1 – Content of document	9
Table 2 – Available connector codings	14
Table 3 – Styles of fixed connectors	16
Table 4 – Styles of free connectors	23
Table 5 – Dimensions of style JM-OP, Figure 13	23
Table 6 – Dimensions of style KM-OP, Figure 14	24
Table 7 – Dimensions of style LM-OP, Figure 15	25
Table 8 – Dimensions of style MM-OP, Figure 16	25
Table 9 – Dimensions of style JF-OP, Figure 17	26
Table 10 – Dimensions of style KF-OP, Figure 18	27
Table 11 – Dimensions of style LF-OP, Figure 19	28
Table 12 – Dimensions of style MF-OP, Figure 20	29
Table 13 – Dimensions of style JM-IP, Figure 21	29
Table 14 – Dimensions of style KM-IP, Figure 22	30
Table 15 – Dimensions of style LM-IP, Figure 23	31
Table 16 – Dimensions of style MM-IP, Figure 24	31
Table 17 – Dimensions of fixed connector with push pull housing and male contacts	33

Table 18 – Dimensions for Figure 26.....	35
Table 19 – Dimensions of CA for Figure 26.....	36
Table 20 – Dimensions of CD for Figure 26.....	36
Table 21 – Dimensions of CC for Figure 26.....	36
Table 22 – Dimensions for Figure 27.....	38
Table 23 – Dimensions of engage-plane for Figure 27	39
Table 24 – Climatic category.....	39
Table 25 – Insertion and withdrawal forces for the locking mechanism.....	41
Table 26 – Number of test specimens	43
Table 27 – Test group BP	43
Table A.1 – Diameter of the female connector body, dimension X.....	45
Table A.2 – Dimension DAB.....	46
Table A.3 – Dimension FP for Figure A.3	47
Table B.1 – Comparison of dimension between screw- and push-pull-locking	49
Table C.1 – Female free connector styles to extend push-pull free male connectors	50

INTERNATIONAL ELECTROTECHNICAL COMMISSION

CONNECTORS FOR ELECTRICAL AND ELECTRONIC EQUIPMENT – PRODUCT REQUIREMENTS –

Part 2-010: Circular connectors – Detail specification for connectors with outer or inner push-pull locking mechanism, based on mating interfaces according to IEC 61076-2-101, IEC 61076-2-109, IEC 61076-2-111 and IEC 61076-2-113

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61076-2-010 has been prepared by subcommittee 48B: Electrical connectors, of IEC technical committee 48: Electrical connectors and mechanical structures for electrical and electronic equipment.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
48B/2876/FDIS	48B/2887/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts in the IEC 61076 series, published under the general title *Connectors for electrical and electronic equipment – Product requirements*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

INTRODUCTION

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this International Standard may involve the use of patent(s) concerning the free connectors

The IEC takes no position concerning the evidence, validity and scope of these patent rights.

The holder of this patent right has assured the IEC that he/she is willing to give free licences with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with the IEC.

Information may be obtained from:

Molex LLC
2222 Wellington Court
Lisle, IL60532
USA

HARTING Electronics GmbH
Marienwerderstraße 3
32339 Espelkamp
Germany

Table 1 – Content of document

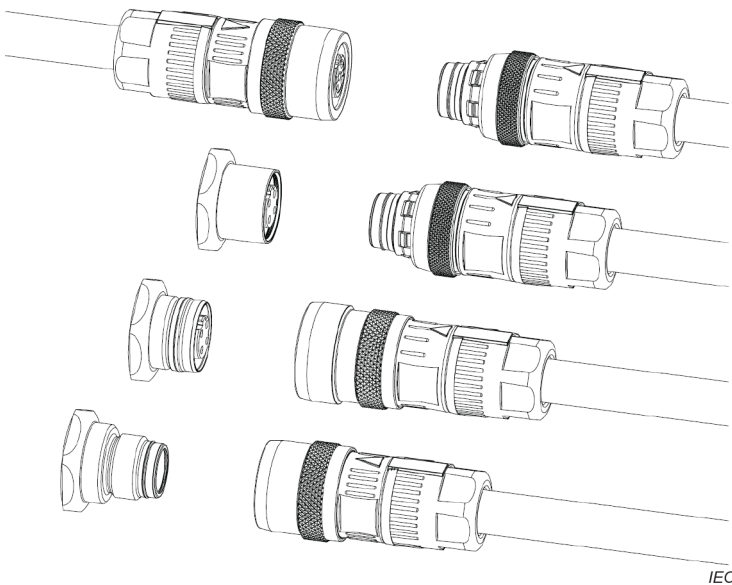
<p>IEC SC 48B – Electrical connectors</p> <p>Specification available from:</p> <p>IEC General secretariat</p> <p>Or from the addresses shown on the inside cover.</p>	<p>IEC 61076-2-010 Ed. 1</p>
<p>DETAIL SPECIFICATION in accordance with IEC 61076-1</p>	
 <p>IEC</p>	<p>Circular M12 connectors with push-pull locking for power and/or signal and/or data transmission</p> <p>Fixed connectors with male and female contacts, mateable with M12 screw or push-pull plugs</p> <p>Free cable connectors with male or female contacts with push-pull locking</p> <p>Rewireable – Non-rewirable</p> <p>Fixed connectors, with front, rear or single hole mounting</p> <p>Straight and right-angled free cable connectors</p>

Table 1 shows the content of this document.

CONNECTORS FOR ELECTRICAL AND ELECTRONIC EQUIPMENT – PRODUCT REQUIREMENTS –

Part 2-010: Circular connectors – Detail specification for connectors with outer or inner push-pull locking mechanism, based on mating interfaces according to IEC 61076-2-101, IEC 61076-2-109, IEC 61076-2-111 and IEC 61076-2-113

1 Scope

This part of IEC 61076-2 specifies circular connectors with a push-pull locking mechanism of a size derived from, and thus being compatible with M12 screw-locking connectors (free connectors with screw-locking according to IEC 61076-2-101, IEC 61076-2-109, IEC 61076-2-111 or IEC 61076-2-113 are compatible with push-pull fixed interfaces according to this document) and with mating interfaces according to IEC 61076-2-101, IEC 61076-2-109, IEC 61076-2-111 (except codings E in general and coding F for inner push-pull) or IEC 61076-2-113.

A fixed connector with push-pull locking according to this document is intermateable with a correspondingly coded free connector with M12 screw-locking according to any of the above mentioned standards.

NOTE 1 M12 is the dimension of the thread of the screw-locking mechanism of circular connectors with M12 screw-locking.

NOTE 2 IEC 61076-2-012 defines another inner push-pull for fixed female connectors which is however not compatible to the inner push-pull defined in this document. Annex C shows the different styles of female free connectors to extend male free connectors.

This document covers both:

- a) power connectors with current ratings up to 16 A and voltage ratings up to 630 V, typically used for power supply and power applications in industrial premises, and
- b) connectors for data and signal transmission with frequencies up to 500 MHz.

These connectors consist of both, fixed and free connectors, either rewirable or non-rewirable, with M12 push-pull locking as explained above. Male connectors have round contacts from Ø 0,6 mm up to Ø 1,5 mm. In addition, the push-pull mechanisms consist of 2 different push-pull designs:

- c) An outer push-pull for male and female fixed connector, where the locking groove is placed onto the outer cylindric surface of the housing. The outer push-pull for female fixed connectors is made for 2 different types of male connectors. It has locking means for both types on its outer surface.

NOTE 3 For design and dimensions see 5.3.2 and 5.3.3.

- d) An inner push-pull for female fixed connectors and for male free connectors, where the locking means are placed onto the inner cylindric surface of the housing.

NOTE 4 For design and dimensions see 5.3.4.

The different codings provided by IEC 61076-2 series detail specifications mentioned within this document prevent the mating of accordingly coded male or female connectors to any other similarly sized interfaces, covered by other standards and the cross-mating between the different codings provided by any other IEC 61076-2 series detail specification mentioned within this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-581:2008, *International Electrotechnical Vocabulary (IEV) – Part 581: Electromechanical components for electronic equipment*

IEC 60068-1, *Environmental testing – Part 1: General and guidance*

IEC 60512-1, *Connectors for electrical and electronic equipment – Tests and measurements – Part 1: Generic specification*

IEC 60512-2-1, *Connectors for electronic equipment – Tests and measurements – Part 2-1: Electrical continuity and contact resistance tests – Test 2a: Contact resistance – Millivolt level method*

IEC 60512-3-1, *Connectors for electronic equipment – Tests and measurements – Part 3-1: Insulation tests – Test 3a: Insulation resistance*

IEC 60512-4-1, *Connectors for electronic equipment – Tests and measurements – Part 4-1: Voltage stress tests – Test 4a: Voltage proof*

IEC 60512-5-1, *Connectors for electronic equipment – Tests and measurements – Part 5-1: Current-carrying capacity tests – Test 5a: Temperature rise*

IEC 60512-6-3, *Connectors for electronic equipment – Tests and measurements – Part 6-3: Dynamic stress tests – Test 6c: Shock*

IEC 60512-6-4, *Connectors for electronic equipment – Tests and measurements – Part 6-4: Dynamic stress tests – Test 6d: Vibration (sinusoidal)*

IEC 60512-9-1, *Connectors for electronic equipment – Tests and measurements – Part 9-1: Endurance tests – Test 9a: Mechanical operation*

IEC 60512-13-1, *Connectors for electronic equipment – Tests and measurements – Part 13-1: Mechanical operation tests – Test 13a: Engaging and separating forces*

IEC 60512-13-2, *Connectors for electronic equipment – Tests and measurements – Part 13-2: Mechanical operation tests – Test 13b: Insertion and withdrawal forces*

IEC 60512-13-5, *Connectors for electronic equipment – Tests and measurements – Part 13-5: Mechanical operation tests – Test 13e: Polarizing and keying method*

IEC 60512-15-6, *Connectors for electronic equipment – Tests and measurements – Part 15-6: Connector tests (mechanical) – Test 15f: Effectiveness of connector coupling devices*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP Code)*

IEC 60529:1989/AMD1:1999

IEC 60529:1989/AMD2:2013

IEC 60664-1, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*