



BSI Standards Publication

Industrial communication networks — Fieldbus specifications

Part 3-28: Data-link layer service definition — Type 28 elements

National foreword

This British Standard is the UK implementation of EN IEC 61158-3-28:2023. It is identical to IEC 61158-3-28:2023.

The UK participation in its preparation was entrusted to Technical Committee GEL/65, Measurement and control.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2023
Published by BSI Standards Limited 2023

ISBN 978 0 539 16652 1

ICS 25.040; 25.040.01; 33.040.40

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2023.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

English Version

Industrial communication networks - Fieldbus specifications -
Part 3-28: Data-link layer service definition - Type 28 elements
(IEC 61158-3-28:2023)

Réseaux de communication industriels - Spécifications des
bus de terrain - Partie 3-28: Définition des services de la
couche liaison de données - Eléments de Type 28
(IEC 61158-3-28:2023)

Industrielle Kommunikationsnetze - Feldbusse - Teil 3-28:
Dienstfestlegungen des Data Link Layer
(Sicherheitsschicht) - Typ 28-Elemente
(IEC 61158-3-28:2023)

This European Standard was approved by CENELEC on 2023-04-11. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 65C/1206/FDIS, future edition 1 of IEC 61158-3-28, prepared by SC 65C "Industrial networks" of IEC/TC 65 "Industrial-process measurement, control and automation" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 61158-3-28:2023.

The following dates are fixed:

- latest date by which the document has to be implemented at national (dop) 2024-01-11 level by publication of an identical national standard or by endorsement
- latest date by which the national standards conflicting with the (dow) 2026-04-11 document have to be withdrawn

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

Endorsement notice

The text of the International Standard IEC 61158-3-28:2023 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standard indicated:

IEC 61158-1 NOTE Approved as EN IEC 61158-1

IEC 61158-5-28 NOTE Approved as EN IEC 61158-5-28

IEC 61158-6-28 NOTE Approved as EN IEC 61158-6-28¹

IEC 61784-1 (series) NOTE Approved as EN IEC 61784-1 (series)²

IEC 61784-2 (series) NOTE Approved as EN IEC 61784-2 (series)³

¹ To be published. Stage at the time of publication: prEN IEC 61158-6-28:2023.

² To be published. Stage at the time of publication: FprEN IEC 61784-1-X:2023.

³ To be published. Stage at the time of publication: FprEN IEC 61784-2-X:2023.

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61158-2	2023	Industrial communication networks - Fieldbus specifications - Part 2: Physical layer specification and service definition	EN IEC 61158-2	2023
IEC 61158-4-28	2023	Industrial communication networks - Fieldbus specifications - Part 4-28: Data- link layer protocol specification - Type 28 elements	EN IEC 61158-4-28	2023
ISO/IEC 7498-1	-	Information technology - Open Systems Interconnection - Basic reference model: The basic model	-	-
ISO/IEC 7498-3	-	Information technology - Open Systems Interconnection - Basic reference model: Naming and addressing	-	-
ISO/IEC 8886	-	Information technology - Open Systems Interconnection - Data link service definition	-	-
ISO/IEC 10731	1994	Information technology - Open Systems Interconnection - Basic Reference Model - Conventions for the definition of OSI services	-	-
ISO/IEC/IEEE 8802-3	2021	Telecommunications and exchange between information technology systems - Requirements for local and metropolitan area networks - Part 3: Standard for Ethernet	-	-

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
1 Scope.....	8
1.1 General.....	8
1.2 Specifications	8
1.3 Conformance	8
2 Normative references.....	9
3 Terms, definitions, abbreviated terms and conventions	9
3.1 Reference model terms and definitions	9
3.2 Service convention terms and definitions	11
3.3 Common data-link service terms and definitions.....	11
3.4 Additional Type 28 data-link specific definitions	13
3.5 Common symbols and abbreviations.....	15
3.6 Additional Type 28 symbols and abbreviations	15
4 Type 28 Data-link service	16
4.1 Overview.....	16
4.2 Model of the DLS	17
4.2.1 General	17
4.2.2 Connection-less mode data transmission with acknowledge (CLMDTA)	17
4.2.3 Connection-less mode data transmission with no acknowledge (CLMDTNA)	17
4.2.4 Connection-less mode data transmission with request and acknowledge (CLMDTRA)	17
4.2.5 Connection-less mode data transmission with request and response but no acknowledge (CLMDTRRNA).....	18
4.2.6 Connection mode data transmission with acknowledge (CMDTA)	18
4.2.7 Connection mode data transmission with no acknowledge (CMDTNA)	18
4.3 Detailed description of DLS	18
4.3.1 CLMDTA.....	18
4.3.2 CLMDTNA	20
4.3.3 CLMDTRA	22
4.3.4 CLMDTRRNA.....	25
4.3.5 CMDTA.....	27
4.3.6 CMDTNA	29
4.4 Detailed description of DLCSS.....	30
4.4.1 General	30
4.4.2 Delay measurement	31
4.4.3 Clock synchronization	33
4.4.4 Clock interrupt	35
5 Type 28 Data-link management service	36
5.1 Overview.....	36
5.2 DLMS related information table	36
5.2.1 General	36
5.2.2 Protocol stack version management Information table.....	37
5.2.3 Link node management Information table.....	37
5.2.4 Link timeout management information table	38
5.3 Detailed description of DLMS	41

5.3.1	General	40
5.3.2	Config.....	40
5.3.3	Discovery.....	45
5.3.4	Maintenance	47
5.3.5	Establish.....	51
5.3.6	Release	53
5.3.7	Update.....	54
Bibliography		57
Figure 1 – Relationships of DLSAPs, DLSAP-addresses and group DL-addresses.....		12
Figure 2 – Bitmap Data type diagram		15
Figure 3 – Primitive process of CLMDTA		19
Figure 4 – Primitive process of CLMDTNA		21
Figure 5 – Primitive process of CLMDTRA.....		23
Figure 6 – Primitive process of CLMDTRRNA		25
Figure 7 – Primitive process of CMDTA		27
Figure 8 – Primitive process of CMDTNA.....		29
Figure 9 – Delay measurement service primitive process		31
Figure 10 – Clock synchronization service primitive process		33
Figure 11 – Clock interrupt service primitive process		35
Figure 12 – Data-link config management service primitive process		41
Figure 13 – TN active logout discovery service primitive process		45
Figure 14 – Data-link discovery management service primitive process.....		45
Figure 15 – Local data-link maintenance service primitive process.....		48
Figure 16 – Remote data-link maintenance service primitive process		48
Figure 17 – Data-link establish management service primitive process.....		51
Figure 18 – Data-link release management service primitive sequence diagram		53
Figure 19 – Data-link update management service primitive sequence diagram.....		55
Table 1 – DTS status output value.....		16
Table 2 – DLCSS status return value.....		17
Table 3 – CLMDTA service primitives and parameters		20
Table 4 – CLMDTA service primitive parameter		20
Table 5 – CLMDTNA service primitives and parameters.....		22
Table 6 – CLMDTNA service primitive parameter.....		22
Table 7 – CLMDTRA service primitives and parameters.....		24
Table 8 – CLMDTRA service primitive parameter.....		24
Table 9 – CLMDTRRNA service primitives and parameters		26
Table 10 – CLMDTRRNA service primitive parameter		26
Table 11 – CMDTA service primitives and parameters		28
Table 12 – CMDTA service primitive parameter		28
Table 13 – CMDTNA service primitives and parameters.....		30
Table 14 – CMDTNA service primitive parameter.....		30
Table 15 – Delay measurement service primitives and parameters.....		30

Table 16 – Delay measurement service primitive parameter.....	32
Table 17 – Clock synchronization service primitives and parameters.....	34
Table 18 – Clock synchronization service primitive parameter.....	34
Table 19 – Clock interrupt service primitives and parameters.....	35
Table 20 – Clock interrupt service primitive parameter.....	36
Table 21 – Protocol stack version management Information table	37
Table 22 – Link node management Information table	37
Table 23 – Link timeout management information table.....	39
Table 24 – DLMS status return value.....	40
Table 25 – Data-link config management service	41
Table 26 – Data-link config management service primitive parameter.....	41
Table 27 – CFG_PARAM_INFO structure	42
Table 28 – TIMEOUT_CFG structure.....	43
Table 29 – GROUP_IDMAP_S structure	43
Table 30 – NODEID_MAC_S structure	44
Table 31 – COMM_RES_CFG structure.....	44
Table 32 – Data-link discovery service primitives and parameters	46
Table 33 – Data-link discovery management service primitive parameter	46
Table 34 – NODE_MGT_INFO_S structure.....	47
Table 35 – Data-link maintenance service primitives and parameters	49
Table 36 – Data-link maintenance service primitive parameter	49
Table 37 – DIAG_INFO_S structure (Command in range from 0x00 to 0x05)	50
Table 38 – DIAG_INFO_S structure (Command = 0x06).....	50
Table 39 – Data-link establish management service primitives and parameters	52
Table 40 – Data-link establish management service parameter	52
Table 41 – CH_RES_INFO_S structure	52
Table 42 – Data-link release management service primitives and parameters.....	54
Table 43 – Data-link release management service primitive parameter.....	54
Table 44 – Data-link update management service primitives and parameters	56
Table 45 – Data-link update management service primitive parameter	56

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INDUSTRIAL COMMUNICATION NETWORKS –
FIELDBUS SPECIFICATIONS –****Part 3-28: Data-link layer service definition –
Type 28 elements****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

Attention is drawn to the fact that the use of the associated protocol type is restricted by its intellectual-property-right holders. In all cases, the commitment to limited release of intellectual-property-rights made by the holders of those rights permits a layer protocol type to be used with other layer protocols of the same type, or in other type combinations explicitly authorized by its intellectual-property-right holders.

NOTE Combinations of protocol types are specified in the IEC 61784-1 series and the IEC 61784-2 series.

IEC 61158-3-28 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial-process measurement, control and automation. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
65C/1206/FDIS	65C/1235/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all the parts of the IEC 61158 series, under the general title *Industrial communication networks – Fieldbus specifications*, can be found on the IEC web site.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This document is one of a series produced to facilitate the interconnection of automation system components. It is related to other standards in the set as defined by the "three-layer" fieldbus reference model described in IEC 61158-1.

Throughout the set of fieldbus standards, the term "service" refers to the abstract capability provided by one layer of the OSI Basic Reference Model to the layer immediately above. Thus, the data-link layer service defined in this document is a conceptual architectural service, independent of administrative and implementation divisions.

INDUSTRIAL COMMUNICATION NETWORKS – FIELDBUS SPECIFICATIONS –

Part 3-28: Data-link layer service definition – Type 28 elements

1 Scope

1.1 General

This part of IEC 61158 describes basic packet communication services and models in an automation control industrial field environment. The Type 28 data-link layer provides time-critical and non-time-critical communication services. Time-critical refers to the requirement to complete specified functions between devices in a defined time window in an industrial field environment. Failure to complete specified functions within the time window can lead to failure or harm in industrial production.

This document defines in an abstract way the externally visible service provided by the Type 28 fieldbus data-link layer in terms of

- a) function description;
- b) primitive actions and events with primitive sequence diagram;
- c) the form of externally service interface and related parameters.

The purpose of this document is to define the services provided to:

- the Type 28 fieldbus application layer at the boundary between the application and data-link layers of the fieldbus reference model;
- systems management at the boundary between the data-link layer and systems management of the fieldbus reference model.

Type 28 DL-service provides both a connected and a connectionless subset of those services provided by OSI data-link protocols as specified in ISO/IEC 8886.

1.2 Specifications

The principal objective of this document is to specify the characteristics of conceptual data-link layer services suitable for time-critical communications and thus supplement the OSI Basic Reference Model in guiding the development of data-link protocols for time-sensitive communications. A secondary objective is to provide migration paths from previously-existing industrial communications protocols.

This specification can be used as the basis for formal DL-Programming-Interfaces. Nevertheless, it is not a formal programming interface, and any such interface will need to address implementation issues not covered by this specification, including:

- a) the sizes and octet ordering of various multi-octet service parameters; and
- b) the correlation of paired request and confirm, or indication and response primitives.

1.3 Conformance

This document does not specify individual implementations or products, nor does it constrain the implementations of data-link entities within industrial automation systems.

There is no conformance of equipment to this data-link layer service definition standard. Instead, conformance is achieved through implementation of the corresponding data-link protocol that fulfills the Type 28 data-link layer services defined in this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE All parts of the IEC 61158 series, as well as the IEC 61784-1 series and the IEC 61784-2 series are maintained simultaneously. Cross-references to these documents within the text therefore refer to the editions as dated in this list of normative references.

IEC 61158-2:2023, *Industrial communication networks – Fieldbus specifications – Part 2: Physical layer specification and service definition*

IEC 61158-4-28:2023, *Industrial communication networks – Fieldbus specifications – Part 4-28: Data-link layer protocol specification – Type 28 elements*

ISO/IEC 7498-1, *Information technology – Open Systems Interconnection – Basic Reference Model – Basic Reference Model: The Basic Model*

ISO/IEC 7498-3, *Information technology – Open Systems Interconnection – Basic Reference Model: Naming and addressing*

ISO/IEC 10731:1994, *Information technology – Open Systems Interconnection – Basic Reference Model – Conventions for the definition of OSI services*

ISO/IEC 8886, *Information technology – Open Systems Interconnection – Data link service definition*

ISO/IEC/IEEE 8802-3:2021, *Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 3: Standard for Ethernet*

3 Terms, definitions, abbreviated terms and conventions

For the purposes of this document, the following terms, definitions, symbols, abbreviated terms and conventions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1 Reference model terms and definitions

This document is based in part on the concepts developed in ISO/IEC 7498-1 and ISO/IEC 7498-3, and makes use of the following terms defined therein:

3.1.1	DL-address	[ISO/IEC 7498-3]
3.1.2	DL-address-mapping	[ISO/IEC 7498-1]
3.1.3	called-DL-address	[ISO/IEC 7498-3]
3.1.4	calling-DL-address	[ISO/IEC 7498-3]
3.1.5	centralized multi-end-point-connection	[ISO/IEC 7498-1]
3.1.6	DL-connection	[ISO/IEC 7498-1]
3.1.7	DL-connection-end-point	[ISO/IEC 7498-1]
3.1.8	DL-connection-end-point-identifier	[ISO/IEC 7498-1]
3.1.9	DL-connection-mode transmission	[ISO/IEC 7498-1]
3.1.10	DL-connectionless-mode transmission	[ISO/IEC 7498-1]
3.1.11	correspondent (N)-entities correspondent DL-entities (N=2) correspondent Ph-entities (N=1)	[ISO/IEC 7498-1]
3.1.12	DL-duplex-transmission	[ISO/IEC 7498-1]
3.1.13	(N)-entity DL-entity (N=2) Ph-entity (N=1)	[ISO/IEC 7498-1]
3.1.14	DL-facility	[ISO/IEC 7498-1]
3.1.15	flow control	[ISO/IEC 7498-1]
3.1.16	(N)-layer DL-layer (N=2) DL-layer (N=1)	[ISO/IEC 7498-1]
3.1.17	layer-management	[ISO/IEC 7498-1]
3.1.18	DL-local-view	[ISO/IEC 7498-3]
3.1.19	DL-name	[ISO/IEC 7498-3]
3.1.20	naming-(addressing)-domain	[ISO/IEC 7498-3]
3.1.21	peer-entities	[ISO/IEC 7498-1]
3.1.22	primitive name	[ISO/IEC 7498-3]
3.1.23	DL-protocol	[ISO/IEC 7498-1]
3.1.24	DL-protocol-connection-identifier	[ISO/IEC 7498-1]
3.1.25	DL-protocol-data-unit	[ISO/IEC 7498-1]
3.1.26	DL-relay	[ISO/IEC 7498-1]
3.1.27	reset	[ISO/IEC 7498-1]
3.1.28	responding-DL-address	[ISO/IEC 7498-3]
3.1.29	routing	[ISO/IEC 7498-1]
3.1.30	segmenting	[ISO/IEC 7498-1]
3.1.31	(N)-service DL-service (N=2) Ph-service (N=1)	[ISO/IEC 7498-1]
3.1.32	(N)-service-access-point DL-service-access-point (N=2) Ph-service-access-point (N=1)	[ISO/IEC 7498-1]
3.1.33	DL-service-access-point-address	[ISO/IEC 7498-3]
3.1.34	DL-service-connection-identifier	[ISO/IEC 7498-1]
3.1.35	DL-service-data-unit	[ISO/IEC 7498-1]
3.1.36	DL-simplex-transmission	[ISO/IEC 7498-1]

3.1.37 DL-subsystem	[ISO/IEC 7498-1]
3.1.38 systems-management	[ISO/IEC 7498-1]
3.1.39 DLS-user-data	[ISO/IEC 7498-1]

3.2 Service convention terms and definitions

This document also makes use of the following terms defined in ISO/IEC 10731 as they apply to the data-link layer:

- 3.2.1 acceptor**
- 3.2.2 asymmetrical service**
- 3.2.3 confirm (primitive);
requestor.deliver (primitive)**
- 3.2.4 deliver (primitive)**
- 3.2.5 DL-confirmed-facility**
- 3.2.6 DL-facility**
- 3.2.7 DL-local-view**
- 3.2.8 DL-mandatory-facility**
- 3.2.9 DL-non-confirmed-facility**
- 3.2.10 DL-provider-initiated-facility**
- 3.2.11 DL-provider-optional-facility**
- 3.2.12 DL-service-primitive;
primitive**
- 3.2.13 DL-service-provider**
- 3.2.14 DL-service-user**
- 3.2.15 DLS-user-optional-facility**
- 3.2.16 indication (primitive);
acceptor.deliver (primitive)**
- 3.2.17 multi-peer**
- 3.2.18 request (primitive);
requestor.submit (primitive)**
- 3.2.19 requestor**
- 3.2.20 response (primitive);
acceptor.submit (primitive)**
- 3.2.21 submit (primitive)**
- 3.2.22 symmetrical service**

3.3 Common data-link service terms and definitions

For the purposes of this document, the following terms and definitions apply.

NOTE Many definitions are common to more than one protocol Type; they are not necessarily used by all protocol types.

3.3.1


DL-segment, link, local link

single DL-subnetwork in which any of the connected DLEs may communicate directly, without any intervening DL-relaying, whenever all of those DLEs that are participating in an instance of communication are simultaneously attentive to the DL-subnetwork during the period(s) of attempted communication

3.3.2 DLSAP

distinctive point at which DL-services are provided by a single DL-entity to a single higher-layer entity

Note 1 to entry: This definition, derived from ISO/IEC 7498-1, is repeated here to facilitate understanding of the critical distinction between DLSAPs and their DL-addresses. (See Figure 1.)

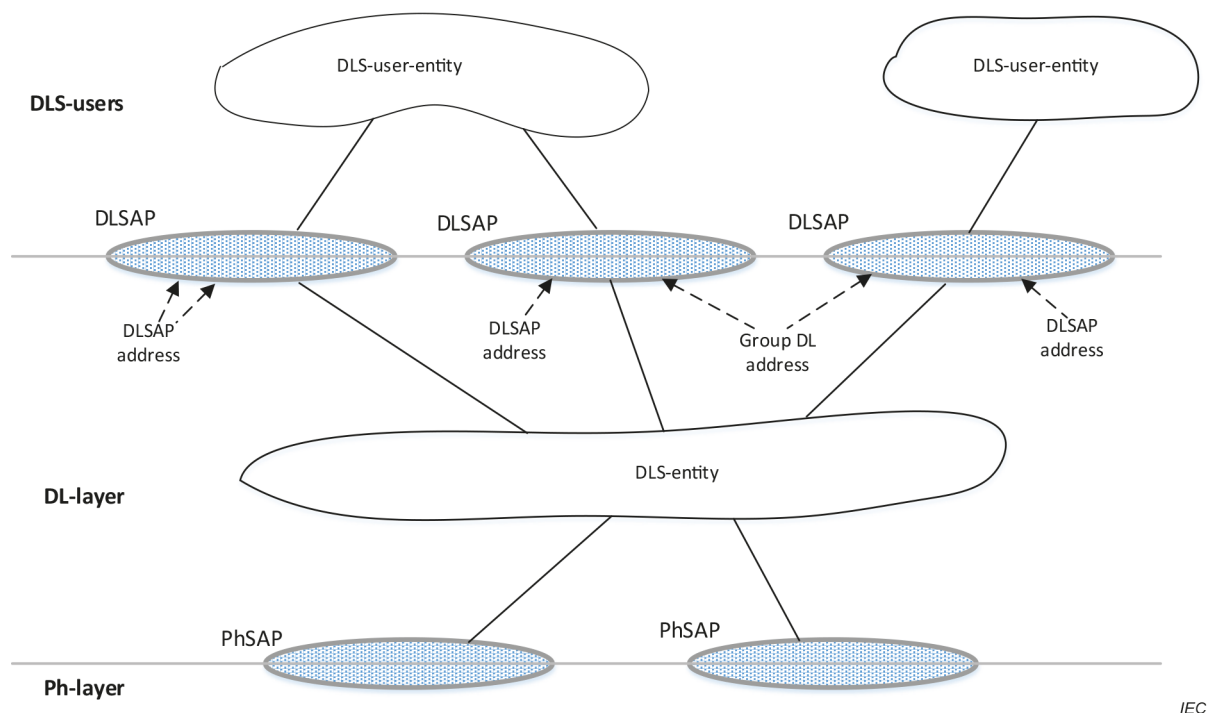

IEC

Note 2 to entry: DLSAPs and PhSAPs are depicted as ovals spanning the boundary between two adjacent layers.

Note 3 to entry: DL-addresses are depicted as designating small gaps (points of access) in the DLL portion of a DLSAP.

Note 4 to entry: A single DL-entity may have multiple DLSAP-addresses and group DL-addresses associated with a single DLSAP.

Figure 1 – Relationships of DLSAPs, DLSAP-addresses and group DL-addresses

3.3.3 DL(SAP)-address

either an individual DLSAP-address, designating a single DLSAP of a single DLS user, or a group DL-address potentially designating multiple DLSAPs where each DLSAP is from a single DLS-user

Note 1 to entry: This terminology is chosen because ISO/IEC 7498-3 does not permit the use of the term DLSAP address to designate more than a single DLSAP at a single DLS-user.

3.3.4 (individual) DLSAP-address

DL-address that designates only one DLSAP within the extended link

Note 1 to entry: A single DL-entity may have multiple DLSAP-addresses associated with a single DLSAP.

3.3.5 extended link

DL-subnetwork, consisting of the maximal set of links interconnected by DL-relays, sharing a single DL-name (DL-address) space, in which any of the connected DL-entities may communicate, one with another, either directly or with the assistance of one or more of those intervening DL-relay entities

Note 1 to entry: An extended link may be composed of just a single link.

3.3.6

frame

denigrated synonym for DLPDU

3.3.7

group DL-address

DL-address that potentially designates more than one DLSAP within the extended link

Note 1 to entry: A single DL-entity may have multiple group DL-addresses associated with a single DLSAP. A single DL-entity may also have a single group DL-address associated with more than one DLSAP.

3.3.8

node

single DL-entity as it appears on one local link

3.3.9

receiving DLS-user

DL-service user that acts as a recipient of DLS-user-data

Note 1 to entry: A DL-service user can be concurrently both a sending and receiving DLS-user.

3.3.10

sending DLS-user

DL-service user that acts as a source of DLS-user-data

3.4 Additional Type 28 data-link specific definitions

3.4.1

control device

device that controls all field devices for logical operations, timing, calculations, etc.

3.4.2

management node

device for allocating and managing Type 28 network physical communication resources

3.4.3

terminal node

device in Type 28 network that communicates based on allocated physical communication resources

3.4.4

clock synchronization

clock calibration of the terminal node device

3.4.5

cyclic time

time of cyclic processing of a device or module

3.4.6

RT data

data sensitive to time deterministic requirements

3.4.7

non-RT data

data insensitive to time deterministic requirements

3.4.8

orthogonal frequency division multiplexing (OFDM) symbol

minimum data transmission unit in time domain that includes all subcarriers in frequency based on OFDM technology

3.4.9

upper sideband

subcarriers with a frequency range from 16,896 MHz to 32,256 MHz on an OFDM symbol

3.4.10

lower sideband

subcarriers with a frequency range from 1,536 MHz to 16,896 MHz on an OFDM symbol

3.4.11

carrier mode

data transfer mode over available resources made up of OFDM symbols

3.4.12

working mode

OFDM operation in a specific transmission mode, RS coding, convolutional coding, and modulation mode

3.4.13

cyclic frame

signal frames which are processed in a regular and repetitive manner

3.4.14

cyclic symbol

OFDM symbols in signal frames which are processed in a regular and repetitive manner

3.4.15

code block

octet sequence of data interaction between the Type 28 physical layer entity and the Type 28 data-link layer entity

3.4.16

data transmission channel

logical channel of the Type 28 data-link layer mapped by the determined physical communication resource for transmitting data-link layer data frames

3.4.17

BITMAP

bitmap format type including Width and Mask_Info information and the length range from 2 octets to 256 octets

Note 1 to entry: See Figure 2.

Note 2 to entry: Width has 1 octet and its value indicates the number of the octets of Mask_Info.

Note 3 to entry: Mask_Info represented by bit. The octet length is Width value and the bit length is Width × 8.

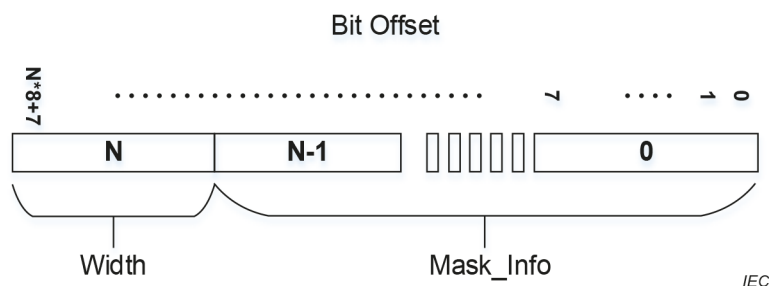


Figure 2 – Bitmap Data type diagram

3.5 Common symbols and abbreviations

NOTE Many symbols and abbreviations are common to more than one protocol Type; they are not necessarily used by all protocol Types.

DL-	Data-link layer (as a prefix)
DLC	DL-connection
DLCEP	DL-connection-end-point
DLE	DL-entity (the local active instance of the data-link layer)
DLL	DL-layer
DLPCI	DL-protocol-control-information
DLPDU	DL-protocol-data-unit
DLM	DL-management
DLME	DL-management Entity (the local active instance of DL-management)
DLMS	DL-management Service
DLS	DL-service
DLSAP	DL-service-access-point
DLSDU	DL-service-data-unit
FIFO	First-in first-out (queuing method)
OSI	Open systems interconnection
Ph-	Physical layer (as a prefix)
PhE	Ph-entity (the local active instance of the physical layer)
PhL	Ph-layer
QoS	Quality of service

3.6 Additional Type 28 symbols and abbreviations

For the purposes of this document, the following abbreviations apply.

AL	Application layer
C/S	Client/Server
CLMDTA	Connection-less Mode Data Transmission with Acknowledge
CLMDTNA	Connection-less Mode Data Transmission with No Acknowledge
CLMDTRA	Connection-less Mode Data Transmission with Request and Acknowledge
CLMDTRRNA	Connection-less Mode Data Transmission with Request and Response but No Acknowledge
CMDTA	Connection Mode Data Transmission with Acknowledge
CMDTNA	Connection Mode Data Transmission with No Acknowledge