



BSI Standards Publication

Terrestrial photovoltaic (PV) modules — Design qualification and type approval

Part 1: Test requirements

National foreword

This British Standard is the UK implementation of EN IEC 61215-1:2021. It is identical to IEC 61215-1:2021, incorporating corrigendum May 2021. It supersedes [BS EN 61215-1:2016](#), which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee GEL/82, Photovoltaic Energy Systems.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2021
Published by BSI Standards Limited 2021

ISBN 978 0 539 18100 5

ICS 27.160

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2021.

Amendments/corrigenda issued since publication

Date	Text affected
30 June 2021	Implementation of IEC corrigendum May 2021: replacement of Figure 2

English Version

Terrestrial photovoltaic (PV) modules - Design qualification and
type approval - Part 1: Test requirements
(IEC 61215-1:2021)

Modules photovoltaïques (PV) pour applications terrestres -
Qualification de la conception et homologation - Partie 1:
Exigences d'essai
(IEC 61215-1:2021)

Terrestrische Photovoltaik(PV)-Module - Bauartegnung und
Bauartzulassung - Teil 1: Prüfanforderungen
(IEC 61215-1:2021)

This European Standard was approved by CENELEC on 2021-03-30. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 82/1828A/FDIS, future edition 2 of IEC 61215-1, prepared by IEC/TC 82 "Solar photovoltaic energy systems" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 61215-1:2021.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2021-12-30
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2024-03-30

This document supersedes EN 61215-1:2016 and all of its amendments and corrigenda (if any).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 61215-1:2021 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60904-7	NOTE	Harmonized as EN IEC 60904-7
IEC 60904-9	NOTE	Harmonized as EN IEC 60904-9
IEC 61215-1-1:2021	NOTE	Harmonized as EN IEC 61215-1-1:2021 (not modified)
IEC 61215-1-2:2021	NOTE	Harmonized as EN IEC 61215-1-2:2021 (not modified)
IEC 61215-1-3:2021	NOTE	Harmonized as EN IEC 61215-1-3:2021 (not modified)
IEC 61215-1-4:2021	NOTE	Harmonized as EN IEC 61215-1-4:2021 (not modified)
IEC 61853-2:2016	NOTE	Harmonized as EN 61853-2:2016 (not modified)
IEC 62108:2016	NOTE	Harmonized as EN 62108:2016 (not modified)
IEC 62506	NOTE	Harmonized as EN 62506
IEC 60904-9:2007	NOTE	Harmonized as EN 60904-9:2007 (not modified)

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60269-6	-	Low-voltage fuses - Part 6: Supplementary requirements for fuse-links for the protection of solar photovoltaic energy systems	EN 60269-6	-
IEC 60891	-	Photovoltaic devices - Procedures for temperature and irradiance corrections to measured I-V characteristics	EN 60891	-
IEC 60904-1	-	Photovoltaic devices - Part 1: Measurement of photovoltaic current-voltage characteristics	EN IEC 60904-1	-
IEC/TS 60904-1-2	2019	Photovoltaic devices - Part 1-2: Measurement of current-voltage characteristics of bifacial photovoltaic (PV) devices	-	-
IEC 60904-3	-	Photovoltaic devices - Part 3: Measurement principles for terrestrial photovoltaic (PV) solar devices with reference spectral irradiance data	EN IEC 60904-3	-
IEC 60904-10	-	Photovoltaic devices - Part 10: Methods of linear dependence and linearity measurements	EN IEC 60904-10	-
IEC/TS 60904-13	-	Photovoltaic devices - Part 13: Electroluminescence of photovoltaic modules	-	-
IEC 61140	-	Protection against electric shock - Common aspects for installation and equipment	EN 61140	-
IEC 61215-2	-	Terrestrial photovoltaic (PV) modules - Design qualification and type approval - Part 2: Test procedures	EN IEC 61215-2	-

EN IEC 61215-1:2021 (E)

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61730-1	-	Photovoltaic (PV) module safety qualification - Part 1: Requirements for construction	EN IEC 61730-1	-
IEC 61730-2	-	Photovoltaic (PV) module safety qualification - Part 2: Requirements for testing	EN IEC 61730-2	-
IEC/TS 61836	-	Solar photovoltaic energy systems - Terms, definitions and symbols	-	-
IEC 61853-1	-	Photovoltaic (PV) module performance testing and energy rating - Part 1: Irradiance and temperature performance measurements and power rating	EN 61853-1	-
IEC/TS 62782	-	Photovoltaic (PV) modules - Cyclic (dynamic) mechanical load testing	-	-
IEC 62790	-	Junction boxes for photovoltaic modules - Safety requirements and tests	EN IEC 62790	-
IEC/TS 62804-1	-	Photovoltaic (PV) modules - Test methods for the detection of potential-induced degradation - Part 1: Crystalline silicon	-	-
IEC 62852	-	Connectors for DC-application in photovoltaic systems - Safety requirements and tests	EN 62852	-
IEC/TS 62915	-	Photovoltaic (PV) modules - Type approval, design and safety qualification - Retesting	-	-
IEC 62941	-	Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing	EN IEC 62941	-
IEC/TS 63163	— ¹	Terrestrial photovoltaic (PV) modules for consumer products - Design qualification and type approval	-	-
ISO/IEC Guide 98-3	-	Uncertainty of measurement - Part 3: Guide to the expression of uncertainty in measurement (GUM:1995)	-	-

¹ Under preparation. Stage at the time of publication: ADTS.

CONTENTS

FOREWORD	4
INTRODUCTION	6
1 Scope	7
2 Normative references	7
3 Terms, definitions and abbreviated terms	9
4 Test samples	11
5 Marking and documentation	13
5.1 Name plate	13
5.2 Documentation	13
5.2.1 Minimum requirements	13
5.2.2 Information to be given in the documentation	13
5.2.3 Assembly instructions	15
6 Testing	15
7 Pass criteria	17
7.1 General	17
7.2 Power output and electric circuitry	18
7.2.1 Identification of rated values and tolerances	18
7.2.2 Verification of rated label values → Gate No. 1	20
7.2.3 Maximum power degradation during type approval testing → Gate No. 2	23
7.2.4 Electrical circuitry	23
7.3 Visual defects	23
7.4 Electrical safety	23
8 Major visual defects	24
9 Report	24
10 Modifications	25
11 Test flow and procedures	26
Annex A (informative) Changes from previous edition	28
A.1 General	28
A.2 Procedures for bifacial modules	28
A.3 Use of representative samples	30
A.4 Addition of dynamic mechanical load test	31
A.5 Addition of test for potential induced degradation	31
A.6 Simulator requirements	33
A.6.1 General	33
A.6.2 Rationale for changes to spectral requirements	34
A.6.3 Rationale for changes to uniformity requirements	35
A.7 References to retest guidelines	36
A.8 Weight on junction boxes	36
A.9 Correction to monolithically-integrated hot-spot endurance test	36
A.10 Number of modules in sequence	38
A.11 Removal of nominal module operating temperature (NMOT)	39
A.12 Very low currents during thin-film tests	40
A.13 Limit bypass diode testing to three diodes	40
A.14 Revert the insulation test to 2005 version	40
A.15 Bending test	41

A.16 Stabilization option for boron oxygen LID (MQT 19.3)	41
Bibliography	42
Figure 1 – Geometry that shows radius of curvature of a flexible module	10
Figure 2 – Full test flow for design qualification and type approval of photovoltaic modules	16
Figure 3 – Examples of hypothetical partial nameplates (left column), datasheets (center column), and derived rated values and tolerances (right column)	20
Figure A.1 – Derived temperature coefficients (α) for nine different mc-Si products types	38
Table 1 – Required component tests	17
Table 2 – Summary of Gate No. 1 requirements	17
Table 3 – Summary of test levels	26
Table A.1 – Published uncertainty values as a function of simulator uniformity class	35
Table A.2 – Summary of foil placement during insulation test in three different versions	40

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**TERRESTRIAL PHOTOVOLTAIC (PV) MODULES –
DESIGN QUALIFICATION AND TYPE APPROVAL –****Part 1: Test requirements****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61215-1 has been prepared by IEC technical committee 82: Solar photovoltaic energy systems.

This second edition of IEC 61215-1 cancels and replaces the first edition of IEC 61215-1, published in 2016; it constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Addition of a test taken from IEC TS 62782.
- b) Addition of a test taken from IEC TS 62804-1.
- c) Addition of test methods required for flexible modules. This includes the addition of the bending test (MQT 22).
- d) Addition of definitions, references and instructions on how to perform the IEC 61215 design qualification and type approval on bifacial PV modules.

- e) Clarification of the requirements related to power output measurements.
- f) Addition of weights to junction box during 200 thermal cycles.
- g) Requirement that retesting be performed according to IEC TS 62915.
- h) Removal of the nominal module operating test (NMOT), and associated test of performance at NMOT, from the IEC 61215 series.

Informative Annex A explains the background and reasoning behind some of the more substantial changes that were made in the IEC 61215 series in progressing from edition 1 to edition 2.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
82/1828A/FDIS	82/1848/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61215 series, published under the general title *Terrestrial photovoltaic (PV) modules – Design qualification and type approval*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

The contents of the corrigendum of May 2021 have been included in this copy.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

Whereas Part 1 of this standards series describes requirements (both in general and specific with respect to device technology), the sub-parts of Part 1 define technology variations and Part 2 defines a set of test procedures necessary for design qualification and type approval. The test procedures described in Part 2 are valid for all device technologies.

TERRESTRIAL PHOTOVOLTAIC (PV) MODULES – DESIGN QUALIFICATION AND TYPE APPROVAL –

Part 1: Test requirements

1 Scope

This document lays down requirements for the design qualification of terrestrial photovoltaic modules suitable for long-term operation in open-air climates. The useful service life of modules so qualified will depend on their design, their environment and the conditions under which they are operated. Test results are not construed as a quantitative prediction of module lifetime.

In climates where 98th percentile operating temperatures exceed 70 °C, users are recommended to consider testing to higher temperature test conditions as described in IEC TS 63126. Users desiring qualification of PV products with lesser lifetime expectations are recommended to consider testing designed for PV in consumer electronics, as described in IEC TS 63163 (under development). Users wishing to gain confidence that the characteristics tested in IEC 61215 appear consistently in a manufactured product may wish to utilize IEC 62941 regarding quality systems in PV manufacturing.

This document is intended to apply to all terrestrial flat plate module materials such as crystalline silicon module types as well as thin-film modules. It does not apply to systems that are not long-term applications, such as flexible modules installed in awnings or tenting.

This document does not apply to modules used with concentrated sunlight although it may be utilized for low concentrator modules (1 to 3 suns). For low concentration modules, all tests are performed using the irradiance, current, voltage and power levels expected at the design concentration.

This document does not address the particularities of PV modules with integrated electronics. It may however be used as a basis for testing such PV modules.

The objective of this test sequence is to determine the electrical characteristics of the module and to show, as far as possible within reasonable constraints of cost and time, that the module is capable of withstanding prolonged exposure outdoors. Accelerated test conditions are empirically based on those necessary to reproduce selected observed field failures and are applied equally across module types. Acceleration factors may vary with product design, and thus not all degradation mechanisms may manifest. Further general information on accelerated test methods including definitions of terms may be found in IEC 62506.

Some long-term degradation mechanisms can only reasonably be detected via component testing, due to long times required to produce the failure and necessity of stress conditions that are expensive to produce over large areas. Component tests that have reached a sufficient level of maturity to set pass/fail criteria with high confidence are incorporated into the IEC 61215 series via addition to Table 1. In contrast, the tests procedures described in this series, in IEC 61215-2, are performed on modules.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60269-6, *Low-voltage fuses – Part 6: Supplementary requirements for fuse-links for the protection of solar photovoltaic energy systems*

IEC 60891, *Photovoltaic devices – Procedures for temperature and irradiance corrections to measured I-V characteristics*

IEC 60904-1, *Photovoltaic devices – Part 1: Measurement of photovoltaic current-voltage characteristics*

IEC TS 60904-1-2:2019, *Photovoltaic devices – Part 1-2: Measurement of current-voltage characteristics of bifacial photovoltaic (PV) devices*

IEC 60904-3, *Photovoltaic devices – Part 3: Measurement principles for terrestrial photovoltaic (PV) solar devices with reference spectral irradiance data*

IEC 60904-10, *Photovoltaic devices – Part 10: Methods of linear dependence and linearity measurements*

IEC TS 60904-13, *Photovoltaic devices – Part 13: Electroluminescence of photovoltaic modules*

IEC 61140, *Protection against electric shock – Common aspects for installation and equipment*

IEC 61215-2, *Terrestrial photovoltaic (PV) modules – Design qualification and type approval – Part 2: Test procedures*

IEC 61730-1, *Photovoltaic (PV) module safety qualification – Part 1: Requirements for construction*

IEC 61730-2, *Photovoltaic (PV) module safety qualification – Part 2: Requirements for testing*

IEC TS 61836, *Solar photovoltaic energy systems – Terms, definitions and symbols*

IEC 61853-1, *Photovoltaic (PV) module performance testing and energy rating – Part 1: Irradiance and temperature performance measurements and power rating*

IEC TS 62782, *Photovoltaic (PV) modules – Cyclic (dynamic) mechanical load testing*

IEC 62790, *Junction boxes for photovoltaic modules – Safety requirements and tests*

IEC TS 62804-1, *Photovoltaic (PV) modules – Test methods for the detection of potential-induced degradation – Part 1: Crystalline silicon*

IEC 62852, *Connectors for DC-application in photovoltaic systems – Safety requirements and tests*

IEC TS 62915, *Photovoltaic (PV) modules – Type approval, design and safety qualification – Retesting*

IEC 62941, *Terrestrial photovoltaic (PV) modules – Quality system for PV module manufacturing*

IEC TS 63163: –¹Terrestrial photovoltaic (PV) modules for consumer products – Design qualification and type approval

ISO/IEC Guide 98-3, *Uncertainty of measurement – Part 3: Guide to the expression of uncertainty in measurement (GUM:1995)*

3 Terms, definitions and abbreviated terms

For the purposes of this document, the terms and definitions in IEC TS 61836 apply, as well as the following.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

bins of power classes

power (typically maximum power) sorting criteria from the PV module manufacturer

3.2

tolerances <on label>

value range of electrical parameters on the label of the PV module as given by the manufacturer

3.3

MQT

Module Quality Test

3.4

type approval

conformity test made on one or more items representative of the production

[SOURCE: IEC 60050-581:2008, 581-21-08 – Type test]

3.5

reproducibility <of measurements>

closeness of agreement between the results of measurements of the same value of a quantity, when the individual measurements are made under different conditions of measurement:

- principle of measurement,
- method of measurement,
- observer,
- measuring instruments,
- reference standards,
- laboratory,

¹ Under preparation. Stage at the time of publication: ADTS.

– under conditions of use of the instruments, different from those customarily used, after intervals of time relatively long compared with the duration of a single measurement. [consistent with the International Vocabulary of Metrology (VIM), 3.7]

Note 1 to entry: The concepts of "principle of measurement" and "method of measurement" are respectively defined in VIM 2.3 and 2.4.

Note 2 to entry: The term "reproducibility" also applies to the instance where only certain of the above conditions are taken into account, provided that these are stated.

Note 3 to entry: It is recommended that laboratories determine their reproducibility according to the formulas and principles in ISO 5725-2.

[SOURCE: IEC 60050-311:2001, 311-06-07]

3.6

flexible module

PV module that exhibits a radius of curvature of 500 mm or less in at least one direction according to the manufacturer's specification and is capable of bending to conform to a flat or curved surface

Note 1 to entry: A curved module with a rigid shape is not considered a flexible module.

Note 2 to entry: Radius of curvature is defined as shown in Figure 1. During testing, the applied radius of curvature is no smaller than that specified by the manufacturer.

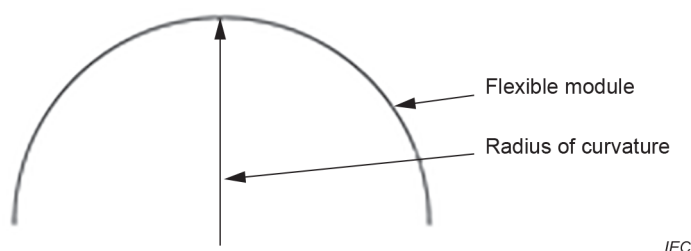


Figure 1 – Geometry that shows radius of curvature of a flexible module

3.7

representative sample

sample that includes all the components of the module, except some repeated parts

Note 1 to entry: The representative samples shall use all key materials and subassemblies, as detailed in Clause 4.

3.8

very large module

module that exceeds the size of standard 2,2 m × 1,5 m commercially-available simulators

Note 1 to entry: A very large module exceeds 2,2 m in length or width, or exceeds 1,5 m in both dimensions. Thus a 3 m × 0,3 m module is considered very large, as is a 2,2 m × 2,2 m module.

Note 2 to entry: Very large modules are exempt from class A simulator spatial irradiance uniformity requirements, as detailed in IEC 61215-2 MQT 02.

Note 3 to entry: During test sequences representative samples may be substituted for very large modules, within the limits described in Clause 4.

Note 4 to entry: In future editions, the size threshold to be considered a very large module will likely increase to larger dimensions.

3.9

bifacial PV modules

modules that can convert irradiation received on both the front-side and rear-side into electric energy by means of the photovoltaic effect

3.10

bifaciality coefficients

ratios between the I - V characteristics of the rear-side and the front-side of a bifacial module each measured under Standard Test Conditions (STC – IEC TS 61836), namely the short-circuit current bifaciality coefficient ϕ_{ISC} , the open-circuit voltage bifaciality coefficient ϕ_{Voc} and the maximum power bifaciality coefficient ϕ_{Pmax}

Note 1 to entry: Bifaciality coefficients are fully defined in IEC TS 60904-1-2:2019, 6.2.

3.11

bifacial nameplate irradiance

BNPI

higher irradiance at which nameplate verification is performed for bifacial modules, corresponding to 1 000 W/m² on the module front and 135 W/m² on the module rear, applied in any method allowed by IEC TS 60904-1-2

3.12

bifacial stress irradiance

BSI

higher irradiance at which currents for stress are measured on bifacial modules, corresponding to 1 000 W/m² on the module front and 300 W/m² on the module rear, applied by any method allowed in IEC TS 60904-1-2, I - V characteristic at which may be extrapolated from lower irradiances

4 Test samples

The PV module samples shall have been manufactured from specified materials and components in accordance with the relevant drawings and process sheets and have been subjected to the manufacturer's normal inspection, quality control and production acceptance procedures. The PV modules shall be complete in every detail and shall be accompanied by the manufacturer's handling, mounting, and connection instructions. When the PV modules to be tested are prototypes of a new design and not from production, this fact shall be noted in the test report (see Clause 9).

The number of test samples required is derived from the applicable test sequences (see Clause 11).

Special test samples may be required for tests such as the bypass diode test MQT 18 (see IEC 61215-2).

For qualification of multiple bins of power classes within the boundaries given in IEC TS 62915 at least 2 modules each, from the lower end, median and higher end power class shall be used for testing. If median power class does not exist the next higher class shall be used. If qualification of a single power class shall be extended to further bins of power classes within the boundaries given in IEC TS 62915 then at least 2 modules each, from the lower end and higher end power class shall be used for label verification (see Gate No.1 in 7.2.1). If a power class is extended only towards higher (or lower) bins, then modules only from the higher (or lower) bins, respectively, shall be used for verification of rated label values.

Qualification to multiple bins of power classes does not increase the minimum requirement of one control sample used in 7.2.3.

It is advisable to provide additional spare samples meeting the same output power requirements.

If applicable, the test samples shall be used to represent a group or family of products, or variations in the materials, or production processes used to produce the modules. The additional samples required for the test programme are then derived from IEC TS 62915.

For very large modules (as defined in 3.8), representative samples (as defined in 3.7) may be used for all qualification tests given in Clause 11 and IEC 61215-2. During the design and manufacturing of the representative samples, attention should be paid to reach the maximum similarity to the full-size product in all electrical, mechanical, and thermal characteristics related to quality and reliability. The cell, encapsulation methods, interconnects, terminations, clearance and creepage distances around all edges, and distance through solid insulation (relied upon insulation and cemented joints) shall be the same as on the actual full-size products. Limits are placed on how much one may reduce the dimensions of a very large module in making representative samples for qualification testing. The reduced dimension(s) shall be no less than one half the dimensions that define a very large module. In other words, when reducing the shorter dimension, the representative sample shall be at least 0,75 m wide. In reducing the longer dimension, the representative sample shall be at least 1,1 m long. If representative samples are used for any test, the test report shall include a table listing the dimensions of the product being qualified, and for each MQT, the dimensions of the samples tested. The table shall contain the statement, "Smaller samples were used for some tests as noted above. Use of smaller samples may affect test results." For determination of maximum power degradation during testing (7.2.3) on a representative sample, $P_{\max}(\text{Lab_GateNo.1})$ refers to the representative sample's initial stabilized measured power output. However, for verification of rated label values (7.2.2) a standard production product shall be measured, either at the test facility or utilizing a test at the manufacturer monitored by the testing entity.

If representative samples are utilized in Sequence E, then one extra module, full-sized, is required, and shall be subjected only to MQT 16 (static mechanical load test) and the requirements therein.

Any representative sample used for MQT 09 (hot-spot endurance test) shall contain the same number of cells per bypass diode (i.e. the same substring size) as the full-size product.

NOTE It is preferable in any test to measure a full-size sample, rather than a representative sample, when equipment size allows.

Prior to beginning the qualification test, care should be taken not to damage the samples in transit. Such care may include adherence to best practices in packing and shipping,^[1]² as well as electroluminescence imaging according to IEC TS 60904-13 before and after shipping to make sure cracks have not developed in transit.

For the requirements in the IEC 61215 series, a module shall be considered "bifacial " if the manufacturer claims bifaciality on the nameplate or datasheet, or if the module exhibits a maximum power bifaciality coefficient $\geq 20\%$. If a module is to be tested as a monofacial module, the test laboratory shall verify that the module is monofacial by at least one of the following methods:

- a) Information from the manufacturer showing that the rear of the cell is fully metallized;
- b) Spectrally-resolved backsheet transmission data from the module manufacturer; or
- c) Determination of bifaciality coefficient on one sample according to the procedure in IEC TS 60904-1-2.

² Numbers in square brackets refer to the Bibliography.