



BSI Standards Publication

Electric vehicle conductive charging system

Part 24: Digital communication between a DC EV supply equipment
and an electric vehicle for control of DC charging

National foreword

This British Standard is the UK implementation of EN IEC 61851-24:2024. It is identical to IEC 61851-24:2023. It supersedes BS EN 61851-24:2014, which will be withdrawn on 31 December 2027.

The UK participation in its preparation was entrusted to Technical Committee PEL/69, Electric vehicles.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2024
Published by BSI Standards Limited 2024

ISBN 978 0 580 96154 0

ICS 43.120

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 December 2024.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

English Version

Electric vehicle conductive charging system - Part 24: Digital communication between a DC EV supply equipment and an electric vehicle for control of DC charging
(IEC 61851-24:2023)

Système de charge conductive pour véhicules électriques -
Partie 24: Communication numérique entre le système
d'alimentation à courant continu et le véhicule électrique
pour le contrôle de la charge à courant continu
(IEC 61851-24:2023)

Konduktive Ladesysteme für Elektrofahrzeuge - Teil 24:
Digitale Kommunikation zwischen einer
Gleichstromversorgungseinrichtung für Elektrofahrzeuge
und dem Elektrofahrzeug zur Steuerung des
Gleichstromladevorgangs
(IEC 61851-24:2023)

This European Standard was approved by CENELEC on 2024-10-16. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 69/909/FDIS, future edition 2 of IEC 61851-24, prepared by TC 69 "Electrical power/energy transfer systems for electrically propelled road vehicles and industrial trucks" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 61851-24:2024.

The following dates are fixed:

- latest date by which the document has to be implemented at national (dop) 2025-12-31 level by publication of an identical national standard or by endorsement
- latest date by which the national standards conflicting with the (dow) 2027-12-31 document have to be withdrawn

This document supersedes EN 61851-24:2014 and all of its amendments and corrigenda (if any).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a standardization request addressed to CENELEC by the European Commission. The Standing Committee of the EFTA States subsequently approves these requests for its Member States.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

Endorsement notice

The text of the International Standard IEC 61851-24:2023 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standard indicated:

IEC 61851-1:2017 NOTE Approved as EN IEC 61851-1:2019 (not modified)

ISO 8751 NOTE Approved as EN ISO 8751

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61851-23	2023	Electric vehicle conductive charging system - Part 23: DC electric vehicle supply equipment	-	-
ISO/TR 8713	-	Electrically propelled road vehicles - Vocabulary	-	-
ISO 11898-1	2015	Road vehicles - Controller area network (CAN) - Part 1: Data link layer and physical signalling	-	-
ISO 11898-2	2016	Road vehicles - Controller area network (CAN) - Part 2: High-speed medium access unit	-	-
ISO 15118-2	2014	Road vehicles - Vehicle-to-Grid Communication Interface - Part 2: Network and application protocol requirements	EN ISO 15118-2	2016

CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Normative references	6
3 Terms and definitions	6
4 System configuration	7
5 Digital communication architecture	7
6 Charging control process	7
7 Overview of charging control	7
8 Exchanged information for DC charging control	8
Annex A (normative) Digital communication for control of DC EV charging system A	10
A.1 General.....	10
A.2 Digital communication actions during charging control process	10
A.3 Digital communication of DC charging control	14
A.4 Parameter definition.....	15
A.5 Physical/data link layer	25
A.5.1 Communication circuit	25
A.5.2 Terminating resistor.....	25
A.5.3 Noise filter	25
A.5.4 CAN transceiver	25
A.5.5 Twisted-pair line	25
A.5.6 Overvoltage protection for the CAN communication circuit.....	25
A.5.7 Communication protocol	25
A.5.8 CAN bus.....	26
A.5.9 Transmission process	26
A.5.10 CAN reception error.....	27
A.6 Bi-directional power flow	27
A.6.1 Digital communication actions during charging/discharging control process.....	27
A.6.2 Digital communication of DC charging/discharging control	31
A.6.3 Parameter definition	32
A.6.4 Charging/discharging control process	41
A.6.5 Exchanged information for DC charging/discharging control	41
Annex B (normative) Digital communication for control of DC charging system B	43
B.1 General.....	43
B.2 Digital communication of DC charging control	43
B.3 Digital communication actions during charging control process	43
B.4 Parameter definition.....	44
B.5 Physical/data link layer	48
Annex C (normative) Digital communication for control of DC charging system C.....	50
C.1 General.....	50
C.2 Required exchange parameters	50
Bibliography.....	52

Figure 1 – Digital communication between a DC EV supply equipment and an electric vehicle for control of DC charging 8

Figure A.1 – Sequence diagram of DC charging control communication for system A..... 14

Figure A.2 – CAN communication circuit	25
Figure A.3 – CAN bus	26
Figure A.4 – Transmission cycle	27
Figure A.5 – Sequence diagram of DC charging/discharging control communication for system A.....	31
Figure B.1 – Sequence diagram of DC charging control communication for system B.....	43
Table 1 – Exchanged information for DC charging control	8
Table A.1 – Communication actions and parameters during DC charging control process between system A station and vehicle	11
Table A.2 – Exchanged parameter during DC charging control process from vehicle to system A station	16
Table A.3 – Exchanged parameter during DC charging control process from system A station to vehicle.....	20
Table A.4 – The physical link layer specification for system A.....	26
Table A.5 – Specification of data transmission.....	26
Table A.6 – Communication actions and parameters during DC charging/discharging control process between system A and vehicle	28
Table A.7 – Exchanged parameter during DC charging/discharging control process from vehicle to system A station	33
Table A.8 – Exchanged parameter during DC charging/discharging control process from system A station to vehicle	38
Table A.9 – Exchanged information for DC charging/discharging control.....	41
Table B.1 – Communication actions and parameters during DC charging control process between system B station and vehicle	44
Table B.2 – Parameters in handshake stage for system B.....	45
Table B.3 – Parameters in charge parameter configuration stage for system B	46
Table B.4 – Parameters in charging stage for system B	46
Table B.5 – Parameters in charge ending stage for system B.....	48
Table B.6 – Error Parameters for system B	48
Table B.7 – Physical/data link layer specifications for system B	49
Table C.1 – Required exchanged parameters for DC charging control for system C	50

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ELECTRIC VEHICLE CONDUCTIVE CHARGING SYSTEM –**Part 24: Digital communication between a DC EV supply equipment
and an electric vehicle for control of DC charging**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61851-24 has been prepared by IEC technical committee 69: Electrical power/energy transfer systems for electrically propelled road vehicles and industrial trucks. It is an International Standard.

This second edition cancels and replaces the first edition published in 2014. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Annex A and Annex B have been updated in line with IEC 61851-23:2023 and relevant standards.

The text of this International Standard is based on the following documents:

Draft	Report on voting
69/909/FDIS	69/914/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 61851 series, published under the general title *Electric vehicle conductive charging system*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

ELECTRIC VEHICLE CONDUCTIVE CHARGING SYSTEM –

Part 24: Digital communication between a DC EV supply equipment and an electric vehicle for control of DC charging

1 Scope

This part of IEC 61851, together with IEC 61851-23, applies to digital communication between a DC EV supply equipment and an electric road vehicle (EV) for control of conductive DC power transfer, with a rated supply voltage up to 1 000 V AC or up to 1 500 V DC and a rated output voltage up to 1 500 V DC.

This document also applies to digital communication between the DC EV charging/discharging station and the EV for system A, as specified in Annex A.

The EV charging mode is mode 4, according to IEC 61851-23.

Annex A, Annex B, and Annex C give descriptions of digital communications for control of DC charging specific to DC EV charging systems A, B and C as defined in IEC 61851-23.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61851-23:2023, *Electric vehicle conductive charging system – Part 23: DC electric vehicle supply equipment*

ISO TR 8713, *Electrically propelled road vehicles – Vocabulary*

ISO 11898-1:2015, *Road vehicles – Controller area network (CAN) – Part 1: Data link layer and physical signalling*

ISO 11898-2:2016, *Road vehicles – Controller area network (CAN) – Part 2: High-speed medium access unit*

ISO 15118-2:2014, *Road vehicles – Vehicle-to-grid communication interface – Part 2: Network and application protocol requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO TR 8713 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

This clause of IEC 61851-23:2023 is applicable except as follows:

Additional terms and definitions:

3.1

parameter

single piece of information relevant to charging control, and that is exchanged between a DC EV supply equipment and an EV using a form of digital communication

3.2

signal

data element that is communicated between a DC EV supply equipment and an EV using any means other than digital communication

4 System configuration

The system configuration shall be in accordance with GG.2 of IEC 61851-23:20—.

5 Digital communication architecture

In this document, two digital communication architectures are used:

- based on CAN using a dedicated data communication circuit; CAN protocol is given in ISO 11898-1. Refer to Annex A and Annex B for specific implementation details.
- based on Homeplug® Green PHY™¹ (see IEEE 1901) over the control pilot line; refer to Annex C for specific implementation details.

6 Charging control process

GG.3 of IEC 61851-23:2023 provides general information on the charging process and the state of DC EV supply equipment.

Specific requirements of charging process are given in AA.4 and AA.6.3 for system A, BB.4 and BB.6 for system B, and CC.3 for system C in IEC 61851-23:2023 respectively.

7 Overview of charging control

The digital communication of DC charging control covered by this document is as shown in Figure 1, identifying the SECC (supply equipment communication controller) and EVCC (EV communication controller), as defined in IEC 61851-23. This document does not cover the control protocol internal to the DC EV supply equipment, nor the vehicle, such as power control protocol for AC/DC inverter of DC EV supply equipment and battery management control in the vehicle.

¹ Homeplug® and Green PHY™ are examples of suitable products available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of these products.

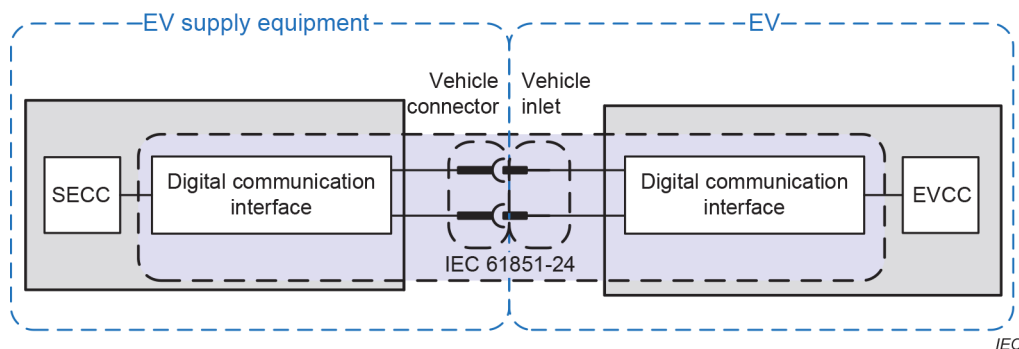


Figure 1 – Digital communication between a DC EV supply equipment and an electric vehicle for control of DC charging

8 Exchanged information for DC charging control

This clause describes information which shall be exchanged between a DC EV supply equipment and a vehicle during the charging process according to IEC 61851-23. The information in Table 1 is common to all systems described in Annex A, Annex B and Annex C. Each information listed in Table 1 is defined as a parameter in each annex. Each system can have additional parameters, and these parameters are defined in each annex.

Table 1 – Exchanged information for DC charging control

No.	Information	Description	Relevant requirement in IEC 61851-23:2023
a-1	Current request for the controlled current charging (CCC) system	Exchange of current value requested by EV	6.3.1.101
a-2	Voltage request for the controlled voltage charging (CVC) system	Exchange of voltage value requested by EV	
a-3	Maximum rated voltage of DC EV supply equipment	Exchange of maximum rated voltage value of DC EV supply equipment	6.3.1.101 6.3.1.104
a-4	Maximum rated current of DC EV supply equipment	Exchange of maximum rated current value of DC EV supply equipment	6.3.1.101 6.3.1.104
b-1	Communication protocol	Exchange of software version of a charging system	6.3.1.104 6.3.1.106
b-2	Maximum voltage limit of EV	Exchange of maximum voltage limit value of vehicle.	
b-3	EV minimum current limit, only for the controlled voltage charging (CVC) system	Under consideration	
b-4	Implementation of optional control function	Exchange information about available optional function, such as high current control and dynamic control.	6.3.1.104 6.3.2.102
c	Insulation check result	Exchange of the result of insulation check before charging – If insulation check fails, a signal is sent that charging is not allowed.	6.3.1.105
d	Short circuit test before charging	Exchange of information on short circuit test before charging	6.3.1.109
e	Charging stopped by user	Exchange of information on charge stop command by the user of DC EV supply equipment	6.3.1.110

No.	Information	Description	Relevant requirement in IEC 61851-23:2023
f	EV supply equipment real time available load current (optional)	Exchange of EV supply equipment real time available load current for demand management. Required for system providing that function.	6.3.2.102
g	Loss of digital communication	Detection of loss of digital communication – If a receiver does not get information expected to receive within time out period, it is considered as loss of digital communication.	6.3.1.5
h-1	Zero current confirmed	Notification of zero current confirmed – Station informs EV that low current condition has been met (to allow the opening and welding check of EV contactors by EV)	6.3.1.113 G.3.4
h-2	Welding detection	Exchange of information on the whole process of welding detection	
i-1	Normal shutdown	Termination of the charging process not caused by a failure	6.3.1.113.2
i-2	Error shutdown	Termination of the charging process caused by a failure	6.3.1.113.3

Annex A (normative)

Digital communication for control of DC EV charging system A

A.1 General

This annex shows the specification of digital communication for control of the DC EV supply equipment of system A (in this annex, referred to as "System A station" or "station") as specified in Annex AA of IEC 61851-23:2023. More detailed information on System A is defined in IEEE 2030.1.1.

This annex is also applicable to the DC EV charging/discharging station of system A.

NOTE Technical Specifications of CHAdeMO 2.0.1, Amendment 1 2020, provides additional information on system A. Available at <https://www.chademo.com>.

A.2 Digital communication actions during charging control process

The communication actions and parameters according to the charging control process as defined in Table AA.15 of IEC 61851-23:2023 are shown in Table A.1.

Table A.1 – Communication actions and parameters during DC charging control process between system A station and vehicle


Charging control stage	State	High level action at system level ^a	Digital communication action	Parameter	
				From DC EV supply equipment	From vehicle
Initialization	DC-A	Vehicle unconnected	None	N/A	N/A
	DC-B1	Connector plugged in	None	N/A	N/A
	DC-B1	Wake up of DCCCF and VCCF	None	None	(default CAN)
		Communication data initialization	Preparation for digital communication	(default CAN)	(default CAN)
	DC-B1 → DC-B2	Communication established, parameters exchanged, and compatibility checked	Exchange of charging control parameters	– Control protocol number	– Control protocol number
				– Available output voltage	– Total capacity of battery
				– Available output current	– Maximum battery voltage
				– Battery incompatibility	– Maximum charging time
				– Energizing state	– Target battery voltage
				– Identifier of welding detection	– Vehicle charging enabled
				– Threshold voltage	– Minimum charge current
				– Charging stop control	– Estimated charging time
					– Vehicle status
					– Charged rate
Charge preparation	DC-B2 → DC-B3	Connector latched	Notification of state of charging progress	– Energizing state	None
	DC-B3	Insulation resistance check for DC power line	None	– Charging system error	None
	DC-B3	Pre-charge (depending on the system architecture)	N/A	N/A	N/A

Charging control stage	State	High level action at system level ^a	Digital communication action	Parameter	
				From DC EV supply equipment	From vehicle
Energy transfer	DC-C or DC-D	Vehicle side contactors closed	Notification of vehicle main contactor closed status	None	– Vehicle status
	DC-C or DC-D	Charging by current demand (for CCC)	Notification of request value of charging current (or voltage)	– Station status – Output voltage – Output current – Remaining charging time – Station error – Charging system error – Charging stop control	– Charging current request – Charging system error – Parking status of the vehicle
	DC-C or DC-D	Charging by voltage demand (for CVC)	N/A	N/A	N/A
	DC-C,(D) →DC-B'1	Current suppression	Request of energy transfer shut-off	– Station status – Charging stop control – Output voltage – Output current	– Vehicle charging enabled
Shutdown (case 1)	DC-B'1	Zero current confirmed	Notification of energy transfer shut-off	– Station status – Charging system error	
	DC-B'1 → DC-B'2	Welding detection (by vehicle)		None	None
	DC-B'2	Vehicle side contactors open	None	None	– Vehicle status
	DC-B'2	DC power line voltage verification	Notification of present voltage	– Output voltage – Energizing state	None
	DC-B'3	Connector unlatched	Notification of connector unlatch status	None	None
	DC-B'4	End of charge at communication level	Terminate the digital communication	None	None
	DC-A	Connector unplugged		N/A	N/A

Charging control stage	State	High level action at system level ^a	Digital communication action	Parameter	
				From DC EV supply equipment	From vehicle
Shutdown (case 2)	DC-B'1	Zero current confirmed	Notification of energy transfer shut-off	– Station status – Charging system error	
	DC-B'1→DC-B'2	Welding detection (by vehicle)		None	None
	DC-B'2	Vehicle side contactors open	None	None	– Vehicle status
	DC-B'2	DC power line voltage verification	Notification of present voltage	Output voltage Energizing state	None
	DC-B'3-1	Connector remain latched	Notification of connector unlatch status	None	None
	DC-B'4-1	End of charge at communication level	Terminate the digital communication	None	None
	DC-B'4-2	Connector unlatched or remain latched		N/A	N/A
	DC-A or DC-B1	Connector unplugged or remain plugged in		N/A	N/A
	^a The order of actions does not refer to the procedure of charging control process.				

A.3 Digital communication of DC charging control

The parameters for digital communication of DC charging control shall be exchanged according to the sequence diagram as shown in Figure A.1.

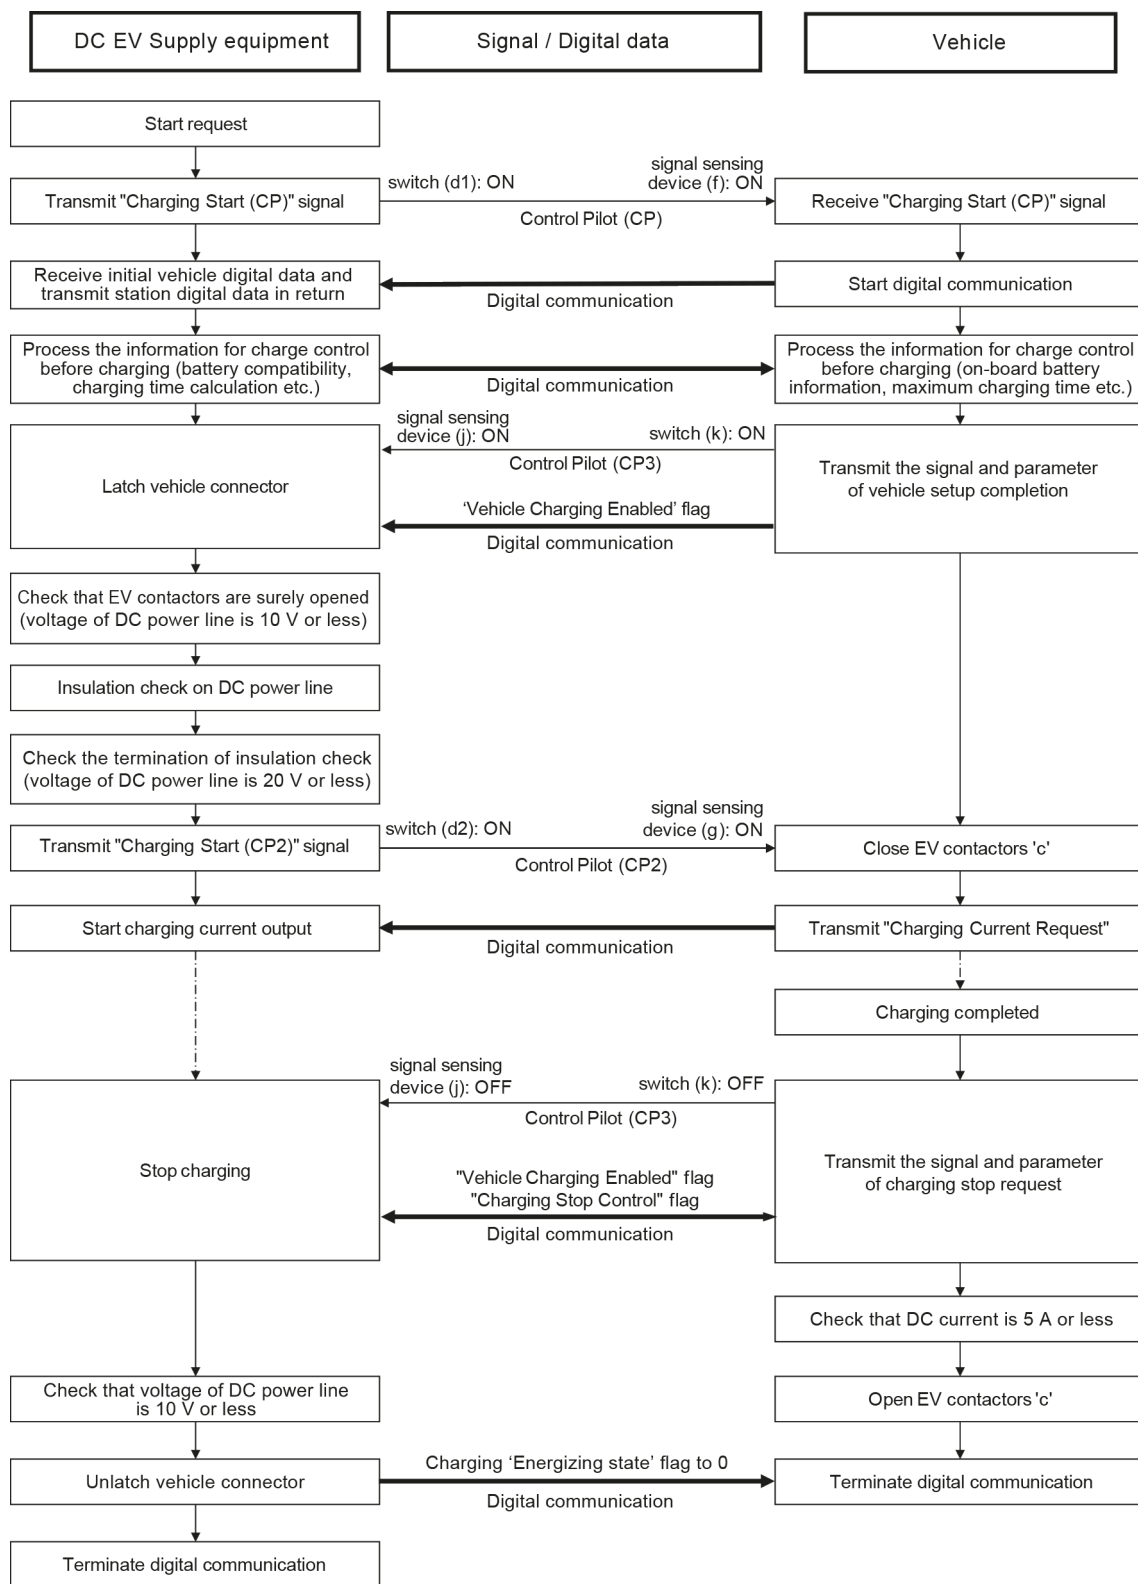

IEC

NOTE For symbols, see Table AA.1 of IEC 61851-23:2023.

Figure A.1 – Sequence diagram of DC charging control communication for system A