



BSI Standards Publication

Instrument transformers

Part 1: General requirements

National foreword

This British Standard is the UK implementation of EN IEC 61869-1:2024. It is identical to IEC 61869-1:2023. It supersedes BS EN 61869-1:2009, which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee PEL/38, Instrument transformers.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2024
Published by BSI Standards Limited 2024

ISBN 978 0 580 95479 5

ICS 17.220.20; 29.180

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2024.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

English Version

Instrument transformers - Part 1: General requirements (IEC 61869-1:2023)

Transformateurs de mesure - Partie 1: Exigences générales
(IEC 61869-1:2023)

Messwandler - Teil 1: Allgemeine Anforderungen
(IEC 61869-1:2023)

This European Standard was approved by CENELEC on 2024-09-11. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 38/718/FDIS, future edition 2 of IEC 61869-1, prepared by TC 38 "Instrument Transformers" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 61869-1:2024.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2025-10-31
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2027-10-31

This document supersedes EN 61869-1:2009 and EN 61869-6:2016 and all of its amendments and corrigenda (if any).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

Endorsement notice

The text of the International Standard IEC 61869-1:2023 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standard indicated:

IEC 60255-1:2009 NOTE Approved as EN 60255-1:2010 (not modified)

IEC 60255-27:2013 NOTE Approved as EN 60255-27:2014 (not modified)

IEC 60664-1 NOTE Approved as EN IEC 60664-1

IEC 60695-1-30 NOTE Approved as EN 60695-1-30

IEC 60695-7-1 NOTE Approved as EN 60695-7-1

IEC 60721-2-6 NOTE Approved as EN IEC 60721-2-6

IEC 60812 NOTE Approved as EN IEC 60812

IEC 61000 (series) NOTE Approved as EN IEC 61000 (series)

IEC 61000-4-7 NOTE Approved as EN 61000-4-7

IEC 61000-6-5 NOTE Approved as EN 61000-6-5

IEC 61025 NOTE Approved as EN 61025

IEC 61754-2 NOTE Approved as EN 61754-2

IEC 61754-20 NOTE Approved as EN 61754-20

IEC 62262 NOTE Approved as EN 62262

IEC 62271-1:2017 NOTE Approved as EN 62271-1:2017 (not modified)

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60060-1	-	High-voltage test techniques - Part 1: General definitions and test requirements	EN 60060-1	-
IEC 60068-2-1	-	Environmental testing - Part 2-1: Tests - Test A: Cold	EN 60068-2-1	-
IEC 60068-2-2	2007	Environmental testing - Part 2-2: Tests - Test B: Dry heat	EN 60068-2-2	2007
IEC 60068-2-6	-	Environmental testing - Part 2-6: Tests - Test Fc: Vibration (sinusoidal)	EN 60068-2-6	-
IEC 60068-2-11	-	Environmental testing - Part 2-11: Tests - Test Ka: Salt mist	EN IEC 60068-2-11	-
IEC 60068-2-17	-	Environmental testing - Part 2-17: Tests - Test Q: Sealing	EN IEC 60068-2-17	-
IEC 60068-2-27	2008	Environmental testing - Part 2-27: Tests - Test Ea and guidance: Shock	EN 60068-2-27	2009
IEC 60068-2-47	-	Environmental testing - Part 2-47: Test - Mounting of specimens for vibration, impact and similar dynamic tests	EN 60068-2-47	-
IEC 60068-2-57	2013	Environmental testing - Part 2-57: Tests - Test Ff: Vibration - Time-history and sine-beat method	EN 60068-2-57	2013
IEC 60068-2-75	-	Environmental testing - Part 2-75: Tests - Test Eh: Hammer tests	EN 60068-2-75	-
IEC 60068-2-78	2012	Environmental testing - Part 2-78: Tests - Test Cab: Damp heat, steady state	EN 60068-2-78	2013
IEC 60068-3-3	2019	Environmental testing - Part 3-3: Supporting documentation and guidance - Seismic test methods for equipment	EN IEC 60068-3-3	2019
IEC 60071-1	2019	Insulation co-ordination - Part 1: Definitions, principles and rules	EN IEC 60071-1	2019
IEC 60071-2	2018	Insulation co-ordination - Part 2: Application guidelines	EN IEC 60071-2	2018

IEC 60085	-	Electrical insulation - Thermal evaluation and designation	EN 60085	-
IEC 60270	2000	High-voltage test techniques - Partial discharge measurements	EN 60270	2001
+ A1	2015		+ A1	2016
IEC 60296	-	Fluids for electrotechnical applications - Mineral insulating oils for electrical equipment	EN IEC 60296	-
IEC 60376	-	Specification of technical grade sulphur hexafluoride (SF ₆) and complementary gases to be used in its mixtures for use in electrical equipment	EN IEC 60376	-
IEC 60455	series	Resin based reactive compounds used for electrical insulation	EN IEC 60455	series
IEC 60475	-	Method of sampling insulating liquids	EN IEC 60475	-
IEC 60480	-	Specification for the re-use of sulphur hexafluoride (SF ₆) and its mixtures in electrical equipment	EN IEC 60480	
IEC 60529	1989	Degrees of protection provided by enclosures (IP Code)	EN 60529	1991
-	-		+ corrigendum May 1993	
+ A1	1999		+ A1	2000
+ A2	2013		+ A2	2013
IEC 60603-7-1	-	Connectors for electronic equipment - Part 7-1: Detail specification for 8-way, shielded, free and fixed connectors	EN 60603-7-1	-
IEC 60695-1-10	-	Fire hazard testing - Part 1-10: Guidance for assessing the fire hazard of electrotechnical products - General guidelines	EN 60695-1-10	-
IEC 60695-1-11	-	Fire hazard testing - Part 1-11: Guidance for assessing the fire hazard of electrotechnical products - Fire hazard assessment	EN 60695-1-11	-
IEC 60794-2	2017	Optical fibre cables - Part 2: Indoor cables - Sectional specification	EN 60794-2	2017
IEC 60794-3	-	Optical fibre cables - Part 3: Outdoor cables - Sectional specification	EN IEC 60794-3	-
IEC/TS 60815-1	2008	Selection and dimensioning of high-voltage-insulators intended for use in polluted conditions - Part 1: Definitions, information and general principles		-
IEC/TS 60815-2	2008	Selection and dimensioning of high-voltage-insulators intended for use in polluted conditions - Part 2: Ceramic and glass insulators for a.c. systems		-
IEC/TS 60815-3	2008	Selection and dimensioning of high-voltage-insulators intended for use in polluted conditions - Part 3: Polymer insulators for a.c. systems		-

EN IEC 61869-1:2024 (E)

IEC 60867	-	Insulating liquids - Specifications for unused liquids based on synthetic aromatic hydrocarbons	EN IEC 60867	-
IEC/TR 61000-4-1	-	Electromagnetic compatibility (EMC) - Part 4-1: Testing and measurement techniques - Overview of IEC 61000-4 series		
IEC 61000-4-2	-	Electromagnetic compatibility (EMC) - Part 4-2: Testing and measurement techniques - Electrostatic discharge immunity test	EN 61000-4-2	-
IEC 61000-4-3	-	Electromagnetic compatibility (EMC) - Part 4-3: Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test	EN IEC 61000-4-3	-
IEC 61000-4-4	-	Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test	EN 61000-4-4	-
IEC 61000-4-5	2014	Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test	EN 61000-4-5	2014
+ A1			+ A1	2017
IEC 61000-4-6	-	Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields	EN 61000-4-6	-
IEC 61000-4-8	-	Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test	EN 61000-4-8	-
IEC 61000-4-9	-	Electromagnetic compatibility (EMC) - Part 4-9: Testing and measurement techniques - Impulse magnetic field immunity test	EN 61000-4-9	-
IEC 61000-4-10	-	Electromagnetic compatibility (EMC) - Part 4-10: Testing and measurement techniques - Damped oscillatory magnetic field immunity test	EN 61000-4-10	-
IEC 61000-4-11	-	Electromagnetic compatibility (EMC) - Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests for equipment with input current up to 16 A per phase	EN IEC 61000-4-11	-
IEC 61000-4-13	-	Electromagnetic compatibility (EMC) - Part 4-13: Testing and measurement techniques - Harmonics and interharmonics including mains signalling at a.c. power port, low frequency immunity tests	EN 61000-4-13	-
IEC 61000-4-16	-	Electromagnetic compatibility (EMC) - Part 4-16: Testing and measurement techniques - Test for immunity to conducted, common mode disturbances in the frequency range 0 Hz to 150 kHz	EN 61000-4-16	-

IEC 61000-4-17	-	Electromagnetic compatibility (EMC) - Part 4-17: Testing and measurement techniques - Ripple on d.c. input power port immunity test	EN 61000-4-17	-
IEC 61000-4-18	2019	Electromagnetic compatibility (EMC) - Part 4-18: Testing and measurement techniques - Damped oscillatory wave immunity test	EN IEC 61000-4-18	2019
IEC 61000-4-29	-	Electromagnetic compatibility (EMC) - Part 4-29: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations on d.c. input power port immunity tests	EN 61000-4-29	-
IEC 61000-6-4	2018	Electromagnetic compatibility (EMC) - Part 6-4: Generic standards - Emission standard for industrial environments	EN IEC 61000-6-4	2019
IEC 61076-2-101	-	Connectors for electronic equipment - Product requirements - Part 2-101: Circular connectors - Detail specification for M12 connectors with screw-locking	EN 61076-2-101	-
IEC 61083-1	-	Instruments and software used for measurements in high-voltage and high-current tests - Part 1: Requirements for instruments for impulse tests	EN 61083-1	-
IEC 61099	-	Insulating liquids - Specifications for unused synthetic organic esters for electrical purposes	EN 61099	-
IEC 61181	-	Mineral oil-filled electrical equipment - Application of dissolved gas analysis (DGA) to factory tests on electrical equipment	EN 61181	-
IEC 61462	-	Composite hollow insulators - Pressurized and unpressurized insulators for use in electrical equipment with AC rated voltage greater than 1 000 V AC and D.C. voltage greater than 1500V - Definitions, test methods, acceptance criteria and design recommendations	EN IEC 61462	-
IEC 61850-7-4	-	Communication networks and systems for power utility automation - Part 7-4: Basic communication structure - Compatible logical node classes and data object classes	EN 61850-7-4	-
IEC 61869-9	2016	Instrument transformers - Part 9: Digital interface for instrument transformers	EN IEC 61869-9	2019
IEC 61869-99	-	Instrument transformers - Part 99: Glossary	EN IEC 61869-99	-
IEC 62155	-	Hollow pressurized and unpressurized ceramic and glass insulators for use in electrical equipment with rated voltages greater than 1 000 V	EN 62155	-

EN IEC 61869-1:2024 (E)

IEC 62217	2012	Polymeric HV insulators for indoor and outdoor use - General definitions, test methods and acceptance criteria	EN 62217	2013
IEC 62271-4	2022	High-voltage switchgear and controlgear - Part 4: Handling procedures for gases for insulation and/or switching	EN IEC 62271-4	2022
IEC 62271-100	-	High-voltage switchgear and controlgear - Part 100: Alternating-current circuit-breakers	EN IEC 62271-100	-
IEC 62271-203	2022	High-voltage switchgear and controlgear - Part 203: AC gas-insulated metal-enclosed switchgear for rated voltages above 52 kV	EN IEC 62271-203	2022
IEC 62770	-	Fluids for electrotechnical application – Unused natural esters for transformers and similar electrical equipment	EN IEC 62772	-
IEC 63012	-	Insulating liquids - Unused modified or blended esters for electrotechnical applications	EN IEC 63012	-
ISO 4628-3	-	Paints and varnishes - Evaluation of degradation of coatings - Designation of quantity and size of defects, and of intensity of uniform changes in appearance - Part 3: Assessment of degree of rusting	EN ISO 4628-3	-
ISO 22479	-	Corrosion of metals and alloys - Sulfur dioxide test in a humid atmosphere (fixed gas method)	EN ISO 22479	-
CISPR/TR 18-2	-	Radio interference characteristics of overhead power lines and high-voltage equipment - Part 2: Methods of measurement and procedure for determining limits	-	-
ISO/IEC/IEEE 21451-4	-	Information technology - Smart transducer - interface for sensors and actuators - Part 4: Mixed-mode communication protocols and Transducer Electronic Data Sheet (TEDS) formats	-	-

CONTENTS

FOREWORD.....	9
INTRODUCTION.....	12
1 Scope.....	14
2 Normative references	15
3 Terms, definitions, symbols and abbreviated terms.....	18
3.1 Terms and definitions.....	18
3.2 Symbols and abbreviated terms	18
4 Normal and special environmental conditions	19
4.1 General.....	19
4.2 Normal environmental conditions	20
4.2.1 Ambient air temperature	20
4.2.2 Altitude	20
4.2.3 Vibrations or earth tremors	20
4.2.4 Exposure to pollution	20
4.2.5 Other environmental conditions for indoor instrument transformers.....	20
4.2.6 Other environmental conditions for outdoor instrument transformers.....	21
4.2.7 IT with outdoor parts.....	21
4.3 Special environmental conditions	21
4.3.1 General	21
4.3.2 Altitude	21
4.3.3 Ambient temperature	21
4.3.4 Vibrations or earth tremors	22
4.3.5 Earthquakes	22
5 Ratings.....	22
5.1 General.....	22
5.2 Voltage ratings.....	22
5.2.1 Highest voltage for equipment (U_m).....	22
5.2.2 Power system earthing	25
5.2.3 Standard values for rated primary voltage (U_{pr}).....	25
5.2.4 Standard values for rated secondary voltage (U_{sr})	25
5.2.5 Rated auxiliary power supply voltage (U_{ar}).....	25
5.3 Current ratings.....	26
5.3.1 Standard values for rated primary current (I_{pr})	26
5.3.2 Standard values for rated secondary current (I_{sr})	26
5.3.3 Standard values for rated continuous thermal current (I_{cth}).....	26
5.3.4 Short-time current ratings	26
5.4 Dielectric ratings	27
5.4.1 General	27
5.4.2 Rated primary terminal insulation level	27
5.4.3 Other requirements for primary terminal insulation.....	27
5.4.4 Between-section insulation requirements	29
5.4.5 Insulation requirements for secondary terminals and low-voltage components	29
5.5 Rated frequency (f_r).....	30
5.6 Output ratings	

5.6.1	Rated output for inductive instrument transformers and CVTs	30
5.6.2	Rated burden for LPITs	30
5.6.3	Standard values for the rated delay time for EITs (t_{dr})	30
5.7	Accuracy requirements	30
5.7.1	General	30
5.7.2	Rated accuracy classes	31
5.7.3	Accuracy class extension for harmonics	31
5.7.4	Accuracy requirements for harmonics	31
5.7.5	Harmonic requirements for LPIT protection accuracy classes	34
5.7.6	Anti-aliasing filter for EIT using digital data processing	34
6	Design and construction	36
6.1	Requirements for liquids used in equipment	36
6.1.1	General	36
6.1.2	Liquid quality	36
6.1.3	Liquid level indicator	37
6.1.4	Liquid tightness	37
6.2	Requirements for gases used in equipment	37
6.2.1	General	37
6.2.2	Gas quality	37
6.2.3	Gas monitoring device	37
6.2.4	Gas tightness	37
6.2.5	Pressure-relief device	38
6.3	Requirements for solid materials used in equipment	38
6.4	Requirements for temperature rise of parts and components	38
6.4.1	General	38
6.4.2	Influence of altitude on temperature rise	40
6.5	Requirements for earthing of equipment	41
6.5.1	General	41
6.5.2	Earthing of the enclosure	41
6.5.3	Electrical continuity	41
6.6	Requirements for the external insulation	41
6.6.1	Pollution	41
6.6.2	Altitude	42
6.7	Mechanical requirements	43
6.8	Multiple chopped impulses on primary terminals	44
6.9	Internal arc fault protection requirements	45
6.10	Degrees of protection by enclosures	45
6.10.1	General	45
6.10.2	Protection against access to hazardous parts and protection of the equipment against ingress of solid foreign objects and water	45
6.10.3	Protection of enclosure against mechanical impact under normal operating conditions	46
6.11	Electromagnetic compatibility (EMC)	46
6.11.1	General	46
6.11.2	Requirements for immunity	46
6.11.3	Requirements for emission	50
6.11.4	Requirements for transmitted overvoltage (TOV)	50
6.11.5	Requirements for radio interference voltage (RIV)	50
6.12	Corrosion	

6.13	Markings	50
6.13.1	General	50
6.13.2	Terminal markings	51
6.13.3	Rating plate markings	51
6.14	Requirements for LPIT secondary terminal connection	52
6.14.1	Requirements for digital output connection	52
6.14.2	Requirements for analogue output connections	53
6.15	EIT secondary signal noise	54
6.16	Fire hazard	55
6.17	Pressure withstand of gas-filled enclosures	55
6.18	Failure detection of EIT	55
6.19	Operability	55
6.20	Reliability and dependability of electronic part of EIT	55
6.21	Vibration requirements	56
6.22	Storage climatic conditions withstand capability	56
7	Tests	56
7.1	General	56
7.1.1	Classification of tests	56
7.1.2	List of tests	57
7.1.3	Sequence of tests	58
7.1.4	Testing conditions	60
7.2	Type tests	60
7.2.1	General	60
7.2.2	Temperature rise test	61
7.2.3	Impulse voltage withstand test on primary terminals	62
7.2.4	Wet test for outdoor type instrument transformers	65
7.2.5	Electromagnetic compatibility (EMC) tests	66
7.2.6	Tests for accuracy	71
7.2.7	Verification of the degree of protection by enclosures	74
7.2.8	Enclosure tightness test at ambient temperature	74
7.2.9	Proof test for the gas-filled enclosure	74
7.2.10	Mechanical tests	75
7.2.11	Voltage withstand test of low-voltage components and secondary terminals	76
7.2.12	Storage climatic environmental tests	77
7.2.13	Vibration test	79
7.2.14	Durability of markings	80
7.2.15	Tests for accuracy for harmonics	80
7.2.16	Test for anti-aliasing	81
7.3	Routine tests	81
7.3.1	Power-frequency voltage withstand test on primary terminals	81
7.3.2	Partial discharge measurement	82
7.3.3	Power-frequency voltage withstand tests between sections	84
7.3.4	Power-frequency voltage withstand tests on secondary terminals	85
7.3.5	Power-frequency voltage withstand test for low-voltage components	85
7.3.6	Test for accuracy	85
7.3.7	Verification of markings	86
7.3.8	Enclosure tightness test at ambient temperature	86
7.3.9	Pressure test for the gas-filled enclosure	86

7.3.10	Measurement of capacitance and dielectric dissipation factor	87
7.4	Special tests	87
7.4.1	Multiple chopped impulse test on primary terminals	87
7.4.2	Transmitted overvoltage test.....	88
7.4.3	Internal arc fault test.....	92
7.4.4	Enclosure tightness test at low and high temperatures.....	93
7.4.5	Insulation resistance measurement on secondary terminals.....	94
7.4.6	Corrosion test.....	94
7.4.7	Fire hazard test	94
7.4.8	Thermo-mechanical endurance test	95
7.4.9	Vibration and shock tests.....	95
7.4.10	Tests for accuracy versus harmonics	98
7.4.11	Seismic qualification	98
7.5	Commissioning tests	98
7.5.1	General	98
7.5.2	Final installation inspection and tests	98
7.5.3	Gas dew point test.....	99
7.6	Sample tests	99
8	Rules for transport, storage, erection, operation and maintenance.....	99
8.1	General.....	99
8.2	Conditions during transport, storage and installation	99
8.3	Installation	99
8.3.1	General	99
8.3.2	Unpacking and lifting	99
8.3.3	Assembly.....	100
8.3.4	Mounting	100
8.3.5	Connections	100
8.3.6	Final installation inspection and tests	100
8.4	Operation.....	101
8.5	Maintenance	101
8.5.1	General	101
8.5.2	Responsibilities for the manufacturer	101
8.5.3	Responsibilities for the user.....	101
8.6	Failure report	102
9	Safety.....	102
10	Influence of products on the natural environment.....	102
Annex A (normative)	Identification of test specimen	103
A.1	General.....	103
A.2	Data.....	103
A.3	Drawings.....	103
Annex B (informative)	Recommendation for contents of failure reports.....	104
B.1	General.....	104
B.2	Content.....	104
Annex C (informative)	Fire hazard	106
C.1	Fire hazard	106
C.2	Fire hazard test.....	106
Annex D (informative)	Sample test.....	107
D.1	Sample test definition	

D.2	Sample tests	107
Annex E (informative)	Technique used in temperature rise test of transformers to determine the thermal time constant by an experimental estimation.....	108
Annex F (informative)	Guidance for the extension of validity of type tests or special tests of instrument transformers	111
F.1	General.....	111
F.2	Information needed for extension of type test validity	111
F.3	Application of extension criteria	112
F.3.1	Dielectric tests.....	112
F.3.2	Temperature rise tests.....	112
F.3.3	Short-time and dynamic withstand current tests (current transformers)	113
F.3.4	Internal arc fault tests	114
F.3.5	Multiple chopped impulse test.....	114
Annex G (informative)	Guidance for the calculation of equivalent diameter in case of irregular shape of insulating part	116
G.1	General.....	116
G.2	Current transformers and earthed voltage transformers	116
G.3	Unearthed voltage transformers	117
Annex H (informative)	Test circuits	119
H.1	Test circuits for accuracy measurements in steady state for current transformers with analogue secondary signal.....	119
H.2	Test circuits for accuracy measurements in steady state for voltage transformers with analogue secondary signal.....	123
Annex I (normative)	Seismic qualification of instrument transformers	127
I.1	Scope	127
I.2	Seismic conditions	127
I.2.1	Time-history	127
I.2.2	Seismic severity of application.....	127
I.2.3	Superelevation factor (k_{se})	129
I.3	Seismic qualification information	129
I.3.1	Qualification options	129
I.3.2	General information provided by purchaser.....	129
I.4	Qualification procedure	129
I.4.1	General	129
I.4.2	Qualification by static calculation or dynamic analysis	130
I.4.3	Qualification by test	137
I.5	Validity of qualification	139
Bibliography		140
Figure 1	– General block diagram of single-phase LPITs	14
Figure 2	– Example of digital data acquisition system	34
Figure 3	– Example of frequency response mask for EIT with digital output	36
Figure 4	– Altitude correction factor for the temperature rise.....	40
Figure 5	– Factor m for the switching impulse voltage (U_{SIL}) withstand test.....	43
Figure 6	– Example structure used in HV AIS applications subjected to EMC tests	48
Figure 7	– Example of structure used in HV GIS applications subjected to EMC tests	49
Figure 8	– Duplex LC connector.....	53
Figure 9	– RIV measuring circuit.....	66

Figure 10 – Temperature cycle accuracy test	73
Figure 11 – Test circuit for partial discharge measurement	82
Figure 12 – Alternative circuit for partial discharge measurement	83
Figure 13 – Example of balanced test circuit for partial discharge measurement	83
Figure 14 – Voltage profile for partial discharge measurement	84
Figure 15 – Transmitted overvoltage measurement: test impulse waveforms	89
Figure 16 – Transmitted overvoltage measurement: primary test configuration for AIS equipment.....	90
Figure 17 – Transmitted overvoltage measurement: primary test configuration for GISs (CTs and VTs)	90
Figure 18 – Transmitted overvoltage measurement: example of correct secondary test connection for CT and VT	91
Figure 19 – Typical configuration for internal arc fault test	92
Figure E.1 – Graphical extrapolation to ultimate temperature rise	110
Figure G.1 – Shed dimensions	116
Figure G.2 – Examples of MV CTs and earthed VTs	117
Figure G.3 – Example of a CT with multiple insulator areas	117
Figure G.4 – Examples of unearthed VTs	118
Figure G.5 – Example of a VT with multiple insulator areas.....	118
Figure H.1 – Test circuit for accuracy measurements of inductive CTs.....	119
Figure H.2 – Test circuit for analogue accuracy measurements of LPCTs	120
Figure H.3 – Test circuit for analogue accuracy measurements of LPCTs (alternative solution).....	121
Figure H.4 – Test circuit for digital accuracy measurements of LPCTs	122
Figure H.5 – Test circuit for accuracy measurements of inductive VTs or CVTs	123
Figure H.6 – Test circuit for analogue accuracy measurements of LPVTs	124
Figure H.7 – Test circuit for analogue accuracy measurements of LPVTs (alternative solution).....	125
Figure H.8 – Test circuit for digital accuracy measurements of LPVTs	126
Figure I.1 – Record of time-history in real (3 dimensional)	127
Figure I.2 – Required response spectrum.....	128
Figure I.3 – Flowchart of qualification procedure	130
Figure I.4 – Measured deflection in free oscillation	132
Figure I.5 – Sketch of the parameters in static calculation.....	134
 Table 1 – Operating ambient temperature categories	 20
Table 2 – Rated primary terminal insulation levels for instrument transformers for AC applications	24
Table 3 – Insulation requirements for power supply terminals	26
Table 4 – Partial discharge test voltages and permissible levels for AC applications.....	28
Table 5 – Maximum values of $\tan\delta$	29
Table 6 – LPIT secondary terminal and low-voltage component terminal withstand capability	29
Table 7 – WB0 extension for harmonics	32
Table 8 – Accuracy class extensions for wide bandwidth applications	33

Table 9 – Harmonic requirements for protection accuracy classes	34
Table 10 – Anti-aliasing filter requirements	35
Table 11 – Permissible temporary leakage rates for gas systems	38
Table 12 – Limits of temperature and temperature rise for various parts, materials and dielectrics of instrument transformers	39
Table 13 – Specific creepage distances by site pollution severity class, as defined in the former publication	42
Table 14 – Maximum static withstand loads	44
Table 15 – Maximum gas-in-oil level in instrument transformers	44
Table 16 – Arc fault duration and performance criteria	45
Table 17 – Immunity requirements and test levels	47
Table 18 – Acceptance criteria for EMC immunity tests	49
Table 19 – Connectors	54
Table 20 – List of tests	57
Table 21 – Gas type and pressure during tests	58
Table 22 – Required routine tests	59
Table 23 – Modalities of application of the test loads to be applied to the primary terminals	76
Table 24 – Dry heat test, storage temperature	78
Table 25 – Cold test, storage temperature	78
Table 26 – Damp heat steady state test	79
Table 27 – Transmitted overvoltage limits	89
Table 28 – Shock severity levels	97
Table A.1 – Example of drawing to be submitted	103
Table C.1 – Fire hazard of electrotechnical products	106
Table F.1 – Extension criteria for dielectric withstand performance	112
Table F.2 – Extension criteria for temperature rise performance	113
Table F.3 – Extension criteria for short-time and dynamic withstand current performance	113
Table F.4 – Extension criteria for internal arc fault tests	114
Table F.5 – Extension criteria for multiple chopped impulse test	115
Table I.1 – Seismic severity levels	128
Table I.2 – External mass to simulate external forces	137
Table I.3 – Comparable seismic levels	139

INTERNATIONAL ELECTROTECHNICAL COMMISSION

INSTRUMENT TRANSFORMERS –**Part 1: General requirements****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61869-1 has been prepared by IEC technical committee 38: Instrument transformers. It is an International Standard.

This second edition cancels and replaces the first edition published in 2007 and IEC 61869-6:2016. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) merger with IEC 61869-6:2016;
- b) new scope: equipment for HV applications with a nominal voltage > 1 kV AC or 1,5 kV DC;
- c) new classification of some special tests as type tests or routine test;
- d) additional type tests, additional special tests and new clause for commissioning tests;
- e) new annexes E, F, G and I.

The text of this International Standard is based on the following documents:

Draft	Report on voting
38/718/FDIS	38/722/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 61869 series, published under the general title *Instrument transformers*, can be found on the IEC website. An overview of the planned or existing set of standards at the date of publication of this document is given below.

The updated list of standards issued by IEC TC 38 is available at the website: <https://www.iec.ch>

Product family standard	Product standard	Title
61869-1 General requirements	61869-2	Additional requirements for current transformers
	61869-3	Additional requirements for inductive voltage transformers
	61869-4	Additional requirements for combined transformers
	61869-5	Additional requirements for capacitor voltage transformers
	61869-7	Additional requirements for low-power voltage transformers
	61869-8	Additional requirements for low-power current transformers
	61869-9	Digital interface for instrument transformers
	61869-10	Additional requirements for current sensors
	61869-11	Additional requirements for voltage sensors
	61869-12	Additional requirements for combined low-power instrument transformers
	61869-13	Stand-alone merging unit (SAMU)
	61869-14	Additional requirements for current transformers for DC applications
	61869-15	Additional requirements for voltage transformers for DC applications
	61869-16	TEDS (transducer electronic data sheet) for instrument transformers
	61869-99	Glossary

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This document is the first revision of IEC 61869-1, defining common requirements for instrument transformers, applicable to all types or technologies.

Furthermore, the document is the result of a merger of IEC 61869-1:2007 (*General requirements*) and IEC 61869-6:2016 (*Additional general requirements for low-power instrument transformers*) with the aim of having one single document and simplify the comprehension for the reader of LPIT product-specific standards.

The main modifications of this revision are listed below:

- new scope: equipment for HV applications with a nominal voltage > 1 kV AC or 1,5 kV DC;
- transfer of the definitions to the TC 38 Glossary IEC 61869-99;
- ratings:
 - addition of HV insulation levels above 800 kV;
 - new DC insulation resistance requirements for secondary terminals;
 - additional accuracy class extensions for harmonics;
- design and construction:
 - additional mechanical requirements for EHV applications;
 - clarification of the altitude correction for external insulation and dielectric tests;
 - multiple chopped impulse test: definition of maximum gas-in-oil level before test;
 - internal arc fault protection: simplification of the acceptance criteria;
 - new requirements for storage climatic conditions withstand capability for LPIT;
- type tests:
 - temperature rise test: more accurate definition of the test duration;
 - lightning impulse test: new test procedure (15 impulses) for gas-insulated and resin-insulated instrument transformers, for $U_m \geq 300$ kV;
 - switching impulse test: to be performed in both polarities in case of gas-insulated instrument transformers;
 - chopped wave impulse test: moved from special test to type test;
 - test for accuracy: to be performed with regard to the temperature range and frequency;
 - mechanical test: moved from special test to type test;
 - new specification for storage climatic environmental tests;
- routine tests:
 - partial discharge measurement: addition of record of PD inception voltage and extinction voltage;
 - measurement of capacitance and $\tan\delta$: moved from special test to routine test;
- special tests:
 - transmitted overvoltage test: improved test procedure;
 - internal arc fault test: clarified test procedure;
 - new insulation resistance measurement on secondary terminals;
 - new test for resin insulated instrument transformers operating at low temperature;
 - vibration test: improvement and addition of a shock test for parts mechanically coupled to a circuit-breaker;
 - optional tests for accuracy versus harmonics and for anti-aliasing;

- commissioning tests (new clause):
 - new installation inspection;
 - gas dew point test moved from special test to commissioning tests;
 - new recommended insulation test on LV connection up to the LV cubicle;
- rules for transport, storage, erection, operation and maintenance:
 - new mandatory rules for user and manufacturer;
 - new conditions for transportation and storage;
- new annexes:
 - Annex E (informative): technique used in temperature rise test of transformers to determine the thermal time constant by an experimental estimation;
 - Annex F (informative): guidance for the extension of validity of type tests and special tests;
 - Annex G (informative): guidance for the calculation of equivalent diameter in case of irregular shape of insulating part;
 - Annex I (normative): seismic qualification of instrument transformers.

INSTRUMENT TRANSFORMERS –

Part 1: General requirements

1 Scope

This part of IEC 61869 is applicable to newly manufactured instrument transformers intended for applications where the nominal voltage is higher than 1 kV AC or 1,5 kV DC, with an analogue or a digital secondary signal for measuring, protection and control purposes, with rated frequencies from 15 Hz to 400 Hz, or for DC applications.

NOTE 1 A bushing type current transformer, although having no primary insulation level for itself is often placed on a system with a nominal voltage > 1 kV AC or > 1,5 kV DC and therefore falls within the scope of this document. Example: CT placed around an HV bushing or a cable.

The general requirements for instrument transformers for applications in LV systems (nominal voltage ≤ 1 kV AC or $\leq 1,5$ kV DC) are covered by IEC 61869-201.

This part of IEC 61869 is a product family standard and covers general requirements only. For each type of instrument transformer, the product standard is composed of this document and the relevant specific product standard.

This part of IEC 61869 contains the requirements for the limits of the errors both for analogue and digital secondary signals. The other characteristics of a digital interface for instrument transformer are standardised in IEC 61869-9 as an application of the IEC 61850 horizontal standard series, covering communication networks and systems for power utility automation.

This part of IEC 61869 considers bandwidth requirements. The accuracy requirements on harmonics and requirements for the anti-aliasing filter are specified in 5.7.

In the case of an LPIT, the general block diagram of single-phase devices is given in Figure 1.

According to the technology, it is not always necessary that all parts described in Figure 1 be included in the instrument transformer.

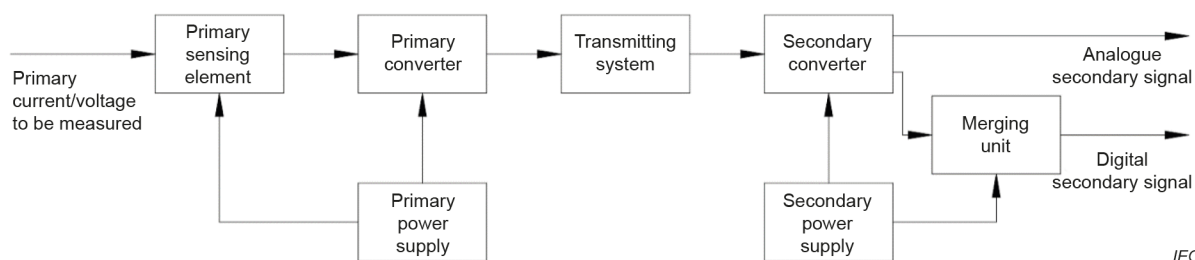


Figure 1 – General block diagram of single-phase LPITs

NOTE 2 A secondary power supply can be combined with a primary power supply or with a power supply of other instrument transformers.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60060-1, *High-voltage test techniques – Part 1: General definitions and test requirements*

IEC 60068-2-1, *Environmental testing – Part 2-1: Tests – Test A: Cold*

IEC 60068-2-2:2007, *Environmental testing – Part 2-2: Tests – Test B: Dry heat*

IEC 60068-2-6, *Environmental testing – Part 2-6: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60068-2-11, *Environmental testing – Part 2-11: Tests – Test Ka: Salt mist*

IEC 60068-2-17, *Basic environmental testing procedures – Part 2-17: Tests – Test Q: Sealing*

IEC 60068-2-27:2008, *Environmental testing – Part 2-27: Tests – Test Ea and guidance: Shock*

IEC 60068-2-47, *Environmental testing – Part 2-47: Tests – Mounting of specimens for vibration impact and similar dynamic tests*

IEC 60068-2-57:2013, *Environmental testing – Part 2-57: Tests – Test Ff: Vibration – Time-history and sine-beat method*

IEC 60068-2-75, *Environmental testing – Part 2-75: Tests – Test Eh: Hammer tests*

IEC 60068-2-78:2012, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

IEC 60068-3-3:2019, *Environmental testing – Part 3-3: Supporting documentation and guidance – Seismic test methods for equipment*

IEC 60071-1:2019, *Insulation co-ordination – Part 1: Definitions, principles and rules*

IEC 60071-2:2018, *Insulation co-ordination – Part 2: Application guidelines*

IEC 60085, *Electrical insulation – Thermal evaluation and designation*

IEC 60270:2000, *High-voltage test techniques – Partial discharge measurements*
IEC 60270:2000/AMD1:2015

IEC 60296, *Fluids for electrotechnical applications – Mineral insulating oils for electrical equipment*

IEC 60376, *Specification of technical grade sulphur hexafluoride (SF₆) and complementary gases to be used in its mixtures for use in electrical equipment*

IEC 60455 (all parts), *Resin based reactive compounds used for electrical insulation*

IEC 60475, *Method of sampling insulating liquids*

IEC 60480, *Specifications for the re-use of sulphur hexafluoride (SF₆) and its mixtures in electrical equipment*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP Code)*

IEC 60529:1989/AMD1:1999

IEC 60529:1989/AMD2:2013

IEC 60603-7-1, *Connectors for electronic equipment – Part 7-1: Detail specification for 8-way, shielded, free and fixed connectors*

IEC 60695-1-10, *Fire hazard testing – Part 1-10: Guidance for assessing the fire hazard of electrotechnical products – General guidelines*

IEC 60695-1-11, *Fire hazard testing – Part 1-11: Guidance for assessing the fire hazard of electrotechnical products – Fire hazard assessment*

IEC 60794-2:2017, *Optical fibre cables – Part 2: Indoor cables – Sectional specification*

IEC 60794-3, *Optical fibre cables – Part 3: Outdoor cables – Sectional specification*

IEC TS 60815-1:2008, *Selection and dimensioning of high-voltage insulators intended for use in polluted conditions – Part 1: Definitions, information and general principles*

IEC TS 60815-2:2008, *Selection and dimensioning of high-voltage insulators intended for use in polluted conditions – Part 2: Ceramic and glass insulators for a.c. systems*

IEC TS 60815-3:2008, *Selection and dimensioning of high-voltage insulators intended for use in polluted conditions – Part 3: Polymer insulators for a.c. systems*

IEC 60867, *Insulating liquids – Specifications for unused liquids based on synthetic aromatic hydrocarbons*

IEC TR 61000-4-1, *Electromagnetic compatibility (EMC) – Part 4-1: Testing and measurement techniques – Overview of IEC 61000-4 series*

IEC 61000-4-2, *Electromagnetic compatibility (EMC) – Part 4-2: Testing and measurement techniques – Electrostatic discharge immunity test*

IEC 61000-4-3, *Electromagnetic compatibility (EMC) – Part 4-3: Testing and measurement techniques – Radiated, radio-frequency, electromagnetic field immunity test*

IEC 61000-4-4, *Electromagnetic compatibility (EMC) – Part 4-4: Testing and measurement techniques – Electrical fast transient/burst immunity test*

IEC 61000-4-5:2014, *Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Surge immunity test*

IEC 61000-4-5:2014/AMD1:2017

IEC 61000-4-6, *Electromagnetic compatibility (EMC) – Part 4-6: Testing and measurement techniques – Immunity to conducted disturbances, induced by radio-frequency fields*

IEC 61000-4-8, *Electromagnetic compatibility (EMC) – Part 4-8: Testing and measurement techniques – Power frequency magnetic field immunity test*

IEC 61000-4-9, *Electromagnetic compatibility (EMC) – Part 4-9: Testing and measurement techniques – Impulse magnetic field immunity test*

IEC 61000-4-10, *Electromagnetic compatibility (EMC) – Part 4-10: Testing and measurement techniques – Damped oscillatory magnetic field immunity test*

IEC 61000-4-11, *Electromagnetic compatibility (EMC) – Part 4-11: Testing and measurement techniques – Voltage dips, short interruptions and voltage variations immunity tests for equipment with input current up to 16 A per phase*

IEC 61000-4-13, *Electromagnetic compatibility (EMC) – Part 4-13: Testing and measurement techniques – Harmonics and interharmonics including mains signalling at AC power port, low frequency immunity tests*

IEC 61000-4-16, *Electromagnetic compatibility (EMC) – Part 4-16: Testing and measurement techniques – Test for immunity to conducted, common mode disturbances in the frequency range 0 Hz to 150 kHz*

IEC 61000-4-17, *Electromagnetic compatibility (EMC) – Part 4-17: Testing and measurement techniques – Ripple on DC input power port immunity test*

IEC 61000-4-18:2019, *Electromagnetic compatibility (EMC) – Part 4-18: Testing and measurement techniques – Damped oscillatory wave immunity test*

IEC 61000-4-29, *Electromagnetic compatibility (EMC) – Part 4-29: Testing and measurement techniques – Voltage dips, short interruptions and voltage variations on DC input power port immunity tests*

IEC 61000-6-4:2018, *Electromagnetic compatibility (EMC) – Part 6-4: Generic standards – Emission standard for industrial environments*

IEC 61076-2-101, *Connectors for electronic equipment – Product requirements – Part 2-101: Circular connectors – Detail specification for M12 connectors with screw-locking*

IEC 61083-1, *Instruments and software used for measurement in high-voltage and high-current tests – Part 1: Requirements for instruments for impulse tests*

IEC 61099, *Insulating liquids – Specifications for unused synthetic organic esters for electrical purposes*

IEC 61181, *Mineral oil-filled electrical equipment – Application of dissolved gas analysis (DGA) to factory tests on electrical equipment*

IEC 61462, *Composite hollow insulators – Pressurized and unpressurized insulators for use in electrical equipment with rated voltage greater than 1 000 V – Definitions, test methods and acceptance criteria and design recommendations*

IEC 61850-7-4, *Communication networks and systems for power utility automation – Part 7-4: Basic communication structure – Compatible logical node classes and data object classes*

IEC 61869-9:2016, *Instrument transformers – Part 9: Digital interface for instrument transformers*

IEC 61869-99, *Instrument transformers: Glossary*

IEC 62155, *Hollow pressurized and unpressurized ceramic and glass insulators for use in electrical equipment with rated voltages greater than 1 000 V*

IEC 62217:2012, *Polymeric HV insulators for indoor and outdoor use – General definitions, test methods and acceptance criteria*

IEC 62271-4:2022, *High-voltage switchgear and controlgear – Part 4: Handling procedures for gases for insulation and/or switching*

IEC 62271-100, *High-voltage switchgear and controlgear – Part 100: Alternating-current circuit-breakers*

IEC 62271-203:2022, *High-voltage switchgear and controlgear – Part 203: Gas-insulated metal-enclosed switchgear for rated voltages above 52 kV*

IEC 62770, *Fluids for electrotechnical applications – Unused natural esters for transformers and similar electrical equipment*

IEC 63012, *Insulating liquids – Unused modified or blended esters for electrotechnical applications*

CISPR TR 18-2, *Radio interference characteristics of overhead power lines and high-voltage equipment – Part 2: Methods of measurement and procedure for determining limits*

ISO/IEC/IEEE 21451-4, *Information technology – Smart transducer interface for sensors and actuators – Part 4: Mixed-mode communication protocols and Transducer Electronic Data Sheet (TEDS) formats*

ISO 4628-3, *Paints and varnishes – Evaluation of degradation of coatings – Designation of quantity and size of defects, and of intensity of uniform changes in appearance – Part 3: Assessment of degree of rusting*

ISO 22479, *Corrosion of metals and alloys – Sulfur dioxide test in a humid atmosphere (fixed gas method)*

3 Terms, definitions, symbols and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions of IEC 61869-99 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>;
- ISO Online browsing platform: available at <https://www.iso.org/obp>.

3.2 Symbols and abbreviated terms

ADC	analogue-to-digital converter
AIS	air-insulated switchgear
CT	current transformer
CVT	capacitor voltage transformer
EIT	electronic IT
EMC	electromagnetic compatibility
F	mechanical load
f_r	rated frequency
F_{rel}	relative leakage rate

F_V	rated voltage factor
GIS	gas-insulated switchgear
I_{arc}	rated internal arc fault current
I_{cth}	rated continuous thermal current
I_{dyn}	rated dynamic current
I_{pr}	rated primary current
I_{psc}	rated short-circuit current
I_{sr}	rated secondary current
I_{th}	rated short-time thermal current
IED	intelligent electronic device
IT	instrument transformer
K_r	rated transformation ratio
k_{se}	superelevation factor
LPCT	low-power current transformer
LPIT	low-power instrument transformer
LPVT	low-power voltage transformer
MU	merging unit
PD	partial discharge
RMS	root-mean-square
SAMU	stand-alone merging unit
S_r	rated output – rated output power
t_{dr}	rated delay time
U_m	highest voltage for equipment
U_{pr}	rated primary voltage
U_{sr}	rated secondary voltage
U_{sys}	highest voltage of the system
VT	voltage transformer
Z_{br}	rated burden
ZPA	zero period acceleration
$\Delta\phi$	phase displacement
ε	ratio error
ε_c	composite error
φ_e	phase error

4 Normal and special environmental conditions

4.1 General

Unless otherwise specified, instrument transformers are intended to be used at their rated characteristics under the normal environmental conditions listed in 4.2.

If the actual environmental conditions differ from these normal environmental conditions, instrument transformers shall be designed to comply with special environmental conditions as required by the purchaser.

4.2 Normal environmental conditions

4.2.1 Ambient air temperature

Instrument transformers are classified in three operating temperature categories, as given in Table 1.

Table 1 – Operating ambient temperature categories

Category	Minimum temperature °C	Maximum temperature °C
–5/40	–5	40
–25/40	–25	40
–40/40	–40	40

In the case of instrument transformers integrated within other equipment (e.g. GIS, circuit-breaker), the instrument transformer should be specified for the temperature conditions for the respective equipment.

The lower limit for storage temperature shall be selected from the following values:

–5 °C, –25 °C or –40 °C.

The upper limit for storage temperature shall be selected from the following values:

+40 °C, +55 °C or +70 °C.

4.2.2 Altitude

The altitude does not exceed 1 000 m.

4.2.3 Vibrations or earth tremors

Vibrations occurring after switching operations of circuit-breakers shall be regarded as normal environmental conditions. Vibrations due to earth tremors are considered as special environmental conditions.

4.2.4 Exposure to pollution

For degrees of severity of environmental conditions under condensation and pollution, refer to IEC TS 60815-1:2008, Clause 8:

- for instrument transformers to be used in an enclosed switchgear, minimum site pollution severity (SPS) class is "Very Light";
- for AIS indoor instrument transformers, minimum SPS class is "Light";
- for AIS outdoor instrument transformers, minimum SPS class is "Heavy".

For GIS applications, no pollution severity is defined.

4.2.5 Other environmental conditions for indoor instrument transformers

Other considered environmental conditions applicable to indoor ITs are as follows:

- a) the influence of solar radiation can be neglected;
- b) the conditions of humidity are as follows:

- the average value of the relative humidity measured for a period of 24 h does not exceed 95 %;
- the average value of the relative humidity for a period of one month does not exceed 90 %.

For these conditions, condensation can occasionally occur.

NOTE 1 Condensation can be expected when sudden temperature changes occur in periods of high humidity.

NOTE 2 Condensation can be prevented by special design of the housing, by suitable ventilation and heating, or using a dehumidifying device.

4.2.6 Other environmental conditions for outdoor instrument transformers

Other considered environmental conditions applicable to outdoor IT are as follows:

- a) the average value of the ambient air temperature, measured over a period of 24 h, does not exceed 35 °C;
- b) solar radiation up to a level of 1 000 W/m² (on a clear day at noon) shall be considered;
- c) the wind pressure does not exceed 700 Pa (corresponding to a 34 m/s wind speed);
- d) the presence of condensation or precipitation should be considered;
- e) the ice coating does not exceed 20 mm.

4.2.7 IT with outdoor parts

In the case of an IT with indoor and outdoor parts, the manufacturer shall indicate which parts of the equipment are located indoors and which parts are located outdoors.

4.3 Special environmental conditions

4.3.1 General

When instrument transformers are intended to be used under conditions different from the normal environmental conditions given in 4.2, the purchaser's requirements should refer to standardised criteria given in 4.3.2 to 4.3.5.

4.3.2 Altitude

4.3.2.1 Influence of altitude on external insulation

At an altitude >1 000 m, the disruptive discharge voltage for external insulation is affected by the reduction of air density. Considering the reduced withstand capability of the air, the required insulation withstand level of the external insulation is specified in 6.6.2.

4.3.2.2 Influence of altitude on temperature rise

At an altitude >1 000 m, the thermal behaviour of an instrument transformer is affected by the reduction of air density. The reduction of the temperature rise limits is specified in 6.4.2.

4.3.3 Ambient temperature

For installations located in a place where the ambient temperature can be significantly outside the normal environmental condition range stated in 4.2.1, the preferred ranges of minimum and maximum temperature to be specified should be:

- a) –50 °C and +40 °C for very cold climates;
- b) –5 °C and +50 °C for very hot climates.

NOTE 1 In certain regions with a frequent occurrence of warm humid atmosphere, sudden changes of temperature can occur, resulting in condensation, even indoors.

For the electronic part of an instrument transformer mounted inside an indoor or outdoor cabinet, the preferred maximum temperature for very hot climates is increased to +55 °C. Temperatures up to +70 °C may also be specified.

NOTE 2 +55 °C is consistent with IEC 62271-1 and +70 °C is consistent with IEC 60255-1.

NOTE 3 Under certain conditions of solar radiation, appropriate measures (e.g. roofing, forced ventilation) are sometimes necessary in order not to exceed the specified temperature rises. Alternatively, derating can be used.

For storage located in a place where the minimum ambient temperature can be significantly outside the normal environmental condition range stated in 4.2.1, the lower limit for storage temperature can be –50 °C.

4.3.4 Vibrations or earth tremors

Vibration levels that are likely to occur shall be specified by the purchaser.

NOTE Earth tremors are not to be confused with earthquakes.

4.3.5 Earthquakes

For installations at locations where earthquakes are likely to occur, the relevant severity level shall be specified by the purchaser in accordance with I.2.2.

5 Ratings

5.1 General

The ratings of instrument transformers, including their auxiliary equipment if existing, shall be selected from the following ones (when applicable):

- a) highest voltage for equipment (U_m);
- b) rated insulation level;
- c) rated primary current (I_{pr}) or rated primary voltage (U_{pr});
- d) rated secondary current (I_{sr}) or rated secondary voltage (U_{sr}) or rated transformation ratio (K_r);
- e) rated extended primary current (I_{epr}) and rated extended primary current factor (K_{epr});
- f) rated short-time thermal current (for CT) (I_{th});
- g) rated dynamic current (for CT) (I_{dyn});
- h) rated continuous thermal current (for CT) (I_{cth});
- i) rated short-circuit current (for CT) (I_{psc});
- j) rated voltage factor (for VT) (F_v);
- k) rated frequency (f_r);
- l) rated output (S_r) or rated burden (Z_{br});
- m) accuracy class.

5.2 Voltage ratings

5.2.1 Highest voltage for equipment (U_m)

Table 2 contains a list of standard values for the highest voltage for equipment.

For exposed installations (which are subject to overvoltage of atmospheric origin), it is recommended to choose the highest coordinated insulation level.

The highest voltage for equipment (U_m) shall be higher or equal to the highest voltage of the system (U_{sys}).

For bushing types CT, no primary insulation level is applicable.

NOTE A bushing type CT has no primary insulation for itself. The insulation is part of the HV equipment on which it is mounted.

Guidance for the selection of the rated AC insulation level, is given in IEC 60071-1:2019, 5.5. This should also take into account the overvoltage during the disconnector operations. For DC applications, refer to product-specific standards.

Table 2 – Rated primary terminal insulation levels for instrument transformers for AC applications

Highest voltage for equipment U_m (RMS) kV	Rated power-frequency withstand voltage (RMS) kV	Rated lightning impulse withstand voltage (peak) kV	Rated switching impulse withstand voltage (peak) kV
3,6	10	20 40	
7,2	20	40 60	
12	28	60 75	
17,5	38	75 95	
24	50	95 125	
36	70	145 170	
52	95	250	
72,5	140	325	
100	185	450	
123	185 230	450 550	
145	230 275	550 650	
170	275 325	650 750	
245	395 460	950 1 050	
300	395 460	950 1 050	750 850
362	460 510	1 050 1 175	850 950
420	570 630	1 300 1 425	950 1 050
550	630 680	1 425 1 550	1 050 1 175
800	880 975	1 950 2 100	1 425 1 550
1 100	1 100	2 250 2 400 2 550	1 550 1 675 1 800
1 200	1 200	2 250 2 400 2 700	1 675 1 800 1 950

5.2.2 Power system earthing

The considered power system earthing can be:

- a) isolated neutral system;
- b) earthed neutral system:
 - 1) solidly earthed neutral system;
 - 2) impedance earthed neutral system:
 - effectively earthed neutral characterized by an earth fault factor $\leq 1,4$;
 - non-effectively earthed neutral characterized by an earth fault factor $> 1,4$;
 - 3) resonant earthed neutral system.

NOTE The condition to be effectively earthed is obtained approximately when, for all system configurations, the ratio of zero-sequence reactance to the positive sequence reactance is less than 3 and the ratio of zero-sequence resistance to positive sequence reactance is less than 1.

5.2.3 Standard values for rated primary voltage (U_{pr})

See product-specific standards.

5.2.4 Standard values for rated secondary voltage (U_{sr})

See product-specific standards.

5.2.5 Rated auxiliary power supply voltage (U_{ar})

5.2.5.1 General

The rated auxiliary power supply voltage is the voltage value on which the requirements of a specification are based. It is measured at the power supply terminals.

The manufacturer may specify an auxiliary power supply voltage range.

5.2.5.2 Rated AC auxiliary voltage

The standard values of AC voltages are given below:

110 V – 120 V – 220 V – 230 V

Preferential values are those underlined.

The preferred operating range is 80 % to 110 % of the rated voltage.

The preferred values of the AC power supply frequency are:

50 Hz or 60 Hz

The manufacturer may specify an auxiliary power supply frequency range.

5.2.5.3 Rated DC auxiliary voltage

Standard values for the rated DC voltages are given below:

24 V – 48 V – 110 V – 125 V – 220 V – 250 V

The preferred operating range is 80 % to 110 % of the rated voltage.

In the case of a long distance between the control room and the instrument transformer electronics, a lower minimum supply voltage may be specified.

For LPITs with a DC power supply provided by the associated IED, the maximum power consumption shall be limited to 0,5 W. This includes the primary converter and the secondary converter. If the LPIT has phase-segregated components, this limitation applies to each phase. The standard value of the rated power supply voltage for this application is 24 V DC.

5.2.5.4 Insulation requirements for power supply terminals

Insulation requirements for the power supply terminals are given in Table 3. Requirements apply from the input terminals to any grounded part, and/or neighbouring circuit terminals (if present).

Table 3 – Insulation requirements for power supply terminals

Overvoltage category	Insulation type	Rated insulation voltage (RMS or DC)	Power-frequency voltage withstand capability (1 min)	Impulse voltage withstand capability (1,2/50 µs)
III	Basic insulation	300 V	2,2 kV	4 kV
III	Basic insulation	600 V	3,25 kV	6 kV

NOTE The overvoltage category III and the basic insulation concept are described in IEC 60664-1. Table 3 requirements assume that the protection from electrical shock is implemented using basic insulation plus grounding.

5.3 Current ratings

5.3.1 Standard values for rated primary current (I_{pr})

See product-specific standards.

5.3.2 Standard values for rated secondary current (I_{sr})

See product-specific standards.

5.3.3 Standard values for rated continuous thermal current (I_{cth})

See product-specific standards.

5.3.4 Short-time current ratings

5.3.4.1 Rated short-time thermal current (I_{th})

See product-specific standards.

5.3.4.2 Rated dynamic current (I_{dyn})

See product-specific standards.

5.3.4.3 Rated internal arc fault current (I_{arc})

If optionally specified, the value of the rated internal arc fault current (I_{arc}) shall be declared by the manufacturer.

If not otherwise specified, an internal arc fault current equal to 60 % of the switchgear rated short-time withstand current is suitable for most of applications.

NOTE 1 Experience has shown that selection of internal arc fault currents equal to 100 % system fault current statistically requires a degree of over-design of the transformer, since local phase-to-earth fault levels are significantly lower.

NOTE 2 Values higher than 60 % of the system fault current could be required based on the phase-to-earth fault current calculation at a given location where the transformer will be installed.

5.4 Dielectric ratings

5.4.1 General

For most of the values of highest voltage for equipment (U_m), several rated insulation levels exist to allow application of different performance criteria or overvoltage patterns. The choice should be made considering the degree of exposure to fast-front and slow-front overvoltage, the type of neutral earthing of the system, and the type of overvoltage limiting devices.

For the bushing type CT, the primary insulation is not provided by the CT of its own, but through the HV device on which it is mounted (e.g. GIS, HV cable, HV bushing). No primary insulation level is applicable for these devices.

5.4.2 Rated primary terminal insulation level

The rated primary terminal insulation level of an instrument transformer shall be based on its highest voltage for equipment U_m in accordance with Table 2.

The VT primary terminal intended to be earthed in operation shall have a power-frequency withstand voltage of 3 kV.

For instrument transformers mounted on GIS, the rated insulation levels shall be in accordance with IEC 62271-203:2022, Table 2 and Table 3, phase-to-earth insulation.

5.4.3 Other requirements for primary terminal insulation

5.4.3.1 Partial discharges

The partial discharge level for AC application shall not exceed the limits specified in Table 4. The test procedure is specified in 7.3.2.2.

The partial discharge level for DC application is defined in the product-specific standards.

Table 4 – Partial discharge test voltages and permissible levels for AC applications

Type of earthing of the neutral system ^a	Instrument transformer type	PD test voltage (RMS) kV	Maximum permissible PD level ^b pC	
			insulated in liquid or gas	solid
Earthed neutral system (earth fault factor $\leq 1,4$)	CT and earthed VT	U_m	10	50
		$1,2 U_m/\sqrt{3}$	5	20
	Unearthed VT	$1,2 U_m$	5	20
Isolated or non-effectively earthed neutral system (earth fault factor $> 1,4$)	CT and earthed VT	$1,2 U_m$	10	50
		$1,2 U_m/\sqrt{3}$	5	20
	Unearthed VT	$1,2 U_m$	5	20
^a If the neutral system is not defined, the values given for isolated or non-effectively earthed neutral systems are applicable.				
^b The maximum permissible PD level is also applicable for test frequencies different from rated frequency.				

5.4.3.2 Chopped lightning impulse

Instrument transformers with $U_m \geq 72,5$ kV, other than GIS devices, shall be capable to withstand a chopped lightning impulse voltage of negative polarity applied to its primary terminals with a peak value of 115 % of the rated lightning impulse withstand voltage.

5.4.3.3 Capacitance and dielectric dissipation factor ($\tan\delta$)

This requirement applies only to the following instrument transformers with $U_m \geq 72,5$ kV:

- with liquid-insulated primary insulation;
- with solid insulation;
- free-standing gas-insulated with capacitance grading insulation system.

NOTE The main purpose of this measurement is to check the water content and the purity of the insulating material.

Capacitance and $\tan\delta$ measurement can be not applicable for certain types of voltage transformers. For the measuring procedure, refer to the relevant product standard.

The dielectric dissipation factor ($\tan\delta$) is dependent on the type of insulation, and on both voltage and temperature. Its value at ambient temperature shall not exceed the values indicated in Table 5.

Table 5 – Maximum values of $\tan\delta$

Type of insulation	Maximum value of $\tan\delta$ measured at $U_m / \sqrt{3}$
Oil-impregnated paper	0,005
Oil-impregnated film	0,001
Oil-impregnated mixed film-paper	0,002
Gas-impregnated paper	0,003
Gas-impregnated film	0,001
Solid insulation	a
Other (e.g.: new technologies)	a
a To be indicated and justified by the manufacturer	

5.4.4 Between-section insulation requirements

For terminals of each section, the rated power-frequency withstand voltage of the insulation between sections shall be 3 kV.

The insulation requirement between sections of secondary windings is covered by 5.4.5.

5.4.5 Insulation requirements for secondary terminals and low-voltage components

5.4.5.1 General requirements

For inductive instrument transformers and CVT, the rated power-frequency withstand voltage between secondary terminals and earth shall be 3 kV.

5.4.5.2 Special requirements for LPITs

In the case of LPITs, insulation requirements for secondary terminals and low-voltage component terminals are given in Table 6.

Table 6 – LPIT secondary terminal and low-voltage component terminal withstand capability

Transmitting system of the LPIT	Power-frequency voltage withstand capability	Impulse voltage withstand capability
Electrical cable length ≤ 10 m	820 V	1,5 kV - 1,2/50 μ s
Electrical cable length > 10 m	3 kV	5 kV - 1,2/50 μ s
Optical connectors	NA	NA
NOTE In cases where the total electrical cable length of the transmitting system up to the secondary equipment does not exceed 10 m, and the associated earthing impedance is sufficiently low, the common mode voltage is not supposed to exceed a safe value. The levels indicated in the first row are reduced to a value consistent with the requirements defined in IEC 60255-27:2013, Table C.3. The insulation level meets PEB (protection by equipotential bonding) system requirements for 150 V working voltage.		

5.4.5.3 DC insulation resistance requirement

If requested, the insulation resistance between the short-circuited terminals of each secondary winding and earth shall be higher or equal to 200 M Ω when measured at a voltage of 1 kV DC. If the power-frequency voltage withstand capability is below 1 kV according to Table 6, the insulation measurement voltage shall be reduced to 500 V DC.

NOTE The on-site measurement of insulation resistance can present a lower value owing to ambient humidity.

5.5 Rated frequency (f_r)

The standard values of the rated frequency for AC applications are

16,7 Hz – 50 Hz – 60 Hz – 400 Hz.

5.6 Output ratings

5.6.1 Rated output for inductive instrument transformers and CVTs

5.6.1.1 General

For inductive instrument transformers and CVTs, the rated output (S_r) is expressed in volt-amperes absorbed in the secondary circuit connected with the rated burden (Z_{br}), at a specified power factor and at the rated secondary voltage or current.

5.6.1.2 Rated output values

See specific product standards.

5.6.2 Rated burden for LPITs

For LPITs, the standard value of rated burden is defined by a resistance of 2 M Ω in parallel with a capacitance of 50 pF. This specification assumes that the transmitting cable is part of the LPIT. The rated burden represented by the measuring and/or protection device is connected at the end of the transmitting cable.

For use on devices backward compatible with IEC 60044-8 or applications which require increased electromagnetic immunity, 2 k Ω /5 000 pF and 20 k Ω /500 pF are acceptable.

NOTE When necessary, an impedance converter can be integrated into the LPIT to adapt it to the standard rated burden.

5.6.3 Standard values for the rated delay time for EITs (t_{dr})

The standard values for rated delay time are:

0 μ s – 50 μ s – 100 μ s – 500 μ s

In the case of a digital signal in accordance with IEC 61869-9, the rated delay time is zero, because the merging unit provides an absolute time reference for signal measurement.

5.7 Accuracy requirements

5.7.1 General

The limits of error for steady-state and transient performance related to each accuracy class as well as the related tests are defined in the product-specific standards.

For very low current or very low voltage, the maximum absolute error is defined in the product-specific standard.

For measuring accuracy classes, the limits of error shall be granted from 99 % to 101 % of the rated frequency (f_r). For protection accuracy classes, the limits of error shall be granted from 96 % to 102 % of the rated frequency (f_r). For the majority of the instrument transformers, no additional tests are needed. In the case of specific technologies having known issues, this will be covered by the product-specific standard.

5.7.2 Rated accuracy classes

See specific product standards.

5.7.3 Accuracy class extension for harmonics

Owing to the use of specific devices (e.g. non-linear loads, railways), harmonics can be generated on the network. The amount of harmonics depends on the network and the voltage level. Harmonics are of interest for measuring applications, power quality measurements and protection purposes. Specific accuracy requirements for each class are given in 5.7.4, 5.7.5 and 5.7.6.

To give a brief indication of the performance of a piece of equipment in terms of harmonics response, an accuracy class extension identifier may be used for each accuracy class.

Accuracy class extensions for harmonics are:

- WB0 extension for harmonic frequencies up to the 13th harmonic;
- WB1 extension for harmonic frequencies up to 3 kHz;
- WB2 extension for harmonic frequencies up to 20 kHz;
- WB3 extension for harmonic frequencies up to 150 kHz;
- WB4 extension for wide bandwidth applications up to 500 kHz.

Requirements for accuracy on harmonics are defined in 5.7.4.

This accuracy class extension identifier may be appended to the rated accuracy class, separated by a dash.

EXAMPLE 1 Accuracy class 0,5-WB1.

Extensions can be freely combined with all accuracy classes to indicate better performances at high frequencies.

For all LPITs and SAMU, the accuracy class extension shall be at least WB0, while the extensions WB1, WB2, WB3 and WB4 are optional.

For other instrument transformers, all extensions are optional.

Some extensions may be not applicable to a specific instrument transformer.

Where applicable, multiple extensions may be claimed for the same IT.

EXAMPLE 2 Class 0,2-WB1 and class 0,5-WB2.

The extensions apply to both voltage transformers and current transformers.

5.7.4 Accuracy requirements for harmonics

5.7.4.1 Accuracy class extension for measuring applications

Table 7 provides the limit of errors for the accuracy class extension WB0.

Table 7 – WB0 extension for harmonics

Accuracy class	Ratio error at low frequency		Ratio error at harmonics based on f_r				Phase error at low frequency	Phase error at harmonics based on f_r			
	%		%				Degrees	Degrees			
	DC ^a	1 Hz	2 nd to 4 th	5 th and 6 th	7 th to 9 th	10 th to 13 th	1 Hz	2 nd to 4 th	5 th and 6 th	7 th to 9 th	10 th to 13 th
0,1	+1 -100	+1 -30	±1	±2	±4	±8	±45	±1	±2	±4	±8
0,2 – 0,2 S ^b	+2 -100	+2 -30	±2	±4	±8	±16	±45	±2	±4	±8	±16
0,5 – 0,5 S ^b	+5 -100	+5 -30	±5	±10	±20	±20	±45	±5	±10	±20	±20
1 – 3 – 5	+10 -100	+10 -30	±10	±20	±20	±20	±45	±10	±20	±20	±20
^a DC coupling is allowed but not required.											
^b The accuracy classes 0,2 S and 0,5 S apply only for current transformers.											

The transition between points defined in Table 7 shall be a straight line when shown in a diagram with logarithmic scales on both axes.

5.7.4.2 Accuracy class extensions for wide bandwidth applications

According to EN 50160 and IEC 61000-4-7, for such purposes, harmonics up to the 40th order are measured (in some cases even to the 50th order). IEC 61000-4-7 specifies a limit for quality measuring applications. The limits of accuracy for wide bandwidth application are given in Table 8.

Table 8 – Accuracy class extensions for wide bandwidth applications

Accuracy class	Ratio error at frequencies shown below			Phase error at frequencies shown below		
	%			Degrees		
WB1	$f_r < f \leq 1 \text{ kHz}$	$1 < f \leq 1,5 \text{ kHz}$	$1,5 < f \leq 3 \text{ kHz}$	$f_r < f \leq 1 \text{ kHz}$	$1 < f \leq 1,5 \text{ kHz}$	$1,5 < f \leq 3 \text{ kHz}$
WB2	$f_r < f \leq 5 \text{ kHz}$	$5 < f \leq 10 \text{ kHz}$	$10 < f \leq 20 \text{ kHz}$	$f_r < f \leq 5 \text{ kHz}$	$5 < f \leq 10 \text{ kHz}$	$10 < f \leq 20 \text{ kHz}$
WB3	$f_r < f \leq 20 \text{ kHz}$	$20 < f \leq 50 \text{ kHz}$	$50 < f \leq 150 \text{ kHz}$	$f_r < f \leq 20 \text{ kHz}$	$20 < f \leq 50 \text{ kHz}$	$50 < f \leq 150 \text{ kHz}$
WB4	$f_r < f \leq 50 \text{ kHz}$	$50 < f \leq 150 \text{ kHz}$	$150 < f \leq 500 \text{ kHz}$	$f_r < f \leq 50 \text{ kHz}$	$50 < f \leq 150 \text{ kHz}$	$150 < f \leq 500 \text{ kHz}$
0,1	±1	±2	±5	±1	±2	±5
0,2 – 0,2 S	±2	±4	±5	±2	±4	±5
0,5 – 0,5 S	±5	±10	±10	±5	±10	±20
1	±10	±20	±20	±10	±20	±20
Protection	±10	±20	±30	-	-	-
The accuracy classes 0,2 S and 0,5 S apply only for current transformers.						
NOTE 1 Accuracy class extension WB4 is intended for very wide bandwidth applications like travelling-wave protections and fault locators where signal frequencies reach as high as 500 kHz. The use of relays based on travelling-wave analysis is a promising solution offering very accurate fault location. For instance, new devices based on such principles claim to be much more accurate than conventional reactance-based fault locators. This field is still evolving, but CTs and VTs suitable for these relays need a very large frequency range, hence the "extended" range up to 500 kHz. No consensus for general requirements for this kind of application is available at the date of the publication. NOTE 2 Travelling wave relays are designed especially for this purpose and are very special (very large bandwidth, etc.). Although WB4 compliant ITs are very desirable, inductive CTs and CVTs often have not a sufficient bandwidth allowing relays and fault locators to accurately measure the traveling wave arrival times. NOTE 3 Owing to the high bandwidth, the classes WB3 and WB4 are not compatible with digital signals in accordance with IEC 61869-9 and its standardized sampling rates.						

IEC 61850-7-4 introduces a mechanism which allows the IT frequency response compensation factors to be exposed to the IED by using the frequency correction setting "CorCrv" contained within the logical nodes for current and voltage transformers (TCTR and TVTR). Correction factors are provided in the form of "curve shape setting" (CSG).

It is recommended that manufacturers of SAMUs and LPITs with digital interfaces provide device-specific frequency correction factors supporting the IEC 61850-7-4 "CorCrv" correction mechanism.

When the frequency correction factors are provided, the manufacturer shall specify the accuracy at harmonics after correction according to Table 8.

5.7.5 Harmonic requirements for LPIT protection accuracy classes

For all protective accuracy classes, the harmonic requirements of Table 9 are mandatory, and harmonic requirements of Table 8 are optional. Frequencies of 16,7 Hz or 20 Hz are relevant to cover possible influences coming from railway power frequencies (for electrical networks with rated frequencies of 50 Hz or 60 Hz).

Table 9 – Harmonic requirements for protection accuracy classes

Ratio error at low frequency		Ratio error at frequencies and harmonics shown below, based on f_r		Phase error at low frequency	Phase error at frequencies and harmonics shown below, based on f_r	
%				Degrees		
DC	1 Hz	1/3 rd component (16,7 Hz or 20 Hz)	2 nd to 5 th harmonic	1 Hz	1/3 rd component (16,7 Hz or 20 Hz)	2 nd to 5 th harmonic
+10	+10	±10	±10	-	±10	±10
-100	-30					


The above limits apply equally to both low-power voltage and low-power current transformers.

5.7.6 Anti-aliasing filter for EIT using digital data processing

Digital and discrete time data processing limits the bandwidth to less than one half the digital sampling rate f_s (Nyquist criterion). If different sampling rates along the signal processing path are used, the lowest rate is the limiting factor. For instrument transformers with digital signal, the lowest rate is usually the output sampling rate. Frequencies above $f_s / 2$ are mirrored to frequencies below $f_s / 2$. From the point of view of accuracy, the most critical frequencies are those mapped onto the power system frequency f_r . The first frequency mapped on f_r is

$$f_s - f_r$$

An example of data acquisition system is illustrated in Figure 2 which shows that a single system can use multiple sampling frequencies f_s marked in this case as f_{adc} and f_{dr} .

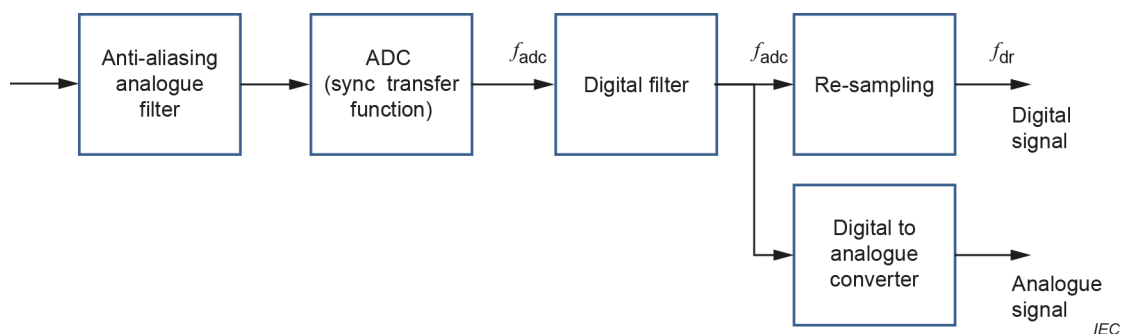

Key

- f_{adc} ADC sampling rate
- f_{dr} output sampling rate

Figure 2 – Example of digital data acquisition system

If f_{adc} is larger than f_{dr} , the useable signal bandwidth is less than $f_{dr} / 2$, otherwise the signal bandwidth is less than $f_{adc} / 2$.

Hence, a so-called anti-aliasing filter shall be used. Minimum anti-aliasing filter attenuation requirements are specified as a function of the instrument transformer accuracy class and given in Table 10.

Table 10 – Anti-aliasing filter requirements

Accuracy class	Anti-aliasing filter attenuation guarding frequencies up to 13 th harmonic $(f_s - 13 \times f_r \leq f < f_s - f_r)$	Anti-aliasing filter attenuation guarding the fundamental $(f_s - f_r \leq f)$
0,1	≥ 17 dB	≥ 34 dB
0,2	≥ 14 dB	≥ 28 dB
0,5	≥ 10 dB	≥ 20 dB
1	≥ 10 dB	≥ 20 dB
Protection classes	≥ 10 dB	≥ 20 dB

The attenuation, expressed in decibels (dB), is calculated in accordance with the following formula in the case of current transformers with an analogue secondary signal:

$$\alpha = 20 \lg \left(\frac{I_p}{I_{pr}} \times \frac{U_{sr}}{U_s} \right)$$

where

α is the attenuation;

I_p is the RMS value of the primary current at frequency f , with $f \geq f_s - f_r$;

U_s is the RMS value of the secondary voltage at the mirrored frequency $(f_s - f_r)$;

I_{pr} is the rated primary current;


U_{sr} is the rated secondary voltage.

For a digital secondary signal, the attenuation is defined by

$$\alpha = 20 \lg \frac{I_p}{I_s}$$

For low-power voltage transformers, replace current I_p by voltage U_p and current I_s by voltage U_s .

Figure 3 illustrates the combined harmonic and anti-aliasing frequency response magnitude requirements for measuring accuracy class 1, WB0 and protection accuracy class 5P where $f_r = 60$ Hz and $f_s = 4\,800$ Hz.

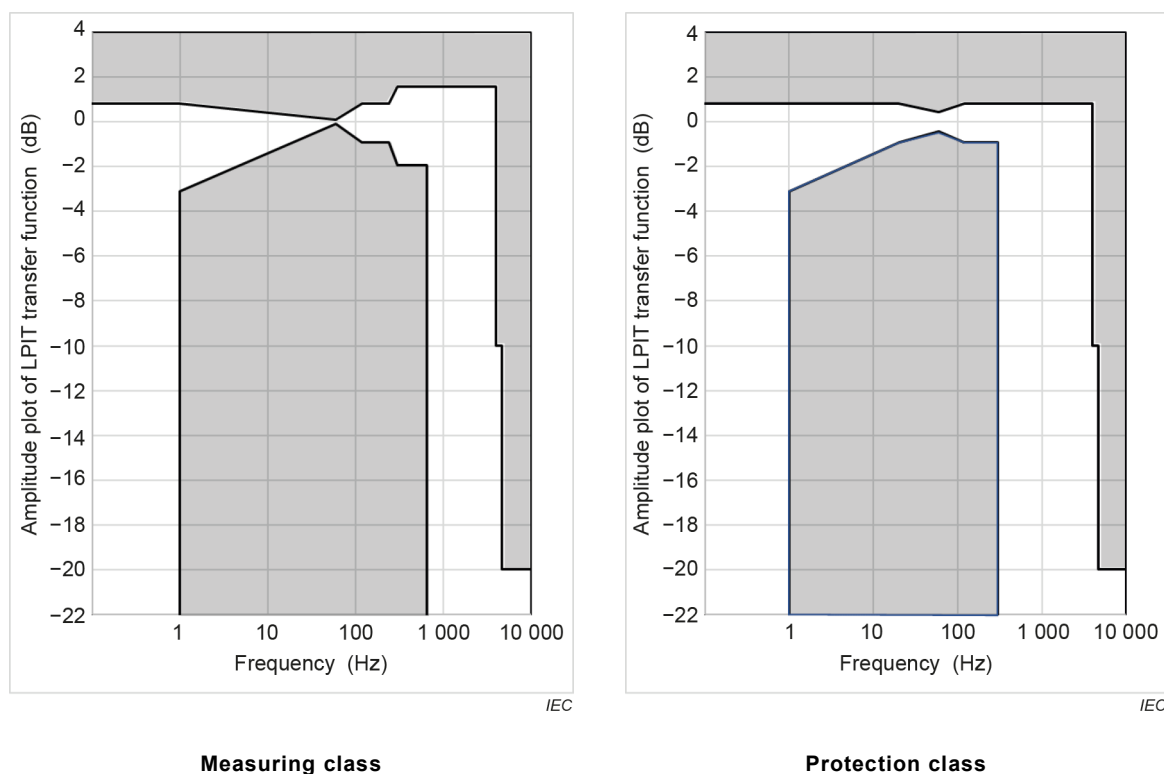

Key Grey zone: prohibited region for response

Figure 3 – Example of frequency response mask for EIT with digital output

It is recommended that a typical frequency response plot (phase and magnitude) be provided with the documentation. The frequency response plot may be obtained by simulation.

6 Design and construction

6.1 Requirements for liquids used in equipment

6.1.1 General

The manufacturer shall specify the type and the required quantity and quality of the liquid to be used in equipment.

6.1.2 Liquid quality

For mineral oil-filled equipment, new insulating oil shall comply with IEC 60296.

For synthetic liquid-filled equipment, new insulating liquid shall comply with IEC 60867.

For natural ester liquid-filled equipment, new insulating liquid shall comply with IEC 62770.

For synthetic ester liquid-filled equipment, new insulating liquid shall comply with IEC 61099.

For modified or blended ester liquid-filled equipment, new insulating liquid shall comply with IEC 63012.

6.1.3 Liquid level indicator

If supplied, the device for checking the liquid level shall indicate whether the liquid level is within the permissible range during operation.

6.1.4 Liquid tightness

No liquid leakage is permitted. Any liquid leakage represents a danger for insulation dielectric performance and can be harmful for the environment.

6.2 Requirements for gases used in equipment

6.2.1 General

The manufacturer shall specify the type and the required quantity and quality of the gas to be used in equipment.

6.2.2 Gas quality

New SF₆ (sulphur hexafluoride) shall comply with IEC 60376. Used SF₆ shall comply with IEC 60480.

SF₆ handling shall be in accordance with IEC 62271-4:2022, Clauses 4 and 5.

The maximum allowed moisture content within instrument transformers filled with gas at rated filling pressure shall be such that the dew point is not higher than -5 °C^1 for a measurement at 20 °C. Adequate correction shall be applied for measurement at other temperatures. For the measurement and determination of the dew point, refer to IEC 60376 for new SF₆ and IEC 60480 for used SF₆. This is applicable at any time in the life of the instrument transformer.

NOTE New insulating gases are being introduced and used today. The standardization is under consideration, but the maturity is not yet sufficient to be considered.

6.2.3 Gas monitoring device

Gas-insulated instrument transformers with a minimum functional pressure above 0,2 MPa shall be provided with a pressure or density monitoring device. Gas monitoring devices can be provided alone or together with the associated equipment.

6.2.4 Gas tightness

6.2.4.1 General

The specifications of 6.2.4.2 apply to all instrument transformers that use gas as an insulating medium, other than air at atmospheric pressure.

6.2.4.2 Closed pressure systems for gas

The tightness characteristic of a closed pressure system and the time between replenishments under normal environmental conditions shall be stated by the manufacturer. This time shall be at least 10 years for maintenance planning purposes.

The tightness of closed pressure systems for gas is specified by the relative leakage rate F_{rel} of each compartment.

¹ This value is consistent with other high-voltage equipment standards.