



BSI Standards Publication

Gas cylinders - Self-closing cylinder valves - Specification and type testing (ISO 17879:2017)

National foreword

This British Standard is the UK implementation of EN ISO 17879:2017. It is identical to ISO 17879:2017.

The UK participation in its preparation was entrusted to Technical Committee PVE/3/1, Gas containers - Valve fittings for gas containers.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2017
Published by BSI Standards Limited 2017

ISBN 978 0 580 86649 4

ICS 23.020.30; 23.020.35

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2017.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

English Version

Gas cylinders - Self-closing cylinder valves - Specification and type testing (ISO 17879:2017)

Bouteilles à gaz - Robinets de bouteilles équipés de
clapets auto-obturants - Spécifications et essais de type
(ISO 17879:2017)

Gasflaschen - Selbstschließende Flaschenventile -
Spezifikation und Baumusterprüfung (ISO
17879:2017)

This European Standard was approved by CEN on 26 June 2017.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

European foreword

This document (EN ISO 17879:2017) has been prepared by Technical Committee ISO/TC 58 “Gas cylinders” in collaboration with Technical Committee CEN/TC 23 “Transportable gas cylinders” the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2018, and conflicting national standards shall be withdrawn at the latest by February 2018.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 17879:2017 has been approved by CEN as EN ISO 17879:2017 without any modification.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 58, *Gas cylinders*, Subcommittee SC 2, *Cylinder fittings*.

Introduction

This document covers the function of a self-closing cylinder valve as a closure (defined by the UN Model Regulations). Additional features of self-closing cylinder valves (e.g. pressure relief devices) might be covered by other standards and/or regulations.

Self-closing cylinder valves conforming to this document can be expected to perform satisfactorily under normal service conditions.

This document pays particular attention to:

- a) suitability of materials;
- b) safety (mechanical strength, impact strength, endurance, leak tightness, resistance to ignition, resistance to acetylene flashback);
- c) testing;
- d) marking;
- e) manufacturing tests and examinations.

In this document, the unit bar is used due to its universal use in the field of technical gases. It should, however, be noted that bar is not an SI unit, and that the corresponding SI unit for pressure is Pa ($1 \text{ bar} = 10^5 \text{ Pa} = 10^5 \text{ N/m}^2$).

Pressure values in this document are given as gauge pressure (pressure exceeding atmospheric pressure) unless noted otherwise.

Gas cylinders — Self-closing cylinder valves — Specification and type testing

1 Scope

This document specifies the design, type testing, marking and manufacturing tests and examinations requirements for self-closing cylinder valves intended to be fitted to refillable transportable gas cylinders which convey compressed, liquefied or dissolved gases.

NOTE 1 The main applications for such self-closing cylinder valves are in the calibration gas and beverage industries.

This document covers the function of a self-closing cylinder valve as a closure.

NOTE 2 Requirements for standard cylinder valves are given in ISO 10297. Requirements for quick-release cylinder valves are given in ISO 17871.

This document is not applicable to self-closing cylinder valves for cryogenic equipment, for portable fire extinguishers, or for liquefied petroleum gas (LPG).

NOTE 3 Requirements for valves for cryogenic vessels are specified in ISO 21011 and at a regional level, for example, in EN 1626. Requirements for valves for portable fire extinguishers at a regional level are specified, for example, in EN 3 series. Requirements for self-closing LPG cylinder valves are specified in ISO 14245.

NOTE 4 Additional requirements for pressure-relief devices might be specified in international/regional regulations/standards.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 10286, *Gas cylinders — Terminology*

ISO 10297:2014, *Gas cylinders — Cylinder valves — Specification and type testing*

ISO 10524-3, *Pressure regulators for use with medical gases — Part 3: Pressure regulators integrated with cylinder valves*

ISO 11114-1, *Gas cylinders — Compatibility of cylinder and valve materials with gas contents — Part 1: Metallic materials*

ISO 11114-2, *Gas cylinders — Compatibility of cylinder and valve materials with gas contents — Part 2: Non-metallic materials*

ISO 13341, *Gas cylinders — Fitting of valves to gas cylinders*

ISO 14246, *Gas cylinders — Cylinder valves — Manufacturing tests and examinations*

ISO 22435, *Gas cylinders — Cylinder valves with integrated pressure regulators — Specification and type testing*

3 Terms and definitions

For the purposes of this document, the terms and definitions in ISO 10286 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

self-closing cylinder valve

cylinder valve with a normally closed *valve operating mechanism* (3.2) that is actuated by a separate *operating device* (3.3) which is not an integral part of the cylinder valve

3.2

valve operating mechanism

mechanism which opens the valve orifice by an *operating device* (3.3) and closes automatically when or before the operating device is disconnected and which includes the internal sealing system

3.3

operating device

external component which actuates the *valve operating mechanism* (3.2)

EXAMPLE Push-pin as part of a regulator, lever-operated push-pin.

3.4

external leak tightness

leak tightness to atmosphere when the valve is open

Note 1 to entry: Some designs of self-closing valves cannot leak externally except through the outlet connection.

3.5

internal leak tightness

leak tightness to atmosphere when the valve is closed and pressurized from the inlet

3.6

valve working pressure

p_w
settled pressure of a compressed gas at a uniform reference temperature of 15 °C in a full gas cylinder for which the valve is intended

Note 1 to entry: This definition does not apply to liquefied gases (e.g. carbon dioxide) or dissolved gases (e.g. acetylene).

Note 2 to entry: The valve working pressure is expressed in bar.

3.7

valve burst test pressure

p_{vbt}
minimum pressure applied to a valve during hydraulic burst pressure test

Note 1 to entry: The valve burst test pressure is expressed in bar.

3.8

valve test pressure

p_{vt}
minimum pressure applied to a valve during testing

Note 1 to entry: The valve test pressure is expressed in bar.

3.9

total package mass

combined mass of a gas cylinder, its valve(s), its permanent attachment(s) and its maximum allowed gas content

Note 1 to entry: Valve guards but not valve protection caps are examples of permanent attachments.

Note 2 to entry: The total package mass is expressed in kg.

3.10

valve inlet connection

connection on the valve which connects the valve to the cylinder

3.11

valve outlet connection

connection on the valve used to discharge the cylinder

Note 1 to entry: For most valves, this connection is also used for filling the cylinder.

3.12

valve filling connection

connection on the valve used to fill the cylinder

Note 1 to entry: For some valves, the valve filling connection is different from the valve outlet connection.

3.13

normal temperature and pressure

NTP

temperature of 20,0 °C (293,15 K) and pressure of 1,013 bar absolute (0,101 3 MPa absolute)

4 Valve description

4.1 A self-closing valve typically comprises a:

- a) valve body;
- b) valve operating mechanism;
- c) valve outlet connection(s);
- d) valve inlet connection.


4.2 Valves can also include:

- a) a pressure-relief device;

NOTE Some transport regulations require or forbid pressure relief devices for some gases, gas mixtures or gas groups.

- b) a dip tube;
- c) an outlet connection plug/cap;
- d) an excess flow device;
- e) a flow restricting orifice;
- f) a filter(s).

4.3 Typical designs are given in [Figure 1](#).

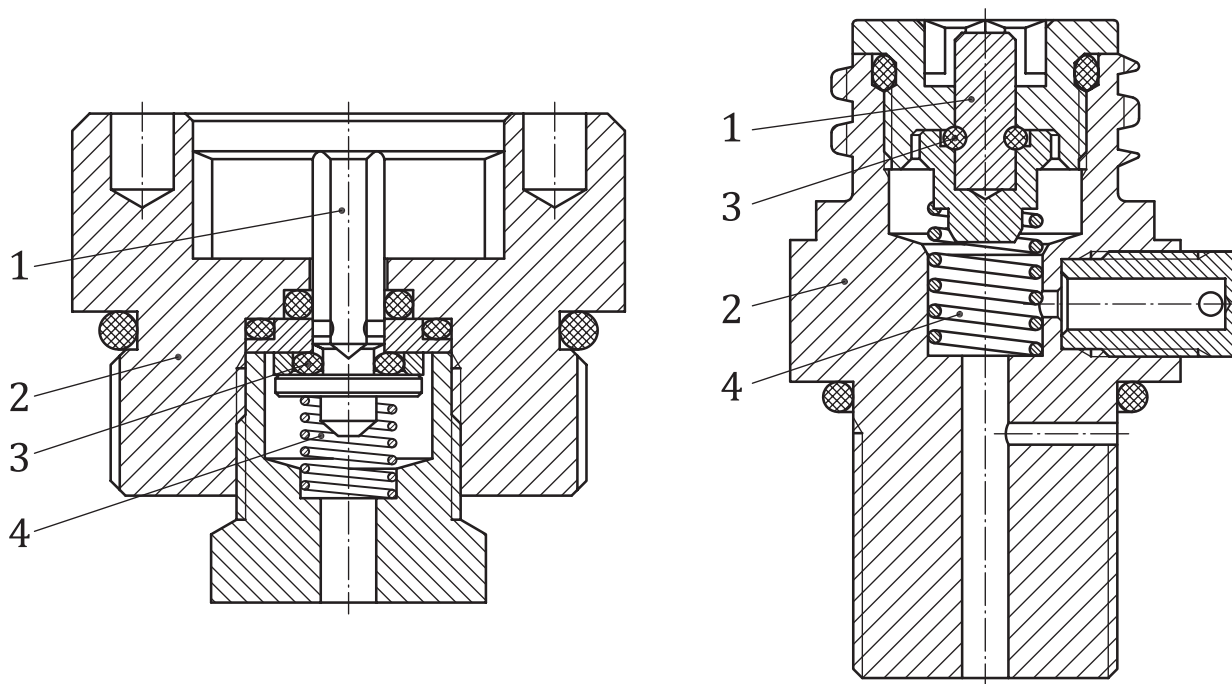

Key

- 1 poppet
- 2 valve body
- 3 seat insert/soft seal
- 4 seat closing spring

Figure 1 — Typical self-closing cylinder valve designs

5 Valve design requirements

5.1 General

Valves shall operate within specification and be leak tight over a range of service temperatures, from at least $-20\text{ }^{\circ}\text{C}$ to $+65\text{ }^{\circ}\text{C}$ in indoor and outdoor environments.

Closed valves shall be internally leak tight during transport and storage (see test 4 in [Table 2](#)) for temperatures down to $-40\text{ }^{\circ}\text{C}$.

Where higher or lower service temperatures are required, any additional requirements and tests shall be agreed between the manufacturer and purchaser.

5.2 Materials

Metallic and non-metallic materials in contact with the gas shall be chemically and physically compatible with the gas, in accordance with ISO 11114-1 and ISO 11114-2, under all intended operating conditions. For valves used for dissolved gases, the compatibility of the materials in contact with the solvent shall also be considered. For valves used with gas mixtures, the compatibility of the gas wetted materials with each component of the gas mixture shall be considered.

Copper alloys in contact with oxygen or other oxidizing gases or gas mixtures shall have a maximum aluminium content of no more than 2,5 %.