

Methods of test for petroleum and its products — BS 2000-475: Petroleum liquids — Manual sampling

(Identical with IP 475-2005)

The European Standard EN ISO 3170:2004 has the status of a
British Standard

ICS 75.080

National foreword

This British Standard is the official English language version of EN ISO 3170:2004. It is identical with ISO 3170:2004. It supersedes BS EN ISO 3170:1999 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee PTI/13, Petroleum testing and terminology, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Energy Institute, under the brand of Institute of Petroleum publishes and sells all parts of BS 2000, and all BS EN petroleum test methods that would be part of BS 2000, both in its annual publication “Standard methods for analysis and testing of petroleum and related products and British Standard 2000 parts” and individually.

Further information is available from:

**Energy Institute, 61 New Cavendish Street, London W1G 7AR.
Tel: 020 7467 7100. Fax: 020 7255 1472.**

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 9 January 2004

Summary of pages

This document comprises a front cover, an inside front cover, the EN ISO title page, the EN ISO foreword page, the ISO title page, pages ii to v, a blank page, pages 1 to 55 and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments
15158	7 May 2004	Addition of secondary identifier and alteration of National foreword

© Energy Institute and BSI
7 May 2004

ISBN 0 580 43478 8

English version

Petroleum liquids - Manual sampling (ISO 3170:2004)

Produits pétroliers liquides - Echantillonnage manuel (ISO 3170:2004)

Flüssige Mineralölerzeugnisse - Manuelle Probenahme (ISO 3170:2004)

This European Standard was approved by CEN on 16 January 2004.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

CORRECTED 2004-03-17

Foreword

This document (EN ISO 3170:2004) has been prepared by Technical Committee ISO/TC 28 "Petroleum products and lubricants" in collaboration with Technical Committee CEN/TC 19 "Petroleum products, lubricants and related products", the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2004, and conflicting national standards shall be withdrawn at the latest by August 2004.

This document supersedes EN ISO 3170:1998.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Endorsement notice

The text of ISO 3170:2004 has been approved by CEN as EN ISO 3170:2004 without any modifications.

INTERNATIONAL STANDARD

EN ISO 3170:2004

**ISO
3170**

Third edition
2004-02-01

Petroleum liquids — Manual sampling

Produits pétroliers liquides — Échantillonnage manuel



Reference number
ISO 3170:2004(E)
AVA Documents
Document Sharing Hub

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Principles	6
5 Apparatus	7
5.1 General	7
5.2 Tank samplers	8
5.3 Drum and can samplers	22
5.4 Pipeline samplers	24
5.5 Sample receivers, vessels and containers	25
5.6 Container closures	27
5.7 Sample coolers	27
6 Safety precautions	27
7 Procedures for homogeneous petroleum liquids	27
7.1 Introduction	27
7.2 Precautions	28
7.3 Tank sampling	30
7.4 Pipeline sampling	36
7.5 Dispenser (nozzle) sampling	40
8 Procedures for crude oils and other non-homogeneous petroleum liquids	41
8.1 General	41
8.2 Procedures	41
9 Sample handling	43
9.1 General	43
9.2 Homogenization of samples	43
9.3 Verification of mixing efficiency	45
9.4 Transfer of samples	47
10 Sampling of tank residues/deposits	47
11 Package sampling	47
11.1 Statistical aspects of sampling packages	47
11.2 Procedures for sampling packages	49
Annex A (informative) Guidance on safety precautions	52
Bibliography	55

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3170 was prepared by Technical Committee ISO/TC 28, *Petroleum products and lubricants*, Subcommittee SC 3, *Static petroleum measurement*.

This third edition cancels and replaces the second edition (ISO 3170:1988), which has been technically revised.

The principal technical changes include the addition of

- procedures for tank sampling under restricted and closed system conditions, and
- procedures for the taking of manual spot samples from pipelines containing high vapour pressure liquids.

Introduction

This International Standard may be applied in combination with ISO 3171.

The purpose of this International Standard is to standardize conditions for obtaining a sample of liquid/semi-liquid hydrocarbons from a tank, drum or pipeline by manual means. If the hydrocarbon to be sampled is of non-homogeneous character showing significant variations in composition or containing sediments and water, samples taken manually should not be expected to be representative, but may enable the degree of non-homogeneity to be assessed and estimates of quality and quantity to be made.

Procedures are specified which minimize or eliminate losses of light ends from samples. Such losses can occur during handling or transfer of samples, thereby making them non-representative of the bulk.

The procedures specified are intended to provide samples for the following purposes:

- a) the determination of the liquid/hydrocarbon quality;
- b) the determination of the water content;
- c) the determination of other contaminants that are not considered to be part of the liquid transferred.

If the sampling conditions for purposes a), b) and c) are in conflict, separate samples are required.

Sampling procedures for tank contents that are not homogeneous are specified that enable the degree of non-homogeneity to be assessed and estimates of quality and quantity to be made.

Procedures for the tank sampling of liquid hydrocarbons under inert gas pressure are included, together with techniques for sampling from tanks which are equipped with vapour emission control systems.

It is recognized that, in many countries, some or all of the items covered by this International Standard are the subject of mandatory regulations imposed by the laws of those countries. In cases of conflict between such mandatory regulations and this International Standard, the former prevail.

Petroleum liquids — Manual sampling

1 Scope

This International Standard specifies the manual methods to be used for obtaining samples of liquid or semi-liquid hydrocarbons, tank residues and deposits from fixed tanks, railcars, road vehicles, ships and barges, drums and cans, or from liquids being pumped in pipelines.

It applies to the sampling of petroleum products, crude oils and intermediate products, which are stored in tanks at or near atmospheric pressure, or transferred by pipelines, and are handled as liquids at temperatures from near ambient up to 200 °C.

The sampling procedures specified are not intended for the sampling of special petroleum products which are the subject of other International Standards, such as electrical insulating oils (IEC 60475), liquefied petroleum gases (ISO 4257), liquefied natural gases (ISO 8943) and gaseous natural gases (ISO 10715).

This International Standard refers to existing methods of sampling and the type of equipment presently in use. It is, however, not intended that it should exclude the use of new equipment not yet developed for commercial use, provided that such equipment enables samples to be obtained in accordance with the requirements and procedures of this International Standard.

NOTE For the purposes of this International Standard, the term “% (m/m)” is used to represent the mass fraction.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1998 (all parts), *Petroleum industry — Terminology*

ISO 2859-1:1999, *Sampling procedures for inspection by attributes — Part 1: Sampling plans indexed by acceptable quality limit (AQL) for lot-by-lot inspection*

ISO 3171:1988, *Petroleum liquids — Automatic pipeline sampling*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1998 and the following apply.

3.1

acceptable quality level

AQL

maximum per cent defective (or the maximum number of defects per hundred units) that, for purposes of sampling inspection, can be considered satisfactory as a process average

3.2

all-level sample

sample obtained with an apparatus which accumulates the sample while passing in one direction only through the total liquid height, excluding any free water

3.3

automatic sampler

device used to extract a representative sample from the liquid flowing in a pipe

NOTE The automatic sampler generally consists of a probe, a sample extractor, an associated controller, a flow measuring device, and a sample receiver.

3.4

batch

collection of packages containing a product of a single type and composition and of a single manufactured lot, or of a single delivery

3.5

bottom sample

spot sample taken from the product at or close to the bottom of a tank or container

See Figure 1.

3.6

bottom water sample

spot sample of free water taken from beneath the petroleum in a tank

3.7

closed sampling

process of taking samples within a tank under closed conditions, which does not permit the release of any tank contents or vapour to the atmosphere

3.8

composite sample

sample obtained by combining a number of spot samples in defined proportions so as to obtain a sample representative of the bulk of the product

3.9

dipper sample

sample obtained by placing a dipper or other collecting vessel in the path of a free-flowing stream to collect a definite volume from the full cross-section of the stream at regular time intervals for a constant time rate of flow, or at time intervals varied in proportion to the flow rate

NOTE This method is normally restricted to sampling petroleum coke from conveyor belts.

3.10

drain sample

sample obtained from the water draw-off valve on a storage tank

NOTE Occasionally, a drain sample may be the same as a bottom sample, for example, in the case of a tank car.

3.11

floating roof sample

spot sample taken just below the surface to determine the density of the liquid on which the roof is floating

3.12

grease sample

spot sample obtained by scooping or dipping a quantity of soft or semi-liquid material from a container

3.13**integrity of the sample**

condition of being complete and unaltered, i.e. the sample being preserved with the same composition as when it was taken from the bulk of the liquid

3.14**lower sample**

spot sample taken at a level of five-sixths of the depth of liquid below the top surface

See Figure 1.

3.15**middle sample**

spot sample taken at a level of one-half of the depth of liquid below the top surface

See Figure 1.

3.16**mixer**

device which provides a homogeneous mixture of the liquid within a pipeline or container in order to obtain a representative sample

3.17**open sampling**

process of taking traditional samples within a tank via an open gauge hatch or gauging access point

NOTE If the tank ullage space is pressurized, it will normally be necessary to use other (closed or restricted) procedures to avoid de-pressurizing the tank and the consequent loss of volatile organic compounds (VOCs).

3.18**per cent defective**

one hundred times the number of defective units of product contained in any given quantity of units of product divided by the total number of units of product inspected, i.e.:

$$\text{per cent defective} = \frac{\text{number of defectives}}{\text{number of units inspected}} \times 100$$

3.19**portable sampling device****PSD**

housing designed to provide a gas-tight connection to a vapour-lock valve, which contains a restricted or closed system sampler and is fitted with a tape or cable winding mechanism for lowering and retrieving the sampler

3.20**representative sample**

sample having its physical or chemical characteristics identical to the volumetric average characteristics of the total volume being sampled

3.21**residues and deposits**

organic and inorganic matter, together with any water dispersed within it, which has separated from the liquid and either fallen to the bottom of the tank containing the liquid, or been left in the tank after the liquid has been pumped out

3.22

restricted sampling

process of taking samples within a tank using equipment which is designed to substantially reduce or minimize the vapour losses that would occur during open sampling, but where the equipment is not completely gas-tight

3.23

running sample

sample obtained with an apparatus which accumulates the sample while passing in both directions through the total liquid height, excluding any free water

3.24

sample conditioning

mixing necessary to homogenize the sample during sample handling in preparation for subsampling and/or analysis

3.25

sample handling

any conditioning, transferring, dividing and transporting of the sample

NOTE Sample handling includes transferring the sample from the primary sampling device to any secondary container, and the transferring of subsamples to the laboratory apparatus in which it is to be analyzed.

3.26

sample size

number of samples to be drawn from a batch to determine its acceptability as given in sampling plans

3.27

skim sample

surface sample

spot sample taken from the surface of the liquid

See Figure 1.

3.28

spot sample

sample taken at a specific location in a tank or from a flowing stream in a pipe at a specific time

3.29

static mixer

mixing device having no moving parts and located within a pipe or tube

NOTE The effectiveness of the static mixer depends on the kinetic energy of the moving liquid for the energy required to mix the liquid.

3.30

still-well

guide pole

still-pipe

sounding-pipe

stand pipe

vertical cylindrical pipe built into a tank to permit gauging operations while reducing errors arising from turbulence or agitation of the liquid

NOTE 1 Samples taken from unperforated or unslotted still-wells should not be used for custody transfer applications, see 7.2.1.3.

NOTE 2 Still-wells may also be found on ships and barges.

3.31**suction-level sample**

outlet sample

sample taken at the lowest level from which liquid hydrocarbon is pumped from the tank

See Figure 1.

NOTE In determining this level, appropriate allowance is made for any fittings within the tank such as swing-arm, suction baffle or internal bend.

3.32**sump sample**

spot sample taken from within a sump

3.33**suspended water**

water within the oil that is finely dispersed as small droplets

NOTE It may, over a period of time, either collect as free water or become dissolved water, depending on the conditions of temperature and pressure prevailing.

3.34**tap sample**

tank-side sample

spot sample taken from a sample tap on the side of a tank

3.35**test portion**

portion of a sample or subsample that is introduced into the analytical test apparatus

3.36**top sample**

spot sample obtained 150 mm below the top surface of the liquid

See Figure 1.

3.37**total water**

sum of all the dissolved, suspended and free water in a cargo or parcel of oil

3.38**ullage**

empty capacity left in a fixed volume sample receiver/container above the liquid surface

3.39**upper sample**

spot sample taken at a level of one-sixth of the depth of liquid below the top surface

See Figure 1.

3.40**vapour-lock valve**

vapour control valve

device fitted to the top of vapour-tight or pressure tanks to permit manual measurement and/or sampling operations to be carried out without loss of pressure


3.41

zone sample

core sample

flow-through sample

sample taken as that part of the liquid column which is trapped within the whole height of a sampler when it is sealed at a single spot location within a tank, after having been fully flushed as it was lowered to that position

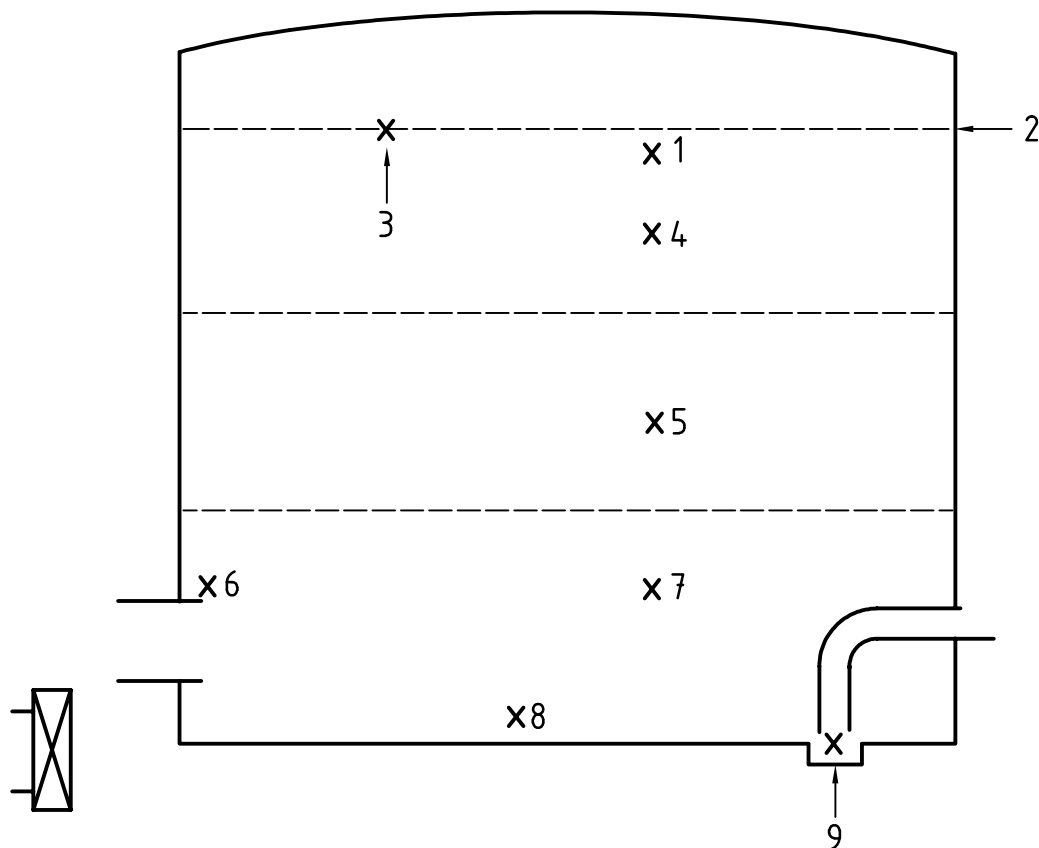

Key

- | | |
|------------------|----------------------------------|
| 1 top sample | 6 suction level or outlet sample |
| 2 surface of oil | 7 lower sample |
| 3 skim sample | 8 bottom sample |
| 4 upper sample | 9 sump sample |
| 5 middle sample | |

Figure 1 — Examples of spot sample positions

4 Principles

4.1 To ensure that samples submitted for examination are as representative as possible of the liquid being sampled, the necessary precautions are given. These depend on the characteristics of the liquid, the tank, container or pipeline from which the sample is being obtained, and the nature of the tests to be carried out on the sample.

Two basic manual sampling methods are available:

- tank sampling (static sampling);
- pipeline sampling (dynamic sampling).

When a batch is received or consigned, either tank or pipeline sampling, or both, may be possible. However, if both methods are used, the two sets of samples shall not be mixed.

4.2 Tank sampling is commenced when the contents of the tank are at rest. The following types of samples are normally taken for analysis:

- a) upper, middle and lower samples, or
- b) upper, middle and suction-level (outlet) samples.

If tests on these samples show that the contents of the tank are homogeneous, they may be combined, in proportion to the volume that each sample represents, for further tests.

If the tests on these samples show that the contents of the tank are non-homogeneous, it may be necessary to draw spot samples from more than three levels and either a composite sample is prepared for analysis or, if blending would impair the integrity of the sample, each sample is analysed separately and the composition corresponding to the composite sample is calculated. In this calculation, allowance is made for the proportion of the oil represented by each sample. Examples of spot sample positions are shown in Figure 1.

Other methods are a running sample or an all-level sample.

As both these methods only result in a single sample, they cannot be used to assess the homogeneity (or otherwise) of a tank's contents. Running and all-level samples are commonly taken and used to determine the average quality of a tank's contents.

NOTE 1 Safety and environmental regulations may restrict tank sampling operations which can result in the release of hydrocarbons or other volatile organic compounds (VOCs) into the atmosphere. In these circumstances, it will not normally be feasible to use traditional open sampling procedures via an open gauge hatch or gauging access point. If the tank ullage space is pressurized, and/or the tank forms part of a vapour balancing/recovery system, it will normally be necessary to use closed or restricted sampling procedures to avoid de-pressurizing the tank and minimize the consequent loss of VOCs. If the vapour from the tank contents is hazardous, it will also normally be necessary to use closed or restricted sampling procedures to minimize the risk of environmental impact.

NOTE 2 Closed sampling is the process of taking samples within a tank using closed sampling devices under closed system conditions. A closed system exists when the operations do not permit the direct exposure and/or release of any tank contents to atmosphere. Manual closed sampling is therefore normally carried out via a vapour-lock valve, using a closed sampling device that provides a gas-tight seal when in use. In order to ensure that no residual vapour is released from a closed system, special facilities may be provided to displace any vapour held up within the device prior to disconnecting the sampling device from the vapour-lock valve.

NOTE 3 Restricted sampling is the process of taking samples within a tank using a restricted sampling device that is operated via a vapour-lock valve. Restricted equipment is designed to substantially reduce or minimize the vapour losses that would occur during open sampling, but may still allow a small quantity of vapour to escape because the equipment is not completely gas-tight.

4.3 To obtain a representative sample of a batch/parcel transfer quantity being pumped in a pipeline, the sample is drawn using an automatic sampling device in accordance with ISO 3171. On occasions, it may be necessary to take dynamic pipeline samples manually. These are spot samples and may not be representative of the bulk (see 7.4).

5 Apparatus

5.1 General

All sampling devices shall be designed to be leak-tight, and constructed so as to assure the function for which they are intended in order to maintain the initial characteristics of the oil. They shall be of sufficient strength and externally protected to withstand normal internal pressures likely to be generated, and sufficiently robust to withstand any handling that may be encountered. Their cleanliness shall be confirmed before use.

NOTE 1 In some cases, it may be desirable to rinse the sample receiver/equipment with the fluid that is to be sampled, prior to taking the actual sample (although this will normally only be practicable with liquid hydrocarbons).

NOTE 2 Various sampling devices are described in 5.2 to 5.7 and any essential aspects are specified. Detailed specifications have not been given for these items because any suitable device of the type described may be used.

5.2 Tank samplers

5.2.1 General

Tank samplers are classified according to the type of sample to be drawn, these are

- spot sample,
- zone/core sample,
- running sample, and
- all-level sample.

Tank samplers are also classified according to the mode of tank operation and sampling access, these are

- open (traditional) sampling,
- restricted sampling, and
- closed sampling.

Synthetic fibre cords shall not be used for lowering or raising tank samplers through the tank contents as they can generate electrostatic sparks.

NOTE Chains are not recommended for suspending samplers because earth continuity cannot be guaranteed.

5.2.2 Spot and zone samplers

5.2.2.1 General

Spot and zone samplers shall be constructed so that a sample can be taken at any specific level in a tank. The equipment described in 5.2.2.2 to 5.2.2.4 is suitable.

NOTE Other spot sampling devices are available and may be used. Some have special opening facilities, for example, having valves opened or closed at the desired level by a weight falling down alongside and guided by the suspending cable, or having wing or flap valves which are closed upon initiation of upward movement. Some are designed to be operated when deployed via a vapour-lock valve (restricted and closed system samplers).


5.2.2.2 Sampling cage

A sampling cage shall be a metal or plastics holder or cage, suitably constructed to hold the appropriate container, typically a bottle or can. The combined apparatus shall be weighted so as to sink readily in the product to be sampled, and provision shall be made to fill the container at any desired level (see Figure 2).

Sampling cages should be sized to fit the desired sample bottle size. Some designs of bottle cage can accept a variety of different neck size (and volume) bottles, and incorporate a floating ball system to seal the bottle once it has been filled.


NOTE 1 The use of a sampling bottle cage is preferred to other spot sampling methods for volatile products, since it avoids the loss of light ends that is likely to occur when transferring the sample to another container.

NOTE 2 The sampling cage may be omitted if the sample bottle is securely attached to a weighted cord. The cork is also tied to the line about 150 m from the neck of the bottle.

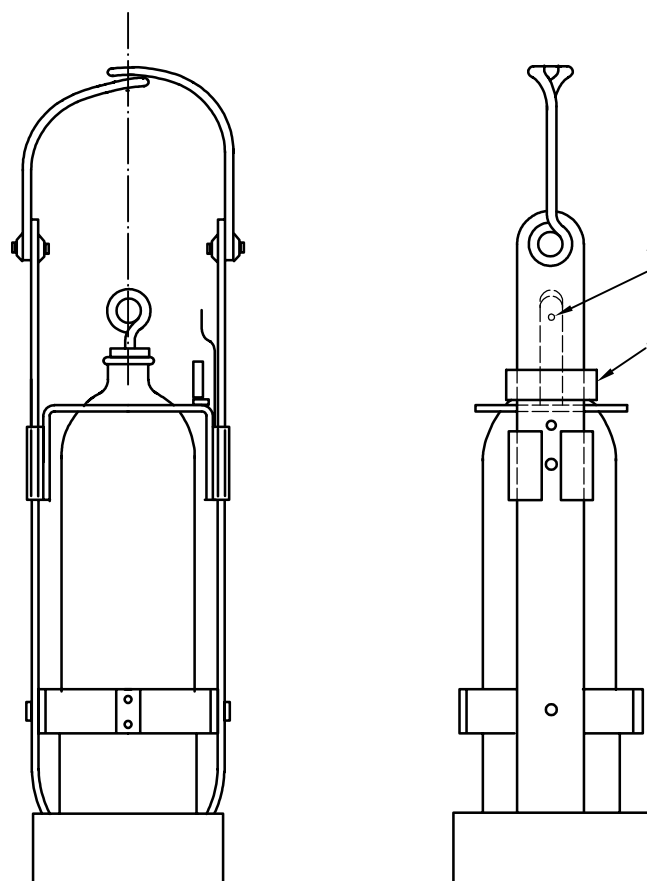**Key**

- 1 swivel point
- 2 locking piece

Figure 2 — Example of a sample-bottle cage

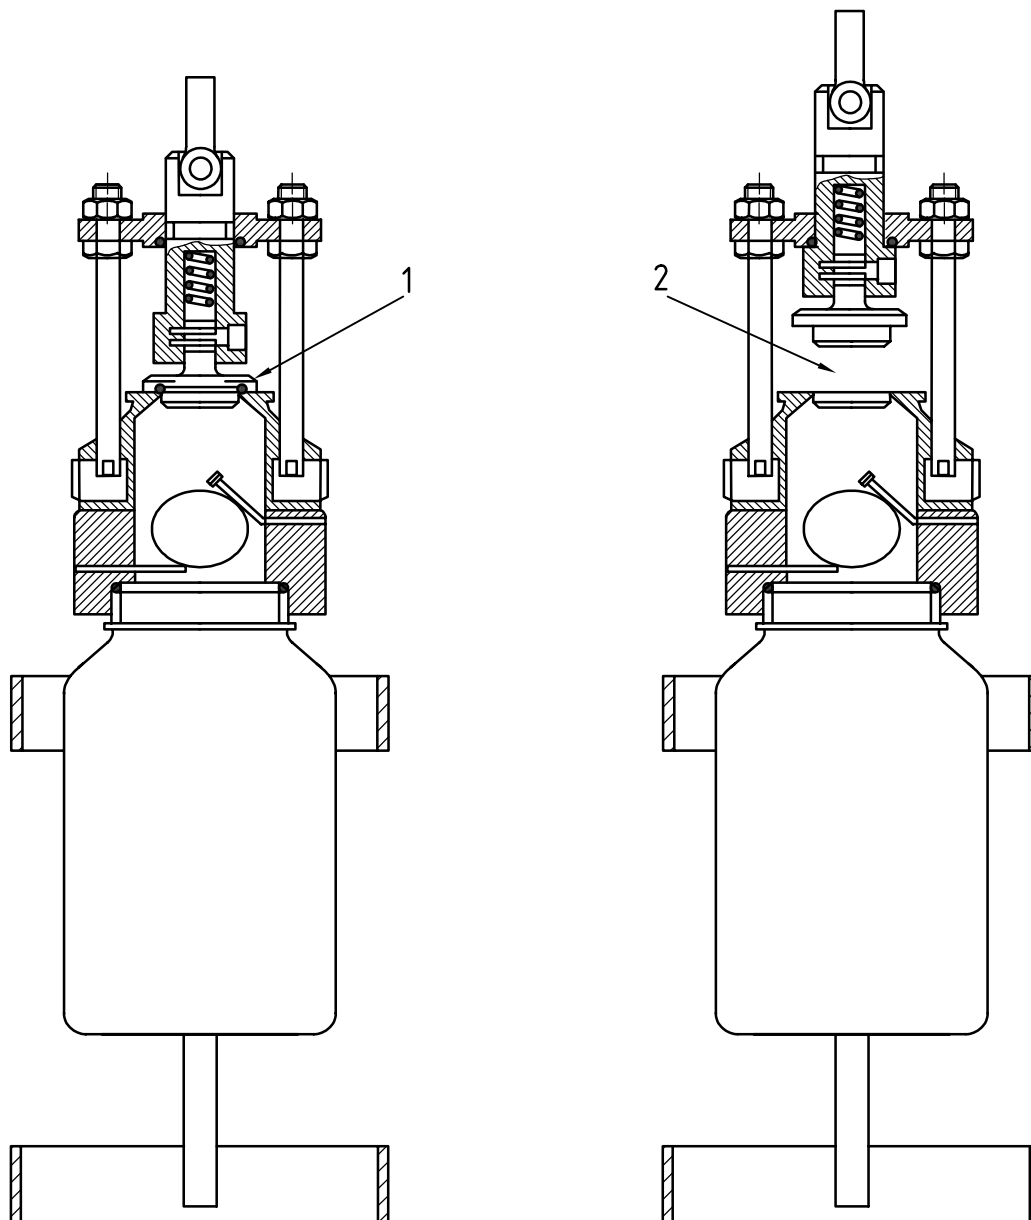

Key

- 1 sample inlet closed
- 2 sample inlet open

NOTE This example of a proprietary bottle cage sampler incorporates a self-sealing mechanism to close the inlet once the bottle is full.

Figure 2 — Example of a sample-bottle cage (continued)

5.2.2.3 Weighted sampling can (beaker)

The sampling can or beaker (see Figure 3) shall be weighted so as to sink readily in the liquid to be sampled. The lowering device shall be attached to the can in such a manner that the stopper can be opened by means of a sharp jerk. In order to avoid problems in cleaning the can and/or possible contamination of sensitive samples, any weighting material shall be fixed to the can in such a way that it does not come into contact with the sample.