

Ergonomic requirements for office work with visual display terminals (VDTs)

Part 8. Requirements for displayed colours

The European Standard EN ISO 9241-8 : 1997 has the status of a British Standard.

ICS 13.180; 35.180

National foreword

This British Standard is the English language version of EN ISO 9241-8 : 1997. It is identical with ISO 9241-8 : 1997.

The UK participation in its preparation was entrusted by Technical Committee PH/9, Applied ergonomics, to Subcommittee PH/9/6, User system interface, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this Subcommittee can be obtained on request to its secretary.

Cross-references

Attention is drawn to the fact that CEN and CENELEC Standards normally include an annex which lists normative references to international publications with their corresponding European publications. The British Standards which implement these international or European publications may be found in the BSI Standards Catalogue under the section entitled 'International Standards Correspondence Index', or by using the 'Find' facility of the BSI Standards Electronic Catalogue.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN ISO title page, the EN ISO foreword page, the ISO title page, pages ii to iv, pages 1 to 27 and a back cover.

This British Standard, having been prepared under the direction of the Health and Environment Sector Board, was published under the authority of the Standards Board and comes into effect on 15 April 1998

© BSI 1998

ISBN 0 580 28798 X

Amendments issued since publication

Amd. No.	Date	Text affected

ICS 13.180; 35.180

Descriptors: See ISO document

English version

Ergonomic requirements for office work with visual display
terminals (VDTs) - Part 8: Requirements for displayed colours
(ISO 9241-8:1997)

Exigences ergonomiques pour travail de bureau avec
terminaux à écrans de visualisation (TEV) - Partie 8:
Exigences relatives aux couleurs affichées (ISO 9241-
8:1997)

This European Standard was approved by CEN on 16 June 1997.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Foreword

The text of the International Standard ISO 9241-8:1997 has been prepared by Technical Committee ISO/TC 159 "Ergonomics" in collaboration with CEN/CS.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 1998, and conflicting national standards shall be withdrawn at the latest by April 1998.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of the International Standard ISO 9241-8:1997 was approved by CEN as a European Standard without any modification.

INTERNATIONAL STANDARD

ISO
9241-8

First edition
1997-10-01

Ergonomic requirements for office work with visual display terminals (VDTs) —

Part 8

Requirements for displayed colours

*Exigences ergonomiques pour travail de bureau avec terminaux à écrans
de visualisation (TEV) —*

Partie 8: Exigences relatives aux couleurs affichées



Contents

1 Scope..... Page 1

2 Normative references Page 1

3 Definitions Page 2

4 Guiding principles Page 8

5 Visual performance objectives..... Page 9

6 Design requirements and recommendations..... Page 10

7 Measurement conditions and conventions Page 13

8 Compliance Page 20

Annexes

 A Colour difference calculations Page 21

 B Visual performance test status..... Page 25

 C Bibliography..... Page 26

Descriptors: ergonomics, office machines, data processing equipment, text processing, data terminal equipment, display devices, specifications, colour.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards' bodies (ISO member bodies). The work of preparing International Standards is carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication of an International Standard requires approval by at least 75% of the member bodies casting a vote.

International Standard ISO 9241-8 was prepared by Technical Committee ISO/TC 159, *Ergonomics*, Subcommittee SC 4, *Ergonomics of human system interaction*

ISO 9241 consists of the following parts, under the general title *Ergonomic requirements for office work with visual display terminals (VDTs)*:

- Part 1: General Introduction
- Part 2: Guidance on task requirements
- Part 3: Visual display requirements
- Part 4: Keyboard requirements
- Part 5: Workstation layout and postural requirements
- Part 6: Environmental requirements
- Part 7: Display requirements with reflections
- Part 8: Requirements for displayed colours
- Part 9: Requirements for nonkeyboard input devices
- Part 10: Dialogue principles
- Part 11: Guidance on usability
- Part 12: Presentation of information
- Part 13: User guidance
- Part 14: Menu dialogues
- Part 15: Command dialogues
- Part 16: Direct manipulation dialogues
- Part 17: Form-filling dialogues

Annexes A, B and C of this part of ISO 9241 are for information only.

Introduction

The purpose of this part of ISO 9241 is to prescribe basic specifications for colours on computer display terminals to ensure their visibility, identification and discrimination.

The specifications in this part address colour images (visual "stimuli"), their appearance (visual "perception") and identification (colour "naming"). The specifications thus address both the perceptual components of colour (such as detection of saturation and lightness) and some cognitive components (such as naming of specific colours). Other cognitive components will be addressed in ISO 9241-12.

The ability to detect, identify and discriminate colours on display terminals determines the usefulness of colour in the perception and interpretation of the computer-generated image. Colour perception of displayed images depends on a number of factors such as:

- hardware and software components of the *display* system,
- physical characteristics of the display *image*,
- the ability of the *viewer* to perceive the colours,
- the lighting in the viewing *environment*.

The primary characteristics of these factors (that is display, image, viewer and environment) that affect colour appearance are shown in table 1.

Table 1 - Examples of factors affecting colour appearance

Source	Factor affecting colour appearance
Display	Luminance
	Spectral distribution and range
	Phosphor type
	Screen treatment for reflection control
	Resolution
Image	Adjacent colours
	Size
	Spatial frequency content
Viewer	State of visual adaptation
	Colour-perception ability
Room	Illumination level
	Colour temperature of the illumination

Colour interpretation depends on the ability of the viewer to associate a colour with a specific meaning, function, or action. It is thus important that colours assigned to images on displays be carefully chosen to achieve intended effects or convey intended meaning. However, the appearance of colours may vary among different suppliers' displays. For example, the blue on one display may appear darker and more purple than on another, and red may appear more orange.

Ergonomic requirements for office work with visual display terminals (VDTs) -

Part 8: Requirements for displayed colours

1 Scope

This part of ISO 9241 describes minimum ergonomic requirements and recommendations to be applied to colours assigned to text and graphic applications and images in which colours are discretely assigned. The specifications in this part thus exclude photorealistic images and graphics.

This part of ISO 9241 applies to both hardware and software for visual display terminals, because both these sources control the presentation and appearance of colour on the display screen.

The specifications, measurements and test procedures described in this part of ISO 9241 are for displays that produce colour images and are intended to be independent of display technologies unless otherwise specified.

The specifications in this part of ISO 9241 are for images on computer displays that meet minimum requirements for users with normal colour vision. Displays conforming to this part will be suboptimal for persons with colour vision deficiencies.

This part of ISO 9241 is complementary to ISO 9241-3. The tasks and conditions of use in this part are similar to those described in ISO 9241-3, unless otherwise specified. This part of ISO 9241 is not intended to be a specification on colour coding.

Although the primary users of this part of ISO 9241 are intended to be hardware and software user-interface designers and manufacturers, it will also be useful to those persons responsible for procuring colour displays and those evaluating the use of colour in the user-interface of the computer system.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 9241. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 9241 are encouraged to investigate the possibility of applying the most recent editions of the standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 9241-3 : 1992 *Ergonomic requirements for office tasks with visual display terminals (VDTs) – Part 3 : Visual display requirements.*

ISO 9241-5:—¹⁾, *Ergonomic requirements for office tasks with visual display terminals (VDTs) – Part 5: Workplace requirements.*

3 Definitions

For the purposes of this part of ISO 9241, the following definitions apply.

3.1 **achromatic (perceived) colour:**

(1) <perceptual sense> Perceived colour devoid of hue.

The colour names white, gray and black are commonly used or, for transmitting objects, colourless and neutral.

(2) <psychophysical sense> See achromatic stimulus 845-03-06. [CIE 17.4 / IEC 50, 845-02-26]

3.2 adaptation (visual): Process by which the state of the visual system is modified by previous and present exposure to stimuli that may have various luminances, spectral distributions and angular subtenses. [CIE 17.4 / IEC 50, 845-02-07]

3.3 additive mixing: Stimulation that combines on the retina the actions of various colour stimuli in such a manner that they cannot be perceived individually. [CIE 17.4 / IEC 50, 845-03-15]

3.4 brightness: Attribute of a visual sensation according to which an area appears to emit more or less light. [CIE 17.4 / IEC 50, 845-02-28]

3.5 chroma: Chromaticness, or colourfulness, of an area judged as a proportion of the brightness of a similarly illuminated area that appears white or highly transmitting. [CIE 17.4 / IEC 50, 845-02-42]

3.6 chromaticity: Property of a colour stimulus defined by its chromaticity coordinates, or by its dominant or complementary wavelength and purity taken together. [CIE 17.4 / IEC 50, 845-03-34]

3.7 chromaticity coordinates: Ratio of each of a set of three tristimulus values relative to their sum. [CIE 17.4 / IEC 50, 845-03-33]


NOTES

- 1 As the sum of the three chromaticity coordinates equals one, two of them are sufficient to define a chromaticity.
- 2 In the CIE standard colorimetric systems, the chromaticity coordinates are represented by the symbols x , y , z and x_{10} , y_{10} , and z_{10} .

3.8 chromaticity diagram: Plane diagram in which points specified by chromaticity coordinates represent the chromaticities of colour stimuli. [CIE 17.4 / IEC 50, 845-03-35]

NOTE –In the CIE standard colorimetric systems, y is normally plotted as ordinate and x as abscissa, to obtain an x , y chromaticity diagram (see figure 1 and 3.10).

1) To be published.

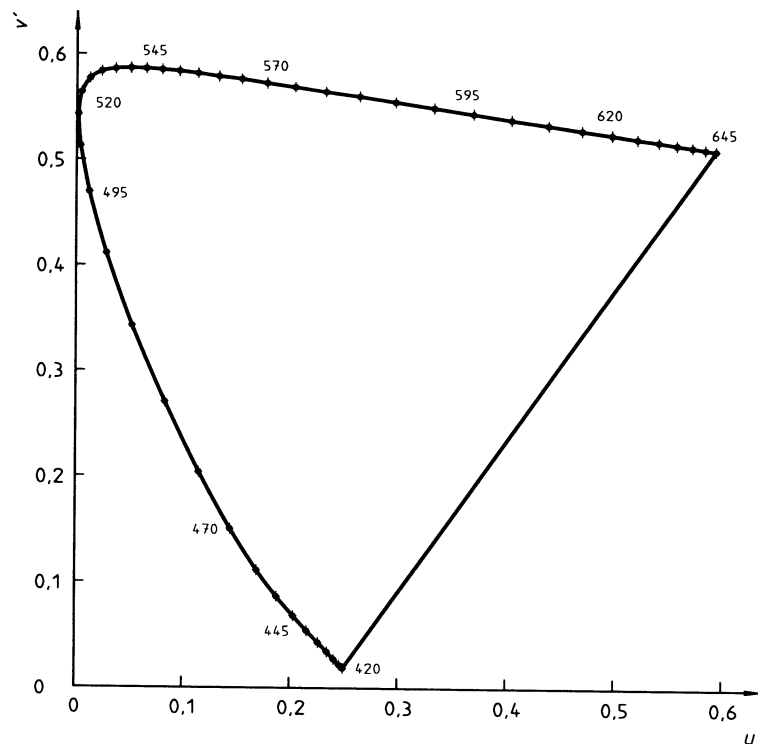

NOTE – The numbers along the curve are the wavelengths of light, in nanometres.

**Figure 1 — CIE 1976 uniform-chromaticity-scale diagram;
CIE 1976 UCS diagram**

3.9 chromostereopsis: Phenomenon in which two visual objects that differ in dominant wavelength and/or brightness appear to be at different distances from the viewer.

3.10 CIE 1976 uniform-chromaticity-scale diagram; CIE 1976 UCS diagram: Uniform-chromaticity-scale diagram produced by plotting in rectangular coordinates v' against u' , quantities defined by the equations (1):

$$(1) \quad \begin{cases} u' = \frac{4X}{X+15Y+3Z} = \frac{4x}{-2x+12y+3} \\ v' = \frac{9Y}{X+15Y+3Z} = \frac{9y}{-2x+12y+3} \end{cases}$$

X, Y, Z are the tristimulus values in the CIE 1931 or 1964 standard colorimetric systems, and x, y are the corresponding chromaticity coordinates of the colour stimulus considered. [CIE 17.4 / IEC 50, 845-03-53].

NOTE – This diagram is a modification of and supersedes, the CIE 1960 UCS diagram in which v was plotted against u in rectangular coordinates. The relationships between the two pairs of coordinates are:

$$u' = u; v' = 1,5v$$

3.11 CIE $L^*u^*v^*$ colour space; CIELUV colour space:

Three-dimensional, approximately uniform colour space produced by plotting in rectangular coordinates L^*, u^*, v^* quantities defined by the equations (2):

$$(2) \quad \begin{cases} L^* = 116(Y/Y_n)^{\frac{1}{3}} - 16; & Y/Y_n > 0,008\ 856 \\ u^* = 13L^*(u' - u'_n) \\ v^* = 13L^*(v' - v'_n) \end{cases}$$