

**Implementation of
EN ISO/IEC 7498-1:1995**

Information technology — Open Systems Interconnection — Basic Reference Model: The Basic Model

The European Standard EN ISO/IEC 7498-1:1995 has the status of a British Standard

ICS 35.100.00

UDC 681.3:621.39

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW



Document Sharing Hub

Committees responsible for this British Standard

The preparation of this British Standard was entrusted to Technical Committee IST/21, Open Systems Interconnection, data management and open distributed processing, upon which the following bodies were represented:

- British Computer Society
- British Telecommunications plc
- CCTA (the Government Centre for Information Systems)
- Department of Trade and Industry [IT Standards Unit (ITD6A)]
- Digital Equipment Co. Ltd.
- IBM United Kingdom Ltd.
- International Computers Limited
- Joint Information Systems Committee
- Level 7 Ltd.
- Logica UK Ltd.
- National Computing Centre Ltd.
- National Health Services
- Nine Tiles Computer Systems Ltd.
- PSC International Ltd.
- Rank Xerox Ltd.
- Salford Software Services (3-5)
- SEMA Group Systems Ltd.
- X Open Company Ltd.

This British Standard, having been prepared under the direction of the Information Systems Technology Assembly, was published under the authority of the Standards Board and comes into effect on 15 December 1995

© BSI 07-1999

The following BSI references relate to the work on this standard:
Committee reference IST/21
Draft for comment 92/68509 DC

ISBN 0 580 24886 0

Amendments issued since publication

Amd. No.	Date	Comments

Contents

	Page
National foreword	ii
Foreword	2
Foreword	iv
Text of ISO/IEC 7498-1	1

National foreword

This British Standard is the English language version of EN ISO/IEC 7498-1:1995 and implements it as the UK national standard.

This British Standard is published under the direction of the Information Systems Technology Assembly whose Technical Committee IST/21 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE International and European Standards, as well as overseas standards, are available from Customer Services, BSI, 389 Chiswick High Road, London W4 4AL.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the EN ISO/IEC title page, page 2, the ISO/IEC title page, pages ii to iv, pages 1 to 51 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

Information technology — Open Systems Interconnection — Basic Reference Model: The Basic Model

(ISO/IEC 7498-1:1994)

Technologies de l'information — Modèle de
référence de base pour l'interconnexion de
systèmes ouverts (OSI): Le modèle de base
(ISO/IEC 7498-1:1994)

Informationstechnik — Kommunikation
Offener Systeme — Basis-Referenzmodell:
Basismodell
(ISO/IEC 7498-1:1994)

This European Standard was approved by CEN on 1995-06-23. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart 36, B-1050 Brussels

Foreword

The text of the International Standard from the work of ISO/IEC/JTC 1, Information technology, of the International Organization for Standardization (ISO) and the International Electrotechnical Commission (IEC) has been taken as a European Standard by the CEN Technical Board.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by January 1996, and conflicting national standards shall be withdrawn at the latest by January 1996.

According to the CEN/CENELEC Internal Regulations, the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, United Kingdom.

**Information technology — Open Systems
Interconnection — Basic Reference Model:
The Basic Model**

*Technologies de l'information — Modèle de référence de base pour
l'interconnexion de systèmes ouverts (OSI): Le modèle de base*



Reference number
ISO/IEC 7498-1:1994(E)

Contents

	Page
Foreword	iv
Introduction	1
1 Scope	1
2 Definitions	2
3 Notation	2
4 Introduction to Open Systems Interconnection (OSI)	2
4.1 Definitions	2
4.2 Open System Interconnection Environment	2
4.3 Modelling the OSI Environment	4
5 Concepts of a layered architecture	4
5.1 Introduction	4
5.2 Principles of layering	5
5.3 Communication between peer-entities	7
5.4 Identifiers	11
5.5 Properties of service-access-points	13
5.6 Data-units	13
5.7 The nature of the (N)-service	14
5.8 Elements of layer operation	14
5.9 Routing	24
5.10 Quality Of Service (QOS)	24
6 Introduction to the specific OSI layers	25
6.1 Specific layers	25
6.2 The principles used to determine the seven layers in the Reference Model	25
6.3 Layer descriptions	26
6.4 Combinations of connection-mode and connectionless-mode	27
6.5 Configurations of OSI Open Systems	27
7 Detailed description of the resulting OSI architecture	28
7.1 Application Layer	28
7.2 Presentation Layer	29
7.3 Session Layer	30
7.4 Transport Layer	32
7.5 Network Layer	35
7.6 Data Link Layer	39
7.7 Physical Layer	41
8 Management aspects of OSI	44
8.1 Definitions	44
8.2 Introduction	45
8.3 Categories of management activities	45
8.4 Principles for positioning management functions	46
9 Compliance and Consistency with this reference model	46
9.1 Definitions	46
9.2 Application of consistency and compliance requirements	46
Annex A Brief explanation of how the layers were chosen	48
Annex B Alphabetical index to definitions	49
Figure 1 — Open systems connected by physical media	3
Figure 2 — Basic elements of OSI	5
Figure 3 — Layering in cooperating open systems	6
Figure 4 — N + 1)-entities in the (N + 1)-layer communicate through the (N)-layer	7

	Page
Figure 6 — Communication through a relay	9
Figure 7 — Entities, service-access-points and identifiers	13
Figure 8 — Relationships among data-units	14
Figure 9 — An illustration of mapping between data-units in adjacent layers	14
Figure 10 — Relationship between (N)-service-data-units, (N)-protocol-data-units and (N – 1)-service-data-units within a layer	23
Figure 11 — Seven layer reference model and peer protocols	26
Figure 12 — Communication involving relay open systems	26
Figure 13 — Association of transport-addresses and network address	34
Figure 14 — Association of one network address with several transport addresses	34
Figure 15 — Interconnection of a low quality and a high quality subnetwork	38
Figure 16 — Interconnection of an enhanced low quality subnetwork and a high quality subnetwork	38
Figure 17 — Interconnection of data circuits within the Physical Layer	42
Figure 18 — Examples of physical connections	43
Figure 19 — Examples of interconnection	44
Table 1 — Functions used in Modes of Communication	19

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 7498-1 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in collaboration with ITU-T. The identical text is published as ITU-T Recommendation X.200.

This second edition, along with parts 2, 3 and 4, cancels and replaces the first edition (ISO 7498:1984), which has been technically revised.

ISO/IEC 7498 consists of the following parts, under the general title *Information technology — Open Systems Interconnection — Basic Reference Model*:

- *Part 1: The Basic Model*;
- *Part 2: Security Architecture*;
- *Part 3: Naming and addressing*;
- *Part 4: Management framework*.

Introduction

This reference model provides a common basis for the coordination of standards development for the purpose of systems interconnection, while allowing existing standards to be placed into perspective within the overall reference model. It also identifies areas for developing and improving standards and provides a common reference for maintaining consistency among all related standards. The text was developed jointly with ITU-T and the main intent of this revision is to introduce the joint text, which incorporates inclusion of the concept of connectionless transmission, in addition to a number of technical and editorial refinements.

1 Scope

1.1 The purpose of this Reference Model of Open Systems Interconnection is to provide a common basis for the coordination of standards development for the purpose of systems interconnection, while allowing existing standards to be placed into perspective within the overall Reference Model.

1.2 The term Open Systems Interconnection (OSI) qualifies standards for the exchange of information among systems that are “open” to one another for this purpose by virtue of their mutual use of the applicable standards.

1.3 The fact that a system is open does not imply any particular systems implementation, technology or means of interconnection, but refers to the mutual recognition and support of the applicable standards.

1.4 It is also the purpose of this Reference Model to identify areas for developing or improving standards, and to provide a common reference for maintaining consistency of all related standards. It is not the intent of this Reference Model either to serve as an implementation specification, or to be a basis for appraising the conformance of actual implementations, or to provide a sufficient level of detail to define precisely the services and protocols of the interconnection architecture. Rather, this Reference Model provides a conceptual and functional framework which allows international teams of experts to work productively and independently on the development of standards for each layer of the Reference Model for OSI.

1.5 The Reference Model has sufficient flexibility to accommodate advances in technology and expansion in user demands. This flexibility is also intended to allow the phased transition from existing implementations to OSI standards.

1.6 While the scope of the general architectural principles required for OSI is very broad, this Reference Model is primarily concerned with systems comprising terminals, computers, and associated devices and the means for transferring information between such systems. Other aspects of OSI requiring attention are described briefly (see 4.2).

1.7 The description of the Basic Reference Model of OSI is developed in stages:

1.8 Clause 4 establishes the reasons for Open Systems Interconnection, defines what is being connected, the scope of the interconnection, and describes the modelling principles used in OSI.

1.9 Clause 5 describes the general nature of the architecture of the Reference Model; namely that it is layered, what layering means, and the principles used to describe layers.

1.10 Clause 6 names, and introduces the specific layers of the architecture.

1.11 Clause 7 provides the description of the specific layers.

1.12 Clause 8 provides the description of Management Aspects of OSI.

1.13 Clause 9 specifies compliance and consistency with the OSI Reference Model.

1.14 An indication of how the layers were chosen is given in Annex A to this Basic Reference Model.

1.15 Additional aspects of this Reference Model beyond the basic aspects are described in several parts. The first part describes the Basic Reference Model. The second part describes the architecture for OSI Security. The third part describes OSI Naming and Addressing. The fourth describes OSI System Management.

1.16 The Basic Reference Model serves as a framework for the definition of services and protocols which fit within the boundaries established by the Reference Model.

1.17 In those few cases where a feature is explicitly marked (optional) in the Basic Reference Model it should remain optional in the corresponding service or protocol (even if at a given instant the two cases of the option are not yet documented).

1.18 This Reference Model does not specify services and protocols for OSI. It is neither an implementation specification for systems, nor a basis for appraising the conformance of implementations.

1.19 For standards which meet the OSI requirements, a small number of practical subsets are defined from optional functions, to facilitate implementation and compatibility.

2 Definitions

Definitions of terms are included at the beginning of individual clauses and sub-clauses. An index of these terms is provided in Annex B for easy reference.

3 Notation

3.1 Layers are introduced in clause 5. An (N)-, (N+1)- and (N-1)- notation is used to identify and relate adjacent layers:

- (N)-layer: any specific layer;
- (N+1)-layer: the next higher layer;
- (N-1)-layer: the next lower layer.

This notation is also used for other concepts in the model which are related to these layers, for example (N)-protocol, (N+1)-service.

3.2 Clause 6 introduces names for individual layers. When referring to these layers by name, the (N)-, (N+1)- and (N-1)- prefixes are replaced by the names of the layers, for example transport-protocol, session-entity, and network-service.

4 Introduction to Open Systems Interconnection (OSI)

NOTE The general principles described in clauses 4 and 5 hold for all layers of the Reference Model, unless layer specific statements to the contrary are made in clauses 6 and 7.

4.1 Definitions

4.1.1 real system

a set of one or more computers, the associated software, peripherals, terminals, human operators, physical processes, information transfer means, etc., that forms an autonomous whole capable of performing information processing and/or information transfer

4.1.2 real open system

a real system which complies with the requirements of OSI standards in its communication with other real systems

4.1.3 open system

the representation within the Reference Model of those aspects of a real open system that are pertinent to OSI

4.1.4 application process

an element within a real open system which performs the information processing for a particular application.

4.1.5

Open System Interconnection Environment (OSIE)

an abstract representation of the set of concepts, elements, functions, services, protocols, etc., as defined by the OSI Reference Model and the derived specific standards which, when applied, enable communications among open systems

4.1.6

Local System Environment (LSE)

an abstract representation of that part of the real system that is not pertinent to OSI

NOTE The LSE may include functions necessary for non-OSI communication.

4.1.7

application-process-invocation

a specific utilization of part or all of the capabilities of a given application process in support of a specific occasion of information processing

4.1.8

application-process-type

a description of a class of application processes in terms of a set of information processing capabilities

4.2 Open System Interconnection Environment


4.2.1 In the concept of OSI, a real system is a set of one or more computers, associated software, peripherals, terminals, human operators, physical processes, information transfer means, etc., that forms an autonomous whole capable of performing information processing and/or information transfer.

4.2.2 An application process is an element within a real open system which performs the information processing for a particular application.

4.2.3 Application processes can represent manual processes, computerized processes or physical processes.

4.2.4 Some examples of application processes that are applicable to this open system definition are the following:

- a) a person operating a banking terminal is a manual application-process;
- b) a FORTRAN program executing in a computer center and accessing a remote database is a computerized application-process; the remote database management systems server is also an application-process; and
- c) a process control program executing in a dedicated computer attached to some industrial equipment and linked into a plant control system is a physical application-process.

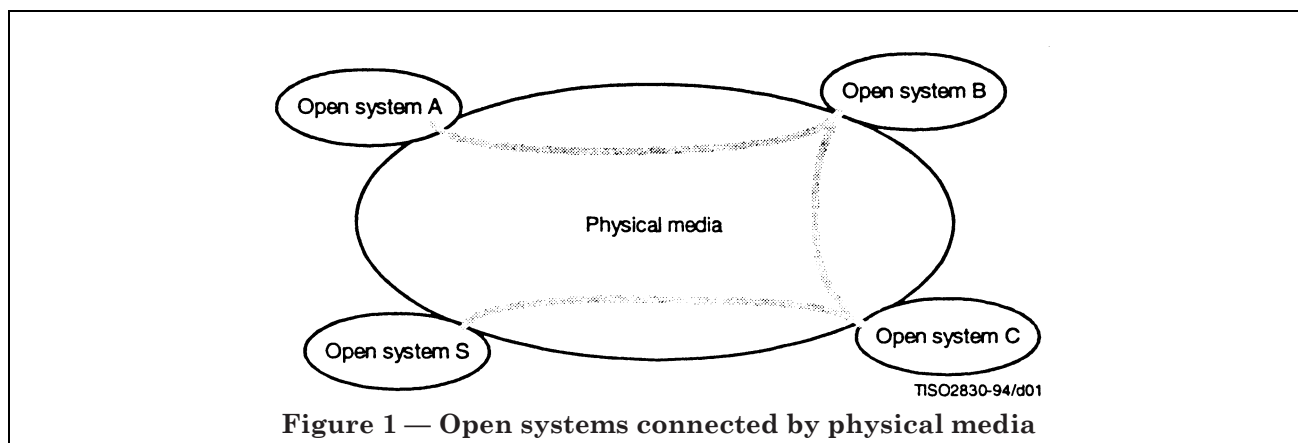

4.2.5 An application process represents a set of resources, including processing resources, within a real open system that may be used to perform a particular information processing activity. An application process may organize its interactions with other application processes in whatever way is necessary to achieve a particular information processing goal: no constraints are imposed by this Reference Model either on the form of these interactions or on the possible relationships that may exist between them.

4.2.6 The activity of a given application process is represented by one or more application process invocations. Cooperation between application processes takes place via relationships established among application process invocations. At a particular time, an application process may be represented by none, one or more application process invocations. An application process invocation is responsible for coordinating its interactions with other application process invocations. Such coordination is outside the scope of this Reference Model.

4.2.7 OSI is concerned with the exchange of information between open systems (and not the internal functioning of each individual real open system).

4.2.8 As shown in Figure 1, the physical media for Open Systems Interconnection provides the means for the transfer of information between open systems.

4.2.9 OSI is concerned only with the interconnection of systems. All other aspects of systems which are not related to interconnection are outside the scope of OSI.

4.2.10 OSI is concerned not only with the transfer of information between systems, i.e. transmission, but also with their capability to interwork to achieve a common (distributed) task. In other words, OSI is concerned with the interconnection aspects of cooperation¹⁾ between systems, which is implied by the expression “systems interconnection.”

4.2.11 The objective of OSI is to define a set of standards to enable real open systems to cooperate. A system which complies with the requirements of applicable OSI standards in its cooperation with other systems is termed a real open system.

¹⁾ Cooperation among open systems involves a broad range of activities of which the following have been identified:

- a) interprocess communication, which concerns the exchange of information and the synchronization of activity between OSI application processes;
- b) data representation, which concerns all aspects of the creation and maintenance of data descriptions and data transformations for reformatting data exchanged between open systems;
- c) data storage, which concerns storage media, and file and database systems for managing and providing access to data stored on the media;
- d) process and resource management, which concerns the means by which OSI application processes are declared, initiated and controlled, and the means by which they acquire OSI resources;
- e) integrity and security, which concern information processing constraints that have to be preserved or assured during the operation of the open systems; and
- f) program support, which concerns the definition, compilation, linking, testing, storage, transfer, and access to the programs executed by OSI application-processes.

Some of these activities may imply exchange of information between the interconnected open systems and their interconnection aspects may, therefore, be of concern to OSI.

This Basic Reference Model covers the elements of OSI aspects of these activities which are essential for early development of OSI standards.

4.2.12 The design intent of the OSI standards is to specify a set of standards that make it possible for autonomous systems to communicate. Any equipment which communicates in conformance with all applicable OSI protocol standards is a real world equivalent of the model concept “open system”. Equipment that is in the “terminal” category, that is, one that requires human intervention for the dominant parts of information processing, may satisfy the conditions of the previous sentences when the appropriate OSI standards are employed in communication with other open systems.

4.3 Modelling the OSI Environment

4.3.1 The development of OSI standards, i.e. standards for the interconnection of real open systems, is assisted by the use of abstract models. To specify the external behavior of interconnected real open systems, each real open system is replaced by a functionally equivalent abstract model of a real open system called an open system. Only the interconnection aspects of these open systems would strictly need to be described. However to accomplish this, it is necessary to describe both the internal and external behavior of these open systems. Only the external behavior of open systems is retained for the definition of standards for real open systems. The description of the internal behavior of open systems is provided in the Basic Reference Model only to support the definition of the interconnection aspects. Any real system which behaves externally as an open system can be considered to be a real open system.

4.3.2 This abstract modelling is used in two steps.

4.3.3 First, basic elements of open systems and some key decisions concerning their organization and functioning, are developed. This constitutes the Basic Reference Model of Open Systems Interconnection described in this Recommendation | Part of this International Standard.

4.3.4 Then, the detailed and precise description of the functioning of the open system is developed in the framework formed by the Basic Reference Model. This constitutes the services and protocols for OSI which are the subject of other Recommendations and/or International Standards.

4.3.5 It should be emphasized that the Basic Reference Model does not, by itself, specify the detailed and precise functioning of the open system and, therefore, it does not specify the external behavior of real open systems and does not imply the structure of the implementation of a real open system.

4.3.6 The reader not familiar with the technique of abstract modelling is cautioned that those concepts introduced in the description of open systems constitute an abstraction despite a similar appearance to concepts commonly found in real systems. Therefore, real open systems need not be implemented as described by the Model.

4.3.7 Throughout the remainder of this Basic Reference Model, only the aspects of real systems and application-processes which lie within the OSI Environment (OSIE) are considered. Their interconnection is illustrated throughout this Reference Model as depicted in Figure 2.

4.3.8 The extent of the application of the OSIE concept through the use of OSI standards may result in subsets of the OSIE which corresponds to partially disjoint sets of real open systems, which are not physically capable of OSI communication between them.

5 Concepts of a layered architecture

5.1 Introduction

5.1.1 Clause 5 sets forth the architectural concepts that are applied in the development of the Reference Model of Open Systems Interconnection. Firstly, the concept of a layered architecture (with layers, entities, service-access-points, protocols, connections, etc.) is described. Secondly, identifiers are introduced for entities, service-access-points, and connections. Thirdly, service-access-points and data-units are described. Fourthly, elements of layer operation are described including connections, transmission of data, and error functions. Then, routing aspects are introduced and finally, management aspects are discussed.

5.1.2 The concepts described in clause 5 are those required to describe the Reference Model of Open Systems Interconnection. However, not all of the concepts described are employed in each layer of the Reference Model.

5.1.3 Four elements are basic to the Reference Model (see Figure 2):

- a) open systems;
- b) the application-entities which exist within the OSI Environment (see 7.1);
- c) the associations (see 5.3) which join the application-entities and permit them to exchange information; and
- d) the physical media for OSI.

NOTE Security aspects which are also general architectural elements of protocols are discussed in CCITT Rec. X.800 | ISO 7498-2.

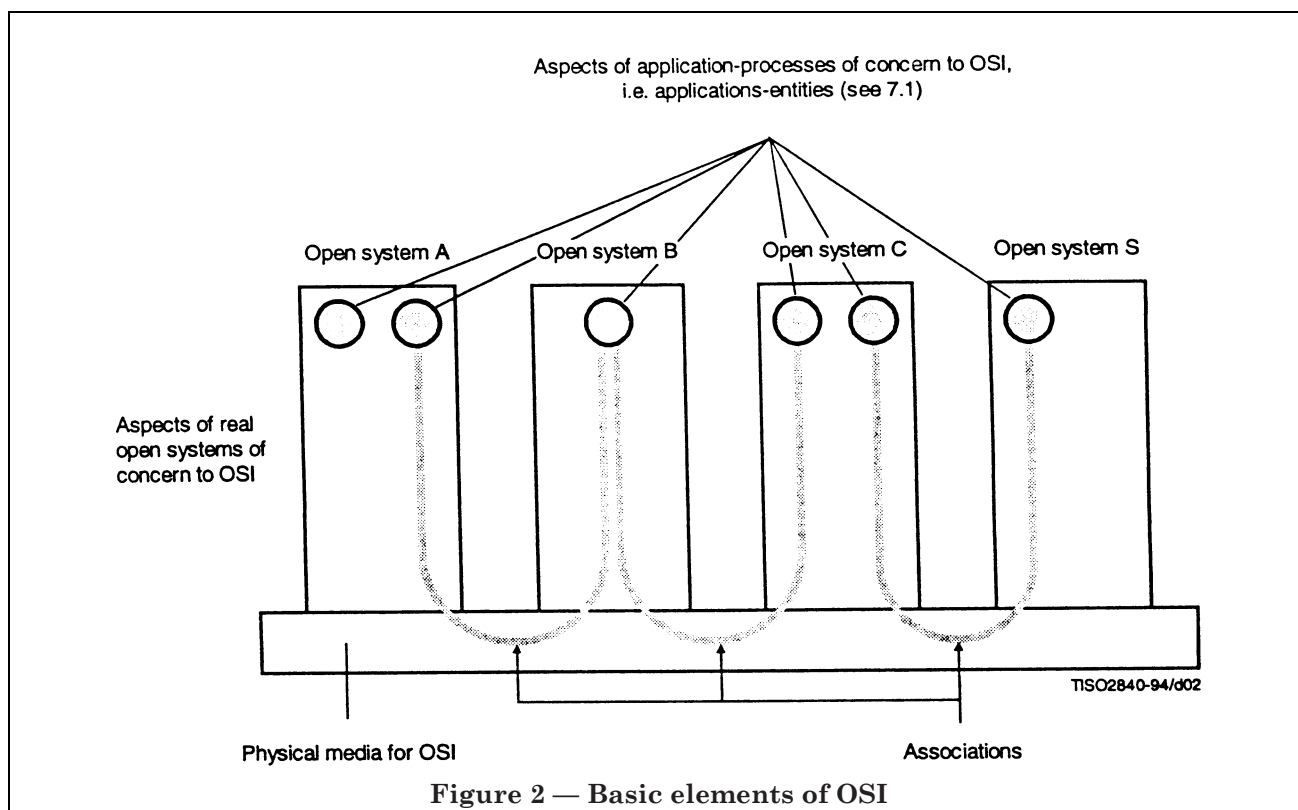


Figure 2 — Basic elements of OSI

5.2 Principles of layering

5.2.1 Definitions

5.2.1.1

(N)-subsystem

an element in a hierarchical division of an open system which interacts directly only with elements in the next higher division or the next lower division of that open system

5.2.1.2

(N)-layer

a subdivision of the OSI architecture, constituted by subsystems of the same rank (N)

5.2.1.3

peer-(N)-entities

entities within the same (N)-layer

5.2.1.4

sublayer

a subdivision of a layer

5.2.1.5

(N)-service

a capability of the (N)-layer and the layers beneath it, which is provided to (N+1)-entities at the boundary between the (N)-layer and the (N+1)-layer

5.2.1.6

(N)-facility

a part of an (N)-service

5.2.1.7

(N)-function

a part of the activity of (N)-entities

5.2.1.8

(N)-service-access-point, (N)-SAP

the point at which (N)-services are provided by an (N)-entity to an (N+1)-entity

5.2.1.9

(N)-protocol

a set of rules and formats (semantic and syntactic) which determines the communication behavior of (N)-entities in the performance of (N)-functions

5.2.1.10

(N)-entity-type

a description of a class of (N)-entities in terms of a set of capabilities defined for the (N)-layer

5.2.1.11

(N)-entity

an active element within an (N)-subsystem embodying a set of capabilities defined for the (N)-layer that corresponds to a specific (N)-entity-type (without any extra capabilities being used)

5.2.1.12

(N)-entity-invocation

a specific utilization of part or all of the capabilities of a given (N)-entity (without any extra capabilities being used)

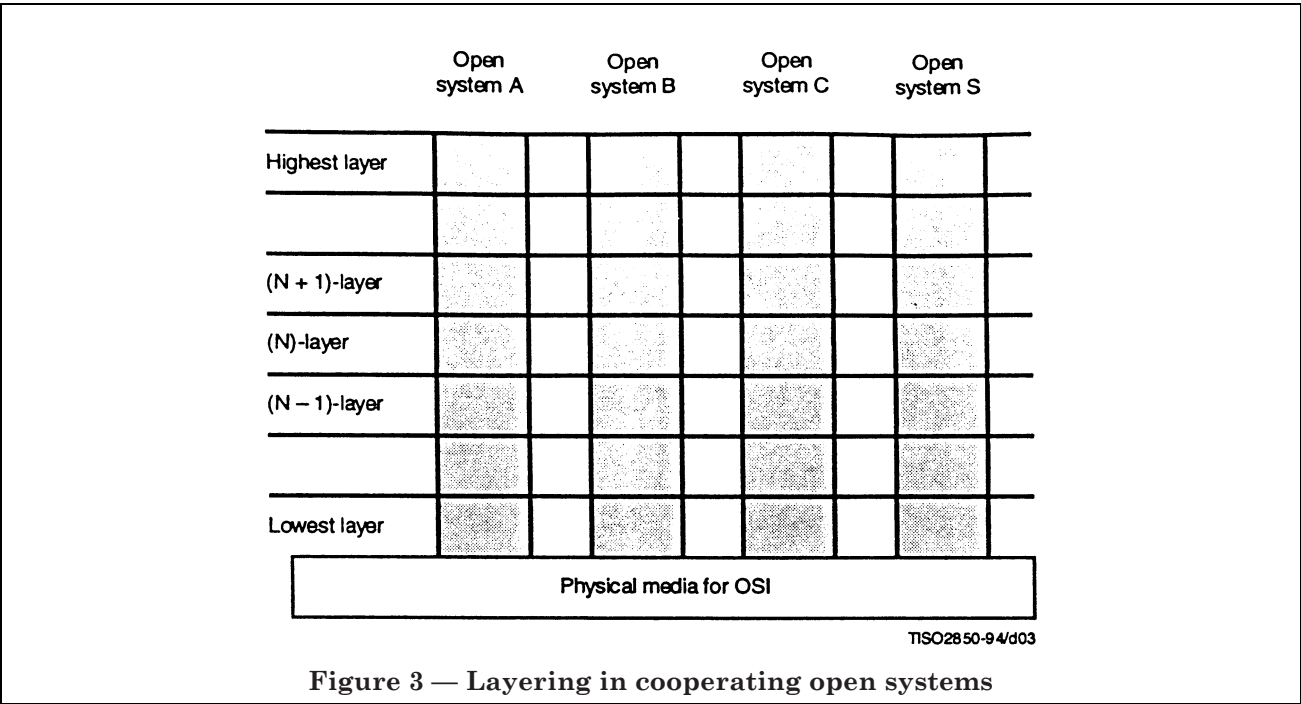


Figure 3 — Layering in cooperating open systems

5.2.2 Description

5.2.2.1 The basic structuring technique in the Reference Model of Open Systems Interconnection is layering. According to this technique, each open system is viewed as logically composed of an ordered set of (N)-subsystems, represented for convenience in the vertical sequence shown in Figure 3. Adjacent (N)-subsystems communicate through their common boundary. (N)-subsystems of the same rank (N) collectively form the (N)-layer of the Reference Model of Open Systems Interconnection. There is one and only one (N)-subsystem in an open system for layer N. An (N)-subsystem consists of one or several (N)-entities. Entities exist in each (N)-layer. Entities in the same (N)-layer are termed peer-(N)-entities. Note that the highest layer does not have an (N+1)-layer above it and the lowest layer does not have an (N–1)-layer below it.

5.2.2.2 Not all peer-(N)-entities need or even can communicate. There may be conditions which prevent this communication (for example: they are not in interconnected open systems, or they do not support the same protocol subsets). Communication among peer-(N)-entities which reside in the same (N)-subsystem is provided by the LSE and therefore is out of the scope of OSI.

NOTE 1 The distinction between the type of some object and an instance of that object is a distinction of significance for OSI. A type is a description of a class of objects. An instance of this type is any object that conforms to this description. The instances of the same type constitute a class. A type, and any instances of this type can be referred to by an individual name. Each nameable instance and the type to which this instance belongs carry distinguishable names.

For example, given that a programmer has written a computer program, that programmer has generated a type of something where instances of that type are created every time that particular program is invoked into execution by a computer. Thus, a FORTRAN compiler is a type and each occasion where a copy of that program is invoked in a data processing machine one displays an instance of that program.

The general concept of instantiation applies within OSI: Consider now an (N)-entity in the OSI context. It too, has two aspects, a type and a collection of invocations. The type of an (N)-entity is defined by description of the specific set of (N)-layer functions it is able to perform. An invocation of that type of (N)-entity is a specific invocation of whatever it is within the relevant open system that provides the (N)-layer functions called for by its type for a particular occasion of communication. It follows from these observations that (N)-entities refer only to the properties of an association between peer (N)-entities, while an (N)-entity-invocation refers to the specific, dynamic occasions of actual information exchange.

It is important to note that actual communication occurs only between (N)-entity-invocations at all layers. In the connection-mode (see 5.3.3), it is only at connection establishment time (or its logical equivalent during a recovery process) that (N)-entities are explicitly relevant. An actual connection is always made with a specific (N)-entity-invocation, although the request for connection is often made to an arbitrary (N)-entity (of a specific type). If an (N)-entity-invocation is aware of the name of its peer-(N)-entity-invocation, it is able to request another connection to that (N)-entity-invocation.

NOTE 2 It may be necessary to further divide a layer into small substructures called sublayers and to extend the technique of layering to cover other dimensions of OSI. A sublayer is defined as a grouping of functions in a layer which may be bypassed. The bypassing of all the sublayers of a layer is not allowed. A sublayer uses the entities and communication services of the layer. The detailed definition or additional characteristics of a sublayer are for further study.

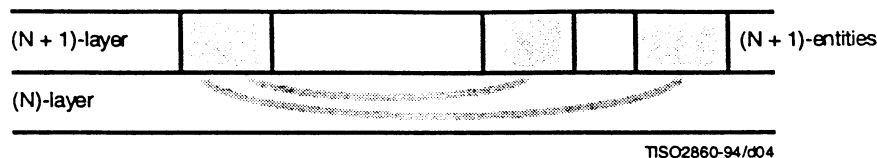


Figure 4 — (N + 1)-entities in the (N + 1)-layer communicate through the (N)-layer

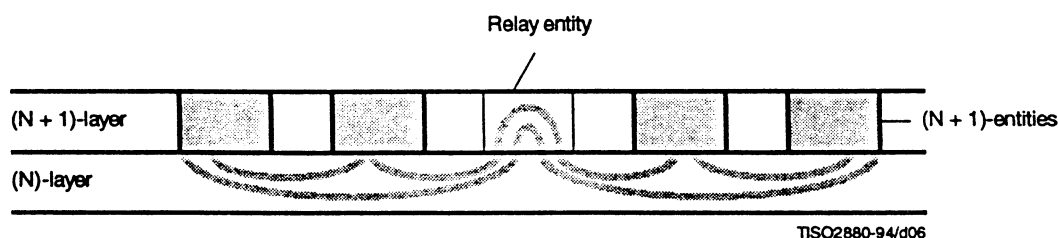


Figure 6 — Communication through a relay

5.2.2.3 Except for the highest layer, each (N)-layer provides (N+1)-entities in the (N+1)-layer with an (N)-service at (N)-SAP(s). The properties of (N)-SAPs are described in 5.5. The highest layer is assumed to represent all possible uses of the (N)-service which are provided by the lower layers.

NOTE Not all open systems provide the initial source or final destination of data. Such open systems need not contain the higher layers of the architecture (see Figure 12).

5.2.2.4 Each service provided by an (N)-layer may be tailored by the selection of one or more (N)-facilities which determine the attributes of that service. When a single (N)-entity cannot by itself fully support a service requested by an (N+1)-entity it calls upon the co-operation of other (N)-entities to help complete the service request. In order to co-operate, (N)-entities in any layer, other than those in the lowest layer, communicate by means of the set of services provided by the (N-1)-layer (see Figure 4). The entities in the lowest layer are assumed to communicate directly via the physical media which connect them.

5.2.2.5 The services of an (N)-layer are provided to the (N+1)-layer using the (N)-functions performed within the (N)-layer and as necessary the services available from the (N-1)-layer.

NOTE This does not preclude the case where no protocol action is required in the (N)-layer to support a given (N)-facility because it is already available at the (N-1)-service boundary. However, null functionality of the complete (N)-protocol is not allowed.

5.2.2.6 An (N)-entity may provide services to one or more (N+1)-entities and use the services of one or more (N-1)-entities. An (N)-service-access-point is the point at which a pair of entities in adjacent layers use or provide services (see Figure 7).

5.2.2.7 Cooperation between (N)-entities is governed by one or more (N)-protocols. The entities and protocols within a layer are illustrated in Figure 5.

5.3 Communication between peer-entities

5.3.1 Definitions

5.3.1.1

(N)-association

a cooperative relationship among (N)-entity-invocations

5.3.1.2

(N)-connection

an association requested by an (N+1)-entity for the transfer of data between two or more (N+1)-entities. The association is established by the (N)-layer and provides explicit identification of a set of (N)-data-transmissions and agreement concerning the (N)-data-transmission services to be provided for the set

5.3.1.3

(N)-connection-endpoint

a terminator at one end of an (N)-connection within an (N)-service-access-point

5.3.1.4

multi-endpoint-connection

a connection with more than two connection-endpoints

5.3.1.5

correspondent (N)-entities

(N)-entities with an (N-1)-connection between them

5.3.1.6**(N)-relay**

an (N)-function by means of which an (N)-entity forwards data received from one peer-(N)-entity to another peer-(N)-entity

5.3.1.7**(N)-data-source**

an (N)-entity that sends (N-1)-service-data-units (see 5.6.1.7) on an (N-1)-connection²⁾

5.3.1.8**(N)-data-sink**

an (N)-entity that receives (N-1)-service-data-units on an (N-1)-connection²⁾

5.3.1.9**(N)-data-transmission**

an (N)-facility which conveys (N)-service-data-units from one (N+1)-entity to one or more (N+1)-entities

5.3.1.10**(N)-duplex-transmission**

(N)-data-transmission in both directions at the same time²⁾

5.3.1.11**(N)-half-duplex-transmission**

(N)-data-transmission in either direction, one direction at a time; the choice of direction is controlled by an (N+1)-entity²⁾

5.3.1.12**(N)-simplex-transmission**

(N)-data-transmission in one pre-assigned direction²⁾

5.3.1.13**(N)-data-communication**

an (N)-function which transfers (N)-protocol-data-units (see 5.6.1.3) according to an (N)-protocol, over one or more (N-1)-connections²⁾

5.3.1.14**(N)-two-way-simultaneous-communication**

(N)-data-communication in both directions at the same time

5.3.1.15**(N)-two-way-alternate-communication**

(N)-data-communication in both directions, one direction at a time

5.3.1.16**(N)-one-way-communication**

(N)-data-communication in one pre-assigned direction

5.3.1.17**(N)-connection-mode transmission**

(N)-data-transmission in the context of an (N)-connection

5.3.1.18**(N)-connectionless-mode transmission**

(N)-data-transmission not in the context of an (N)-connection and not required to maintain any logical relationship between (N)-service-data-units

5.3.2 Description

5.3.2.1 For information to be exchanged between two or more (N+1)-entities, an association is established between them in the (N)-layer using an (N)-protocol.

NOTE Classes of protocols may be defined within the (N)-protocols.

5.3.2.2 The rules and formats of an (N)-protocol are instantiated in an (N)-subsystem by an (N)-entity.

An (N)-entity may support one or more (N)-protocols. (N)-entities may support (N)-protocols which are connection-mode or connectionless-mode or both. (N)-entities when supporting connection-mode maintain the binding of (N)-connections to the appropriate (N+1)-entities at the appropriate (N)-SAPs. (N)-entities when supporting connectionless-mode maintain a binding with the appropriate (N)-SAPs for delivering the connectionless data to the (N+1)-entities.

5.3.2.3 (N+1)-entities can communicate only by using the services of the (N)-layer. There are instances where services provided by the (N)-layer do not permit direct access between all of the (N+1)-entities which have to communicate. If this is the case communication can still occur if some other (N+1)-entities can act as relays between them (see Figure 6).

5.3.2.4 The fact that communication is relayed by a chain of (N+1)-entities is known neither by the (N)-layer nor by the (N+2)-layer.

5.3.3 Modes of communication**5.3.3.1 Introduction**

5.3.3.1.1 An (N)-layer may offer a connection-mode service, a connectionless-mode service, or both, to the (N+1)-layer, using the service or services provided by the (N-1)-layer. Any instance of transmission between the (N+1)-entities must utilize the same mode of (N)-service.

²⁾ These definitions are not for use in this Basic Reference Model, but are for use in other OSI standards.

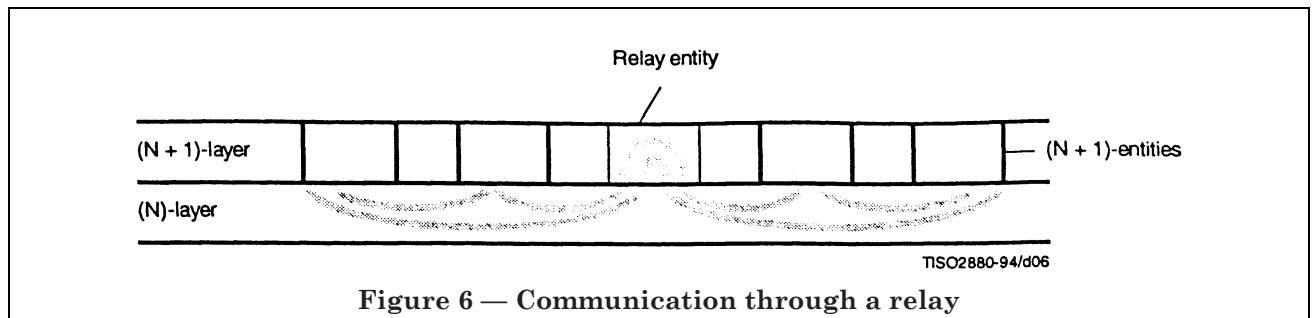


Figure 6 — Communication through a relay

5.3.3.1.2 Both the (N)-connection-mode service and the (N)-connectionless-mode service are characterised by the facilities which they offer to, and the quality of service seen by, the (N+1)-entities. For both the (N)-connection-mode service and the (N)-connectionless-mode service, functions may be provided by the (N)-layer to enhance the facilities offered to, and the quality of service seen by the (N+1)-entities over those which are offered to the (N)-layer by the (N-1)-layer and, if necessary, to convert between one mode of service and another.

5.3.3.1.3 Since connection-mode transmission and connectionless-mode transmission are complementary concepts, they are best understood in juxtaposition, particularly since connectionless-mode transmission is defined most easily in relationship to the concept of a connection.

5.3.3.1.4 In order for (N+1)-entities to be able to communicate using an (N)-connection-mode service or an (N)-connectionless-mode service it is essential that a pre-arranged association exists between them, constituted by the pre-knowledge which it is essential that each (N+1)-entity has of the others in order at least to initiate the use of the service. This association is established in ways which are not detailed in this Basic Reference Model and comprises four elements:

- knowledge of the addresses of the peer-(N)-entities involved;
- knowledge of a protocol agreed by the peer-(N)-entities for use at least to initiate communication;
- knowledge of the availability for communication of the peer-(N)-entities;
- knowledge of the quality of service available from the (N)-service.

NOTE The pre-knowledge constituting a pre-arranged association can be acquired in many ways; some examples are listed below:

- from information acquired manually when contracts are exchanged with a service provider;
- from information which a network administration may provide in a directory or enquiry database;
- from information that may be learned from previous instances of communication;

d) from information that may be provided dynamically through the operation of management protocols.

The total pre-knowledge constituting a pre-arranged association is likely to be acquired in a combination of the above ways.

5.3.3.2 Connection mode

5.3.3.2.1 A connection is an association established for the transfer of data between two or more peer-(N)-entities. This association binds the peer-(N)-entities together with the (N-1)-entities in the next lower layer. The ability to establish and release a connection and to transfer data over it is provided to the (N)-entities in a given (N)-layer by the next lower layer as a connection-mode service. The use of a connection-mode service by peer-(N)-entities proceeds through three distinct phases:

- connection establishment;
- data transfer; and
- connection release.

5.3.3.2.2 In addition to the clearly distinguishable lifetime exhibited by these phases, a connection has the following fundamental characteristics:

- it involves establishing and maintaining a two or more party agreement concerning the transmission of data among the peer-(N)-entities concerned, and using the provider of the (N-1)-service;
- it allows the negotiation between all the parties concerned of the parameters and options that will govern the transmission of data;
- it provides connection identification by means of which the overheads involved in address resolution and transmission can be avoided on data transfers;
- it provides a context within which successive units of data transmitted between the peer-entities are logically related, and makes it possible to maintain sequence and provide flow control for those transmissions.