



BSI Standards Publication

Radio data system (RDS) — VHF/FM sound broadcasting in the frequency range from 64,0 MHz to 108,0 MHz

Part 2: Message format: coding and definitions of RDS features

National foreword

This British Standard is the UK implementation of IEC 62106-2:2021. It supersedes [BS IEC 62106-2:2018](#), which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee EPL/100, Audio-visual equipment.

A list of organizations represented on this committee can be obtained on request to its committee manager.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2021

Published by BSI Standards Limited 2021

ISBN 978 0 539 13523 7

ICS 33.160.40

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 March 2021.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

INTERNATIONAL STANDARD

**Radio data system (RDS) – VHF/FM sound broadcasting in the frequency range
from 64,0 MHz to 108,0 MHz –
Part 2: Message format: coding and definitions of RDS features**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.160.40

ISBN 978-2-8322-9426-0

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	6
INTRODUCTION	8
1 Scope	9
2 Normative references	9
3 Terms, definitions, abbreviated terms and conventions	9
3.1 Terms and definitions	9
3.2 Abbreviated terms	9
3.3 Notation and conventions	11
4 Message format	11
4.1 Design principles	11
4.2 Group structure	12
4.2.1 Group type A structure	12
4.2.2 Group type B structure	13
4.2.3 Group type C structure	13
4.2.4 RFT ODA pipe/channel	14
4.3 Group type A and B usage	15
4.4 Group type C usage	16
4.4.1 Transmitting legacy data using data-streams 1, 2 and 3	16
4.4.2 Transmitting group type C ODA data	16
4.4.3 AID and channel number assignment for group type C ODAs	17
5 Description of the RDS features	18
5.1 Alternative Frequencies list (AFs)	18
5.2 Clock Time and date (CT)	18
5.3 Dynamic PTY Indicator (PTYI) using DI	18
5.4 Extended Country Code (ECC)	18
5.5 Enhanced Other Networks information (EON)	18
5.6 Linkage information	19
5.7 Open Data Applications (ODAs)	19
5.8 Programme Identification (PI)	19
5.9 Programme Service name – (PS)	20
5.10 Long Programme Service name – (LPS)	20
5.11 Programme Type (PTY)	20
5.12 Programme Type Name (PTYN)	20
5.13 RadioText (RT)	21
5.14 enhanced RadioText (eRT)	21
5.15 RadioText Plus (RT+ and eRT+)	21
5.16 Traffic Programme identification (TP)	21
5.17 Traffic Announcement identification (TA)	21
5.18 Traffic Message Channel (TMC)	22
6 Coding of the group types	22
6.1 Groups of type 0A and 0B: Basic tuning and switching information with PS name	22
6.2 Group type 1A: Slow labelling codes	23
6.3 Group type 2A and 2B: RadioText	24
6.4 Group type 3A: Application identification for any specific ODA using groups of type A or B	24

6.5	Group type 4A: Clock-Time and date.....	25
6.6	Group type 10A: Programme Type Name PTYN.....	26
6.7	Group type 14A and B: Enhanced Other Networks information (EON).....	27
6.8	Group type 15A: Long Programme Service name – 32 bytes with UTF-8 coding.....	27
6.9	Group type 15B: Fast basic tuning and switching information.....	28
7	Coding of RDS features for control	29
7.1	Programme Identification (PI) codes and Extended Country Codes (ECC)	29
7.1.1	PI structure.....	29
7.1.2	Country Identifier (CI) codes: 'Nibble 1'.....	29
7.1.3	Extended Country Codes (ECC)	29
7.1.4	Programme service in terms of area coverage (codes for fixed location transmitters only): 'Nibble 2'	30
7.1.5	Programme reference number: 'Nibbles 3 and 4'.....	30
7.1.6	PI codes for low-power short range transmitting devices.....	30
7.2	Programme Type (PTY) codes	31
7.3	Traffic Programme (TP) and Traffic Announcement (TA) codes.....	31
7.4	Decoder Identification (DI) and dynamic PTY Indicator (PTYI) codes	31
7.5	Coding of Alternative Frequencies (AFs).....	32
7.5.1	AF code tables	32
7.5.2	Use of Alternative Frequencies in group type 0A.....	34
7.5.3	Use of AF codes in group type 14A.....	36
7.6	Coding of Enhanced Other Networks information (EON)	37
7.6.1	General	37
7.6.2	Coding of frequencies for cross-referenced programme services in EON	38
7.6.3	Use of the TP and TA features with EON	38
7.6.4	Use of PTY with EON	38
8	Required main RDS feature repetition rates on data-stream 0	39
Annex A (normative) Method for linking RDS programme services – Linkage information – Group type 1A and 14A		44
A.1	General.....	44
A.2	LA – Linkage Actuator.....	45
A.3	EG – Extended Generic indicator	45
A.4	ILS – International Linkage Set indicator	45
A.5	LSN – Linkage Set Number.....	45
Annex B (informative) Conversion between time and date conventions		47
Annex C (normative) RDS2 File Transfer protocol RFT for files up to 163 kB		49
C.1	Group coding of the ODA-AID assignment groups.....	49
C.1.1	General principles	49
C.1.2	Variant 0.....	49
C.1.3	Variant 1.....	50
C.1.4	Variants 2 to 15	51
C.2	Coding of the RFT data group used to carry the file data bytes	51
Annex D (informative) CRC-16 ITU-T/CCITT checkword calculation.....		53
D.1	General.....	53
D.2	PASCAL listing of CRC-16-calculation routine.....	53
D.3	C listing of the CRC-16 calculation routine	53
D.4	Fictitious example	54
Bibliography.....		55

Figure 1 – Group type A structure	12
Figure 2 – Group type B structure	13
Figure 3 – Group type C structure	13
Figure 4 – Tunnelling structure for group types A and B	16
Figure 5 – Basic tuning and switching information – Group type 0A	22
Figure 6 – Basic tuning and switching information – Group type 0B	23
Figure 7 – Slow labelling codes – Group type 1A	23
Figure 8 – RadioText – Group type 2A	24
Figure 9 – RadioText – Group type 2B	25
Figure 10 – Application identification for any specific ODA – Group type 3A	25
Figure 11 – Clock-Time and date transmission – Group type 4A	26
Figure 12 – Programme Type Name PTYN – Group type 10A	26
Figure 13 – Enhanced Other Networks information – Group type 14A	27
Figure 14 – Enhanced Other Networks information – Group type 14B	27
Figure 15 – Long PS, UTF-8 coded – Group type 15A	28
Figure 16 – Fast basic tuning and switching information – Group type 15B	28
Figure 17 – PI code structure	29
Figure A.1 – Structure of group type 1A, block 3	44
Figure A.2 – Structure of group type 14A variant 12, block 3 (Linkage information) – National link	45
Figure A.3 – Structure of group type 14A variant 12, block 3 (Linkage information) – International link	46
Figure B.1 – Conversion routes between Modified Julian Date (MJD) and Coordinated Universal Time (UTC)	47
Figure C.1 – AID assignment group coding for variant 0	49
Figure C.2 – AID assignment group coding for variant 1	51
Figure C.3 – AID assignment group coding for variant 2 to 15	51
Figure C.4 – RFT data group	52
 Table 1 – Group type C Function Header definition	 14
Table 2 – Group type A and B usage	15
Table 3 – Group type C assignment methods used to connect channel numbers with one or more AIDs	17
Table 4 – Assignment of up to three successive channel numbers to multiple AIDs	18
Table 5 – Area coverage codes	30
Table 6 – Programme service reference number codes	30
Table 7 – PI codes for short range transmitting devices	31
Table 8 – Codes for TP and TA	31
Table 9 – Meaning of bits d ₀ to d ₃	32
Table 10 – VHF frequencies 87,6 MHz to 107,9 MHz code table	32
Table 11 – Special meanings AF code table	33
Table 12 – LF/MF code table – ITU regions 1 and 3 (9 kHz spacing)	33
Table 13 – MF code table – ITU region 2 (10 kHz spacing)	33

Table 14 – Example including AFs for the extended FM Band	37
Table 15 – Data-stream 0 group repetition rates: Transmitter not part of a multi-programme service network: no TMC and only 'basic' RDS features.....	39
Table 16 – Data-stream 0 group repetition rates: Transmitter part of a multi-programme service network: no TMC	40
Table 17 – Data-stream 0 group repetition rates: Transmitter not part of a multi-programme service network: with TMC	41
Table 18 – Data-stream 0 group repetition rates: Transmitter not part of a multi-programme service network: no TMC and with support for UTF-8 coded characters.....	42
Table 19 – Data-stream 0 group repetition rates: Transmitter part of a multi-programme service network: with TMC	43
Table B.1 – Symbols used for time and date calculation.....	47
Table C.2 – Relation between chunk size, max. file size and max.chunk address	50

INTERNATIONAL ELECTROTECHNICAL COMMISSION

RADIO DATA SYSTEM (RDS) – VHF/FM SOUND BROADCASTING IN THE FREQUENCY RANGE FROM 64,0 MHz TO 108,0 MHz –

Part 2: Message format: coding and definitions of RDS features

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62106-2 has been prepared by technical area 1: Terminals for audio, video and data services and contents, of IEC technical committee 100: Audio, video and multimedia systems and equipment. It is an International Standard.

This second edition cancels and replaces the first edition published in 2018. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to IEC 62106-2:2018:

- a) Subclause 4.2.4 has been added;
- b) Tables 1 and 13 have been modified;
- c) The new function RDS2 file transfer has been added and it is detailed in Annex C; this uses a CRC-16, which is specified in Annex D.

The text of this International Standard is based on the following documents:

CDV	Report on voting
100/3464/CDV	100/3547/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

A list of all parts in the IEC 62106 series, published under the general title *Radio data system (RDS) – VHF/FM sound broadcasting in the frequency range from 64,0 MHz to 108,0 MHz*, can be found on the IEC website.

The language used for the development of this International Standard is English,

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

INTRODUCTION

Since the mid-1980s, a fascinating development has taken place. Most of the multimedia applications and standards have been created or redefined significantly. Hardware has become extremely powerful with dedicated software and middleware. In the mid-1980s, Internet as well as its protocols did not exist. Navigation systems became affordable in the late 1990s, and a full range of attractive smartphones now exist. The computing power of all these new products is comparable with that of the mainframe installations in that era.

Listener expectations have grown faster than the technology. Visual experience is now very important, like the Internet look and feel. Scrolling text or delivering just audio is nowadays perceived as insufficient for FM radio, especially for smartphone users. New types of radio receivers with added value features are therefore required. RDS has so far proven to be very successful.

FM radio with RDS is an analogue-digital hybrid system, which is still a valid data transmission technology and only the applications need adaptation. Now the time has come to solve the only disadvantage, the lack of sufficient data capacity. With RDS2, the need to increase the data capacity can be fulfilled.

RDS was introduced in the early 1980s. During the introductory phase in Europe, the car industry became very involved and that was the start of an extremely successful roll-out. Shortly afterwards, RDS (RBDS) was launched in the USA [1, 2, 3, 4, 5]¹.

The RDS Forum has investigated a solution to the issue of limited data capacity. For RDS2, both sidebands around the RDS 57 kHz subcarrier can be repeated a few times, up to three, centred on additional subcarriers higher up in the FM multiplex while still remaining compatible with the ITU Recommendations.

The core elements of RDS2 are the additional subcarriers, which will enable a significant increase of RDS data capacity to be achieved, and then only new additional data applications will have to be created, using the RDS-ODA feature, which has been part of the RDS standard IEC 62106 for many years.

In order to update IEC 62106:2015 to the specifications of RDS2, IEC 62106 has been restructured as follows:

Part 1: Modulation characteristics and baseband coding

Part 2: RDS message format, coding and definition of RDS features

Part 3: Usage and registration of Open Data Applications ODAs

Part 4: Registered code tables

Part 5: Marking of RDS and RDS2 devices

Part 6: Compilation of technical specifications for Open Data Applications in the public domain

Part 9: RBDS – RDS variant used in North America

Part 10: Universal Encoder Communication Protocol UECP

The original specifications of the RDS system have been maintained and the extra functionalities of RDS2 have been added.

The presentation in Parts 1, 2 and 3 follows the OSI basic reference model for information processing systems [6].

¹ Numbers in square brackets refer to the Bibliography.

RADIO DATA SYSTEM (RDS) – VHF/FM SOUND BROADCASTING IN THE FREQUENCY RANGE FROM 64,0 MHz TO 108,0 MHz –

Part 2: Message format: coding and definitions of RDS features

1 Scope

This part of IEC 62106 defines the coding and definition of features for the Radio Data System (RDS).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62106 (all parts), *Radio Data System (RDS) – VHF/FM sound broadcasting in the frequency range from 64,0 MHz to 108,0 MHz*

ISO/IEC 10646, *Information technology – Universal Coded Character Set (UCS)*

ISO 14819 (all parts), *Intelligent transport systems – Traffic and travel information messages via traffic message coding*

3 Terms, definitions, abbreviated terms and conventions

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62106-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.2 Abbreviated terms

For the purposes of this document, the abbreviated terms given in IEC 62106-1 and the following apply.

AF Alternative Frequency

NOTE 1 Alternative Frequencies are given in the form of lists (method A or B or mapped).

AID Application IDentification for ODAs

CI Country Identifier

CRC-16 16 bit Cyclic Redundancy Check

CT	Clock Time
	NOTE 2 In RDS, Clock Time includes the date.
DI	Decoder Identification
ECC	Extended Country Code
EG	Extended Generic indicator
EON	Enhanced Other Network information
eRT	enhanced RadioText
EWS	Emergency Warning System
	NOTE 3 EWS was used in previous editions of IEC 62106. It can now be an ODA.
FH	Function Header in group type C composed of FID and FN
FID	Function Identifier
FN	Function Number
hex	hexadecimal
IH	In-House application
	NOTE 4 IH was used in previous editions of IEC 62106. It can now be an ODA.
ILS	International Linkage Set indicator
LA	Linkage Actuator
LI	Linkage Indicator
LPS	Long Programme Service name
lsb	least significant bit or least significant byte
LSN	Linkage Set Number
MS	Music Speech switch
	NOTE 5 MS was used in previous editions of IEC 62106. It is now obsolete.
msb	most significant bit or most significant byte
ODA	Open Data Application
ON	Other Network
PI	Programme Identification
PIN	Programme Item Number
	NOTE 6 PIN was used in previous editions of IEC 62106. It is now obsolete.
PS	Programme Service name
PTY	Programme Type
PTYI	Programme Type Indicator
PTYN	Programme Type Name
RFT	RDS2 File Transfer protocol
rfu	reserved for future use
RP	Radio Paging
	NOTE 7 RP was used in previous editions of IEC 62106. It is now obsolete.
RT	RadioText
RT+	RadioText plus
TA	Traffic Announcement

TDC Transparent Data Channel

NOTE 8 TDC was used in previous editions of IEC 62106. It can now be an ODA.

TMC Traffic Message Channel

TN Tuned Network

TP Traffic Programme

3.3 Notation and conventions

The notation and conventions given in IEC 62106-1 apply.

4 Message format

4.1 Design principles

The basic design principles underlying the message format and addressing structure are as follows:

- a) The original single RDS data-stream (now referred to as data-stream 0) has been supplemented by three new RDS data-streams referred to as data-streams 1, 2 and 3. Data-stream 0 will continue to only carry group types A and B (referred to as legacy data). Data-streams 1, 2 and 3 will only carry a new group type C. Legacy data groups A and B can be carried on data-streams 1, 2 and 3, but first need to be packaged within a type C group, using a mechanism referred to as "tunnelling".
- b) The mixture of different kinds of messages within any type A or B group is minimized. For example, one group type is reserved for basic tuning information, another for RadioText, etc. This is important so that broadcasters, who do not wish to transmit messages of certain kinds, are not forced to waste channel capacity by transmitting groups with unused blocks. Instead, they are able to repeat more frequently those group types which contain the messages they want to transmit.
- c) Data that has to be acquired quickly for receiver operation and for which a short acquisition time is required, for example Programme Identification (PI), Programme Type (PTY), and Traffic Programme flag (TP) are transmitted frequently and are always transmitted in data-stream 0. In data-stream 0, these features are present in every group and occupy the same fixed positions. They can therefore be decoded without reference to any block outside the one which contains the information.
- d) The Programme Service name (PS), a fundamental feature of RDS, is also always transmitted in data-stream 0, using a fixed group type – 0A or 0B for the short form, 15A for the longer (UTF-8, see ISO/IEC 10646) form. By having a fixed group type (i.e. not an ODA), the PS name can be decoded without reference to any other group.
- e) For compatibility with existing receivers, other RDS features will continue to use fixed group types and be transmitted in data-stream 0. These include Slow-labelling (1A), Clock-time (4A), RadioText (2A or 2B), PTYN (10A), EON (14A and 14B) and TA status control bursts (15B).
- f) The practice of allowing future applications to be defined by using an Open Data Application has been extended, and the data formatting has been made more flexible. In addition to an Open Data Application (see IEC 62106-3) using legacy group types A or B in data-stream 0 (see Table 2), a new group type C Open Data Application has been specified to allow greater data capacity in data-streams 1, 2 and 3.
- g) Open Data Applications defined by group types A or B can be carried in any data-stream 0, 1, 2 and 3, although use of data-streams 1 – 3 requires the use of tunnelling.
- h) Open Data Applications defined by group type C can only be carried in data-streams 1, 2 and 3. The essential core RDS features (PI, PTY, PS, etc.) will always be transmitted in data-stream 0 in every programme service using group types A or B.

- i) The application identification AID which identifies an Open Data Application shall be sent at least once every 5 s.
- j) There is no fixed rhythm of repetition of the various types of groups, i.e. there is ample flexibility to interleave the various kinds of messages to suit the needs of the user at any given time and to allow for future developments. However, on data-stream 0, the main RDS features need to use minimum repetition rates specified in Clause 8.


4.2 Group structure

4.2.1 Group type A structure

The group type A structure is illustrated in Figure 1. The main features are the following.

- a) The first block in every group always contains a Programme Identification (PI) code.
- b) The first four bits of the second block of every group are allocated to a 4-bit code which specifies the application of the group. Groups will be referred to as 0 to 15 according to the binary weighting $A_3 = 8$, $A_2 = 4$, $A_1 = 2$, $A_0 = 1$. For each group (0 to 15) two 'versions' can be defined. The 'version' is specified by the fifth bit (B_0) of block 2 as follows:
 - c) $B_0 = 0$: Defines group type A. The PI code is inserted in block 1 only. This will be called version A, for example group type 0A, 1A, etc.
 - d) $B_0 = 1$: Defines group type B (see 4.2.2).
- e) The Programme Type code (PTY) and Traffic Programme identification (TP) occupy fixed locations in block 2 of every group.

Within the group type A structure, the PI, PTY and TP codes can be decoded without reference to any block outside the one that contains the information. This is essential to minimize acquisition time for these kinds of messages and to retain the advantages of the short (26-bit) block length.

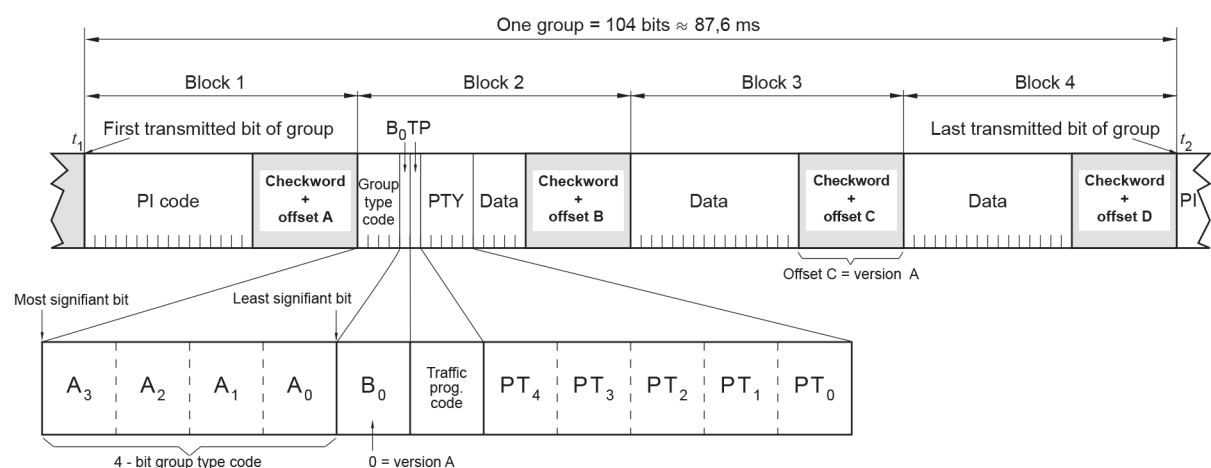

IEC

NOTE 1 Block size = 26 bits.

NOTE 2 Checkword + offset 'N' = 10 bit added to provide error protection and block and group synchronization information (see IEC 62106-1).

NOTE 3 $t_1 < t_2$: block 1 of any particular group is transmitted first and block 4 last.


Figure 1 – Group type A structure

Group type A can be used directly in data-stream 0 and has an application data capacity of 37 bits. To use group type A in the upper data-streams 1, 2 and 3, the PI code in block 1 needs to be replaced by 0x0000 to re-define the group as type C utilizing the tunnelling mechanism (see 4.4.1).

4.2.2 Group type B structure

The group type B structure is illustrated in Figure 2. It is similar to the group type A structure with the following differences.

- The first and third block in every group always contain the Programme Identification (PI) code.
- The 'version' is specified by bit B_0 of block 2 as follows:
 - $B_0 = 0$: Defines group type A (see 4.2.1).
 - $B_0 = 1$: Defines group type B.
- In addition to $B_0 = 1$ a special offset word (which is called C') is used in block 3 of version B groups. The occurrence of offset C' in block 3 of any group can be used to indicate directly that block 3 is a PI code, without any reference to the value of B_0 in block 2.

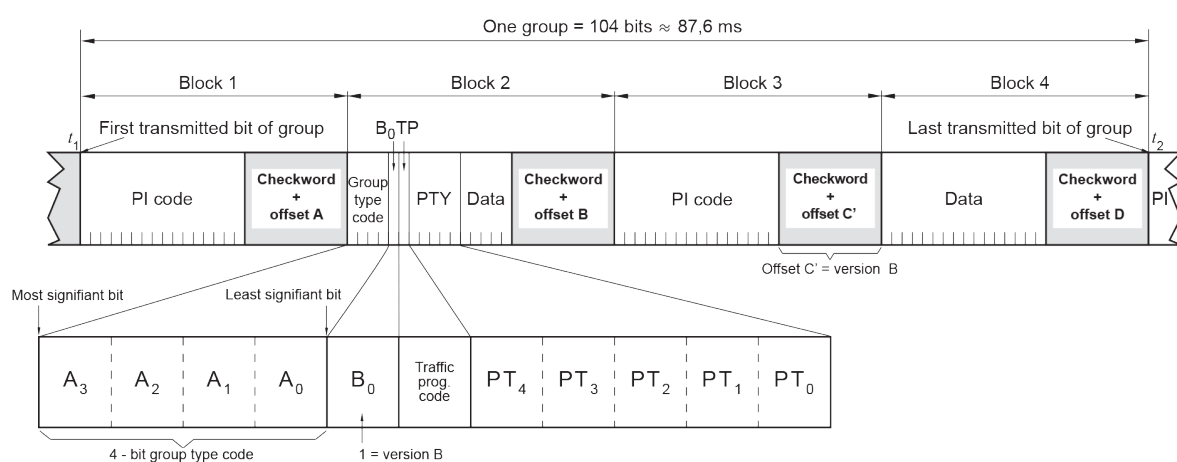


IEC

Figure 2 – Group type B structure

The group type B can be used directly in data-stream 0 and has an application data capacity of 21 bits. To use group type B in the upper data-streams 1, 2 and 3, the PI code in block 1 needs to be replaced by 0x0000 to re-define the group as type C utilizing the tunnelling mechanism (see 4.4.1). The PI code in block 3 will be left unchanged.

4.2.3 Group type C structure

The group type C structure is illustrated in Figure 3.

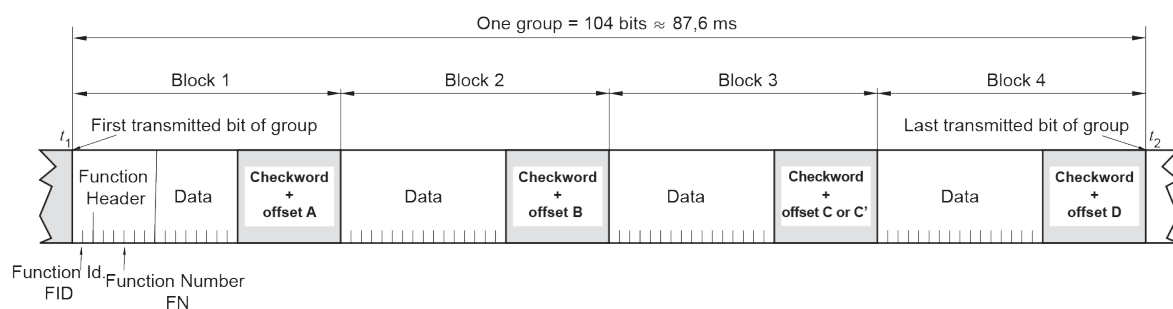

IEC

NOTE The Function Header (FH) fully determines the identification of the group.

Figure 3 – Group type C structure

The group type C can only be used on data-streams 1, 2 and 3 and has an application data capacity of 56 bits considered as a 7-byte contiguous data group.

The Function Header (FH) consists of two elements, see Table 1.

- Function Identifier (FID) (2 bits) indicates one of four types of usage (Functions) of the accompanying data contained in the group.
- Function Number (FN) (6 bits) indicates a sub-function of the main Function Identifier and allows for different features of each function. For a given Function Identifier, not all Function Numbers are defined. Undefined Function Numbers are reserved for future use.

Table 1 – Group type C Function Header definition

FID		FN						Meaning of Function Header (FH) FID and FN
b ₁₅	b ₁₄	b ₁₃	b ₁₂	b ₁₁	b ₁₀	b ₉	b ₈	
0	0	0	0	0	0	0	0	Legacy group type A or B transmission, see 4.4.1
0	0	1	0	y	y	y	y	RFT data group for ODA pipe yyyy, see Annex C 16 pipes/channels are available across data-streams 1 to 3
0	1	y	y	y	y	y	y	Group type C ODA channel, see 4.4.2 64 channels (6 bit: yyyyyy) are available across data-streams 1 to 3. Channels 0 to 15 are reserved for providing additional data. These 16 channels are reserved for ODAs that require additional data in the form of files. This additional data will be sent in FH=0010yyyy using the RFT protocol.
1	0	0	0	0	0	0	0	AID and channel number assignment for group type C ODAs, see 4.4.3
1	1	x	x	x	x	x	x	rfu

4.2.4 RFT ODA pipe/channel

Channel numbers 0 ...15 are reserved for ODAs that use external data in the form of files, which are provided using the RFT protocol. The RFT data is transported using a pipe number that equals the ODA channel number.

The assignment of these ODAs will always use assignment method 1, allowing 4 bytes of additional data, see 4.4.3.

For the channel range 0 ...15, the data in these bytes is organized in 16 variants, where the first eight variants are reserved for the RFT protocol and the other eight are free to be used by the ODA designer (see Annex C).

4.3 Group type A and B usage

Table 2 – Group type A and B usage

Group type	Group type code and version	Description
0A	0000 0	Basic tuning and switching information with Programme Service name
0B	0000 1	Basic tuning and switching information with Programme Service name
1A	0001 0	Slow labelling codes
1B	0001 1	Open Data Applications
2A	0010 0	RadioText
2B	0010 1	RadioText
3A	0011 0	Application Identification for ODA and 16 bits of ODA data
3B	0011 1	Open Data Applications
4A	0100 0	Clock-time and date
4B	0100 1	Open Data Applications
5A	0101 0	Open Data Applications
5B	0101 1	Open Data Applications
6A	0110 0	Open Data Applications
6B	0110 1	Open Data Applications
7A	0111 0	Open Data Applications
7B	0111 1	Open Data Applications
8A	1000 0	Open Data Applications: Traffic Message Channel or if TMC not used, any other ODA
8B	1000 1	Open Data Applications
9A	1001 0	Open Data Applications
9B	1001 1	Open Data Applications
10A	1010 0	Programme Type Name
10B	1010 1	Open Data Applications
11A	1011 0	Open Data Applications
11B	1011 1	Open Data Applications
12A	1100 0	Open Data Applications
12B	1100 1	Open Data Applications
13A	1101 0	Open Data Applications
13B	1101 1	Open Data Applications
14A	1110 0	Enhanced Other Networks information
14B	1110 1	Enhanced Other Networks information
15A	1111 0	Long Programme Service name
15B	1111 1	Fast switching information

4.4 Group type C usage

4.4.1 Transmitting legacy data using data-streams 1, 2 and 3

FID = 00

FN = 000000

All legacy data (any group type A or B) can be transmitted using the upper data-streams 1, 2 and 3 within the group type C structure.

The two bytes of block 1, traditionally representing the PI code, are both set to 0x00. This "deleted" PI code is always the same as the PI code simultaneously transmitted in block 1 of data-stream 0.

This process of transmitting legacy data using the upper data-streams 1, 2 and 3 is known as "tunnelling".

If the application software at the receiving end requires fully defined groups of type A or B, the PI code from data-stream 0 may be reinserted in block 1, replacing the two 0x00 bytes.

Figure 4 shows the tunnelling structure for group types A and B.

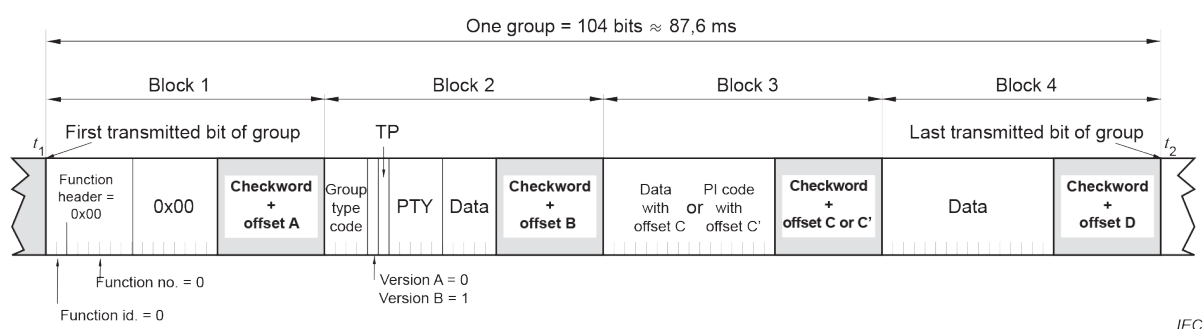


Figure 4 – Tunnelling structure for group types A and B

4.4.2 Transmitting group type C ODA data

FID = 01

FN = yyyyyy (0 ... 63)

This Function Header allows group type C ODA data to be sent using channel yyyyyy (0 ...63) indicated by the 6 bits of FN, 64 channels in total on data-streams 1, 2 and 3.

The ODA application data content is 7 bytes.

The channel number associates the accompanying 7 bytes of data with a particular AID of a group type C ODA. This is similar to the association made (using group 3A) between the group number and a particular AID of a legacy group type A or B ODA in data-stream 0. For group type C ODAs, the channel number is assigned to an AID as defined below in 4.4.3.