BS IEC 62906-5-4:2018
Incorporating corrigendum June 2022

BSI Standards Publication

Laser display devices

Part 5-4: Optical measuring methods of colour speckle

Documents
Document Sharing Hub

Full document details: BS IEC 62906-5-4:2018

National foreword

This British Standard is the UK implementation of IEC 62906-5-4:2018, incorporating corrigendum June 2022.

The start and finish of text introduced or altered by corrigendum is indicated in the text by tags. Text altered by IEC corrigendum June 2022 is indicated in the text by [AC1⟩ ⟨AC1].

The UK participation in its preparation was entrusted to Technical Committee EPL/47, Semiconductors.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2022
Published by BSI Standards Limited 2022

ISBN 978 0 539 23457 2

ICS 31.260

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 January 2018.

Amendments/corrigenda issued since publication

Date	Text affected
30 September 2022	Implementation of IEC corrigendum June 2022

Documents
Document Sharing Hub

Full document details: BS IEC 62906-5-4:2018

IEC 62906-5-4

Edition 1.0 2018-01

INTERNATIONAL STANDARD

colour inside

Laser display devices –
Part 5-4: Optical measuring methods of colour speckle

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 31.260

ISBN 978-2-8322-5243-7

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: BS IEC 62906-5-4:2018

CONTENTS

FOREWORD 5
1 Scope 7
2 Normative references 7
3 Terms, definitions, letter symbols and abbreviated terms 7
3.1 Fundamental terms 7
3.2 Terms related to colour speckle distribution 7
3.3 Terms related to spatial variation 8
3.4 Letter symbols 8
3.5 Abbreviated terms 9
4 Theory of colour speckle 9
4.1 General 9
4.2 Mechanism for generating colour speckle 9
5 Calculation methods of colour speckle 11
5.1 General 11
5.2 Measuring method of spectral behaviour of BGR light sources 12
5.3 Target chromaticity 12
5.4 Adjustment of BGR power ratio 14
5.5 Calculation method (a) using BGR speckle contrast $C_{\text{s-B}}$, $C_{\text{s-G}}$, $C_{\text{s-R}}$ 15
5.5.1 General 15
5.5.2 Examples of measured distributions 16
5.6 Evaluation metrics 20
5.7 Calculation method (b) using the measured spatial distribution of BGR monochromatic speckles 21
5.7.1 General 21
5.7.2 Examples of measured distributions 21
5.7.3 Comparison between methods (a) and (b) 23
5.7.4 Elimination of the background effects 25
5.8 Error analysis based on data size 28
6 Direct measuring methods of colour speckle 32
6.1 General 32
6.2 Fundamental design of LMD for colour speckle measurement 33
6.3 Colour speckle measuring method using LMD with XYZ filters 34
6.4 Colour speckle measuring method using LMD with BGR filters 35
7 Measuring methods related to spatial variation 36
7.1 General 36
7.2 Angular colour speckle variation 36
7.3 Photometric speckle contrast uniformity/non-uniformity 37
7.4 Colour speckle variance/covariance non-uniformity 38
Annex A (informative) Complementary explanation of colour speckle 39
Annex B (informative) Examples of colour speckle distributions 40
B.1 Colour speckle distributions (one of the BGR: 90 %, the others: 1 %) 40
B.2 Colour speckle distributions (two of the BGR: 90 %, the other: 1 %) 43
Annex C (informative) Calibration of XYZ errors 48
C.1 General 48
C.2 Formulation of XYZ mismatches 48

Documents
Document Sharing Hub
Full document details: BS IEC 62906-5-4:2018

C.3 Calibration of the mismatched XYZ errors using the true BGR chromaticity values 50
Bibliography 51

Figure 1 – Two speckle measuring methods and their flow charts 12
Figure 2 – Target chromaticity and colour gamut 13
Figure 3 – $S_{B,G,R}(\lambda)$ with an FWHM of 2 nm 13
Figure 4 – Adjustment method of BGR power ratio 15
Figure 5 – Colour speckle distribution for $C_{s\text{-}B}$ = 100 %, $C_{s\text{-}G}$ = 100 %, $C_{s\text{-}R}$ = 100 % 16
Figure 6 – Photometric speckle distribution for $C_{s\text{-}B}$ = 100 %, $C_{s\text{-}G}$ = 100 %, $C_{s\text{-}R}$ = 100 % 17
Figure 7 – Colour speckle distribution for $C_{s\text{-}B}$ = 50 %, $C_{s\text{-}G}$ = 50 %, $C_{s\text{-}R}$ = 50 % 18
Figure 8 – Photometric speckle distribution for $C_{s\text{-}B}$ = 50 %, $C_{s\text{-}G}$ = 50 %, $C_{s\text{-}R}$ = 50 % 18
Figure 9 – Colour speckle distribution for $C_{s\text{-}B}$ = 10 %, $C_{s\text{-}G}$ = 10 %, $C_{s\text{-}R}$ = 10 % 19
Figure 10 – Photometric speckle distribution for $C_{s\text{-}B}$ = 10 %, $C_{s\text{-}G}$ = 10 %, $C_{s\text{-}R}$ = 10 % 20
Figure 11 – Colour speckle distribution for $C_{s\text{-}B}$ = 9,2 %, $C_{s\text{-}G}$ = 9,7 %, $C_{s\text{-}R}$ = 9,2 % obtained by method (b) 22
Figure 12 – Colour speckle distribution for $C_{s\text{-}B}$ = 9,2 %, $C_{s\text{-}G}$ = 19,2 %, $C_{s\text{-}R}$ = 23,2 % obtained by method (b) 23
Figure 13 – Colour speckle distribution for $C_{s\text{-}B}$ = 9,2 %, $C_{s\text{-}G}$ = 9,7 %, $C_{s\text{-}R}$ = 9,2 % obtained by method (a) 24
Figure 14 – Colour speckle distribution for $C_{s\text{-}B}$ = 9,2 %, $C_{s\text{-}G}$ = 19,2 %, $C_{s\text{-}R}$ = 23,2 % obtained by method (a) 24
Figure 15 – Raw data of BGR speckle distributions (upper row) and post-processed data (lower row) for BGR monochromatic speckles (left: B, centre: G, right: R) 26
Figure 16 – Colour speckle distribution directly using the raw data in Figure 15 26
Figure 17 – Colour speckle distribution for $C_{s\text{-}B}$ = 16,2 %, $C_{s\text{-}G}$ = 17,4 %, $C_{s\text{-}R}$ = 17,3 % obtained by indirect measuring method (a) 27
Figure 18 – Calculated average chromaticity values of the colour speckle distribution with respect to data size for $C_{s\text{-}B}$ = $C_{s\text{-}G}$ = $C_{s\text{-}R}$ = 80 % 28
Figure 19 – Calculated average values of the normalized speckle illuminance speckle distribution and the normalized monochromatic speckle intensity distribution with respect to data size for $C_{s\text{-}B}$ = $C_{s\text{-}G}$ = $C_{s\text{-}R}$ = 80 % 29
Figure 20 – Calculated average chromaticity values of the colour speckle distribution with respect to data size for $C_{s\text{-}B}$ = $C_{s\text{-}G}$ = $C_{s\text{-}R}$ = 60 % 29
Figure 21 – Calculated average values of the normalized speckle illuminance speckle distribution and the normalized monochromatic speckle intensity distribution with respect to data size for $C_{s\text{-}B}$ = $C_{s\text{-}G}$ = $C_{s\text{-}R}$ = 60 % 30
Figure 22 – Calculated average chromaticity values of the colour speckle distribution with respect to data size for $C_{s\text{-}B}$ = $C_{s\text{-}G}$ = $C_{s\text{-}R}$ = 40 % 30
Figure 23 – Calculated average values of the normalized speckle illuminance speckle distribution and the normalized monochromatic speckle intensity distribution with respect to data size for $C_{s\text{-}B}$ = $C_{s\text{-}G}$ = $C_{s\text{-}R}$ = 40 % 31
Figure 24 – Calculated average chromaticity values of the colour speckle distribution with respect to data size for $C_{s\text{-}B}$ = $C_{s\text{-}G}$ = $C_{s\text{-}R}$ = 20 % 31
Figure 25 – Calculated average values of the normalized speckle illuminance speckle distribution and the normalized monochromatic speckle intensity distribution with respect to data size for $C_{s\text{-}B}$ = $C_{s\text{-}G}$ = $C_{s\text{-}R}$ = 20 % 32
Figure 26 – Example of LMDs using XYZ filters for colour speckle measurement 33

AVA Documents
Document Sharing Hub
Full document details: BS IEC 62906-5-4:2018

Figure 27 – Example of LMDs using BGR filters for colour speckle measurement 34
Figure 28 – Example of measurement geometries for colour speckle using an LMD with XYZ filters 35
Figure 29 – Example of measurement geometries for colour speckle using an LMD with BGR filters 36
Figure 30 – Representation of the viewing direction, or direction of measurement, defined by the angle of inclination θ, and the angle of rotation (azimuth angle φ) in a polar coordinate system 37
Figure A.1 – Photograph of colour speckle 39
Figure B.1 – Colour speckle distribution for $C_{\text{s-B}}$ = 90 %, $C_{\text{s-G}}$ = 1 %, $C_{\text{s-R}}$ = 1 % 40
Figure B.2 – Photometric speckle distribution for $C_{\text{s-B}}$ = 90 %, $C_{\text{s-G}}$ = 1 %, $C_{\text{s-R}}$ = 1 % 41
Figure B.3 – Colour speckle distribution for $C_{\text{s-B}}$ = 1 %, $C_{\text{s-G}}$ = 90 %, $C_{\text{s-R}}$ = 1 % 42
Figure B.4 – Photometric speckle distribution for $C_{\text{s-B}}$ = 1 %, $C_{\text{s-G}}$ = 90 %, $C_{\text{s-R}}$ = 1 % 42
Figure B.5 – Colour speckle distribution for $C_{\text{s-B}}$ = 1 %, $C_{\text{s-G}}$ = 1 %, $C_{\text{s-R}}$ = 90 % 43
Figure B.6 – Photometric speckle distribution for $C_{\text{s-B}}$ = 1 %, $C_{\text{s-G}}$ = 1 %, $C_{\text{s-R}}$ = 90 % 43
Figure B.7 – Colour speckle distribution for $C_{\text{s-B}}$ = 90 %, $C_{\text{s-G}}$ = 1 %, $C_{\text{s-R}}$ = 90 % 44
Figure B.8 – Photometric speckle distribution for $C_{\text{s-B}}$ = 90 %, $C_{\text{s-G}}$ = 1 %, $C_{\text{s-R}}$ = 90 % 45
Figure B.9 – Colour speckle distribution for $C_{\text{s-B}}$ = 1 %, $C_{\text{s-G}}$ = 90 %, $C_{\text{s-R}}$ = 90 % 45
Figure B.10 – Photometric speckle distribution for $C_{\text{s-B}}$ = 1 %, $C_{\text{s-G}}$ = 90 %, $C_{\text{s-R}}$ = 90 % 46
Figure B.11 – Colour speckle distribution for $C_{\text{s-B}}$ = 90 %, $C_{\text{s-G}}$ = 90 %, $C_{\text{s-R}}$ = 1 % 46
Figure B.12 – Photometric speckle distribution for $C_{\text{s-B}}$ = 90 %, $C_{\text{s-G}}$ = 90 %, $C_{\text{s-R}}$ = 1 % 47
Figure C.1 – Deviated values (marker points) and ideal colour matching functions 49
Figure C.2 – Correct plot by spectral measurements and plot with XYZ errors 49

Table 1 – Values of measurement metrics for the calculated examples 21
Table 2 – Values of measurement metrics for the examples in Figure 11 to Figure 14 25
Table 3 – Values of measurement indices for the examples in Figure 16 and Figure 17 27
Table C.1 – Mismatch coefficients 49

Documents
Document Sharing Hub
Full document details: BS IEC 62906-5-4:2018

INTERNATIONAL ELECTROTECHNICAL COMMISSION

LASER DISPLAY DEVICES –

Part 5-4: Optical measuring methods of colour speckle

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62906-5-4 has been prepared by IEC technical committee TC 110: Electronic display devices.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
110/926/FDIS	110/938/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62906 series, published under the general title *Laser display devices*, can be found on the IEC website.

Documents
Document Sharing Hub

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: BS IEC 62906-5-4:2018

LASER DISPLAY DEVICES –

Part 5-4: Optical measuring methods of colour speckle

1 Scope

This part of IEC 62906 specifies the fundamental colour speckle distribution in CIE colour systems and the measuring methods of the colour speckle of laser display devices (LDDs).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62906-1-2, *Laser display devices – Part 1-2: Vocabulary and letter symbols*

IEC 62906-5-2:2016, *Laser display devices – Part 5-2: Optical measuring methods of speckle contrast*

CIE publication 15:2004, *Colorimetry*

3 Terms, definitions, letter symbols and abbreviated terms

For the purposes of this document, the following terms and definitions given in IEC 62906-1-2 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1 Fundamental terms

3.1.1
colour speckle distribution
colour distribution in a specified colour space of the speckle patterns which are generated by colour mixing of monochromatic screen speckles

3.1.2
photometric speckle distribution
distribution of photometric variables such as illuminance, luminance or luminous flux of a colour speckle pattern which are generated by colour mixing of monochromatic screen speckles

3.2 Terms related to colour speckle distribution

3.2.1
colour speckle variance
variance for either of the chromaticity coordinates of colour speckle distribution data, used as one of the metrics of colour speckle distribution

AVA Documents
Document Sharing Hub

3.2.2
colour speckle covariance
covariance between chromaticity coordinates of colour speckle distribution data, used as one of the metrics of colour speckle distribution

3.2.3
photometric speckle contrast
photometric speckle contrast ratio
ratio of the standard deviation to the average of the photometric distribution, such as illuminance, luminance, or luminous flux

3.2.4
colour difference variance
variance of distribution of colour difference of colour speckle between the target chromaticity in an appropriate colour space

Note 1 to entry: See Annex B.

3.3 Terms related to spatial variation

3.3.1
angular colour speckle variation
variation of colour speckle contrast and variance/covariance with zenith (θ) or azimuth (φ) angles on a point of the projection plane (screen)

3.3.2
photometric speckle contrast uniformity/non-uniformity
uniformity or non-uniformity of photometric speckle contrast on the predefined points of the projection plane (screen)

3.3.3
colour speckle variance/covariance non-uniformity
non-uniformity of colour speckle variance/covariance on the predefined points of the projection plane (screen)

3.4 Letter symbols

$\bar{x}(\lambda)$ λ,λ,λ, $\bar{y}(\lambda)$, $\bar{z}(\lambda)$	Colour matching functions
X, Y, Z	Tristimulus values
$S_{B,G,R}(\lambda)$	Spectral power distribution for each B, G, R (normalized as unity)
r_B, r_G, r_R,	Average power ratio for each B, G, R ($r_B + r_G + r_R = 1$)
E	Monochromatic speckle (relative illuminance) distributions
$E_{B,G,R}$	Monochromatic speckle distributions for each B, G, R
M	Number of independent coherent light sources
C_s	Monochromatic speckle contrast
$C_{s-B,G,R}$	Monochromatic speckle contrast for each B, G, R
C_{ps}	Photometric speckle contrast
σ	Standard deviation of monochromatic spatial speckle distribution
$\sigma^2_{u'}$, $\sigma^2_{v'}$	Colour speckle variance (CIE 1976)
$\mu_{u'v'}$	Colour speckle covariance (CIE 1976)
NU_{ps}	Photometric speckle contrast non-uniformity

Documents
Document Sharing Hub
Full document details: BS IEC 62906-5-4:2018

$NU_{\mathrm{csu'}}$, $NU_{\mathrm{csv'}}$	Colour speckle variance non-uniformity
$NU_{\mathrm{csu'v'}}$	Colour speckle covariance non-uniformity

3.5 Abbreviated terms

B,G,R (BGR)	Blue, green, red
DUT	Device under test
FDS	Fully developed speckle
FWHM	Full width at half maximum
LD	Laser diode
LDD	Laser display device
LMD	Light measuring device
MTF	Modulation transfer function

4 Theory of colour speckle

4.1 General

The colour speckle of laser display devices (LDDs) is defined as speckle when the light source is multi-coloured (see IEC 62906-1-2). It is recognized as fine colour patterns different from the colour intended to be displayed (see Annex A).

The colour speckle of the LDDs using coherent or partially coherent light sources emitting at different wavelengths is created by spatially superposing their monochromatic speckle patterns. Particularly for hybrid LDDs, the colour speckle is also created by superposing such monochromatic speckle patterns on speckle-less colour patterns generated by incoherent light sources.

The colour speckle is theoretically obtained as distribution in CIE colour spaces (see CIE publication 15:2004) using the measured data of monochromatic speckles created by coherent or partially coherent light sources.

Clause 4 specifies the colour speckle creation mechanism, examples of colour speckle distribution in CIE 1976 chromaticity diagram and the evaluation indices.

4.2 Mechanism for generating colour speckle

Subclause 4.2 specifies the mechanism for generating colour speckle.

Monochromatic speckle contrast C_{s} is expressed as follows:

$$C_{\mathrm{s}} = \frac{\sigma}{< E >_{\mathrm{T}}} \tag{1}$$

where, E is the relative irradiance of spatial distribution for monochromatic speckle, $<E>_{\mathrm{T}}$ is the total average in the probability density function shown later, and σ is the standard deviation. Speckle is recognized as an interference pattern projected on human retina. Therefore, illuminance E on the retina is used here. This is the same definition as in IEC 62906-5-2.

Documents
Document Sharing Hub
Full document details: BS IEC 62906-5-4:2018

The number of independent coherent light sources is defined as M. Therefore, the probability density function of speckle is given by the gamma distribution as follows [1], [3][1]:

$$p_{\mathrm{M}}(E) = \frac{M^{M} E^{M\text{-}1}}{\Gamma(M) < E >_{\mathrm{T}}^{M}} \exp\{-\frac{ME}{< E >_{\mathrm{T}}}\} \tag{2}$$

where, $\Gamma(M)$ is the gamma function. The number M is usually an integer. However, M can be used as a decimal number.

Formula (2) is normalized as $< E >_{\mathrm{T}} / M = 1$ for the colour speckle estimation. The monochromatic speckle contrast given by Formula (1) is then expressed as follows:

$$C_{\mathrm{s}} = \frac{\sqrt{M}}{< E >_{\mathrm{T}}} = \frac{1}{\sqrt{M}} \tag{3}$$

Using Formula (3), the probability density function in Formula (2) is simply rewritten as a function of C_{s} instead of M.

$$p(E) = \frac{E^{C_{\mathrm{s}}^{-2}-1}}{\Gamma(C_{\mathrm{s}}^{-2})} \exp(-E) \tag{4}$$

The illuminance values E at a given C_{s} value can be obtained statistically by generating random numbers for the inverse function of Formula (4). However, it should be noted that E shall be scaled down as E/M because it has already been normalized as $< E >_{\mathrm{T}} / M = 1$. This statistical speckle formulation is based on radiometry.

To apply the above radiometric formulation to colour speckle, it is necessary to couple it with colourimetry. For BGR laser light sources, the normalized spectral power distribution is expressed as $S_{\mathrm{B,G,R}}(\lambda)$ ($\int S_{\mathrm{B,G,R}}(\lambda)\, \mathrm{d}\lambda = 1$). To realize the target white point by mixing the BGR colours, the average power ratio, r_{B}, r_{G}, r_{R}, ($r_{\mathrm{B}} + r_{\mathrm{G}} + r_{\mathrm{R}} = 1$) shall be determined. The target white point is not affected by monochromatic speckles. In actual measurements, it is obtained by averaging the spatial distribution of each monochromatic speckle. The monochromatic speckle distributions for each colour are expressed as $E_{\mathrm{B,G,R}}$. In case of incoherence, $E_{\mathrm{B,G,R}} = 1$.

Therefore, the tristimulus values, X, Y, and Z are given by

$$\begin{aligned} X &= \int_{380}^{780} \bar{x}(\lambda) \cdot \{r_{\mathrm{B}} E_{\mathrm{B}} S_{\mathrm{B}}(\lambda) + r_{\mathrm{G}} E_{\mathrm{G}} S_{\mathrm{G}}(\lambda) + r_{\mathrm{R}} E_{\mathrm{R}} S_{\mathrm{R}}(\lambda)\} d\lambda \\ Y &= \int_{380}^{780} \bar{y}(\lambda) \cdot \{r_{\mathrm{B}} E_{\mathrm{B}} S_{\mathrm{B}}(\lambda) + r_{\mathrm{G}} E_{\mathrm{G}} S_{\mathrm{G}}(\lambda) + r_{\mathrm{R}} E_{\mathrm{R}} S_{\mathrm{R}}(\lambda)\} d\lambda \\ Z &= \int_{380}^{780} \bar{z}(\lambda) \cdot \{r_{\mathrm{B}} E_{\mathrm{B}} S_{\mathrm{B}}(\lambda) + r_{\mathrm{G}} E_{\mathrm{G}} S_{\mathrm{G}}(\lambda) + r_{\mathrm{R}} E_{\mathrm{R}} S_{\mathrm{R}}(\lambda)\} d\lambda \end{aligned} \tag{5}$$

where, $\bar{x}(\lambda)$, $\bar{y}(\lambda)$, $\bar{z}(\lambda)$ are the colour matching functions.

[1] Numbers in square brackets refer to the Bibliography.

Documents
Document Sharing Hub

Full document details: BS IEC 62906-5-4:2018

The CIE 1931 chromaticity coordinates, x, y, are given by

$$x = \frac{X}{X+Y+Z}, \qquad y = \frac{Y}{X+Y+Z} \tag{6}$$

The CIE 1976 chromaticity coordinates, u', v' are thus given by

$$u' = \frac{4x}{-2x+12y+3} = \frac{4X}{X+15Y+3Z}, \qquad v' = \frac{9y}{-2x+12y+3} = \frac{9Y}{X+15Y+3Z} \tag{7}$$

The above formulation can be applied in this document not only to the case of a narrow spectral linewidth of BGR LDs but also to the much wider spectra of an incoherent light source such as phosphor emission.

In the theoretical analysis of the colour speckle distribution, $S_{B,G,R}(\lambda)$ shall be given first. Then the target chromaticity point is determined. Next, the power ratio r_B, r_G, r_R shall be calculated to realize the target chromaticity. After that, the monochromatic speckles, $r_B E_B S_B(\lambda)$, $r_G E_G S_G(\lambda)$, $r_R E_R S_R(\lambda)$ are calculated by generating a random number using Formula (4) at the given C_s values for each B, G, R colour, which are denoted as $C_{s\text{-}B}$, $C_{s\text{-}G}$, $C_{s\text{-}R}$.

Repeating the above procedure, the colour speckle distribution x, y can be obtained in the CIE 1931 chromaticity diagram using Formula (6), or u', v' in the CIE 1976 chromaticity diagram using Formula (7).

If Y only is used, the distribution of the relative illuminance, luminance or luminous flux, as photometric speckle distribution, can be obtained.

5 Calculation methods of colour speckle

5.1 General

For the calculation of colour speckle, it is necessary to determine the following physical parameters on the imaging plane:

a) target chromaticity (determine),

b) spectra of light sources (assumed or measure),

c) spectral power ratio of the BGR outputs (calculated to realize the target chromaticity),

d) speckle contrast of the BGR outputs (assume or measure).

The flow charts of the calculation methods of colour speckle are illustrated in Figure 1.

Two calculation methods of colour speckle are given as follows.

1) Method superposing statistically-calculated spatial distribution of BGR monochromatic speckles using BGR speckle contrast values, $C_{s\text{-}B}$, $C_{s\text{-}G}$, $C_{s\text{-}R}$.

2) Method superposing the measured spatial distribution of BGR monochromatic speckles.

The above two methods theoretically reach the same results within the statistical errors based on the law of large numbers.

Documents
Document Sharing Hub

Full document details: BS IEC 62906-5-4:2018

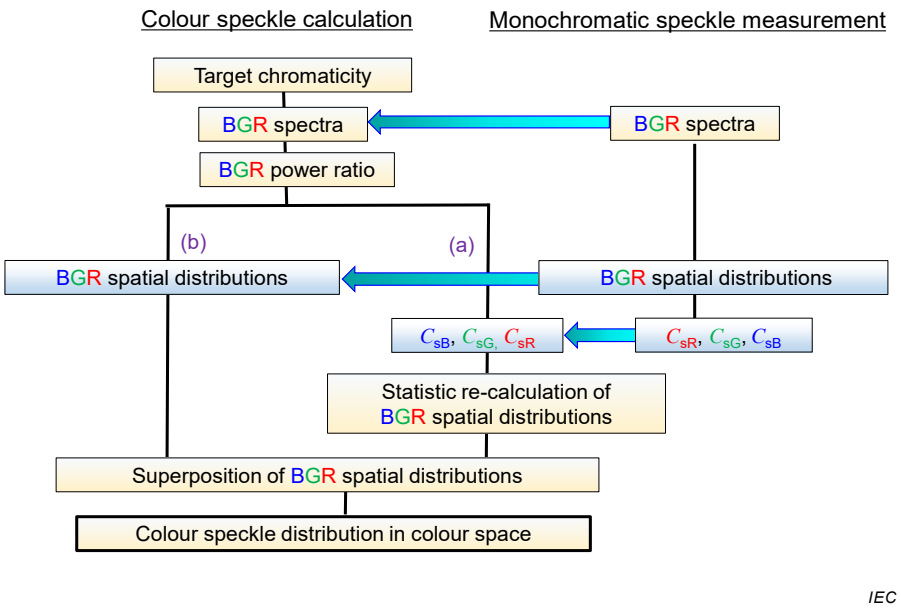

Figure 1 – Two speckle measuring methods and their flow charts

5.2 Measuring method of spectral behaviour of BGR light sources

The normalized spectral power distribution $S_{B,G,R}(\lambda)$ ($\int S_{B,G,R}(\lambda)\mathrm{d}\lambda = 1$) shall be obtained to calculate colour speckle distribution because it is necessary for calculating tristimulus values, X, Y, and Z, as in 4.2.

The spectral measurements should be carried out at the driving currents of the BGR LDs for the light output powers of each BGR LD realizing the target chromaticity of the measurement. This is because $S_{B,G,R}(\lambda)$ usually varies with the driving currents or modulation method of the LDs.

The spectral measurement of coherent light sources such as RGB LDs (laser diodes) of which linewidth is much narrower than LEDs requires an LMD with higher resolution of wavelength, such as a spectrometer, or a spectrum analyser (see IEC 62906-5-2:2016, 4.5.3; examples of LD spectra are shown in IEC 62906-5-2:2016, Annex A). The accuracy of $S_{B,G,R}(\lambda)$ measurement affects the calculation accuracy of colour gamut and/or chromaticity coordinates.

The spectral measurement of incoherent light sources with a broad spectrum can be carried out by the conventional methods.

If the LDD (DUT) uses BGR colour filters, $S_{B,G,R}(\lambda)$ shall be measured or calculated through the colour filters.

5.3 Target chromaticity

The target chromaticity shall be determined for the colour speckle measurement. The target chromaticity can be chosen at any point within the colour gamut created by the BGR spectral power distribution $S_{B,G,R}(\lambda)$. It should be chosen at a white point because it is easier to observe an effect of each of the BGR colours on colour speckle distribution.

It should be noted that the target chromaticity is theoretically equal to the average chromaticity of the colour speckle distribution.

Documents
Document Sharing Hub
Full document details: BS IEC 62906-5-4:2018

Figure 2 illustrates an example of the chromaticity diagram plotting the colour gamut triangle for BT.2020 (Recommendation ITU-R BT.2020-2 [6]). The target chromaticity, u' = 0,198, v' = 0,468 corresponds to the BT.2020 reference white point. The BGR points are plotted slightly inside the wavelength rim because $S_{B,G,R}(\lambda)$ is assumed to have a Lorentzian spectral profile with an FWHM of 2 nm as in Figure 3. This profile is approximately equal to actual high-power BGR LDs. It should be noted that the peak wavelengths are 449 nm, 520 nm, and 636 nm, which are not perfectly in accordance with BT.2020 parameter values. They are chosen for comparison with the measured results shown in 5.7, considering availability of LDs.

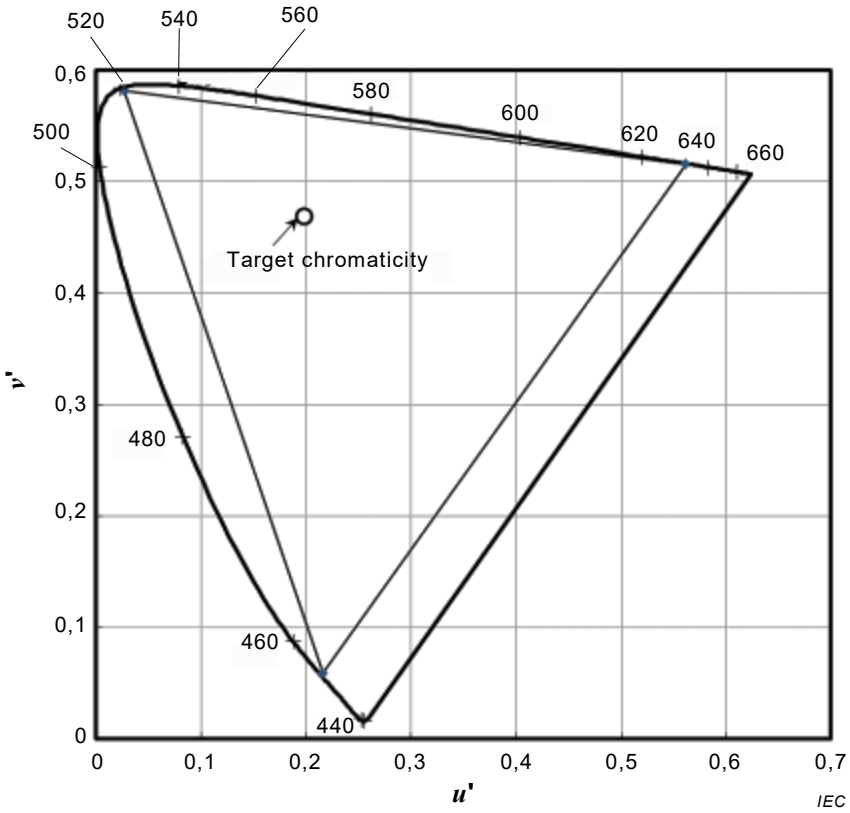

Figure 2 – Target chromaticity and colour gamut

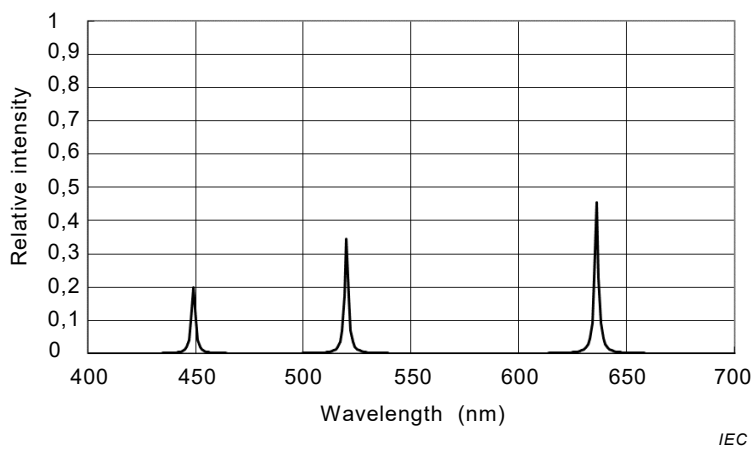

Figure 3 – $S_{B,G,R}(\lambda)$ with an FWHM of 2 nm

Documents
Document Sharing Hub
Full document details: BS IEC 62906-5-4:2018

5.4 Adjustment of BGR power ratio

The BGR power ratio on the projection screen, r_B, r_G, r_R, for the realization of the target chromaticity shall be determined as shown in 4.2. This is the method common to the conventional projector using incoherent BGR light sources. In actual measurements, the target chromaticity is adjusted by changing the BGR power ratio. For colour speckle measurements, it is approximately equal to the average chromaticity of colour speckle when the speckle data are statistically large enough.

An example of the methods for calculating r_B, r_G, r_R is shown below using Figure 4. This method has two steps, and considers the line segments from one primary colour point to the cross-point with the line connecting the other two primary colour points, including the target point. In Figure 4, the primary colour is green and denoted as the point G, the cross-point with the BR-segment is denoted as P, and the target point is W. The line segment from G to P on the BR segment is called the G-BR line.

– Step 1: Calculation of BR power ratio, r'_B, r'_R ($r'_B + r'_R = 1$)

  The BR power ratio, r'_B, r'_R is calculated on the BR line first. The point P is the tentative target chromaticity for obtaining r'_B, r'_R. It is obtained by changing either r'_B or r'_R linearly on the BR line.

– Step 2: Calculation of GP power ratio, r_G, r_P ($r_G + r_P = 1$)

  The GP power ratio, r_G, r_P is then calculated on the GP line. This time, the point W is the target chromaticity for obtaining r_G, r_P on the GP line. It is obtained similarly by changing either r_G or r_P linearly on the GP line. Using the result of step 1, the final BR power ratios r_B and r_R are obtained as, $r_B = r_P\, r'_B$ and $r_R = r_P\, r'_R$, respectively (r_B, r_G, $r_R = r_P\, r'_B$, r_G, $r_P\, r'_R$, $r_B + r_G + r_R = 1$).

The above method is applicable to the other line segment arrangements, such as the R-GB line, or the B-GR line.

As in Figure 4 the BGR power ratio for realizing the target chromaticity (the BT.2020 reference white) is calculated as r_B, r_G, r_R = 0,200: 0,345: 0,456 (see also Figure 3).

Documents
Document Sharing Hub
Full document details: BS IEC 62906-5-4:2018

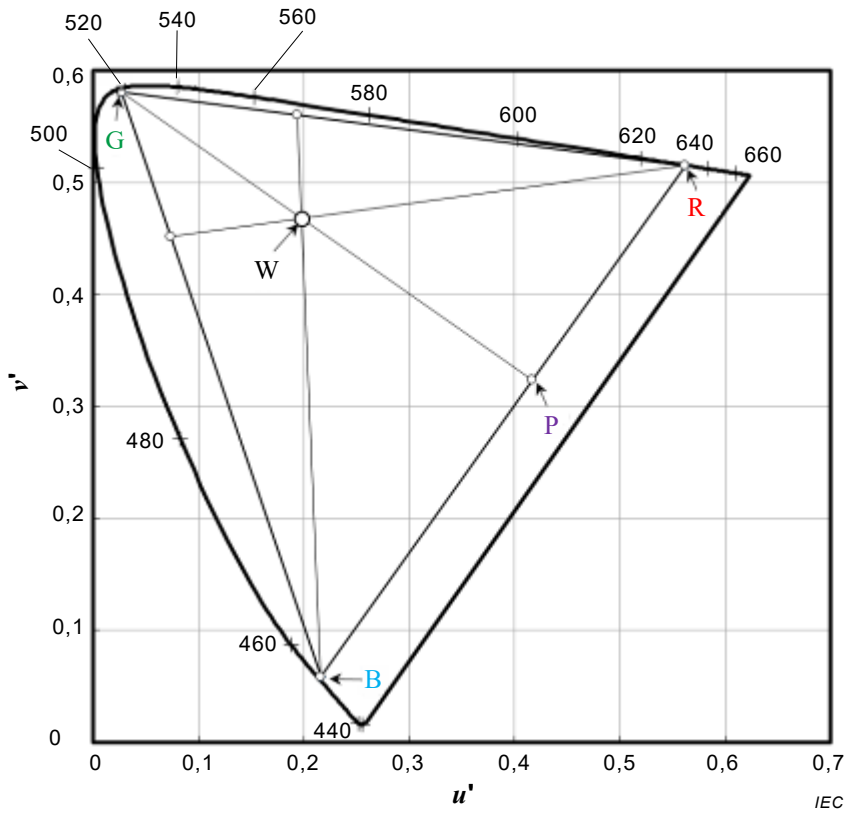

Figure 4 – Adjustment method of BGR power ratio

5.5 Calculation method (a) using BGR speckle contrast $C_{s\text{-}B}$, $C_{s\text{-}G}$, $C_{s\text{-}R}$

5.5.1 General

The colour speckle distribution can be calculated using the monochromatic speckle distributions for each colour $E_{B,G,R}$ as in Formulae (5) to (7) after determination of the normalized spectral power distribution $S_{B,G,R}(\lambda)$ and the BGR power ratio $r_{B,G,R}$.

The speckle generation is considered as a statistical process expressed as Formulae (1) to (4). Therefore, the monochromatic speckle distributions for each colour $E_{B,G,R}$ can be statistically calculated using Formula (4) if the BGR speckle contrast $C_{s\text{-}B}$, $C_{s\text{-}G}$, $C_{s\text{-}R}$ is known. Furthermore, $E_{B,G,R}$ can be obtained by generating a random number in the inverse function of Formula (4) at the given $C_{s\text{-}B}$, $C_{s\text{-}G}$, $C_{s\text{-}R}$ values. For example, as a popular and easy approach, common spreadsheets have a gamma distribution function “gamma.dist” and its inverse function “gamma.inv”. The random numbers can be generated using the function “rand()”. The cell for calculating $E_{B,G,R}$ is specified as: = GAMMA.INV(RAND(),B2,1)/B2. The value of $C_{s-B,G,R}^{-2}$ is stored in the cell B2.

Repeating the above procedure up to an appropriate data size, the colour speckle distribution in the CIE 1976 chromaticity diagram is obtained.

If the values of the BGR speckle contrast $C_{s\text{-}B}$, $C_{s\text{-}G}$, $C_{s\text{-}R}$ are assumed, the calculated results would be a kind of theoretical simulation which implies an ideal colour speckle distribution without any background effects under actual experiment conditions. However, if the measured values of the BGR speckle contrast $C_{s\text{-}B}$, $C_{s\text{-}G}$, $C_{s\text{-}R}$, are used, they are considered as measurement results which reflects the actual measurement conditions.

This method is practically useful when the LMD which is designed only for monochromatic speckles, or when only the measured data of the BGR speckle contrast $C_{s\text{-}B}$, $C_{s\text{-}G}$, $C_{s\text{-}R}$ are available.

AVA Documents
Document Sharing Hub