BS ISO 10300-1:2023

BSI Standards Publication

Calculation of load capacity of bevel gears

Part 1: Introduction and general influence factors

Documents
Document Sharing Hub

Full document details: BS ISO 10300-1:2023

National foreword

This British Standard is the UK implementation of ISO 10300-1:2023. It supersedes BS ISO 10300-1:2014, which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee MCE/5, Gears.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2023
Published by BSI Standards Limited 2023

ISBN 978 0 539 06452 0

ICS 21.200

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2023.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: BS ISO 10300-1:2023

INTERNATIONAL STANDARD

ISO 10300-1

Third edition
2023-08

Calculation of load capacity of bevel gears —

Part 1: Introduction and general influence factors

Calcul de la capacité de charge des engrenages coniques —
Partie 1: Introduction et facteurs généraux d'influence

Reference number
ISO 10300-1:2023(E)

Documents
Document Sharing Hub

© ISO 2023

Full document details: BS ISO 10300-1:2023

COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

© ISO 2023 – All rights reserved

Documents
Document Sharing Hub

Full document details: BS ISO 10300-1:2023

Contents

Page

Foreword ... **v**
Introduction ... **vii**
1 Scope ... **1**
2 Normative references ... **1**
3 Terms and definitions ... **2**
4 Symbols and general subscripts ... **2**
5 Application ... **6**
5.1 Calculation methods ... 6
5.1.1 General ... 6
5.1.2 Method A ... 6
5.1.3 Method B ... 6
5.1.4 Method C ... 6
5.2 Safety factors ... 7
5.3 Rating factors ... 7
5.3.1 Testing ... 7
5.3.2 Manufacturing tolerances ... 7
5.3.3 Implied accuracy ... 8
5.4 Further factors to be considered ... 8
5.4.1 General ... 8
5.4.2 Lubrication ... 8
5.4.3 Misalignment ... 8
5.4.4 Deflection ... 8
5.4.5 Materials and metallurgy ... 8
5.4.6 Residual stress ... 8
5.4.7 System dynamics ... 9
5.4.8 Contact pattern ... 9
5.4.9 Corrosion ... 9
5.5 Further influence factors in the basic formulae ... 9
6 External force and application factor, K_A ... **10**
6.1 Nominal tangential force, torque, power ... 10
6.2 Variable load conditions ... 10
6.3 Application factor, K_A ... 10
6.3.1 Application factor — General ... 10
6.3.2 Influences affecting external dynamic loads ... 11
6.3.3 Establishment of application factors ... 11
7 Dynamic factor, K_v ... **11**
7.1 General ... 11
7.2 Design ... 11
7.3 Manufacturing ... 12
7.4 Transmission error ... 12
7.5 Dynamic response ... 12
7.6 Resonance ... 13
7.6.1 General ... 13
7.6.2 Gear blank resonance ... 13
7.7 Calculation methods for K_v ... 13
7.7.1 General comments ... 13
7.7.2 Method A, $K_{v\text{-}A}$ ... 14
7.7.3 Method B, $K_{v\text{-}B}$ ... 14
7.7.4 Method C, $K_{v\text{-}C}$ ... 18
8 Face load factors, $K_{H\beta}$, $K_{F\beta}$ ... **20**
8.1 General comments ... 20

© ISO 2023 – All rights reserved

AVA Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

8.2 Method A ... 20
8.3 Method B ... 21
8.4 Method C ... 21
8.4.1 Face load factor, $K_{H\beta\text{-}C}$ ... 21
8.4.2 Local face load factor, $K_{H\beta,Y}$ ... 21
8.4.3 Face load factor, $K_{F\beta\text{-}C}$ ... 22
8.4.4 Lengthwise curvature factor for bending strength, K_{F0} ... 22

9 Transverse load factors, $K_{H\alpha}$, $K_{F\alpha}$ ... 23
9.1 General comments ... 23
9.2 Method A ... 24
9.3 Method B ... 24
9.3.1 Bevel gears having virtual cylindrical gears with contact ratio $\varepsilon_{v\gamma} \leq 2$ ... 24
9.3.2 Bevel gears having virtual cylindrical gears with contact ratio $\varepsilon_{v\gamma} > 2$ ... 24
9.4 Method C ... 25
9.4.1 General comments ... 25
9.4.2 Assumptions ... 25
9.4.3 Determination of the factors ... 25
9.5 Running-in allowance, y_α ... 25

Annex A (normative) **Calculation of virtual cylindrical gears — Method B1 ... 27**

Annex B (normative) **Calculation of virtual cylindrical gears — Method B2 ... 43**

Annex C (informative) **Values for application factor, K_A ... 49**

Annex D (informative) **Contact patterns ... 50**

Bibliography ... 54

© ISO 2023 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 60, *Gears*, Subcommittee SC 2, *Gear capacity calculation*.

This third edition cancels and replaces the second edition (ISO 10300-1:2014), which has been technically revised.

The main changes are as follows:

— Table 1 has been inserted in which only symbols and units used in this document are provided;

— Table 2 has been inserted;

— subclause 9.1 — boundary conditions for the calculation of the transverse load factors method B have been rearranged;

— Figure 3 — nomogram for the determination of the resonance speed, n_{E1}, for the mating solid steel pinion/solid wheel, with c_γ = 20 N/(mm · µm) (for bevel gears without offset only) has been removed;

— Figure 4 — dynamic factor, $K_{v\text{-}C}$, has been removed;

— Figure 5 — transverse load factors, $K_{H\alpha\text{-}B}$ and $K_{F\alpha\text{-}B}$ has been removed;

— Figure 6 — running-in allowance, y_α, of gear pairs with a tangential speed of v_{mt2} > 10 m/s has been removed;

— Figure 7 — running-in allowance, y_α, of gear pairs with a tangential speed of v_{mt2} ≤ 10 m/s has been removed;

— Figure A.6 — transverse path of contact has been newly inserted;

© ISO 2023 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

— Figure A.7 — general definition of length of contact lines for local geometry data has been newly inserted.

A list of all parts in the ISO 10300 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

© ISO 2023 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

Introduction

When ISO 10300:2001 (all parts) became due for its first revision, the opportunity was taken to include hypoid gears, since previously the series only allowed for calculating the load capacity of bevel gears without offset axes. The former structure is retained, i.e. three parts of the ISO 10300 series, together with ISO 6336-5, and it is intended to establish general principles and procedures for rating of bevel gears. Moreover, ISO 10300 (all parts) is designed to facilitate the application of future knowledge and developments, as well as the exchange of information gained from experience.

Several calculation methods, i.e. A, B and C, are specified, which stand for decreasing accuracy and reliability from A to C because of simplifications implemented in formulae and factors. The approximate methods in ISO 10300 (all parts) are used for preliminary estimates of gear capacity where the final details of the gear design are not yet known. More detailed methods are intended for the recalculation of the load capacity limits when all important gear data are given.

ISO 10300 (all parts) does not provide an upgraded calculation procedure as a method A, although it would be available, such as finite element or boundary element methods combined with sophisticated tooth contact analyses.

On the other hand, by means of such a computer program, a new calculation procedure for bevel and hypoid gears on the level of method B was developed and checked. It is part of the ISO 10300 series as submethod B1. Besides, if the hypoid offset, a, is zero, method B1 becomes identical to the set of proven formulae of the former version of ISO 10300:2001 (all parts).

In view of the decision for ISO 10300 (all parts) to cover hypoid gears also, Annex B has been included in this document. Additionally, ISO 10300-2 is supplemented by a separate clause: “Gear flank rating formulae — Method B2”; as for ISO 10300-3, the former method B2, which uses the Lewis parabola to determine the critical section in the root and not the 30° tangent at the tooth fillet as method B1 does, is now extended by the AGMA methods for rating the strength of bevel gears and hypoid gears. It was necessary to present a new, clearer structure of the three parts, which is illustrated in Figure 1.

NOTE ISO 10300 (all parts) gives no preferences in terms of when to use method B1 and when to use method B2.

The procedures covered by ISO 10300 (all parts) are based on both testing and theoretical studies.

ISO 10300 (all parts) provides calculation procedures by which different gear designs can be compared. It is not meant to ensure the performance of assembled gear drive systems. It is intended for use by the experienced gear designer capable of selecting reasonable values for the factors in these formulae, based on knowledge of similar designs and on awareness of the effects of the items discussed.

NOTE Contrary to cylindrical gears, where the contact is usually linear, bevel gears are generally manufactured with profile and lengthwise crowning, i.e. the tooth flanks are curved on all sides and the contact develops an elliptical pressure surface. This is taken into consideration when determining the load factors by the fact that the rectangular zone of action (in the case of spur and helical gears) is replaced by an inscribed parallelogram for method B1 and an inscribed ellipse for method B2 (see Annex A for method B1 and Annex B for method B2). The conditions for bevel gears, different from cylindrical gears in their contact, are thus taken into consideration by the face and transverse load distribution factors.

© ISO 2023 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

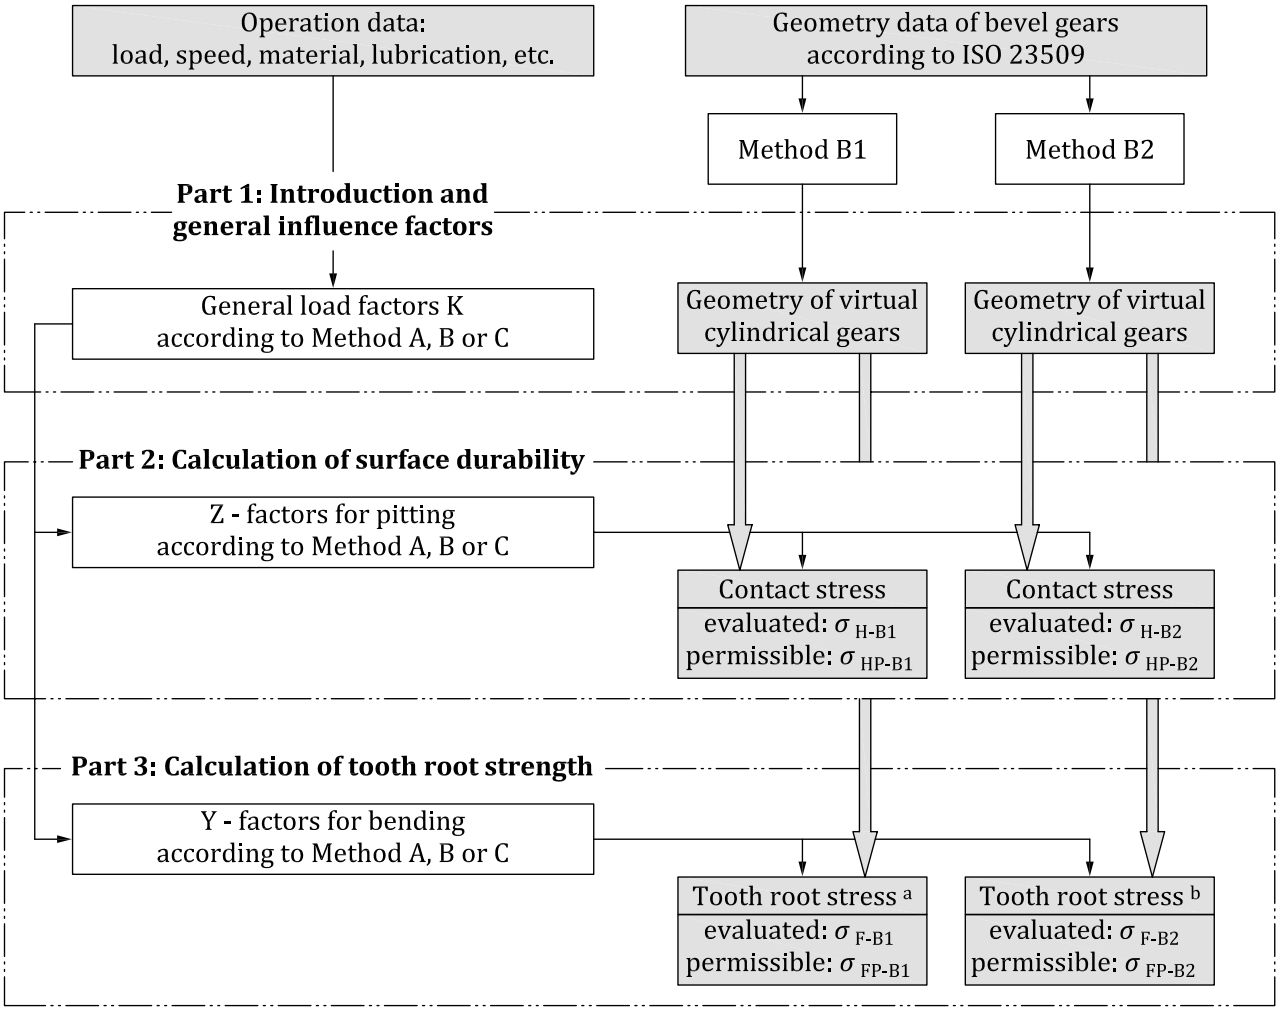

a One set of formulae for both, bevel and hypoid gears.

b Separate sets of formulae for bevel and for hypoid gears.

Figure 1 — Structure of calculation methods in ISO 10300 (all parts)

© ISO 2023 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

Calculation of load capacity of bevel gears —

Part 1: Introduction and general influence factors

1 Scope

This document specifies the methods of calculation of the load capacity of bevel gears, the formulae and symbols used for calculation, and the general factors influencing load conditions.

The formulae in this document are intended to establish uniformly acceptable methods for calculating the load-carrying capacity of straight, helical (skew), spiral bevel, Zerol and hypoid gears. They are applicable equally to tapered depth and uniform depth teeth. Hereinafter, the term "bevel gear" refers to all of the gear types; if not, the specific forms are identified.

The formulae in this document take into account the known major factors influencing load-carrying capacity. The rating formulae are only applicable to types of gear tooth deterioration, that are specifically addressed in the individual parts of the ISO 10300 series. Rating systems for a particular type of bevel gears can be established by selecting proper values for the factors used in the general formulae.

NOTE This document is not applicable to bevel gears which have an inadequate contact pattern under load (see Annex D).

The rating system of this document is based on virtual cylindrical gears and restricted to bevel gears whose virtual cylindrical gears have transverse contact ratios of $\varepsilon_{v\alpha} < 2$. Additionally, for bevel gears the sum of profile shift coefficients of pinion and wheel is zero (see ISO 23509).

The user is cautioned that when the formulae are used for large average mean spiral angles $(\beta_{m1} + \beta_{m2})/2 > 45°$, for effective pressure angles $\alpha_e > 30°$ and/or for large facewidths $b > 13\ m_{mn}$, the calculated results of this document should be confirmed by experience.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 701, *International gear notation — Symbols for geometrical data*

ISO 1122-1, *Vocabulary of gear terms — Part 1: Definitions related to geometry*

ISO 6336-5, *Calculation of load capacity of spur and helical gears — Part 5: Strength and quality of materials*

ISO 6336-6, *Calculation of load capacity of spur and helical gears — Part 6: Calculation of service life under variable load*

ISO 10300-2, *Calculation of load capacity of bevel gears — Part 2: Calculation of surface durability (macropitting)*

ISO 10300-3, *Calculation of load capacity of bevel gears — Part 3: Calculation of tooth root strength*

ISO 17485, *Bevel gears — ISO system of accuracy*

© ISO 2023 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

ISO 23509:2016, *Bevel and hypoid gear geometry*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1122-1 and ISO 23509 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at https://www.electropedia.org/

4 Symbols and general subscripts

For the purposes of this document, the symbols given in ISO 701, ISO 17485, ISO 23509, and the following shall apply. See Tables 1 and 2.

Table 1 — Symbols

Symbol	Description or term	Unit
A	Auxiliary factor for calculating the dynamic factor $K_{v\text{-}C}$	—
A^*	Related area for calculating the load sharing factor Z_{LS}	mm
a	Hypoid offset	mm
a_{rel}	Relative hypoid offset	—
a_v	Centre distance of virtual cylindrical gear pair	mm
a_{vn}	Relative centre distance of virtual cylindrical gear pair in normal section	—
B	Accuracy grade according to ISO 17485	—
b	Facewidth	mm
b_{ce}	Calculated effective facewidth	mm
b_{eff}	Effective facewidth (e.g. measured length of contact pattern)	mm
b_v	Facewidth of virtual cylindrical gears	mm
$b_{v,eff}$	Effective facewidth of virtual cylindrical gears	mm
$b_{v,rel}$	Relative facewidth of virtual cylindrical gear	—
C_F	Correction factor of tooth stiffness for non-average conditions	—
C_{lb}	Correction factor for the length of contact lines	—
c_v	Empirical parameter to determine the dynamic factor	—
c_γ	Mean value of mesh stiffness per unit facewidth	N/(mm·µm)
$c_{\gamma 0}$	Mesh stiffness for average conditions	N/(mm·µm)
c'	Single stiffness	N/(mm·µm)
c_0'	Single stiffness for average conditions	N/(mm·µm)
d_e	Outer pitch diameter	mm
d_m	Mean pitch diameter	mm
d_T	Tolerance diameter according to ISO 17485	mm
d_v	Reference diameter of virtual cylindrical gear	mm
d_{va}	Tip diameter of virtual cylindrical gear	mm
d_{van}	Tip diameter of virtual cylindrical gear in normal section	mm
d_{vb}	Base diameter of virtual cylindrical gear	mm
d_{vbn}	Base diameter of virtual cylindrical gear in normal section	mm
d_{vf}	Root diameter of virtual cylindrical gear	mm
d_{vn}	Reference diameter of virtual cylindrical gear in normal section	mm

© ISO 2023 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

Table 1 *(continued)*

Symbol	Description or term	Unit
E	Modulus of elasticity, Young's modulus	N/mm^2
e_{LS}	Exponent for the load distribution along the lines of contact	—
F_{mt}	Nominal tangential force at mid-facewidth of the reference cone	N
F_{mtH}	Determinant tangential force at mid-facewidth of the reference cone	N
F_{vmt}	Nominal tangential force of virtual cylindrical gears	N
f	Distance from the centre of the zone of action to a contact line	mm
f_m	Distance of the middle contact line in the zone of action	mm
$f_{m,Y}$	Distance of the middle contact line in the zone of action for a contact point Y	mm
f_{max}	Maximum distance to middle contact line	mm
f_{maxB}	Maximum distance to middle contact line at right side of contact pattern	mm
f_{max0}	Maximum distance to middle contact line at left side of contact pattern	mm
f_{pt}	Single pitch deviation	µm
$f_{p,eff}$	Effective pitch deviation	µm
f_r	Distance of the root contact line in the zone of action	mm
$f_{r,Y}$	Distance of the root contact line in the zone of action for a contact point Y	mm
f_t	Distance of the tip contact line in the zone of action	mm
$f_{t,Y}$	Distance of the tip contact line in the zone of action for a contact point Y	mm
g_{va}	Length of path of contact	mm
$g_{v\alpha}$	Length of path of contact of virtual cylindrical gear in transverse section	mm
$g_{v\alpha n}$	Relative length of action in normal section	—
$g_{v\alpha na}$	Relative length of action from pinion tip to pitch circle in the normal section	—
$g_{v\alpha nr}$	Relative length of action from wheel tip to pitch circle in the normal section	—
g_η	Relative length of action within the contact ellipse	—
h_{am}	Mean addendum	mm
h_{fm}	Mean dedendum	mm
h_{vfm}	Relative mean virtual dedendum	—
i	Run variable	—
K	Constant; factor for calculating the dynamic factor $K_{v\text{-}B}$	—
K_v	Dynamic factor	—
K_v^*	Preliminary dynamic factor for non-hypoid gears	—
K_A	Application factor	—
K_{F0}	Lengthwise curvature factor for bending stress	—
$K_{F\alpha}$	Transverse load factor for bending stress	—
$K_{F\beta}$	Face load factor for bending stress	—
$K_{H\alpha}$	Transverse load factor for contact stress	—
$K_{H\alpha}^*$	Preliminary transverse load factor for contact stress for non-hypoid gears	—
$K_{H\beta}$	Face load factor for contact stress	—
$K_{H\beta\text{-be}}$	Mounting factor	—
k_S	Correction factor	—
k'	Contact shift factor	—
l_b	Length of contact line (method B1)	mm
l_{b0}	Theoretical length of contact line	mm
m_{et}	Outer transverse module	mm
m_{mn}	Mean normal module	mm

© ISO 2023 – All rights reserved

AVA Documents Document Sharing Hub
Full document details: BS ISO 10300-1:2023

Table 1 *(continued)*

Symbol	Description or term	Unit
m_{red}	Mass per unit facewidth reduced to the line of action of dynamically equivalent cylindrical gear pairs	kg/mm
m_{vt}	Transverse module	mm
m^*	Relative individual gear mass per unit facewidth referred to line of action	kg/mm
N	Reference speed related to resonance speed n_{E1}	—
n	Rotational speed	min^{-1}
n_{E1}	Resonance speed of pinion	min^{-1}
P	Nominal power	kW
p	Peak load	N/mm
p^*	Relative peak load for calculating the load sharing factor (method B1)	—
p_{mn}	Relative mean normal pitch	—
p_{vet}	Transverse base pitch of virtual cylindrical gear (method B1)	mm
q	Exponent in the Formula for lengthwise curvature factor	—
R_m	Mean cone distance	mm
R_{mpt}	Relative mean back cone distance	—
r_{c0}	Cutter radius	mm
r_{va}	Relative mean virtual tip radius	—
r_{vbn}	Relative mean virtual base radius	—
r_{vn}	Relative mean virtual pitch radius	—
s_{mn}	Mean normal circular thickness	mm
s_{vmn}	Relative virtual tooth thickness	—
$T_{1,2}$	Nominal torque of pinion and wheel	Nm
u	Gear ratio of bevel gear	—
u_v	Gear ratio of virtual cylindrical gear	—
v_{et}	Tangential speed at outer end (heel) of the reference cone	m/s
$v_{et,max}$	Maximum pitch line velocity at operating pitch diameter	m/s
v_{mt}	Tangential speed at mid-facewidth of the reference cone	m/s
X_Y	Curvature factor	—
x	Coordinates of the ends of the contact line	mm
Y_{FS}	Combined tooth form factor for generated gears	—
Y_{LS}	Load sharing factor (bending)	—
y_p	Running-in allowance for pitch deviation related to the polished test piece	µm
y_α	Running-in allowance for pitch deviation	µm
Z_{LS}	Load sharing factor (method B1)	—
z	Number of teeth	—
z_v	Number of teeth of virtual cylindrical gear	—
z_{vn}	Number of teeth of virtual cylindrical gear in normal section	—
z_Y	Auxiliary value	mm
z_0	Number of blade groups of the cutter	—
α_a	Adjusted pressure angle (method B2)	°
$\alpha_{eD,C}$	Effective pressure angle for drive side/coast side	°
α_{et}	Effective pressure angle in transverse section	°
α_{lim}	Limit pressure angle	°
$\alpha_{nD,C}$	Generated pressure angle for drive side/coast side	°

© ISO 2023 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

Table 1 *(continued)*

Symbol	Description or term	Unit
α_{vet}	Effective pressure angle of virtual cylindrical gears calculated for the active flank	°
β_B	Inclination angle of contact line	°
β_m	Mean spiral angle	°
β_v	Helix angle of virtual gear (method B1), virtual spiral angle (method B2)	°
β_{vb}	Helix angle at base circle of virtual cylindrical gear	°
γ	Auxiliary angle for length of contact line calculation (method B1)	°
γ'	Projected auxiliary angle for length of contact line	°
δ	Pitch angle of bevel gear	°
δ_a	Face angle	°
δ_f	Root angle	°
ε_N	Load sharing ratio for bending (method B2)	—
$\varepsilon_{v\alpha}$	Transverse contact ratio of virtual cylindrical gears	—
$\varepsilon_{v\alpha n}$	Transverse contact ratio of virtual cylindrical gears in normal section	—
$\varepsilon_{v\beta}$	Face contact ratio of virtual cylindrical gears	—
$\varepsilon_{v\gamma}$	Virtual contact ratio (method B1), modified contact ratio (method B2)	—
η	Auxiliary angle	°
ζ_R	Pinion offset angle in root plane	°
ζ_m	Pinion offset angle in axial plane	°
ζ_{mp}	Pinion offset angle in pitch plane	°
θ_{v2}	Angular pitch of virtual cylindrical wheel	rad
ϑ_{mp}	Auxiliary angle for virtual facewidth (method B1)	°
λ	Adjustment angle for contact angle of hypoid gears (method B2)	°
λ_r	Adjustment angle for virtual spiral angle of hypoid gears (method B2)	°
ρ	Density of gear material	kg/mm^3
ρ_{a0}	Cutter edge radius	mm
$\rho_{m\beta}$	Lengthwise tooth mean radius of curvature	mm
ρ_{rel}	Local equivalent radius of curvature vertical to the contact line	mm
ρ_t	Relative radius of profile curvature between pinion and wheel (method B2)	—
ρ_{va0}	Relative edge radius of tool	—
ρ'	Slip layer thickness	mm
$\sigma_{H,lim}$	Allowable stress number for contact stress	N/mm^2
ν_0	Lead angle of face hobbing cutter	°
φ	Auxiliary angle to determine the position of the pitch point	°
ω	Angular velocity	rad/s
Σ	Shaft angle	°

© ISO 2023 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

Table 2 — General subscripts

Subscripts	Description
0	Tool
1	Pinion
2	Wheel
A, B, B1, B2, C	Value according to method A, B, B1, B2 or C
D	Drive flank
C	Coast flank
T	Relative to standardized test gear dimensions
(1), (2)	Trials of interpolation

5 Application

5.1 Calculation methods

5.1.1 General

ISO 10300 (all parts) provides the procedures to predict load capacity of bevel gears. The most valid method is full-scale and full-load testing of a specific gear set design. However, at the design stage or in certain fields of application, some calculation methods are needed to predict load capacity. Therefore, methods A, B and C are used in this document, while method A, if its accuracy and reliability are proven, is preferred over method B, which in turn is preferred over method C.

ISO 10300 (all parts) allows the use of mixed factor rating methods within method B1 or method B2. For example, method B for dynamic factor $K_{\text{v-B}}$ may be used with method C face load factor $K_{\text{H}\beta\text{-C}}$.

For the calculation of the virtual cylindrical gear geometry, Annex A shall apply for method B1 and Annex B shall apply for method B2.

5.1.2 Method A

Where sufficient experience from the operation of other, similar designs is available, satisfactory guidance can be obtained by the extrapolation of the associated test results or field data. The factors involved in this extrapolation may be evaluated by the precise measurement and comprehensive mathematical analysis of the transmission system under consideration, or from field experience. All gear and load data shall be known for the use of this method, which shall be clearly described and presented with all mathematical and test premises, boundary conditions and any specific characteristics of the method that influence the result. The accuracy and the reliability of the method shall be demonstrated. Precision, for example, shall be demonstrated through comparison with other, acknowledged gear measurements. The method should be approved by both the customer and the supplier.

5.1.3 Method B

Method B provides the calculation formulae to predict load capacity of bevel gears for which the essential data are known. However, sufficient experience from the operation of other, similar designs is needed in the evaluation of certain factors even in this method. The validity of these evaluations for the given operating conditions shall be checked.

5.1.4 Method C

Where suitable test results or field experience from similar designs are unavailable for use in the evaluation of certain factors, a further simplified calculation method, method C, should be used.

© ISO 2023 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

5.2 Safety factors

The allowable probability of failure shall be carefully weighed when choosing a safety factor, in balancing reliability against cost. If the performance of the gears can be accurately appraised by testing the unit itself under actual load conditions, lower safety factors are allowed. The safety factors shall be determined by dividing the calculated permissible stress by the specific evaluated operating stress.

In addition to this general requirement and the special requirements relating to surface durability (macropitting) and tooth root strength (see ISO 10300-2 and ISO 10300-3, respectively), safety factors shall be determined only after careful consideration of the reliability of the material data and of the load values used for calculation. The allowable stress numbers used for calculation are valid for a given probability of failure, or damage (the material values in ISO 6336-5, for example, are valid for a 1 % probability of damage), the risk of damage being reduced as the safety factors are increased, and vice versa. If loads, or the response of the system to vibration, are estimated rather than measured, a larger factor of safety should be used.

The following deviations shall also be taken into consideration in the determination of a safety factor:

— deviations in gear geometry due to manufacturing;

— deviations in alignment of gear members;

— variations in material due to process variations in chemistry, cleanliness and microstructure (material quality and heat treatment);

— variations in lubrication and its maintenance over the service life of the gears.

The appropriateness of the safety factors will thus depend on the reliability of the assumptions, such as those related to load, on which the calculations are based, as well as on the reliability required of the gears themselves, in respect of the possible consequences of any damage that can occur in the case of failure.

Supplied gears or assembled gear drives should have a minimum safety factor for contact stress $S_{H,min}$ of 1,0. The minimum bending stress value $S_{F,min}$ should be 1,3 for spiral bevel including hypoid gears, and 1,5 for straight bevel gears or those with $\beta_m \leq 5°$.

The minimum safety factors against macropitting damage and tooth breakage should be agreed between the supplier and customer.

5.3 Rating factors

5.3.1 Testing

The most effective overall approach to gear system performance management is through the full-scale, full-load testing of a proposed new design. Alternatively, where sufficient experience of similar designs exists and results are available, a satisfactory solution may be obtained through extrapolation from such data. On the other hand, where suitable test results or field data are not available, rating factor values should be chosen conservatively.

5.3.2 Manufacturing tolerances

Rating factors should be evaluated based on the acceptable quality limits of the expected variation of parts in the manufacturing process. The accuracy grade, B, shall be determined, preferably as specified in ISO 17485, e.g. single pitch deviation for calculating the dynamic factor $K_{v\text{-}B}$.

© ISO 2023 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

5.3.3 Implied accuracy

Where the empirical values for rating factors are given by curves, this document provides curve fitting equations to facilitate computer programming.

NOTE The constants and coefficients used in curve fitting often have significant digits in excess of those implied by the reliability of the empirical data.

5.4 Further factors to be considered

5.4.1 General

In addition to the factors considered that influence macropitting resistance and bending strength, other interrelated system factors can have an important effect on overall transmission performance. Their possible effect on the calculations should be considered.

5.4.2 Lubrication

The ratings determined by the formulae of ISO 10300-2 and ISO 10300-3 shall be valid only if the gear teeth are operated with a lubricant of proper viscosity and additive package for the load, speed and surface finish, and if there is a sufficient quantity of lubricant on the gear teeth and bearings to lubricate and maintain an acceptable operating temperature.

5.4.3 Misalignment

Many gear systems depend on external supports such as machinery foundations to maintain alignment of the gear mesh. If these supports are poorly designed, initially misaligned or become misaligned during operation due to elastic or thermal deflections or other influences, overall gear system performance will be adversely affected.

5.4.4 Deflection

Deflection of gear supporting housings, shafts and bearings due to external overhung, transverse and thrust loads affects tooth contact across the mesh. Since deflection varies with load, it is difficult to obtain good tooth contact at different loads. Generally, deflection due to external loads from driven and driving equipment reduces capacity, and this, as well as deflection caused by internal forces, should be taken into account when determining the actual gear tooth contact.

5.4.5 Materials and metallurgy

Most bevel gears are made from case-hardened steel. Allowable stress numbers for this and other materials shall be taken from gear tests, from special tests or, if the material is similar, from ISO 6336-5. Additionally, different modes of steel making and heat treatment are considered in ISO 6336-5. Hardness and tensile strength as well as the quality grade shall also be criteria for choosing permissible stress numbers.

NOTE Higher quality steel grades indicate higher allowable stress numbers, while lower quality grades indicate lower allowable stress numbers (see ISO 6336-5).

5.4.6 Residual stress

Any ferrous material having a case core relationship is likely to have residual stress. If properly managed, such stress will be compressive at the tooth surface, thereby enhancing the bending fatigue strength of the gear tooth. Shot peening, case carburizing and induction hardening, if properly performed, are common methods of inducing compressive pre-stress in the surface of the gear teeth. Improper grinding techniques after heat treatment can reduce the residual compressive stresses or even introduce residual tensile stresses in the root fillets of the teeth, thereby lowering the allowable stress numbers.

© ISO 2023 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

5.4.7 System dynamics

The method of analysis used in this document includes a dynamic factor, K_v, which derates the gears for increased loads caused by gear tooth inaccuracies. Generally speaking, this provides simplified values for easy application.

The dynamic response of the system results in additional gear tooth loads, due to the relative motions of the connected masses of the driver and the driven equipment. The application factor, K_A, is intended to account for the operating characteristics of the driving and driven equipment. It should be recognized, however, that if the operating roughness of the drive, gearbox or driven equipment causes excitation with a frequency that is near one of the system's major natural frequencies, resonant vibrations can cause severe overloads possibly several times higher than the nominal load. Therefore, where critical service applications are concerned, a vibration analysis of the complete system should be performed. This analysis shall comprise the total system, including driver, gearbox, driven equipment, couplings, mounting conditions and sources of excitation. Natural frequencies, mode shapes and the dynamic response amplitudes should be calculated.

5.4.8 Contact pattern

The teeth of most bevel gears are crowned in both their profile and lengthwise directions during the manufacturing process in order to allow for deflection of the shafts and mountings. This crowning results in a localized contact pattern during roll testing under light loads. Under design load, unless otherwise specified, the tooth contact pattern is spread over the tooth flank without concentrations of the pattern at the edges of either gear member.

The application of the rating formulae to bevel gears manufactured under conditions in which this process has not been carried out and which do not have an adequate contact pattern, can require modifications of the factors given in this document. Such gears are not covered by ISO 10300 (all parts).

NOTE The total load used for contact pattern analysis can include the effects of an application factor (see Annex D for a fuller explanation of tooth contact development).

5.4.9 Corrosion

Corrosion of the gear tooth surface can have a significant detrimental effect on the bending strength and macropitting resistance of the teeth. However, the quantification of the effect of corrosion on gear teeth is beyond the range of ISO 10300 (all parts).

5.5 Further influence factors in the basic formulae

The basic formulae presented in ISO 10300-2 and ISO 10300-3 include factors reflecting gear geometry or being established by convention, which shall be calculated in accordance with their formulae.

In the formulae in ISO 10300 (all parts), there are also factors that reflect the effects of variations in manufacturing and service conditions of the unit. These are known as influence factors because they account for a number of influences. Although treated as independent, they can nevertheless affect each other to an extent that is beyond evaluation. They include the load factors, K_A, K_v, $K_{H\beta}$, $K_{F\beta}$, $K_{H\alpha}$ and $K_{F\alpha}$, as well as those factors influencing permissible stresses.

There are various methods of calculation to determine the influence factors. These are qualified, as needed, by the addition of subscripts A to C to the symbols. Unless otherwise specified (for example in an application standard), the more accurate method should be used for important transmissions. Supplementary subscripts should be used whenever the method used for evaluation of a factor would not otherwise be readily identifiable.

For some applications, it can be necessary to choose between factors determined by using alternative methods (for example, alternatives for the determination of the dynamic factor or the transverse

© ISO 2023 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023

load factor). When reporting the calculation, the method used should be indicated by extending the subscript.

EXAMPLE $K_{v\text{-}C}$, $K_{H\alpha\text{-}B}$

6 External force and application factor, K_A

6.1 Nominal tangential force, torque, power

For the purposes of ISO 10300 (all parts), pinion torque is used in the basic stress calculation formulae. In order to determine the bending moment on the tooth, or the force on the tooth surface, the tangential force is calculated, at the reference cone at mid-facewidth, following Formulae (1) to (5):

Nominal tangential force of bevel gears, F_{mt}:

$$F_{mt1,2} = \frac{2000 \cdot T_{1,2}}{d_{m1,2}} \tag{1}$$

Nominal tangential force of virtual cylindrical gears, F_{vmt}:

$$F_{vmt} = F_{mt1} \cdot \frac{\cos\beta_v}{\cos\beta_{m1}} \tag{2}$$

Nominal torque of pinion and wheel, T:

$$T_{1,2} = \frac{F_{mt1,2} \cdot d_{m1,2}}{2000} = \frac{1000 \cdot P}{\omega_{1,2}} \approx \frac{9549 \cdot P}{n_{1,2}} \tag{3}$$

Nominal power, P:

$$P = \frac{F_{mt1,2} \cdot v_{mt1,2}}{1000} = \frac{T_{1,2} \cdot \omega_{1,2}}{1000} \approx \frac{T_{1,2} \cdot n_{1,2}}{9549} \tag{4}$$

Nominal tangential speed at mean point, v_{mt}:

$$v_{mt1,2} = \frac{d_{m1,2} \cdot \omega_{1,2}}{2000} \approx \frac{d_{m1,2} \cdot n_{1,2}}{19098} \tag{5}$$

6.2 Variable load conditions

If the load is not uniform, a careful analysis of the gear loads should be carried out, in which the external and internal factors are considered. All the different loads that occur during the anticipated life of the gears, and the duration of each load, should be determined. A method based on Miner's Rule (see ISO 6336-6) shall be used for determining the equivalent life of the gears for the torque spectrum.

6.3 Application factor, K_A

6.3.1 Application factor — General

In cases where no reliable experiences, or load spectra determined by practical measurement or comprehensive system analysis, are available, the calculation should use the nominal tangential force F_{mt} according to 6.1 and an application factor, K_A. This application factor makes allowance for any externally applied dynamic loads in excess of the nominal pinion torque, T_1.

© ISO 2023 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10300-1:2023