BRITISH STANDARD

BS ISO 10770-1:2009

Hydraulic fluid power — Electrically modulated hydraulic control valves

Part 1: Test methods for four-port directional flow-control valves

ICS 23.100.50

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

BSI British Standards
AVA Documents Document Sharing Hub

Full document details: BS ISO 10770-1:2009

National foreword

This British Standard is the UK implementation of ISO 10770-1:2009. It supersedes BS ISO 10770-1:1998 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee MCE/18/-/8, Product testing.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2009

© BSI 2009

ISBN 978 0 580 60277 1

Amendments/corrigenda issued since publication

Date	Comments

Documents
Document Sharing Hub

Full document details: BS ISO 10770-1:2009

INTERNATIONAL STANDARD

ISO 10770-1

Second edition
2009-10-01

Hydraulic fluid power — Electrically modulated hydraulic control valves —

Part 1: Test methods for four-port directional flow-control valves

Transmissions hydrauliques — Distributeurs hydrauliques à modulation électrique —

Partie 1: Méthodes d'essai pour distributeurs de commande de débit à quatre voies

Reference number
ISO 10770-1:2009(E)

Documents
Document Sharing Hub

© ISO 2009

Full document details: BS ISO 10770-1:2009

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

© ISO 2009 – All rights reserved

Documents
Document Sharing Hub

Full document details: BS ISO 10770-1:2009

Contents

Page

Foreword iv

Introduction v

1 Scope 1

2 Normative references 1

3 Terms, definitions, symbols and units 2
3.1 Terms and definitions 2
3.2 Symbols and units 2

4 Standard test conditions 3

5 Test installation 3

6 Accuracy 5
6.1 Instrument accuracy 5
6.2 Dynamic range 5

7 Electrical tests for valves without integrated electronics 5
7.1 General 5
7.2 Coil resistance 5
7.3 Coil inductance — Optional test 5
7.4 Insulation resistance 7

8 Performance tests 7
8.1 Steady state tests 7
8.2 Dynamic tests 24

9 Pressure impulse test 29

10 Presentation of results 30
10.1 General 30
10.2 Test reports 30

11 Identification statement (Reference to this part of ISO 10770) 31

Annex A (informative) **Testing guidance** 32

© ISO 2009 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10770-1:2009

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 10770-1 was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 8, *Product testing*.

This second edition cancels and replaces the first edition (ISO 10770-1:1998), which has been technically revised.

ISO 10770 consists of the following parts, under the general title *Hydraulic fluid power — Electrically modulated hydraulic control valves*:

— *Part 1: Test methods for four-port directional flow-control valves*

— *Part 2: Test methods for three-way directional flow control valves*

— *Part 3: Test methods for pressure control valves*

© ISO 2009 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10770-1:2009

Introduction

This part of ISO 10770 has been prepared with the intention of improving the uniformity of valve testing and hence the consistency of recorded valve performance data so that these data can be used for system design, regardless of the data source.

© ISO 2009 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10770-1:2009

Documents
Document Sharing Hub

Full document details: BS ISO 10770-1:2009

INTERNATIONAL STANDARD **ISO 10770-1:2009(E)**

Hydraulic fluid power — Electrically modulated hydraulic control valves —

Part 1:
Test methods for four-port directional flow-control valves

1 Scope

This part of ISO 10770 describes methods for determining the performance characteristics of electrically modulated, hydraulic, four-port directional flow-control valves. This type of electrohydraulic valve controls the direction and flow in a hydraulic system.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1219-1, *Fluid power systems and components — Graphic symbols and circuit diagrams — Part 1: Graphic symbols for conventional use and data-processing applications*

ISO 3448, *Industrial liquid lubricants — ISO viscosity classification*

ISO 4406, *Hydraulic fluid power — Fluids — Method for coding the level of contamination by solid particles*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 6743-4, *Lubricants, industrial oils and related products (class L) — Classification — Part 4: Family H (Hydraulic systems)*

ISO 9110-1, *Hydraulic fluid power — Measurement techniques — Part 1: General measurement principles*

ISO 10771-1, *Hydraulic fluid power — Fatigue pressure testing of metal pressure-containing envelopes — Part 1: Test methods*

IEC 60617-DB-12M, *Graphical symbols and diagrams*

© ISO 2009 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10770-1:2009

3 Terms, definitions, symbols and units

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598, together with the following, apply.

3.1.1
electrically modulated, hydraulic directional flow-control valve
valve that provides a degree of proportional flow control in response to a continuously variable electrical input signal

NOTE The flow direction can be changed by the input signal.

3.1.2
input signal deadband
portion of input signal that does not produce a controlled flow

3.1.3
threshold
change of input signal required to produce a reversal in continuous control valve output

NOTE The threshold is expressed as a percentage of rated signal.

3.1.4
rated input signal
that signal defined by the manufacturer to achieve rated output

3.2 Symbols and units

For the purposes of this document, the symbols given in Table 1 apply.

NOTE The graphic symbols in this part of ISO 10770 conform to ISO 1219-1 and IEC 60617-DB-12M.

Table 1 — Symbols and units

Parameter	Symbol	Unit
Inductance	L_c	H
Insulation resistance	R_i	Ω
Insulation test current	I_i	A
Insulation test voltage	U_i	V
Resistance	R_c	Ω
Dither amplitude	—	% (of max. input signal)
Dither frequency	—	Hz
Input signal	I, or U	A, or V
Rated input signal	I_n, or U_n	A, or V
Output flow	q	l/min
Rated flow	q_n	l/min
Flow gain	$K_v = (\Delta q/\Delta I)$, or $K_v = (\Delta q/\Delta U)$	l/min/A, or l/min/V
Hysteresis	—	% (of max. output signal)
Internal leakage	q_l	l/min
Supply pressure	p_P	MPa (bar)
Return pressure	p_T	MPa (bar)

© ISO 2009 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10770-1:2009

Table 1 (*continued*)

Parameter	Symbol	Unit
Load pressure	p_A or p_B	MPa (bar)
Load pressure difference	$p_L = p_A - p_B$, or $p_L = p_B - p_A$	MPa (bar)
Valve pressure drop	$p_V = p_P - p_T - p_L$	MPa (bar)
Rated valve pressure drop	p_n	MPa (bar)
Pressure gain	$K_p = (\Delta p_L / \Delta I)$, or $K_p = (\Delta p_L / \Delta U)$	MPa (bar)/A MPa (bar)/V
Threshold	—	% (of max. input signal)
Amplitude (ratio)	—	dB
Phase lag	—	°
Temperature	—	°C
Frequency	f	Hz
Time	t	s
Time constant	t_c	s
Linearity error	q_{err}	l/min

4 Standard test conditions

Unless otherwise specified, tests shall be carried out using the standard test conditions given in Table 2.

Table 2 — Standard test conditions

Parameter	Condition
Ambient temperature	20 °C ± 5 °C
Fluid cleanliness	Solid contaminant code number shall be stated in accordance with ISO 4406.
Fluid type	Commercially available mineral-based hydraulic fluid (i.e. L - HL in accordance with ISO 6743-4 or other fluid with which the valve is able to operate)
Fluid viscosity	32 cSt ± 8 cSt at valve inlet
Viscosity grade	Grade VG32 or VG46 in accordance with ISO 3448
Pressure drop	Test requirement ± 2,0 %
Return pressure	Shall conform to the manufacturer's recommendations

5 Test installation

A test installation conforming to the requirements of Figure 1 shall be used for testing all valves.

SAFETY PRECAUTIONS — It is essential that consideration be given to the safety of personnel and equipment during the tests.

Figure 1 shows the minimum items required to carry out the tests without any safety devices to protect against damage in the event of component failure. For tests using the test circuit shown in Figure 1, the following apply.

a) Guidance on carrying out the tests is given in Annex A.

b) A separate circuit may be constructed for each type of test. This can improve the accuracy of test results as it eliminates the possibility of leakage through the shut-off valves.

c) Hydraulic performance tests are carried out on a combination of valve and amplifier. Input signals are applied to the amplifier and not directly to the valve. For electrical tests, the signals are applied directly to the valve.

© ISO 2009 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10770-1:2009

d) If possible, hydraulic tests should be conducted using an amplifier recommended by the valve manufacturer. If not, the type of amplifier used should be recorded, with the operating details (i.e. pulse-width modulation frequency, dither frequency and amplitude).

e) The amplifier supply voltage and magnitude and sign of the voltage applied to the valve during the on and off periods of the pulse-width modulation should be recorded.

f) Electronic test equipment and transducers should have a bandwidth or natural frequency at least ten times greater than the maximum test frequency.

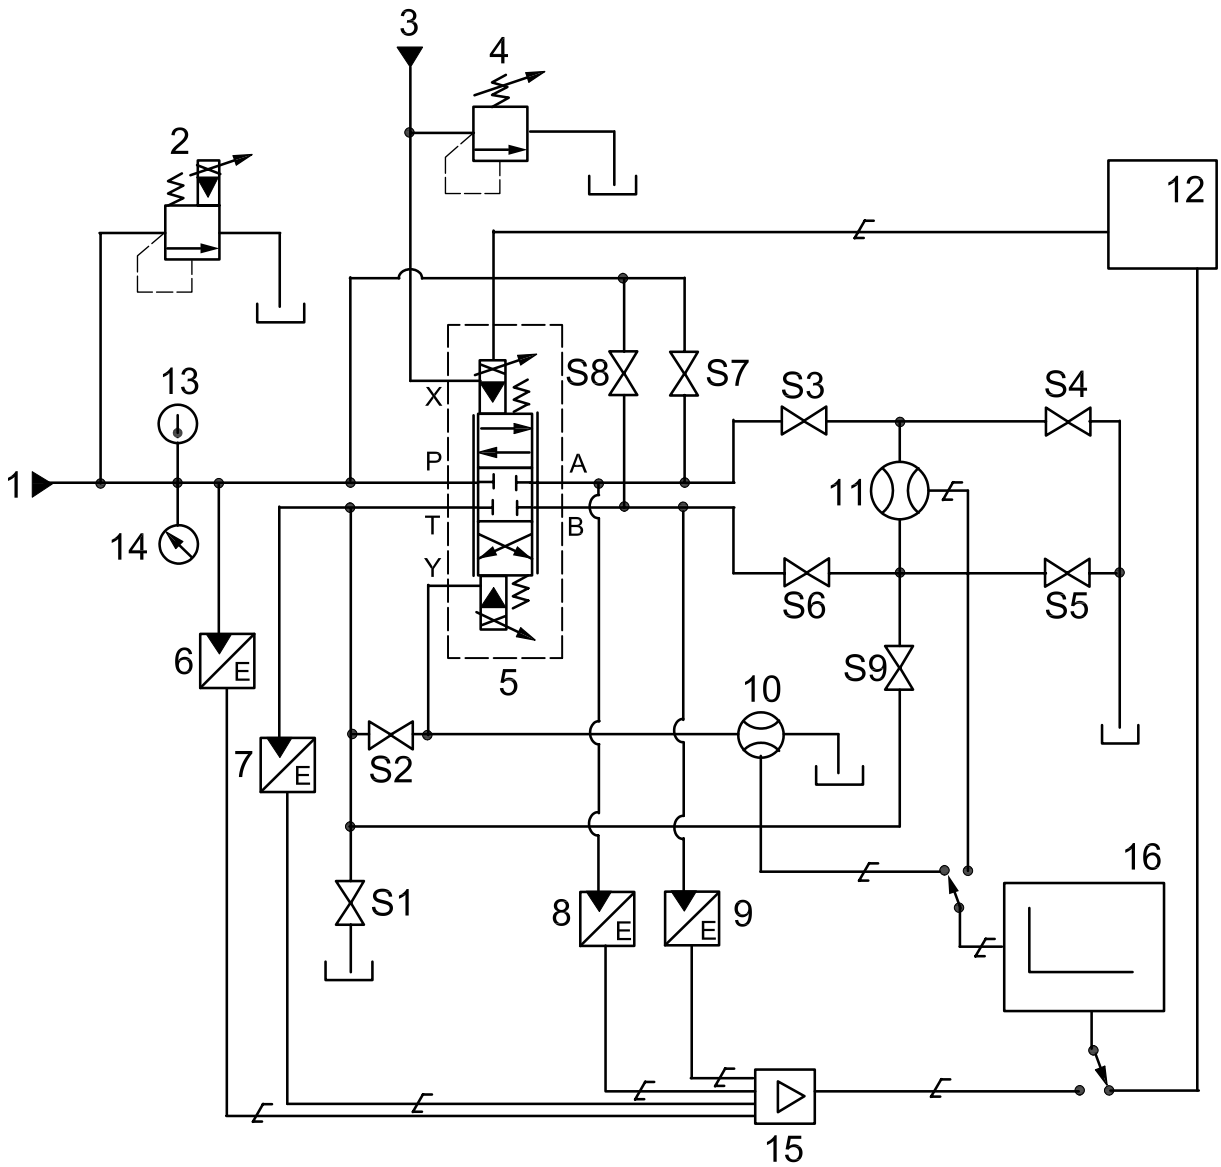

Key

1	main flow source	10, 11	flow transducer	S1 to S9	shut-off valves
2	main relief valve	12	signal generator	A, B	control ports
3	external pilot flow source	13	temperature indicator	P	supply port
4	external pilot relief valve	14	pressure gauge	T	return port
5	unit under test	15	signal conditioner	X	pilot supply port
6 to 9	pressure transducers	16	data acquisition	Y	pilot drain port

Figure 1 — Test circuit

© ISO 2009 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10770-1:2009

6 Accuracy

6.1 Instrument accuracy

Instrumentation shall be accurate to within the limits shown in Class B of ISO 9110-1:

a) electrical resistance: ± 2 % of the actual measurement;

b) pressure: ± 1 % of the valve's rated pressure drop to achieve rated flow;

c) temperature: ± 2 % of the ambient temperature;

d) flow: ± 2,5 % of the valve's rated flow;

e) input signal: ± 1,5 % of the electrical input signal required to achieve the rated flow.

6.2 Dynamic range

For the dynamic tests, ensure that the measuring equipment, amplifiers and recording devices do not generate any damping, attenuation or phase shift of the output signal being recorded that can affect the measured value by more than 1 % of the measured value.

7 Electrical tests for valves without integrated electronics

7.1 General

As appropriate, perform the tests described in 7.2 to 7.4 on all valves without integrated electronics before proceeding to subsequent tests.

NOTE Tests 7.2 to 7.4 apply only to current-driven valves.

7.2 Coil resistance

7.2.1 Coil resistance — Cold

Carry out the test as follows.

a) Soak the complete, un-energized valve at the specified ambient temperature for at least 2 h.

b) Measure and record the electrical resistance between the two leads or terminals of each coil in the valve.

7.2.2 Coil resistance — Hot

Carry out the test as follows.

a) Soak the complete, energized valve, mounted on a subplate recommended by the manufacturer, at its maximum rated temperature and operate the complete valve, fully energized and without flow, until the coil temperature stabilizes.

b) Measure and record the electrical resistance between the two leads or terminals of each coil in the valve. The resistance value shall be measured within 1 s of removing the supply voltage.

7.3 Coil inductance — Optional test

This test method shall not be construed to determine a definitive value of inductance. The value obtained shall be used for comparison purposes only.

Documents
Document Sharing Hub

© ISO 2009 – All rights reserved

Full document details: BS ISO 10770-1:2009

Carry out the test as follows.

a) Connect the coil to a constant voltage supply capable of delivering at least the rated current of the coil.

b) The armature shall be held stationary at 50 % of its working stroke during the test.

c) Monitor the coil current on an oscilloscope or similar equipment.

d) Adjust the voltage so that the steady-state current equals the rated current of the coil.

e) Switch the voltage off then on and record the current transient behaviour.

f) Determine the time constant, t_c, of the coil (see Figure 2) and calculate the inductance, L_c, using Equation (1):

$$L_c = R_c t_c \tag{1}$$

where R_c is the coil resistance in ohms.

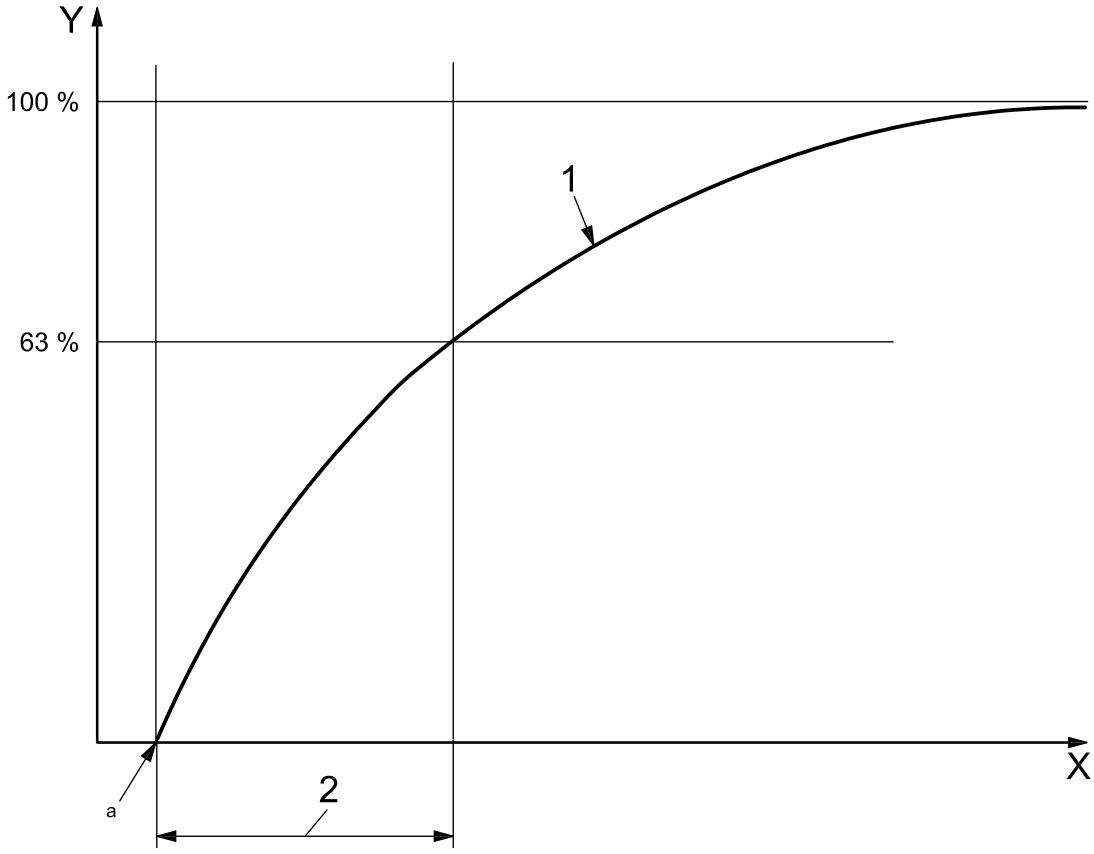

Key

X time
Y current

1 DC current trace
2 time constant, t_c

a Initiation.

Figure 2 — Coil inductance measurement

© ISO 2009 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10770-1:2009