BS ISO 10924-2:2014

BSI Standards Publication

Road vehicles — Circuit breakers

Part 2: User's guide

bsi.

...making excellence a habit.™

Document Sharing Hub

Full document details: BS ISO 10924-2:2014

National foreword

This British Standard is the UK implementation of ISO 10924-2:2014.

The UK participation in its preparation was entrusted to Technical Committee AUE/16, Electrical and electronic equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014. Published by BSI Standards Limited 2014

ISBN 978 0 580 69311 3

ICS 43.040.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 28 February 2014.

Amendments issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: BS ISO 10924-2:2014

INTERNATIONAL STANDARD

ISO 10924-2

First edition
2014-02-15

Road vehicles — Circuit breakers —

Part 2: User's guide

Véhicules routiers — Coupe-circuits —

Partie 2: Guide de l'utilisateur

Reference number
ISO 10924-2:2014(E)

Documents
Document Sharing Hub
© ISO 2014

Full document details: BS ISO 10924-2:2014

COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

© ISO 2014 – All rights reserved

Documents
Document Sharing Hub

Full document details: BS ISO 10924-2:2014

Contents

Page

Foreword ..... **iv**
1 Scope **1**
2 Normative references **1**
3 Terms and definitions **1**
4 General **1**
4.1 Circuit breaker nominal voltage 2
4.2 Supply voltage maximum (U_{smax}) 2
4.3 Rated current (I_R) and continuous current 2
5 Current and conductors (cables) **3**
6 Current and contact resistance **4**
7 Current and ambient temperature **4**
8 Cable protection: temperature versus current characteristics **5**
9 Selectivity **7**
10 Replacement of circuit breakers **8**
11 Voltage peaks during opening of circuit breakers **8**
12 Inrush withstand characteristics of circuit breakers **8**
13 Electromagnetic compatibility (EMC) **9**
Annex A (informative) **Selection procedure for circuit breakers and cables** **10**
Annex B (informative) **Selection of circuit breakers** **24**
Annex C (informative) **Ambient temperature influence** **25**

© ISO 2014 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10924-2:2014

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information/TC 22, *Road vehicles*, Subcommittee SC 3, *Electric and electronic equipment*.

ISO 10924 consists of the following parts, under the general title *Road vehicles — Circuit breakers*:

— *Part 1: Definitions and general test requirements*

— *Part 2: User's guide*

— *Part 4: Medium circuit breakers with tabs (Blade type), Form CB15*

The following parts are under preparation:

— *Part 3: Miniature circuit breakers*

— *Part 5: Circuit breakers with tabs with rated voltage of 450 V*

© ISO 2014 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10924-2:2014

INTERNATIONAL STANDARD ISO 10924-2:2014(E)

Road vehicles — Circuit breakers —

Part 2:
User's guide

1 Scope

This part of ISO 10924 gives guidance for the choice and application of automotive circuit breakers. It describes the various parameters which have to be taken into account when selecting circuit breakers.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8820-1, *Road vehicles — Fuse-links — Part 1: Definitions and general test requirements*

ISO 10924-1, *Road vehicles — Circuit breakers — Part 1: Definitions and general test requirements*

ISO 16750-1, *Road vehicles — Environmental conditions and testing for electrical and electronic equipment — Part 1: General*

ISO 16750-2, *Road vehicles — Environmental conditions and testing for electrical and electronic equipment — Part 2: Electrical loads*

3 Terms and definitions

For the purposes of this document, the terms and definitions in ISO 8820-1 and ISO 10924-1 and the following apply.

4 General

The various parts of ISO 10924 define basic requirements and test methods for nominal voltage, rated current, I_R, and time/current characteristics to give comparable and reproducible results of circuit breakers.

In practice, however, there are other parameters to be considered for the correct selection of circuit breakers in road vehicles, such as

— continuous current,

— operating time,

— overload protection of one or more electrical/electronic devices,

— connection resistance,

— types of cables, e.g. different cross section, length, insulation, bundling,

— internal resistances (voltage drop) of the circuit breakers, contacts, cables, and devices,

— power dissipation of the components comprising the system,

© ISO 2014 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10924-2:2014

— short-circuit parameters,

— inrush parameters of devices,

— operating mode of the load,

— operating of one or more electrical/electronic devices,

— orientation and location of the circuit breakers, e.g. engine, passenger or luggage compartment,

— different currents, voltages, and temperatures of the system and surroundings,

— distances or clearances inside circuit breaker boxes or holders,

— different circuit breakers, circuit breaker holders and boxes (see Annex B),

— environmental conditions (mechanical loads, climatically loads, chemical loads), and

— forced cooling of the circuit breakers.

NOTE Users are advised to consult the manufacturers of circuit-breaker, contacts and cables, because not all of the above points can be addressed in this guide.

The parameters listed are not intended to cover all the possible parameters that need to be taken into consideration for circuit breaker selection nor is it intended that all parameters will need to be considered in each vehicle applications.

4.1 Circuit breaker nominal voltage

See ISO 16750-1

4.2 Supply voltage maximum (U_{smax})

See ISO 16750-2

4.3 Rated current (I_R) and continuous current

The rated current (I_R) is the current used for identifying the circuit breaker.

The continuous current (I_C) in Figure 1 is the maximum current which the circuit can continuously carry under specified conditions: ambient temperature (23 °C), duration maximum 1 h, standard test holder, cross sections of wires. The continuous current can be lower than the rated current, I_R.

See A.2.2.3

© ISO 2014 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10924-2:2014

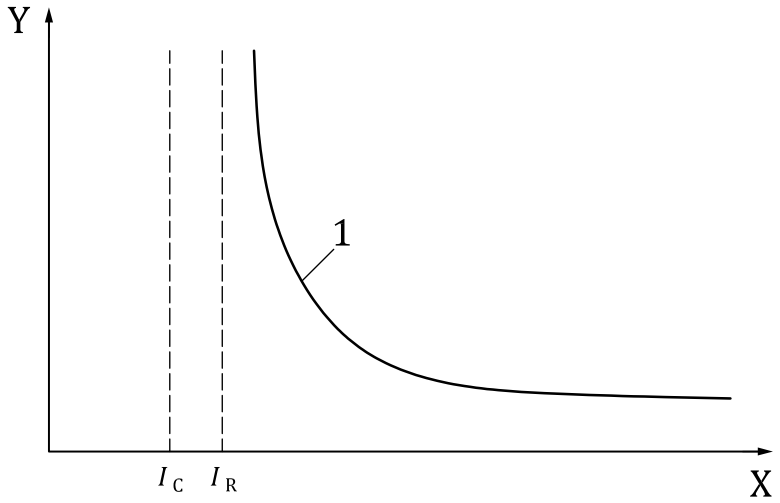

Key

X current, I

Y operating time, t

I_C continuous current

I_R rated current

Figure 1 — Rated current (I_R), continuous current, and time-current characteristic

5 Current and conductors (cables)

The temperature rise of a cable is a function of current, conductor cross-section, strands, insolating materials time duration, and ambient temperature.

See A.2.2.4

Figure 2 shows stabilized temperature rise for various conductor cross sections at *RT*.

© ISO 2014 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10924-2:2014

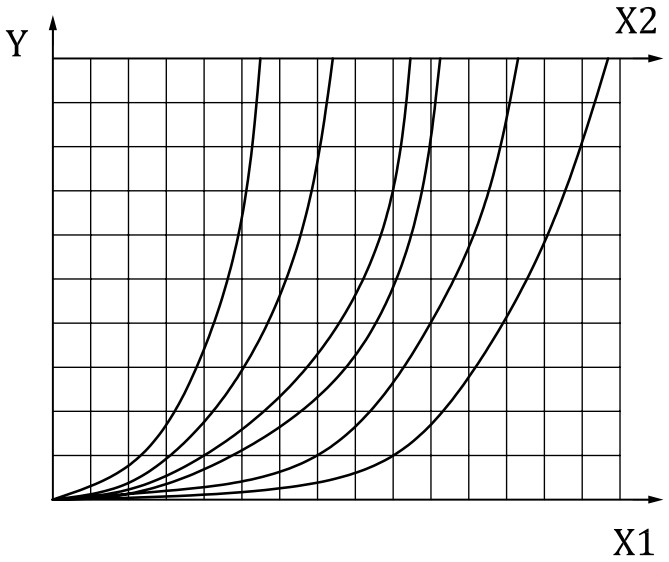

Key

X1 current, *I*

X2 conductor cross section

Y conductor temperature, *T*

Figure 2 — Conductor temperatures for different conductor cross sections vs. current at *RT*

6 Current and contact resistance

A higher resistance of mated terminals will result in a temperature rise and reduced thermal conduction away from the circuit breaker. Hence, the temperature of the circuit breaker terminal will be higher and the continuous current for the application lower.

A temperature rise test can be conducted using circuit breakers, circuit breaker holders and connections as specified by the vehicle manufacturer. At a specified test current, the temperature of the connections shall be measured at the points, either tabs or bolt connection of the circuit breaker that protrude from the base of the circuit breaker body (specified in the appropriate part of the ISO 10924 according to the type of the circuit breaker). After thermal equilibrium has been achieved, the temperature rise of the connection shall not exceed the limits specified for terminals and cable.

7 Current and ambient temperature

All components of a circuit and their parts have their own characteristic curve as shown in Figure 3.

Each component in a circuit has an upper temperature limit. An increase of temperature results in increased resistance, which can increase the temperature by itself. As a result, the circuit breaker can trip. It is always recommended to consult with specific manufacturers of circuit breakers for current versus temperature curves as both design and thermal materials used result in different curve characteristics.

See A.2.2.4 and Annex C

© ISO 2014 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 10924-2:2014

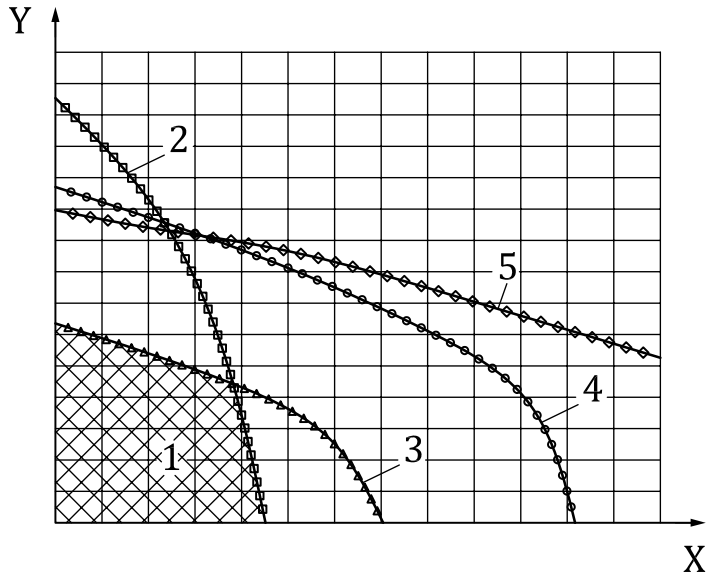

Key

X ambient temperature, T

Y current, I

1 application area

2 cable

3 connection

4 insulator

5 circuit breaker

Figure 3 — Maximum continuous currents of circuit components vs. ambient temperature

8 Cable protection: temperature versus current characteristics

To ensure satisfactory cable protection, circuit breakers shall be chosen such that they will always open before the maximum allowed cable temperature, $T_{max,}$ exceeds. Figure 4 shows the correct circuit breaker selection. The maximum allowed temperature never exceeds, because above a certain minimal operating current (I_f), the circuit breaker will trip before the maximum permitted temperature of the cable exceeds.

See Annex A

© ISO 2014 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 10924-2:2014