

# Road vehicles — Airbag components —

## Part 3: Testing of inflator assemblies

ICS 43.040.80

# National foreword

This British Standard reproduces verbatim ISO 12097-3:2002 and implements it as the UK national standard.

The UK participation in its preparation was entrusted to Technical Committee AUE/7, Automobile Occupant Restraint Systems, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

## Cross-references

The British Standards which implement international publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

**Compliance with a British Standard does not of itself confer immunity from legal obligations.**

## Summary of pages

This document comprises a front cover, an inside front cover, the ISO title page, pages ii to iv, pages 1 to 26, an inside back cover and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 27 May 2003

© BSI 27 May 2003

ISBN 0 580 41932 0

## Amendments issued since publication

| Amd. No. | Date | Comments |
|----------|------|----------|
|          |      |          |
|          |      |          |
|          |      |          |
|          |      |          |
|          |      |          |

# INTERNATIONAL STANDARD

**ISO**  
**12097-3**

First edition  
2002-06-15

---

---

## Road vehicles — Airbag components — Part 3: Testing of inflator assemblies

*Véhicules routiers — Composants des sacs gonflables —  
Partie 3: Essais des générateurs de gaz*



Reference number  
ISO 12097-3:2002(E)



# Contents

Page

|                                                                               |    |
|-------------------------------------------------------------------------------|----|
| Foreword.....                                                                 | iv |
| 1 Scope .....                                                                 | 1  |
| 2 Normative references .....                                                  | 1  |
| 3 Terms and definitions .....                                                 | 1  |
| 4 General requirements.....                                                   | 1  |
| 5 General test conditions.....                                                | 2  |
| 5.1 Purpose of environmental testing .....                                    | 2  |
| 5.2 Test sequence.....                                                        | 3  |
| 5.3 Measurements and test report .....                                        | 4  |
| 5.4 Test programme.....                                                       | 4  |
| 6 Environmental testing .....                                                 | 5  |
| 6.1 General.....                                                              | 5  |
| 6.2 Drop test .....                                                           | 5  |
| 6.3 Mechanical impact test .....                                              | 6  |
| 6.4 Vacuum test .....                                                         | 9  |
| 6.5 Simultaneous vibration and temperature test .....                         | 10 |
| 6.6 Thermal humidity cycling .....                                            | 12 |
| 7 Performance testing .....                                                   | 14 |
| 7.1 Electrostatic discharge (ESD) test.....                                   | 14 |
| 7.2 Electromagnetic compatibility (EMC) test.....                             | 17 |
| 7.3 Tank test .....                                                           | 18 |
| 7.4 Bonfire test.....                                                         | 20 |
| 7.5 Trigger device testing .....                                              | 22 |
| 7.6 Burst test .....                                                          | 22 |
| Annex A (normative) Definition of temperature build-up time, $t_e$ .....      | 23 |
| Annex B (informative) Survey of origin of environmental test procedures ..... | 25 |
| Bibliography .....                                                            | 26 |

## **Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 12097 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 12097-3 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 12, *Passive safety crash protection systems*.

ISO 12097 consists of the following parts, under the general title *Road vehicles — Airbag components*:

- *Part 1: Vocabulary*
- *Part 2: Testing of airbag modules*
- *Part 3: Testing of inflator assemblies*

Annex A forms a normative part of this part of ISO 12097. Annex B is for information only.

# Road vehicles — Airbag components —

## Part 3: Testing of inflator assemblies

**CAUTION** — There is a possibility of accidental firing of the airbag during any of the tests described in this part of ISO 12097. Appropriate precautions should therefore be taken both in terms of handling the inflator assembly and in terms of the design of test equipment.

### 1 Scope

This part of ISO 12097 establishes uniform test methods and specifies environmental procedures and requirements for the inflator assemblies of airbag modules in road vehicles.

**NOTE** For testing of the inflator assembly as part of the airbag module, see ISO 12097-2.

### 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 12097. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 12097 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 12097-1, *Road vehicles — Airbag components — Part 1: Vocabulary*

ISO 6487, *Road vehicles — Measurement techniques in impact tests — Instrumentation*

ISO 11452 (all parts), *Road vehicles — Component test methods for electrical disturbances from narrowband radiated electromagnetic energy*

IEC 60068-2, *Environmental testing — Part 2: Tests*

### 3 Terms and definitions

For the purposes of this part of ISO 12097, the terms and definitions given in ISO 12097-1 and the following, apply.

#### 3.1

##### **trigger device**

device that activates the inflator assembly (IA)

### 4 General requirements

The IA shall be designed such that, when handled appropriately, no dangers arise for persons or objects. The IA manufacturer shall produce and make available appropriate handling instructions.

The gas concentrations and the amount of particles measured immediately after the ignition of an IA (or complete module) shall not occur in concentrations that, with the current state of knowledge, can be considered as toxic to humans within 30 min of exposure in an enclosed room having a volume of 2,5 m<sup>3</sup>.

The gas and particulates arising from the ignition of an IA (or complete module) shall not have a strong irritating effect on a person.

The IA, complete with squib, if applicable, shall not be ignited by electromagnetic coupling or interference voltages.

## 5 General test conditions

### 5.1 Purpose of environmental testing

Environmental tests simulate the effects of environmental loads on the IA with respect to its

- functional behaviour, and
- service life.

They are based on the typical life-cycle of an IA covering shipping, storage, mounting on the module, operation, maintenance and repair of the vehicle.

The complete environmental test programme is composed of individual test methods which simulate automobile-related influences such as mechanical shocks and vibration, heat, cold and humidity.

Simulating the total service life may require more severe test levels than those seen in real world conditions to accelerate ageing and degradation processes.

The environmental test programme for IAs as specified in this part of ISO 12097 shall be a minimum requirement to ensure the verification of its environmental robustness.

Table 1 gives an overview of the complete test programme applied to three identical test samples.

Table 2 lists the performance tests which shall be applied to three exposed samples and nine (or ten, see 7.4.4) unexposed samples.

The supplementary performance tests given in Table 3 shall be performed on the trigger device and the IA housing.

**Table 1 — Inflator assembly environmental test programme**

| Test sequence | Test                                    | Subclause | Sample number   |   |   |                   |   |   |   |   |   |    |    |    |    |
|---------------|-----------------------------------------|-----------|-----------------|---|---|-------------------|---|---|---|---|---|----|----|----|----|
|               |                                         |           | Exposed samples |   |   | Unexposed samples |   |   |   |   |   |    |    |    |    |
|               |                                         |           | 1               | 2 | 3 | 4                 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
| 1             | Drop test                               | 6.2       | X               | X | X |                   |   |   |   |   |   |    |    |    |    |
| 2             | Mechanical impact test                  | 6.3       | X               | X | X |                   |   |   |   |   |   |    |    |    |    |
| 3             | Vacuum test                             | 6.4       | X               | X | X |                   |   |   |   |   |   |    |    |    |    |
| 4             | Simultaneous vibration temperature test | 6.5       | X               | X | X |                   |   |   |   |   |   |    |    |    |    |
| 5             | Thermal humidity cycling                | 6.6       | X               | X | X |                   |   |   |   |   |   |    |    |    |    |

Table 2 — Performance test programme

| Test Sequence | Test                                                                                                                 | Subclause          | Sample number   |   |   |                   |   |   |   |   |   |     |    |    |    |
|---------------|----------------------------------------------------------------------------------------------------------------------|--------------------|-----------------|---|---|-------------------|---|---|---|---|---|-----|----|----|----|
|               |                                                                                                                      |                    | Exposed samples |   |   | Unexposed samples |   |   |   |   |   |     |    |    |    |
|               |                                                                                                                      |                    | 1               | 2 | 3 | 4                 | 5 | 6 | 7 | 8 | 9 | 10  | 11 | 12 | 13 |
| 1             | ESD test                                                                                                             | 7.1                |                 |   |   |                   |   |   | X | X | X |     |    |    |    |
| 2             | EMC test                                                                                                             | 7.2                |                 |   |   |                   |   |   |   |   |   |     | X  | X  | X  |
| 3             | Tank test at<br>— $(-35 \pm 2,5) ^\circ\text{C}$<br>— $(23 \pm 5) ^\circ\text{C}$<br>— $(85 \pm 2,5) ^\circ\text{C}$ | 7.3                | X               |   |   | X                 |   |   |   |   |   |     |    |    |    |
|               |                                                                                                                      |                    |                 | X |   |                   | X |   |   |   |   |     |    |    |    |
|               |                                                                                                                      |                    |                 |   | X |                   |   | X |   |   |   |     |    |    |    |
| 4             | Gas and solid analyses                                                                                               | 7.3.5.6<br>7.3.5.7 | x               | x | x | x                 | x | x |   |   |   |     |    |    |    |
| 5             | Bonfire test                                                                                                         | 7.4                |                 |   |   |                   |   |   | X | X | X | (X) |    |    |    |

Table 3 — Supplementary performance tests

| Test sequence | Test                   | Subclause |                        |
|---------------|------------------------|-----------|------------------------|
| 1             | Trigger device testing | 7.5       | Statistical procedures |
| 2             | Burst test             | 7.6       |                        |

## 5.2 Test sequence

The test purpose and sequence are based on life-cycle considerations and on possible failure mechanisms.

- The drop test and the mechanical impact test reflect handling, transportation and mounting conditions that occur mainly during an early stage of the life cycle.
- The vacuum test simulates transportation in partially pressurized aircraft and driving at high altitudes.
- The simultaneous vibration temperature test simulates the combined action of vibration and temperature that occurs during the life cycle in a vehicle. Dynamic loads during driving can be typically described as broadband random vibrations with increased vibration levels at several characteristic frequency ranges. Such loads may cause friction, abrasion, fatigue and other damaging effects. It is important to apply vibrations to the test sample at various temperatures, as many of the materials, especially polymers, vary their mechanical behaviour with temperature. A simultaneous vibration/temperature regime therefore simulates appropriately the real vehicle environment.
- The thermal humidity test simulates changing climatic influences with special emphasis on the penetration of water into the IA during periods when the IA temperature is below the dew point temperature of the surrounding air. This test can cause electrical failures as well as material swelling, shrinking and corrosion, and can also promote biodeterioration such as fouling.

### 5.3 Measurements and test report

The following items shall be measured and recorded on a data sheet before or during, or both before and during, each test of Table 1:

- test number, sample number, test temperature and date;
- visual inspection of the samples and, if necessary, photographic documentation;
- definition of the three main axes (see example in Figure 1);
- ambient temperature during test, in degrees Celsius (°C);
- squib resistance of the inflator assembly, if applicable.

All relevant observations and unusual events shall be noted and included in the test report.

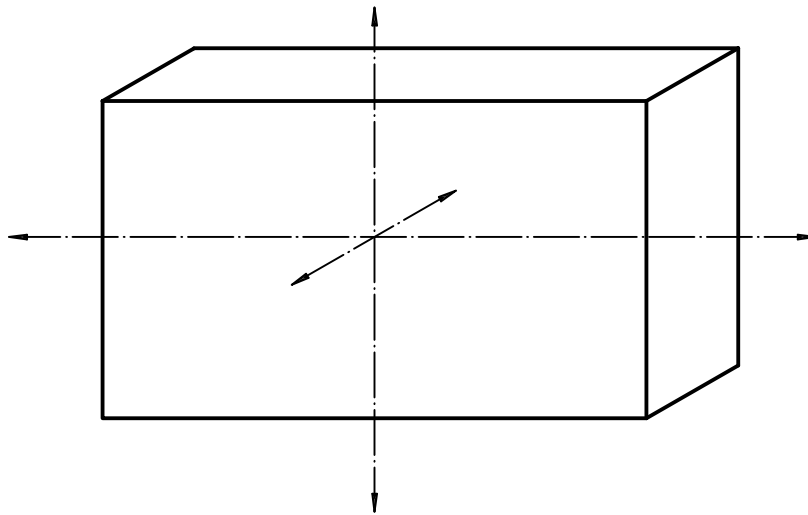


Figure 1 — Definition of IA main axes

### 5.4 Test programme

This part of ISO 12097 specifies a test programme with 12 identical samples of an inflator assembly (possibly 13 in the case of the bonfire test, see 7.4.3), numbered in accordance with Table 1 and Table 2:

- three IAs are subjected to the environmental test programme (multiple exposure);
- nine (or ten) IAs are unexposed samples.

The plug and the ignition cable shall be connected, if applicable; a test current (see Figure 2 for an example) shall be applied according to the system used (with the exception of the mechanical impact test, the drop test and the vacuum test). After each test, measure and record the squib resistance, where applicable.

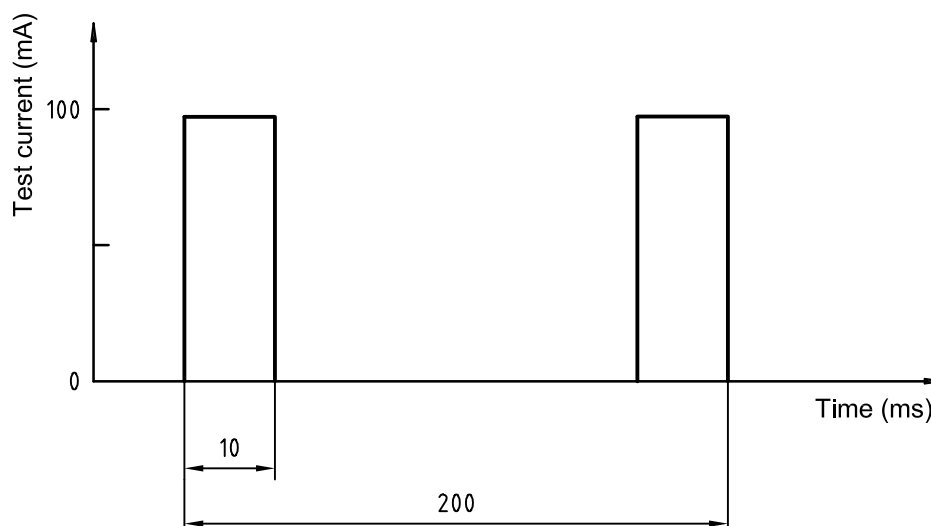


Figure 2 — Example of a test current for environmental simulation

## 6 Environmental testing

### 6.1 General

The following test procedures are based mainly on those of IEC 60068-2 (see the Bibliography). Certain modifications to that basic standard were adopted for this part of ISO 12097 in order to recognize vehicle-specific conditions.

### 6.2 Drop test

#### 6.2.1 Purpose

The purpose of this test is to determine whether the IA experiences any detrimental effect when dropped from a specified height and at specified orientations.

#### 6.2.2 Equipment

A steel impact plate of a minimum of 1 m × 1 m with at least 10 mm thickness, resting on a solid floor, with a fixture that supports the sample at the specified height, shall be used.

#### 6.2.3 Test samples

Three IAs shall be tested under the conditions specified in 6.2.4 and in accordance with Table 1.

#### 6.2.4 Test conditions

The drop height shall be  $1^{+0,2}_0$  m.

The ambient temperature shall be  $(23 \pm 5)$  °C.