BS ISO 12856-2:2020

BSI Standards Publication

Railway applications — Polymeric composite sleepers, bearers and transoms

Part 2: Product testing

Documents
Document Sharing Hub

Full document details: BS ISO 12856-2:2020

National foreword

This British Standard is the UK implementation of ISO 12856-2:2020.

The UK participation in its preparation was entrusted to Technical Committee RAE/2/-/10, Polymer Composite Sleepers & Bearers.

A list of organizations represented on this committee can be obtained on request to its committee manager.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2020
Published by BSI Standards Limited 2020

ISBN 978 0 539 00727 5

ICS 45.080; 83.140.99

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2020.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: BS ISO 12856-2:2020

INTERNATIONAL STANDARD

ISO 12856-2

First edition
2020-11

Railway applications — Polymeric composite sleepers, bearers and transoms —

Part 2: Product testing

Applications ferroviaires — Traverses et supports en matériaux composites à matrice polymère —

Partie 2: Essais de produit

Reference number
ISO 12856-2:2020(E)

Documents
Document Sharing Hub
© ISO 2020

Full document details: BS ISO 12856-2:2020

COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub

Full document details: BS ISO 12856-2:2020

Contents

Page

Foreword ... **iv**
Introduction ... **v**
1 Scope ... **1**
2 Normative references ... **1**
3 Terms and definitions ... **1**
4 Symbols and abbreviated terms ... **1**
5 Product characteristics ... **3**
5.1 General ... 3
5.2 Bending resistance ... 3
5.2.1 Test arrangements ... 3
5.2.2 Initial reference test loads ... 10
5.2.3 Test procedures at the centre section for the negative bending moments ... 10
5.2.4 Test procedures at the centre section for the positive bending moments ... 14
5.2.5 Test procedures at the rail seat ... 18
5.3 Tests with geometric ballast plate (GBP) or with flat plate (FP) at rail seat ... 21
5.3.1 Stiffness with GBP or with FP at rail seat ... 21
5.3.2 Compression test with GBP or with FP at rail seat ... 21
5.4 Thermal expansion ... 22
5.4.1 Principle ... 22
5.4.2 Apparatus ... 22
5.4.3 Procedure ... 23
5.5 Interface between the rail and the sleeper ... 24
5.5.1 Permanent deformation of screw/insert as a function of temperature ... 24
5.5.2 Fastening system ... 26
5.5.3 Electrical resistance ... 27
5.5.4 Screw, spike, cast-in and glued-in fastening components ... 27
5.6 Fire ... 27
5.7 System Test ... 27
Annex A (informative) **Geometric ballast plate (GBP)** ... **28**
Annex B (informative) **Test procedures for stiffness measurement of polymeric composite sleeper or bearer with GBP** ... **31**
Annex C (informative) **Test procedures for stiffness measurement of polymeric composite sleeper with flat plate (FP)** ... **38**
Annex D (informative) **System test** ... **39**
Bibliography ... **42**

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 12856-2:2020

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 269, *Railway applications*, Subcommittee SC 1, *Infrastructure*.

A list of all parts in the ISO 12856 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

© ISO 2020 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 12856-2:2020

Introduction

This document is used as the technical basis for transactions between corresponding parties (purchaser – supplier).

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 12856-2:2020

Documents
Document Sharing Hub

Railway applications — Polymeric composite sleepers, bearers and transoms —

Part 2: Product testing

1 Scope

This document specifies various test methods to ensure the performance of polymeric composite and reinforced polymeric composite sleepers, bearers and transoms for use in tracks. It is applicable to the sleepers, bearers and transoms to be installed in tracks with or without a ballast.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7500-1, *Metallic materials — Calibration and verification of static uniaxial testing machines — Part 1: Tension/compression testing machines — Calibration and verification of the force-measuring system*

ISO 12856-3:—[1], *Railway applications — Polymeric composite sleepers, bearers and transoms — Part 3: General requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 12856-3 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at http://www.electropedia.org/

4 Symbols and abbreviated terms

For the purposes of this document, the symbols and abbreviated terms listed in Table 1 apply.

Table 1 — Symbols

Symbol/ Abbreviated term	Description	Unit
C_{dyn}	low frequency dynamic bedding modulus of polymeric composite sleeper or bearer measured with GBP	N/mm^3
C_{max}	static bedding modulus of polymeric composite sleeper or bearer measured with geometric ballast plate (GBP)	N/mm^3
$d_{fat,lim}$	acceptable displacement of fatigue test as a maintenance policy	mm
d_{0c}	deformation of the sleeper in the compression test under F_{r0}	mm

1) Under preparation. Stage at the time of publication: ISO/DIS 12856-3:2020.

© ISO 2020 – All rights reserved

Documents Document Sharing Hub
Full document details: BS ISO 12856-2:2020

Table 1 *(continued)*

Symbol/ Abbreviated term	Description	Unit
d_{1c}	deformation of the sleeper in the compression test under $k_{1s} \times F_{r0}$	mm
$d_{1s,lim}$	upper limit deformation related to the exceptional test load	mm
d_{2c}	deformation of the sleeper in the compression test under $k_{2s} \times F_{r0}$	mm
$d_{2s,lim}$	upper limit deformation related to the accidental test load	mm
Δk_c	variation of static and dynamic stiffness before and after the fatigue test at the centre section for positive bending moments	MN/m
$\Delta k_{c,n}$	variation of static and dynamic stiffness before and after the fatigue test at the centre section for negative bending moments	MN/m
Δk_r	the variation of static and dynamic stiffness before and after the fatigue test at the rail seat	MN/m
e	design distance between the centre line of the rail seat to the longitudinal girders of bridge	m
E_S	thickness of ballast bed in a ballast box	mm
F_c	positive test load at the centre section of the sleeper	kN
F_{c0}	positive initial test load at the centre section of the sleeper	kN
$F_{c,n}$	negative test load at the centre section of the sleeper	kN
$F_{c,fat}$	positive fatigue test load at the centre section of the sleeper	kN
$F_{c,fat,n}$	negative fatigue test load at the centre section of the sleeper	kN
$F_{c,perm,n}$	constant load applied for permanent deformation test at the centre section for negative bending moments	kN
FP	flat plate	n/a
F_r	positive test load for the rail seat section	kN
F_{rB}	maximum positive test load at the rail seat section which cannot be increased	kN
$F_{r,fat}$	positive fatigue test load for the rail seat section	kN
F_{r0}	positive initial reference test load for the rail seat section	kN
GBP	geometric ballast plate	n/a
$k_{c,dyn1}$	low frequency dynamic stiffness on 10 cycles under applying a cyclic force of $F_{c,min}$ (= $0{,}1 \cdot F_{c0}$) to $F_{c,test1}$ (= $0{,}5 \cdot F_{c0}$) at (5 ±1) Hz for 1 000 cycles	MN/m
$k_{c,dyn2}$	Low frequency dynamic stiffness on 10 cycles under applying a cyclic force of $F_{c,min}$ (= $0{,}1 \cdot F_{c0}$) to $F_{c,test2}$ (= F_{c0}) at (5 ±1) Hz for 1 000 cycles	MN/m
$k_{c,n,stat1}$	static stiffness of the fifth loading at the centre section for negative bending loads between ($0.1 \cdot F_{c0,n}$) and ($0.5 \cdot F_{c0,n}$)	MN/m
$k_{c,n,stat2}$	static stiffness of the fifth loading at the centre section for negative bending loads between ($0.1 \cdot F_{c0,n}$) and $F_{c0,n}$	MN/m
k_{dyn}	low frequency dynamic stiffness of polymeric composite sleeper or bearer measured with GBP	MN/m
k_{max}	static stiffness of polymeric composite sleeper or bearer measured with GBP	MN/m
$k_{r,dyn1}$	low frequency dynamic stiffness on 10 cycles under applying a cyclic force of $F_{r,min}$ (= $0{,}1 \cdot F_{r0}$) to $F_{r,test1}$ (= $0{,}5 \cdot F_{r0}$) at (5 ±1) Hz for 1 000 cycles	MN/m
$k_{r,dyn2}$	low frequency dynamic stiffness on 10 cycles under applying a cyclic force of $F_{r,min}$ (= $0{,}1 \cdot F_{r0}$) to $F_{r,test2}$ (= F_{r0}) at (5 ±1) Hz for 1 000 cycles	MN/m
k_{1s}	load factor of exceptional test load level	n/a
k_{2s}	load factor of accidental test load level	n/a
k_3	static coefficient to be used for calculation of F_{rB} at the end of fatigue test and provided by the purchaser	n/a
L_B	shoulder length of ballast bed in a ballast box	mm

© ISO 2020 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 12856-2:2020

Table 1 *(continued)*

Symbol/ Abbreviated term	Description	Unit
L_c	design distance between centre lines of the rail seat	m
L_O	length measured on the opposite side of top of sleeper, bearer or transom for Thermal expansion test	m
L_p	design distance between the centre line of the rail seat to the edge of the sleeper at the bottom	m
L_r	design distance between the articulated supports centre lines for the test arrangement at the rail seat section	m
L_s	length between the supports on the longitudinal girders of the bridge	m
L_T	length measured on the top of the sleeper, bearer or transom for Thermal expansion test	m
$M_{k,b}$	characteristic bending moment for transom	kN.m
$M_{k,c,neg}$	negative characteristic bending moment at centre station	kN.m
$M_{k,c,pos}$	positive characteristic bending moment at centre station	kN.m
$M_{k,r,pos}$	positive characteristic bending moment at rail seat	kN.m
Q_{nom}	nominal wheel load (static wheel load)	kN

5 Product characteristics

5.1 General

This clause defines the testing regime and rules for the acceptance of polymeric composite sleepers, bearers and transoms.

The bending tests are defined for ballasted track. For ballastless track, the test arrangement shall be reviewed in order to adapt to the real configuration of the track.

5.2 Bending resistance

5.2.1 Test arrangements

5.2.1.1 Rail seat section for the positive load test for sleepers

The arrangement for the rail seat positive load test is shown in Figure 1; the value of L_r in relation to L_p is detailed in Table 2.

The load, F_r, is applied perpendicularly to the base of the sleeper.

The end of the sleeper opposite to the end being tested shall not be fixed.

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 12856-2:2020

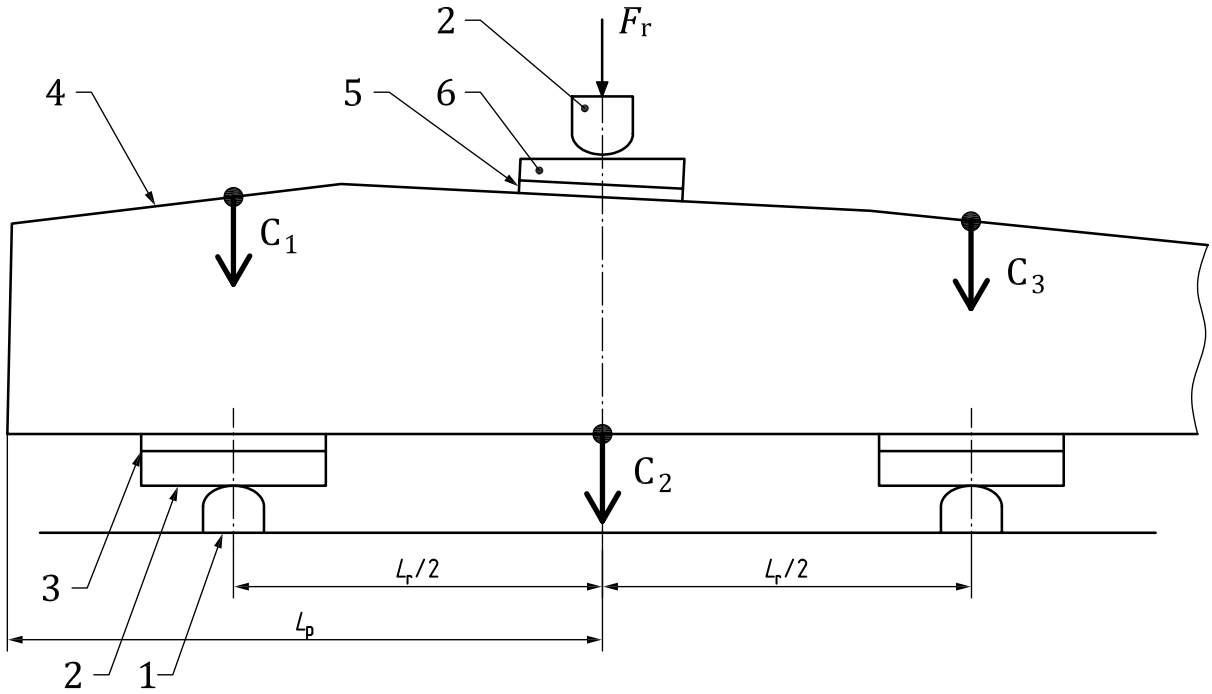

Key

1	rigid support
2	articulated support and steel plate (minimum length: bottom width of the sleeper at the rail seat +20 mm, width: 140 ± 1 mm, thickness: minimum 12 mm and minimum hardness Brinell: HBW > 240)
3	resilient pad (minimum length: bottom width of the sleeper at the rail seat + 20 mm, width: 140 + $^{+10}_{0}$ mm, thickness: 15 $^{+2}_{-3}$ mm and static bedding modulus: static secant bedding modulus measured between 0,3 MPa and 2 MPa: $1 \leq C \leq 4$ N/mm^3)
4	polymeric composite sleeper without the fastening system and with baseplate (if used)
5	standard rail pad as defined by the purchaser
6	steel tapered packing compensating the inclination of the rail seat (minimum length: length of the standard rail pad +20 mm, width: 140 ± 1 mm (this width can be reduced in line with the real width of the rail foot used in track), thickness: minimum 12 mm and minimum hardness Brinell: HBW > 240)
C_1, C_2 and C_3	locations of the vertical displacement measurement on the axis of the articulated support
F_r	positive test load for the rail seat section
L_r	design distance between the articulated supports centre lines for the test arrangement at the rail seat section
L_p	design distance between the centre line of the rail seat to the edge of the sleeper at the bottom

Figure 1 — Test arrangement at the rail seat section for the positive load test

The deformation, d, measured during the tests on the rail seat is calculated with Formula (1):

$$d = C_2 - \frac{C_1 + C_3}{2} \tag{1}$$

© ISO 2020 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 12856-2:2020

Table 2 — Value of L_r in relation to L_p

L_p m	L_r m
$L_p < 0{,}349$	0,3
$0{,}350 \leq L_p < 0{,}399$	0,4
$0{,}400 \leq L_p < 0{,}449$	0,5
$L_p \geq 0{,}450$	0,6

The displacement measuring instruments shall be capable of measuring the displacement within ±0,02 mm.

The force measuring instruments shall conform to ISO 7500-1, class 2, over the required range of force.

5.2.1.2 Centre section for the negative load test for sleepers

The arrangement for the negative centre load test is shown in Figure 2.

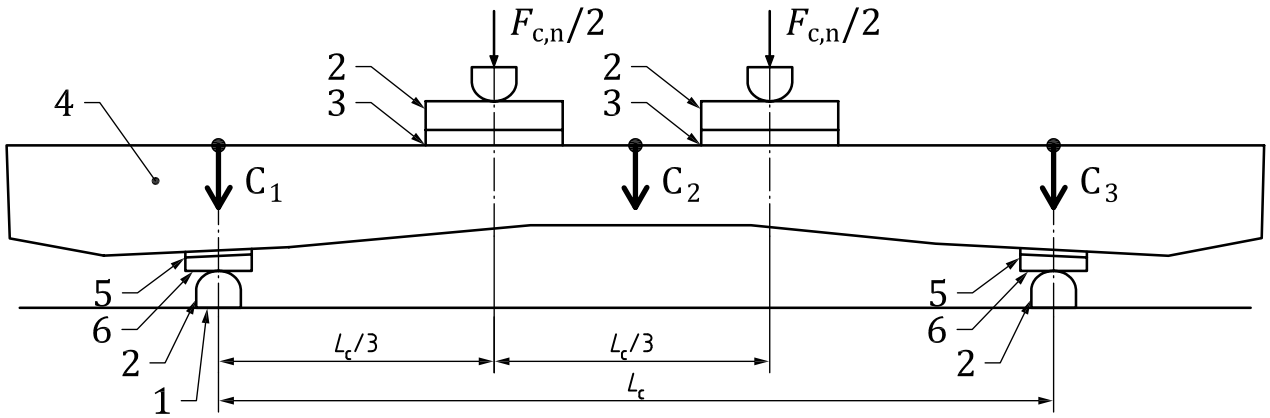

Key

1 rigid support

2 articulated support and steel plate (minimum length: bottom width of the sleeper at the rail seat +20 mm, width: 140 ± 1 mm, thickness: minimum 12 mm and minimum hardness Brinell: HBW > 240)

3 resilient pad (minimum length: bottom width of the sleeper at the rail seat + 20 mm, width: $140\ ^{+10}_{0}$ mm, thickness: $15\ ^{+2}_{-3}$ mm and static bedding modulus: static secant bedding modulus measured between 0,3 MPa and 2 MPa: $1 \leq C \leq 4$ N/mm^3)

4 polymeric composite sleeper with or without the fastening system and the baseplate (if used);

5 standard rail pad as defined by the purchaser

6 steel tapered packing compensated the inclination of the rail seat (minimum length: length of the standard rail pad +20 mm, width: 140 ± 1 mm [this width can be reduced in line with the real width of the rail foot used in track], thickness: minimum 12 mm and minimum hardness Brinell: HBW > 240)

C_1, C_2 and C_3 locations of the vertical displacement measurement on the axis of the articulated support of the rail seats and the centre of the sleeper

$F_{c,n}$ negative reference test load at the centre section of the sleeper

L_c design distance between centre lines of the rail seat

Figure 2 — Test arrangement at the centre section for the negative load test

The deformation, d, measured during the tests on the centre section for the negative load is calculated using Formula (1).

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 12856-2:2020

The displacement measuring instruments shall be capable of measuring the displacement within ±0,02 mm.

The force measuring instruments shall conform to ISO 7500-1, class 2, over the required range of force.

5.2.1.3 Centre section for the positive load test for sleepers

The test arrangement for the positive centre load test is shown in Figure 3.

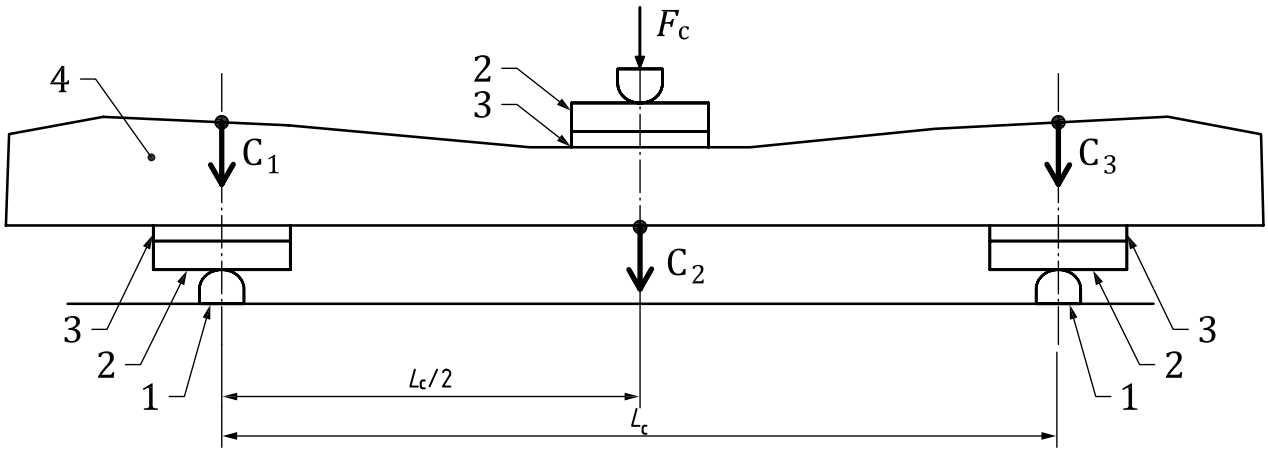

Key

1 rigid support

2 articulated support and steel plate (minimum length: bottom width of the sleeper at the rail seat +20 mm, width: 140 ± 1 mm, thickness: minimum 12 mm and minimum hardness Brinell: HBW > 240)

3 resilient pad (minimum length: bottom width of the sleeper at the rail seat + 20 mm, width: 140 $^{+10}_{0}$ mm, thickness: 15 + $^{+2}_{-3}$ mm and static bedding modulus: static secant bedding modulus measured between 0,3 MPa and 2 MPa: 1 ≤ C 4 N/mm^3)

4 polymeric composite sleeper with or without the fastening system and without the baseplate

C_1, C_2 and C_3 locations of the vertical displacement measurement on the axis of the articulated support

F_c positive test load at the centre section of the sleeper

L_c design distance between centre lines of the rail seat

Figure 3 — Test arrangement at the centre section for the positive load test

The deformation, d, measured during the tests on the centre section for the negative load is calculated using Formula (1).

The displacement measuring instruments shall be capable of measuring the displacement within ±0,02 mm.

The force measuring instruments shall conform to ISO 7500-1, class 2, over the required range of force.

5.2.1.4 Rail seat section for the positive load test for bearers

The arrangement for the rail seat positive load at a rail seat:

— next to the end of the bearer, and

— with direct support of the rail (i.e. fastening system without a baseplate),

is shown in Figure 1. The value of L_r in relation to L_p is detailed in Table 2.

© ISO 2020 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 12856-2:2020

The load, F_r, is applied perpendicularly to the base of the bearer.

The end of the bearer opposite to the end being tested shall be supported during the test in order to compensate the influence of the weight of the bearers on the test bending moment. Alternatively, the bearer may be cut off at the distance, L_p, from the centre line of the rail.

5.2.1.5 Centre section for the negative load test for bearers

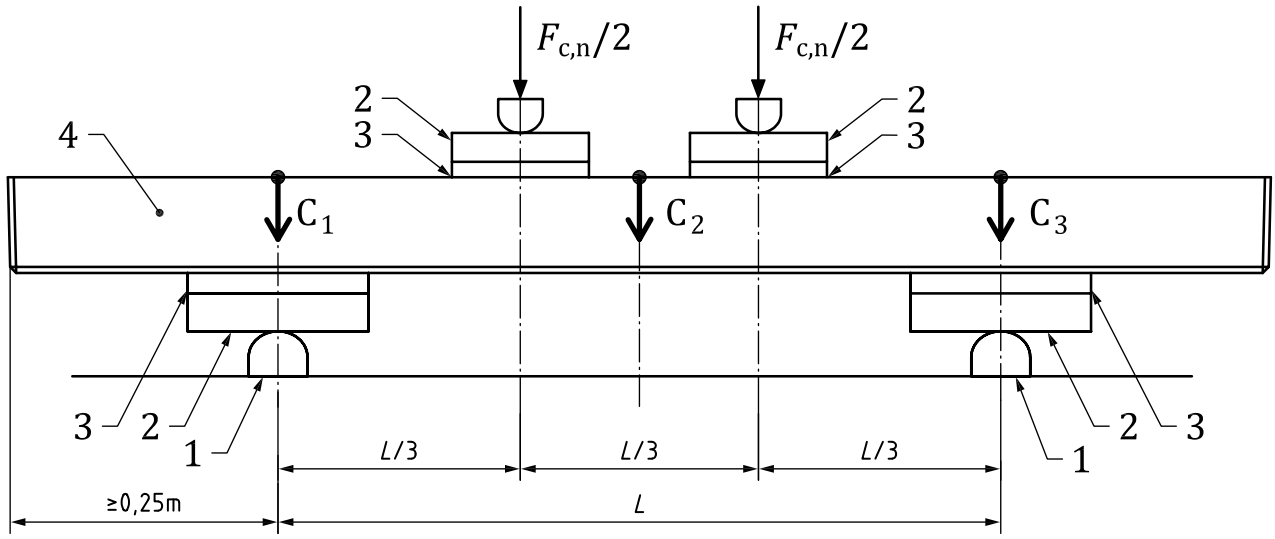

Key

1	rigid support
2	articulated support and steel plate (minimum length: bottom width of the sleeper at the rail seat +20 mm, width: 140 ± 01 mm, thickness: minimum 12 mm and minimum hardness Brinell: HBW > 240)
3	resilient pad (minimum length: bottom width of the sleeper at the rail seat + 20 mm, width: 140 $^{+10}_{0}$ mm, thickness: 15 $^{+2}_{-3}$ mm and static bedding modulus: static secant bedding modulus measured between 0,3 MPa and 2 MPa: 1 ≤ C ≤ 4 N/mm^3)
4	polymeric composite bearer without the fastening system and with the baseplate (if used)
L_C	for gauges of 1 435 mm, L = 1,5 m. For other gauges, the length shall be adapted
C_1, C_2 and C_3	locations of the vertical displacement measurement on the axis of the articulated support
$F_{c,n}$	negative test load at the centre section of the sleeper

Figure 4 — Test arrangement at the centre section for the negative load test

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 12856-2:2020

5.2.1.6 Centre section for the positive load test for bearers

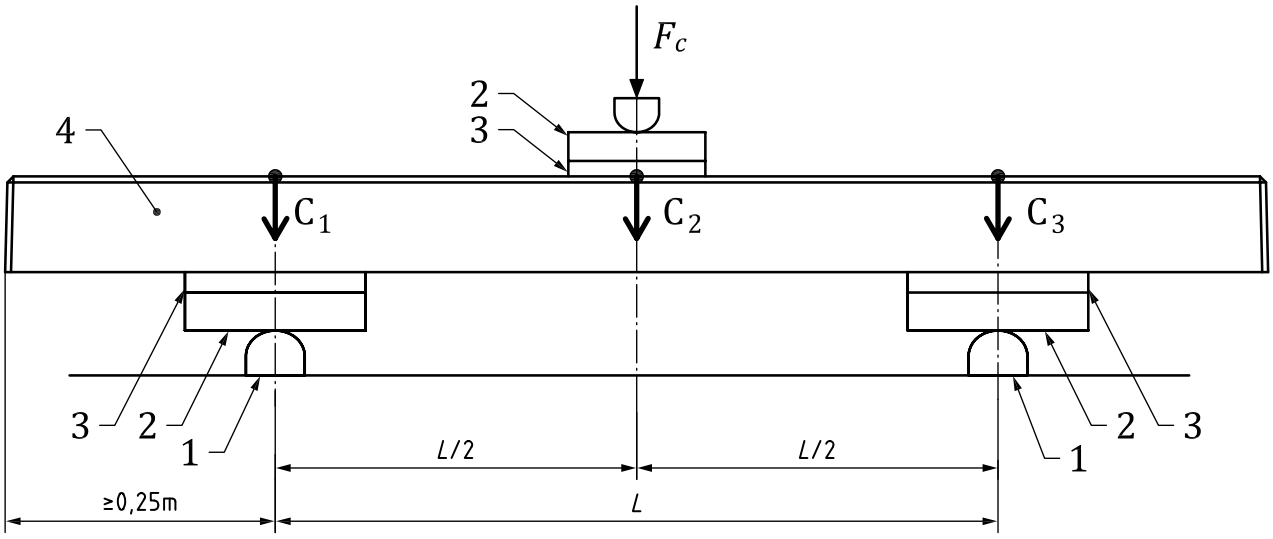

Key

1 rigid support

2 articulated support and steel plate (minimum length: bottom width of the sleeper at the rail seat +20 mm, width: 140 ± 1 mm, thickness: minimum 12 mm and minimum hardness Brinell: HBW > 240)

3 resilient pad (minimum length: bottom width of the sleeper at the rail seat + 20 mm, width: 140 $^{+10}_{0}$ mm, thickness: 15 $^{+2}_{-3}$ mm and static bedding modulus: static secant bedding modulus measured between 0,3 MPa and 2 MPa: 1 ≤ C ≤ 4 N/mm^3)

4 polymeric composite bearer without the fastening system and with the baseplate (if used)

L for gauges of 1 435 mm, L = 1,5 m. For other gauges, the length shall be adapted

C_1, C_2 and C_3 locations of the vertical displacement measurement on the axis of the articulated support

F_c positive test load at the centre section of the sleeper

Figure 5 — Test arrangement at the centre section for the positive load test

5.2.1.7 Centre section for the load test for transom

The test arrangement shall be approved by the purchaser, depending on the bridge.

NOTE This test arrangement generates positive or negative bending moments depending on the eccentricity, e, of the supports on the longitudinal girders of the bridge. However, this test arrangement is only used for the tests in 5.2.3, "Test procedures at the centre section for the negative bending moments".

If support conditions for the transoms on the bridge are different to the test arrangement in Figure 6, this should be taken into account in the calculation of $M_{k,b}$.

Any modification (for example cut-outs to fasten the transom) should be carried out on the transom before testing.

© ISO 2020 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 12856-2:2020