BS ISO 15765-2:2024

BSI Standards Publication

Road vehicles — Diagnostic communication over Controller Area Network (DoCAN)

Part 2: Transport protocol and network layer services

Documents
Document Sharing Hub

Full document details: BS ISO 15765-2:2024

National foreword

This British Standard is the UK implementation of ISO 15765-2:2024. It supersedes BS ISO 15765-2:2016, which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee AUE/16, Data Communication (Road Vehicles).

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2024
Published by BSI Standards Limited 2024

ISBN 978 0 539 20303 5

ICS 43.040.15; 43.180

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2024.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: BS ISO 15765-2:2024

International Standard

ISO 15765-2

Fourth edition
2024-04

Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) —

Part 2: Transport protocol and network layer services

Véhicules routiers — Communication de diagnostic sur gestionnaire de réseau de communication (DoCAN) —

Partie 2: Protocole de transport et services de la couche réseau

Reference number
ISO 15765-2:2024(en)

© ISO 2024

Documents
Document Sharing Hub

Full document details: BS ISO 15765-2:2024

COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

Contents

Page

Foreword ... **v**
Introduction ... **vi**
1 Scope ... **1**
2 Normative references ... **1**
3 Terms and definitions ... **1**
4 Symbols and abbreviated terms ... **2**
4.1 Symbols ... 2
4.2 Abbreviated terms ... 3
5 Conventions ... **4**
6 ISO 11898-1 CAN data link layer extension ... **5**
6.1 CAN CC and CAN FD frame feature comparison ... 5
6.2 Mapping of transport and network layer attributes to CAN data frames ... 5
7 T_Data abstract service primitive interface definition ... **7**
7.1 T_Data services ... 7
7.2 T_Data interface ... 7
7.3 Data type definitions ... 8
8 Transport and network layer services ... **8**
8.1 General ... 8
8.2 Transport and network layer abstract service primitives ... 9
8.2.1 Data.req ... 9
8.2.2 Data.con ... 10
8.2.3 Data_FF.ind ... 10
8.2.4 Data.ind ... 10
8.2.5 ChangeParameter.req ... 11
8.2.6 ChangeParameter.con ... 11
8.3 Service data unit specification ... 12
8.3.1 Mtype, message type ... 12
8.3.2 AI, address information ... 12
8.3.3 <Length> ... 14
8.3.4 <MessageData> ... 14
8.3.5 <Parameter> ... 14
8.3.6 <Parameter_Value> ... 14
8.3.7 <Result> ... 15
8.3.8 <Result_ChangeParameter> ... 16
8.4 ASP T_Data to TL_Data interface parameter mapping ... 16
9 Transport layer protocol ... **17**
9.1 Protocol functions ... 17
9.2 Single frame message transmission ... 17
9.3 Multiple frame message transmission ... 17
9.4 Transport layer protocol data units ... 19
9.4.1 Protocol data unit types ... 19
9.4.2 SF TL_PDU ... 19
9.4.3 FF TL_PDU ... 19
9.4.4 CF TL_PDU ... 19
9.4.5 FC TL_PDU ... 19
9.4.6 TL_PDU field specification ... 19
9.5 Transmit data length (TX_DL) configuration ... 20
9.5.1 Definition of TX_DL configuration values ... 20
9.5.2 Verifying the correctness of received CAN frames ... 20
9.5.3 Receiver determination RX_DL ... 21
9.6 Protocol control information specification ... 22

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

9.6.1 TL_PCI ... 22
9.6.2 SingleFrame TL_PCI parameter definition ... 23
9.6.3 FirstFrame TL_PCI parameter definition ... 25
9.6.4 ConsecutiveFrame TL_PCI parameter definition ... 26
9.6.5 FlowControl TL_PCI parameter definition ... 27
9.7 Maximum number of FC.WAIT frame transmissions (C_{TL_WFTmax}) ... 31
9.8 Transport layer timing ... 31
9.8.1 Timing parameters ... 31
9.8.2 Transport layer timeouts ... 35
9.8.3 Unexpected arrival of TL_PDU ... 35
9.8.4 Wait frame error handling ... 36
9.9 Interleaving of messages ... 37

10 Network layer protocol ... 37
10.1 Protocol data unit field specification ... 37
10.1.1 NL_PDU format ... 37
10.1.2 Address information (NL_AI) ... 37
10.2 Creating CAN frames based on NL_TAtype and TX_DL ... 37
10.3 Mapping of the NL_PDU fields ... 37
10.3.1 Addressing formats ... 37
10.3.2 Normal addressing ... 37
10.3.3 Normal fixed addressing ... 38
10.3.4 Extended addressing ... 39
10.3.5 Mixed addressing ... 39

11 Data link layer usage ... 40
11.1 Data link layer service parameters ... 40
11.2 Data link layer interface services ... 41
11.3 CAN frame data length code (DLC) ... 41
11.3.1 DLC parameter ... 41
11.3.2 CAN frame data ... 41
11.3.3 Data length code (DLC) error handling ... 42

Annex A (normative) **Use of normal fixed and mixed addressing according to SAE J1939-21 ... 43**

Annex B (normative) **Reserved CAN IDs ... 46**

Bibliography ... 47

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

This fourth edition cancels and replaces the third edition (ISO 15765-2:2016), which has been technically revised.

The main changes are as follows:

— restructured the document to achieve compatibility with OSI 7-layers model;

— introduced T_Data abstract service primitive interface to achieve compatibility with ISO 14229-2;

— moved all transport layer protocol-related information to Clause 9;

— clarification and editorial corrections.

A list of all parts in the ISO 15765 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

Introduction

The ISO 15765 series defines common requirements for vehicle diagnostic systems using the controller area network (CAN), as specified in the ISO 11898 series.

The ISO 15765 series presumes the use of external test equipment for inspection, diagnostics, repair and other possible use cases connected to the vehicle.

This document defines the requirements to enable the in-vehicle CAN network to successfully establish, maintain and terminate communication with the devices externally connected to the diagnostic link connector.

This document has been structured according to the open systems interconnection (OSI) basic reference model, in accordance with ISO/IEC 7498-1 and ISO/IEC 10731, which structures communication systems into seven layers. When mapped on this model, the OSI layer 4 and OSI layer 3 framework requirements specified or referenced in the ISO 15765 series are structured according to Figure 1, which shows the related documents of OSI layer 4 and OSI layer 3.

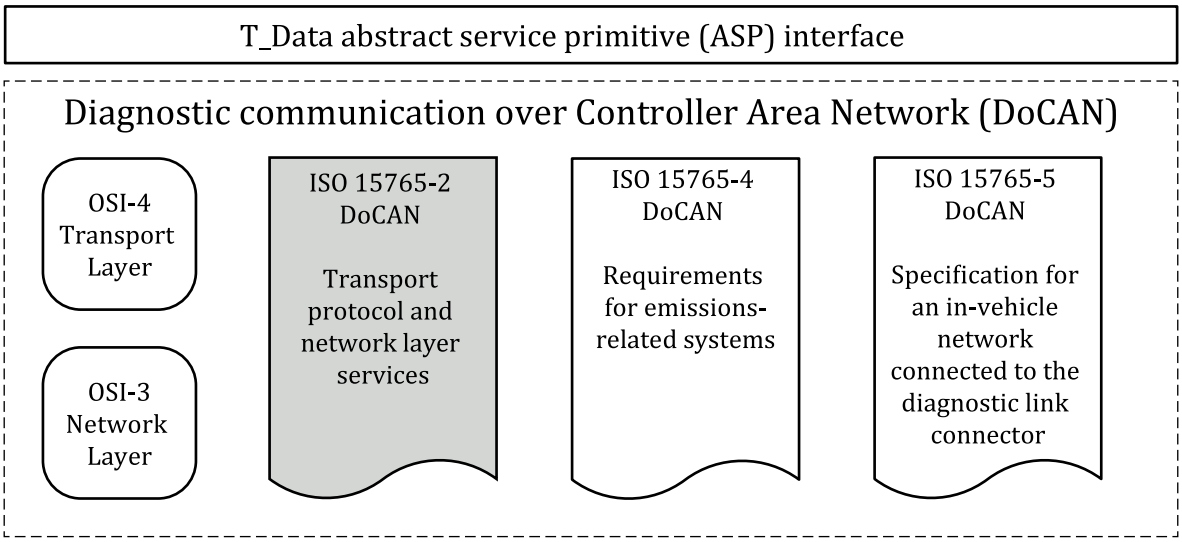

Figure 1 — DoCAN document reference according to the OSI model

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) —

Part 2: Transport protocol and network layer services

1 Scope

This document specifies a transport and network layer protocol with transport and network layer services tailored to meet the requirements of CAN-based vehicle network systems on controller area networks as specified in ISO 11898-1.

The diagnostic communication over controller area network (DoCAN) protocol supports the standardized abstract service primitive interface as specified in ISO 14229-2 (UDS).

This document supports different application layer protocols such as:

— enhanced vehicle diagnostics (emissions-related system diagnostics beyond legislated functionality, non-emissions-related system diagnostics);

— emissions-related on-board diagnostics (OBD) as specified in the ISO 15031 series and SAE J1979 series;

— world-wide harmonized on-board diagnostics (WWH-OBD) as specified in the ISO 27145 series; and

— end of life activation of on-board pyrotechnic devices (the ISO 26021 series).

The transport protocol specifies an unconfirmed communication.

NOTE This document does not determine whether CAN CC, CAN FD or both are recommended or required to be implemented by other standards referencing this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7498-1, *Information technology — Open Systems Interconnection — Basic Reference Model: The Basic Model*

ISO 11898-1[1)], *Road vehicles — Controller area network (CAN) — Part 1: Data link layer and physical signalling*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 7498-1, ISO 11898-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at https://www.electropedia.org/

1) Third edition under preparation. Stage at the time of publication: ISO/FDIS 11898-1:—.

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

3.1
CAN_DL
CAN frame data length
physical length of CAN frame data/*payload* (3.2) in bytes

Note 1 to entry: See Table 2.

3.2
payload
synonym for (CAN) data field as specified in ISO 11898-1

3.3
TX_DL
transmit data link layer data length
parameter configuring the maximum usable *payload* (3.2) length in bytes of the data link layer in the transmitter for the application that implements the network layer

Note 1 to entry: The TX_DL is a fixed configuration value on the sender side for the PDU transmission.

3.4
RX_DL
received data link layer data length
parameter retrieving the maximum usable *payload* (3.2) length in bytes of the data link layer in the receiver for the application that implements the network layer

Note 1 to entry: The RX_DL value is retrieved from the FirstFrame (FF) *CAN_DL* (3.1) of a segmented PDU and is used to verify the correct data length of ConsecutiveFrames (CF).

4 Symbols and abbreviated terms

4.1 Symbols

$C_{\mathrm{TL_BUFFER_OVFLW}}$	ComParam transport layer buffer overflow
$C_{\mathrm{TL_CFSN}}$	ComParam transport layer consecutive frame sequence number
$C_{\mathrm{TL_DLC}}$	ComParam transport layer data length code
$C_{\mathrm{TL_ERROR}}$	ComParam transport layer error
$C_{\mathrm{TL_FCFS}}$	ComParam transport layer flow control flow status
$C_{\mathrm{TL_FCBS}}$	ComParam transport layer flow control block size
$C_{\mathrm{TL_FCFS(CTS)}}$	ComParam transport layer flow control flow status continue to send
$C_{\mathrm{TL_FCFS(OVFLW)}}$	ComParam transport layer flow control flow status overflow
$C_{\mathrm{TL_FCSTmin}}$	ComParam transport layer flow control separation time minimum
$C_{\mathrm{TL_FCFS(WAIT)}}$	ComParam transport layer flow control flow status wait
$C_{\mathrm{TL_INVALID_FS}}$	ComParam transport layer error invalid flow status
$C_{\mathrm{TL_OK}}$	ComParam transport layer ok
$C_{\mathrm{TL_RX_ON}}$	ComParam transport layer receiver error to indicate that the receiving entity did not accept flow control parameter changes during this segmented message reception
$C_{\mathrm{TL_TIMEOUT_A}}$	ComParam transport layer timeout A sender and receiver

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

$C_{\text{TL_TIMEOUT_Bs}}$	ComParam transport layer sender timeout B sender
$C_{\text{TL_TIMEOUT_Cr}}$	ComParam transport layer receiver timeout C receiver
$C_{\text{TL_UNEXP_PDU}}$	ComParam transport layer error unexpected protocol data unit
$C_{\text{TL_WFT_OVRN}}$	ComParam transport layer wait frame transmissions overrun
$C_{\text{TL_WFTmax}}$	ComParam transport layer flow status wait frame transmissions maximum
$C_{\text{TL_WRONG_PARAMETER}}$	ComParam transport layer error wrong parameter
$C_{\text{TL_WRONG_SN}}$	ComParam transport layer error wrong segment number
$C_{\text{TL_WRONG_VALUE}}$	ComParam transport layer error wrong value
t	time
$t_{\text{TL_Ar}}$	timing parameter transport layer receiver timing value Ar
$t_{\text{TL_As}}$	timing parameter transport layer sender timing value As
$t_{\text{TL_Br}}$	timing parameter transport layer receiver timing value Br
$t_{\text{TL_Bs}}$	timing parameter transport layer sender timing value Bs
$t_{\text{TL_Cr}}$	timing parameter transport layer receiver timing value Cr
$t_{\text{TL_Cs}}$	timing parameter transport layer sender timing value Cs

4.2 Abbreviated terms

For the purposes of this document, the following abbreviated terms apply.

AE	address extension
AI	address information
CAN	controller area network
CAN CC	CAN with static arbitration and data phase bit rate
CAN_DL	CAN frame data length
CAN FD	CAN with flexible data phase bit rate
CF	consecutive frame
ChangeParameter	layer service name
ComParam	communication parameter
CTS	continue to send
Data.	abstract service primitive service name
DoCAN	diagnostic communication over CAN
ECU	electronic control unit
FC	flow control

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

FF	first frame
FF_DL	first frame data length in bytes
FMI	failure mode indicator
Mtype	message type
N/A	not applicable
PCI	protocol control information
PCItype	protocol control information type
PDU	protocol data unit
SA	source address
SDU	service data unit
TA	target address
TAtype	target address type
NL	network layer
OBD	on-board diagnostics
OSI	Open Systems Interconnection
PCI	protocol control information
RTR	remote transmission request
RX_DL	received data link layer data length
SF	single frame
SF_DL	single frame data length in bytes
SN	sequence number
SPN	suspect parameter number
TX_DL	transmit data link layer data length
UDS	unified diagnostic services
WWH-OBD	world-wide harmonized OBD

5 Conventions

This document is based on the conventions discussed in the OSI service conventions (ISO/IEC 10731) as they apply for diagnostic services.

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

6 ISO 11898-1 CAN data link layer extension

6.1 CAN CC and CAN FD frame feature comparison

ISO 11898-1 specifies variable length CAN frames with a maximum payload size dependent on the protocol device used. A CAN CC protocol device can transmit/receive frames with payload sizes ranging from 0 byte to 8 byte per frame.

A CAN FD (flexible data rate) protocol device can transmit/receive frames with payload sizes from 0 byte to 64 byte. A CAN FD protocol device is also capable of transmitting/receiving CAN CC frames.

Therefore, the segmented transfer of data using FirstFrame (FF), FlowControl (FC) and ConsecutiveFrame (CF) type frames shall support a variable configurable payload length without changing the original protocol concept.

Table 1 outlines the different features of the CAN frame types provided by ISO 11898-1.

Table 1 — CAN frame feature comparison

RefNo	Feature	CAN CC	CAN FD
#1	Payload length 0 to 8 bytes: data length code (DLC) 0 to 8	Yes	Yes
#2	Payload length 8 bytes: data length code (DLC) 9 to 15[a]	Yes	No
#3	Payload length 12 to 64 bytes[b]: data length code (DLC) 9 to 15	No	Yes
#4	Different bit rates supported for the arbitration and data phases of a CAN frame	No	Yes
#5	Remote transmission request (RTR)	Yes	No

[a] For CAN CC, the DLC values 9 to 15 are automatically reduced to the value of 8 which leads to the maximum possible CAN_DL for CAN CC.

[b] CAN FD does not support all payload lengths between 8 bytes and 64 bytes (e.g. a CAN FD frame with 10 meaningful data bytes requires a payload length of 12 bytes); see Table 2.

6.2 Mapping of transport and network layer attributes to CAN data frames

Figure 2 shows the mapping of CAN parameters onto the data link layer addressing information NL_AI. It illustrates the validity and applicability of transport/network layer parameters and the resulting support of CAN CC versus CAN FD data link layer.

Figure 2 describes this for the example of using either normal or normal fixed addressing. For extended addressing and mixed addressing, the concept in general also applies but the mapping of the NL_AI parameter onto the CAN frame differs.

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

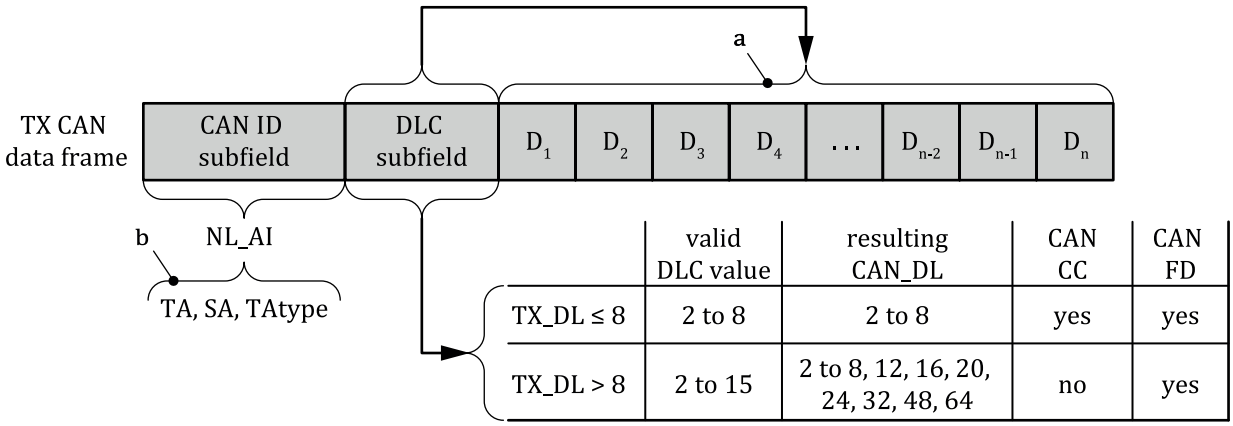

Key

a DLC value results in a CAN_DL value (n), which is the physical length of a CAN frame data/payload; in the receiver, CAN_DL is used to determine the sender TX_DL value.

b The shown NL_AI mapping is an example for normal and normal fixed addressing only.

For 11-bit CAN identifiers, the mapping of the NL_AI target address (TA) and source address (SA) into a CAN identifier is implied.

Figure 2 — Illustration of transport and network layer attributes mapping to the CAN data frame subfields

Table 2 shows the data length code value between CAN CC and CAN FD.

Table 2 — CAN CC/CAN FD data length comparison table

Data length code (DLC)	CAN CC data length (CAN_DL)	CAN FD data length (CAN_DL)
0	0	0
1	1	1
2	2	2
3	3	3
4	4	4
5	5	5
6	6	6
7	7	7
8	8	8
9	8[a]	12
10	8[a]	16
11	8[a]	20
12	8[a]	24
13	8[a]	32
14	8[a]	48
15	8[a]	64

[a] For CAN CC, the DLC values 9 to 15 are automatically reduced to the value of 8 which leads to the maximum possible CAN_DL for CAN CC.

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

7 T_Data abstract service primitive interface definition

7.1 T_Data services

The Open Systems Interconnection (OSI) defines abstract service primitives (ASP) as an implementation-independent description of an interaction between a service user and a service provider. The abstract service primitives are defined for a particular service transition.

The ASP interface defines the service and parameter mappings beween OSI layers.

Figure 3 shows the `T_Data.req` (request), `T_Data.ind` (indication), `T_DataSOM.ind` (indication), and `T_Data.con` (confirmation) service interface.

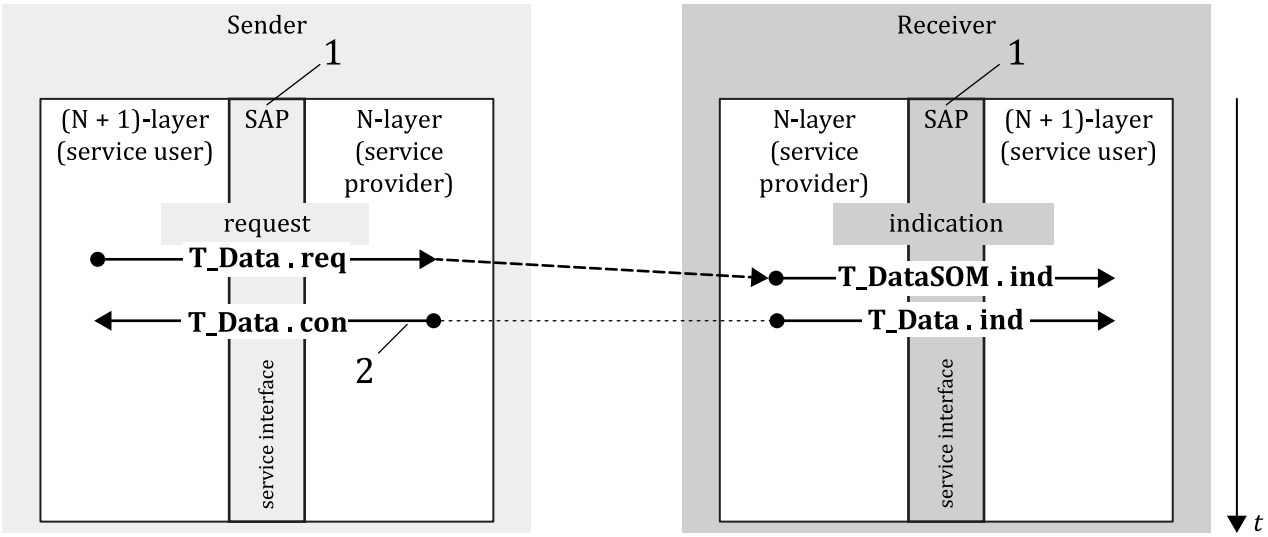

Key

t	time
1	service access point
2	read back from N-layer service provider

Figure 3 — T_Data.req, T_Data.ind, T_DataSOM.ind and T_Data.con service interface

7.2 T_Data interface

The ASP `T_Data` interface is independent (abstraction) of the transport protocol used in the OSI-4 layer. It connects the session layer (OSI-5) and the various transport layers (OSI-4).

The ASP `T_Data` interface shall support the services as specified in Table 3.

Table 3 — ASP `T_Data` interface

ASP	Description
`T_Data.req`	This service is used by the `T_Data` interface to request the transfer of a message.
`T_Data.ind`	This service is used to signal to the `T_Data` interface the completion of a message reception.
`T_DataSOM.ind`	This service is used to signal to the `T_Data` interface the beginning of a segmented message reception.
`T_Data.con`	This service confirms to the `T_Data` interface that the requested service has been carried out (successfully or not).

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

7.3 Data type definitions

This requirement specifies the data types of the abstract service primitive interface parameters.

The data types shall be in accordance to:

— `Enum` = 8-bit enumeration;

— `Unsigned Byte` = 8-bit unsigned numeric value;

— `Unsigned Word =` 16-bit unsigned numeric value;

— `Unsigned Long =` 32-bit unsigned numeric value;

— `Byte Array` = sequence of 8-bit aligned data;

— `Word Array` = sequence of 16-bit aligned data;

— `Bit String =` 8-bit binary coded.

8 Transport and network layer services

8.1 General

In order to describe the functioning of the transport and network layer, it is necessary to consider services provided to higher layers and the internal operation of the transport and network layer.

All transport and network layer services have the same general structure. To define the services, three types of service primitive are specified:

— a service request primitive, used by higher communication layers or the application to pass control information and data required to be transmitted to the network layer;

— a service indication primitive, used by the network layer to pass status information and received data to upper communication layers or the application;

— a service confirmation primitive, used by the network layer to pass status information to higher communication layers or the application.

This service specification does not specify an application programming interface but only a set of service primitives that are independent of any implementation.

All transport and network layer services have the same general format. Service primitives are written in the form:

```
service_name.type          (
                           parameter A,
                           parameter B
                           [,parameter C, ...]
                           )
```

where “service_name” is the name of the service, e.g. TL_/NL_Data, “type” indicates the type of service primitive, and “parameter A, parameter B [,parameter C, ...]” are the TL_/NL_SDU as a list of values passed by the service primitive. The square brackets indicate that this part of the parameter list is optional.

The service primitives define how a service user (e.g. diagnostic application) cooperates with a service provider (e.g. network layer). The following service primitives are specified in this document: request, indication and confirm.

— Using the service primitive request (`service_name.req`), a service user requests a service from the service provider.

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024

— Using the service primitive indication (`service_name.ind`), the service provider informs a service user about an internal event of the network layer or the service request of a peer protocol layer entity service user.

— With the service primitive confirm (`service_name.con`), the service provider informs the service user about the result of a preceding service request of the service user.

The service interface defines a set of services that are needed to access the functions offered by the transport and network layer, i.e. transmission/reception of data and setting of protocol parameters.

Two types of service are defined:

a) communication services: these services, of which the following are defined, enable the transfer of up to 4 294 967 295 bytes of data:

   1) `Data.req`: this service is used to request the transfer of data. If necessary, the network layer segments the data;

   2) `Data_FF.ind`: this service is used to indicate the beginning of a segmented message reception to the upper layer;

   3) `Data.ind`: this service is used to provide received data to the higher layers;

   4) `Data.con`: this service confirms to the higher layers that the requested service has been carried out (successfully or not);

b) protocol parameter setting services: these services, of which the following are defined, enable the dynamic setting of protocol parameters:

   1) `ChangeParameter.req`: this service is used to request the dynamic setting of specific internal parameters;

   2) `ChangeParameter.con`: this service confirms to the upper layer that the request to change a specific protocol has completed (successfully or not).

8.2 Transport and network layer abstract service primitives

8.2.1 Data.req

The service primitive requests transmission of < `MessageData` > with < `Length` > bytes from the sender to the receiver peer entities identified by the address information in `SA`, `TA`, `TAtype` [and `AE`] (see 8.3 for parameter definition).

```
Data.req          (
                  Mtype
                  SA
                  TA
                  TAtype
                  [AE]
                  <MessageData>
                  <Length>
                  )
```

Each time the `Data.req` service is called, the transport and network layer shall indicate the completion (or failure) of the message transmission to the service user by issuing a `Data.con` service call.

© ISO 2024 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 15765-2:2024