BS ISO 17987-3:2016

BSI Standards Publication

# Road vehicles — Local Interconnect Network (LIN)

## Part 3: Protocol specification

Documents
Document Sharing Hub

Full document details: BS ISO 17987-3:2016

## National foreword

This British Standard is the UK implementation of ISO 17987-3:2016.

The UK participation in its preparation was entrusted to Technical Committee AUE/16, Data Communication (Road Vehicles).

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016. Published by BSI Standards Limited 2016

ISBN 978 0 580 81730 4

ICS 01.040.43; 43.020

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2016.

**Amendments issued since publication**

| Date | Text affected |
|---|---|

Documents
Document Sharing Hub

Full document details: BS ISO 17987-3:2016

# INTERNATIONAL STANDARD

# ISO 17987-3

First edition
2016-08-15

# Road vehicles — Local Interconnect Network (LIN) —

## Part 3: Protocol specification

*Véhicules routiers — Réseau Internet local (LIN) —*

*Partie 3: Spécification du protocole*

Reference number
ISO 17987-3:2016(E)

Documents
Document Sharing Hub
© ISO 2016

**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org


© ISO 2016 – All rights reserved

Documents
Document Sharing Hub

Full document details: BS ISO 17987-3:2016

# Contents

Page

**Foreword** ..... **v**

**Introduction** ..... **vi**

**1 Scope** ..... **1**

**2 Normative references** ..... **1**

**3 Terms, definitions, symbols and abbreviated terms** ..... **1**
3.1 Terms and definitions ..... 1
3.2 Symbols ..... 4
3.3 Abbreviated terms ..... 4

**4 Node concept** ..... **5**
4.1 General ..... 5
4.2 Concept of operation ..... 6
4.2.1 Master and slave ..... 6
4.2.2 Frames ..... 6
4.2.3 Data transport ..... 7

**5 Protocol requirements** ..... **7**
5.1 Signal ..... 7
5.1.1 Management ..... 7
5.1.2 Types ..... 7
5.1.3 Consistency ..... 7
5.1.4 Packing ..... 7
5.1.5 Reception and transmission ..... 8
5.2 Frame ..... 9
5.2.1 Transfer ..... 9
5.2.2 Structure ..... 9
5.2.3 Frame length ..... 13
5.2.4 Frame types ..... 14
5.3 Schedule tables ..... 19
5.3.1 General ..... 19
5.3.2 Time definitions ..... 19
5.3.3 Frame slot ..... 19
5.3.4 Schedule table handling ..... 20
5.4 Task behaviour model ..... 20
5.4.1 General ..... 20
5.4.2 Master task state machine ..... 20
5.4.3 Slave task state machine ..... 21
5.5 Status management ..... 23
5.5.1 General ..... 23
5.5.2 Concept ..... 23
5.5.3 Event-triggered frames ..... 23
5.5.4 Reporting to the cluster ..... 23
5.5.5 Reporting within own node ..... 24

**6 Node configuration and identification** ..... **24**
6.1 General ..... 24
6.2 LIN product identification ..... 25
6.2.1 Supplier ID, function ID and variant ID ..... 25
6.2.2 Serial number ..... 25
6.2.3 Wildcards ..... 25
6.3 Slave node model ..... 25
6.3.1 Memory model ..... 25
6.3.2 Slave node configuration variants ..... 26
6.3.3 Initial node address ..... 27
6.3.4 PDU structure ..... 27

AVA Documents
Document Sharing Hub

© ISO 2016 – All rights reserved


Full document details: BS ISO 17987-3:2016

6.3.5 Node configuration handling ..... 29
6.3.6 Node configuration services ..... 29

**Annex A** (normative) **Definition of properties, frame identifiers and various examples** ..... **35**

**Annex B** (informative) **LIN history and version compatibility** ..... **39**

**Annex C** (informative) **LIN auto addressing methods** ..... **43**

**Bibliography** ..... **44**


© ISO 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

# Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

A list of all parts in the ISO 17987 series can be found on the ISO website.

© ISO 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

# Introduction

ISO 17987 (all parts) specifies the use cases, the communication protocol and physical layer requirements of an in-vehicle communication network called Local Interconnect Network (LIN).

The LIN protocol as proposed is an automotive focused low speed UART-based network (Universal Asynchronous Receiver Transmitter). Some of the key characteristics of the LIN protocol are signal-based communication, schedule table-based frame transfer, master/slave communication with error detection, node configuration and diagnostic service communication.

The LIN protocol is for low cost automotive control applications, for example, door module and air condition systems. It serves as a communication infrastructure for low-speed control applications in vehicles by providing the following:

— signal-based communication to exchange information between applications in different nodes;

— bit rate support from 1 kbit/s to 20 kbit/s;

— deterministic schedule table based frame communication;

— network management that wakes up and puts the LIN cluster into sleep mode in a controlled sanner;

— status management that provides error handling and error signalling;

— transport layer that allows large amount of data to be transmitted (such as diagnostic services);

— specification of how to handle diagnostic services;

— electrical physical layer specifications;

— node description language describing properties of slave nodes;

— network description file describing behaviour of communication;

— application programmer's interface.

ISO 17987 (all parts) is based on the Open Systems Interconnection (OSI) Basic Reference Model as specified in ISO/IEC 7498-1 which structures communication systems into seven layers.

The OSI model structures data communication into seven layers called (top down) *application layer* (layer 7), *presentation layer*, *session layer*, *transport layer*, *network layer*, *data link layer* and *physical layer* (layer 1). A subset of these layers is used in ISO 17987 (all parts).

ISO 17987 (all parts) distinguishes between the services provided by a layer to the layer above it and the protocol used by the layer to send a message between the peer entities of that layer. The reason for this distinction is to make the services, especially the application layer services and the transport layer services, reusable also for other types of networks than LIN. In this way, the protocol is hidden from the service user and it is possible to change the protocol if special system requirements demand it.

ISO 17987 (all parts) provides all documents and references required to support the implementation of the requirements related to.

— ISO 17987-1: This part provides an overview of ISO 17987 (all parts) and structure along with the use case definitions and a common set of resources (definitions, references) for use by all subsequent parts.

— ISO 17987-2: This part specifies the requirements related to the transport protocol and the network layer requirements to transport the PDU of a message between LIN nodes.

— ISO 17987-3: This part specifies the requirements for implementations of the LIN protocol on the logical level of abstraction. Hardware related properties are hidden in the defined constraints.


© ISO 2016 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

— ISO 17987-4: This part specifies the requirements for implementations of active hardware components which are necessary to interconnect the protocol implementation.

— ISO/TR 17987-5: This part specifies the LIN API (Application Programmers Interface) and the node configuration and identification services. The node configuration and identification services are specified in the API and define how a slave node is configured and how a slave node uses the identification service.

— ISO 17987-6: This part specifies tests to check the conformance of the LIN protocol implementation according to ISO 17987-2 and ISO 17987-3. This comprises tests for the data link layer, the network layer and the transport layer.

— ISO 17987-7: This part specifies tests to check the conformance of the LIN electrical physical layer implementation (logical level of abstraction) according to ISO 17987-4.

© ISO 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

Documents
Document Sharing Hub

INTERNATIONAL STANDARD ISO 17987-3:2016(E)

# Road vehicles — Local Interconnect Network (LIN) —

# Part 3: Protocol specification

## 1 Scope

This document specifies the LIN protocol including the signal management, frame transfer, schedule table handling, task behaviour and status management and LIN master and slave node. It contains also OSI layer 5 properties according to ISO 14229-7 UDSonLIN-based node configuration and identification services (SID: $B0_{16}$ to $B8_{16}$) belonging to the core protocol specification.

A node (normally a master node) that is connected to more than one LIN network is handled by higher layers (i.e. the application) not within the scope of this document.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 17987-2:2016, *Road vehicles — Local Interconnect Network (LIN) — Part 2: Transport protocol and network layer services*

ISO 17987-4:2016, *Road vehicles — Local Interconnect Network (LIN) — Part 4: Electrical Physical Layer (EPL) specification 12V/24V*

ISO 17987-6:2016, *Road vehicles — Local Interconnect Network (LIN) — Part 6: Protocol conformance test specification*

## 3 Terms, definitions, symbols and abbreviated terms

### 3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 17987-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— IEC Electropedia: available at http://www.electropedia.org/

— ISO Online browsing platform: available at http://www.iso.org/obp

**3.1.1**
**big-endian**
method of storage of multi-byte numbers with the most significant bytes at the lowest memory addresses

**3.1.2**
**broadcast NAD**
addressing every slave node on LIN

© ISO 2016 – All rights reserved



Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

**3.1.3**
**bus interface**
hardware (transceiver, UART, etc.) of a node that is connected to the physical bus wire in a *cluster* (3.1.6)

**3.1.4**
**bus sleep state**
state in which a node only expects an internal or external wake up

Note 1 to entry: The nodes switch output level to the recessive state.

[SOURCE: ISO 17987-2:2016, 6.1.2]

**3.1.5**
**classic checksum**
used for *diagnostic frames* (3.1.10) and legacy LIN slave nodes frames of protocol version 1.x

Note 1 to entry: The classic checksum considers the frame response data bytes only.

**3.1.6**
**cluster**
communication system comprising the LIN wire and all connected nodes

**3.1.7**
**cluster design**
process of designing the LDF

[SOURCE: ISO 17987-2:2016, 11.2.3]

**3.1.8**
**data**
*response* (3.1.27) part of a frame carrying one to eight *data bytes* (3.1.9)

**3.1.9**
**data byte**
one of the bytes in the data

**3.1.10**
**diagnostic frame**
*master request frame* (3.1.21) and the *slave response frame* (3.1.29)

**3.1.11**
**diagnostic trouble code**
**DTC**
value making reference to a specific fault in a system implemented in the server

**3.1.12**
**enhanced checksum**
checksum model used for all non-diagnostic frames and legacy 1.x LIN slave nodes

**3.1.13**
**event-triggered frame**
allowing multiple slave nodes to provide their *response* (3.1.27) to the same header

**3.1.14**
**frame**
communication entity consisting of a header and *response* (3.1.27)

**3.1.15**
**frame identifier**
value identifier uniquely a frame


© ISO 2016 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

**3.1.16**
**frame slot**
time period reserved for the transfer of a specific frame on LIN

Note 1 to entry: This corresponds to one entry in the schedule table.

**3.1.17**
**go-to-sleep command**
special *master request frame* (3.1.21) issued to force slave nodes to *bus sleep state* (3.1.4)

[SOURCE: ISO 17987-2:2016, 6.1.4]

**3.1.18**
**header**
first part of a frame consists of a break field, sync byte field and protected identifier; it is always sent by the LIN master node

**3.1.19**
**LIN product identification**
number containing the supplier and function and variant identification in a LIN slave node

**3.1.20**
**little-endian**
method of storage of multi-byte numbers with the least significant bytes at the lowest memory addresses

**3.1.21**
**master request frame**
*diagnostic frames* (3.1.10) issued by the master node *frame identifier* (3.1.15)

**3.1.22**
**node capability file**
**NCF**
file format describes a slave node as seen from the LIN network

**3.1.23**
**operational state**
slave node may transmit/receive frames in this state

[SOURCE: ISO 17987-2:2016, 5.1.2]

**3.1.24**
**protected identifier**
**PID**
8-bit value consisting of a unique 6-bit *frame identifier* (3.1.15) and 2-bit parity

**3.1.25**
**publisher**
node providing a frame response containing *signals* (3.1.30)

**3.1.26**
**request**
*diagnostic frame* (3.1.10) transmitted by the master node requesting data from a slave nodes

**3.1.27**
**response**
answer sent by a slave node on a diagnostic *request* (3.1.26)

**3.1.28**
**service**
combination of a diagnostic *request* (3.1.26) and *response* (3.1.27)

© ISO 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

**3.1.29**
**slave response frame**
frame used for diagnostic communication sent by one of the slave nodes

**3.1.30**
**signal**
value or byte array transmitted in the *cluster* (3.1.6) using a *signal carrying frame* (3.1.31)

**3.1.31**
**signal carrying frame**
*unconditional frames* (3.1.34), *sporadic frames* (3.1.32), and *event-triggered frames* (3.1.13) containing *signals* (3.1.30)

**3.1.32**
**sporadic frame**
group of *unconditional frames* (3.1.34) assigned to a schedule slot published by the master node

**3.1.33**
**subscriber**
master or slave node that receives the data within a LIN frame

**3.1.34**
**unconditional frame**
frame carrying *signals* (3.1.30) that is always sent in its allocated *frame slot* (3.1.16)

## 3.2 Symbols

$\oplus$ exclusive disjunction (exclusive or)

EXAMPLE a $\oplus$ b; exclusive or. True if exactly one of ‘a’ or ‘b’ is true.

$\neg$ negation

$\in$ element of

EXAMPLE f $\in$ S; belongs to. True if ‘f’ is in the set ‘S’.

## 3.3 Abbreviated terms

API application programmers interface

ASIC application specific integrated circuit

DTC diagnostic trouble code

LDF LIN description file

LIN Local Interconnect Network

LSB least significant bit

MRF master request frame

MSB most significant bit

NAD node address

NCF node capability file

NRC negative response code


© ISO 2016 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

| | |
|---|---|
| NVRAM | non-volatile random access memory |
| OSI | Open Systems Interconnection |
| PCI | protocol control information |
| PDU | protocol data unit |
| PID | protected identifier |
| ROM | read only memory |
| RSID | response service identifier |
| SID | service identifier |
| SRF | slave response frame |
| TL | transport layer |
| VRAM | volatile RAM |

# 4 Node concept

## 4.1 General

The LIN specifications assumes a software implementation of most functions, alternative realizations are promoted.

A node in a cluster interfaces to the physical bus wire using a frame transceiver. The frames are not accessed directly by the application; a signal-based interaction layer is added in between. As a complement, a transport layer (TL) interface exists between the application and the frame handler; see Figure 1.

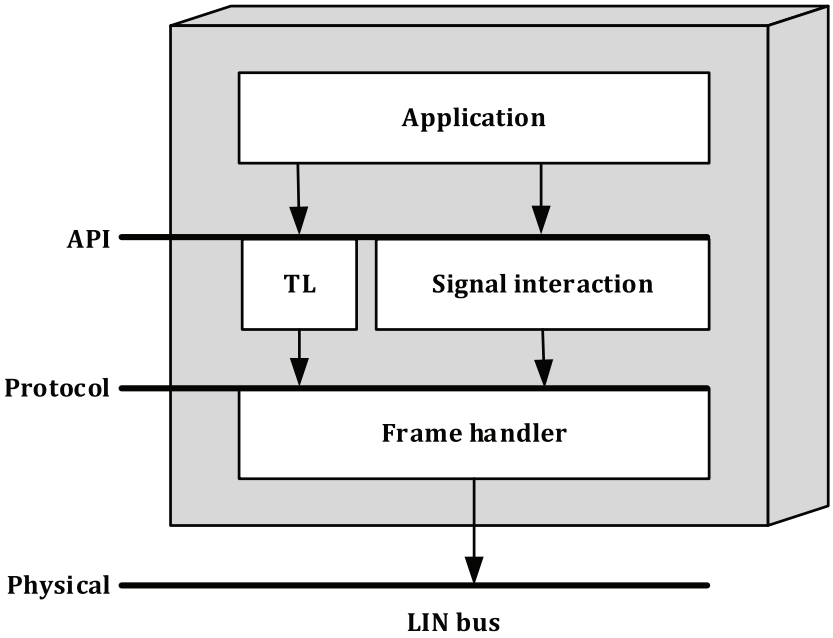


**Figure 1 — Node concept**

© ISO 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

## 4.2 Concept of operation

### 4.2.1 Master and slave

A cluster consists of one master node and several slave nodes. A master node contains a master task as well as a slave task. All slave nodes contain a slave task only.

NOTE The slave task in the master node and in the slave node is not identical due to differences in PID handling.

A master node may participate in more than one cluster with one dedicated bus interfaces for each cluster. A sample cluster with one master node and two slave nodes is shown in Figure 2.

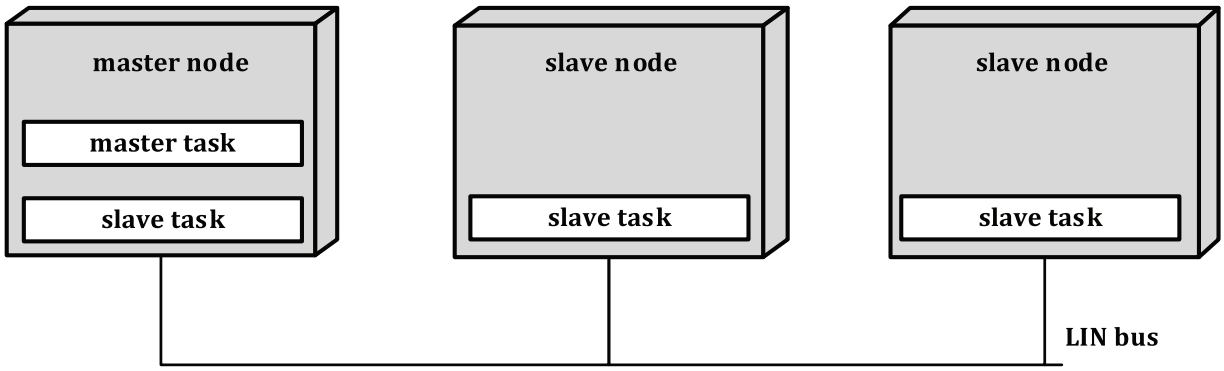


**Figure 2 — Master and slave tasks**

The master task decides when and which frame shall be transferred on the bus. The slave tasks provide the data transmitted by each frame. Both, the master task and the slave task are parts of the frame handler.

### 4.2.2 Frames

A frame consists of a header (provided by the master task) and a response (provided by a slave task).

The header consists of a break field and sync byte field followed by a protected identifier. The protected identifier uniquely defines the purpose of the frame and node providing the response. The slave task of the node assigned as response transmitter provides the response. In case of diagnostic frames, not only the frame identifier but also the NAD assigns the transmitting node.

The response consists of a data field and a checksum field. The slave tasks interested in the data associated with the frame identifier receives the response, verifies the checksum and uses the data transmitted.

Figure 3 shows the LIN frame header and response fields.

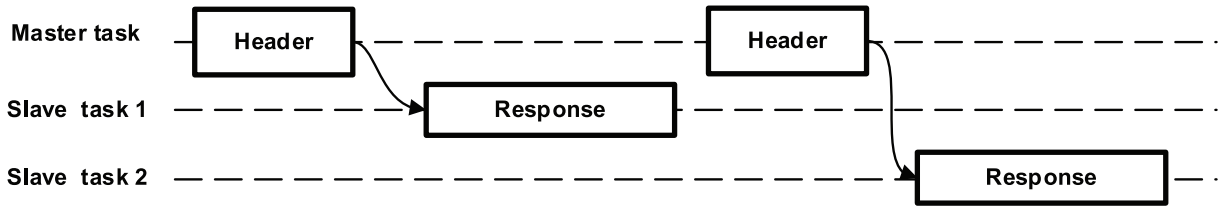


**Figure 3 — LIN frame header and response fields**


© ISO 2016 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

This results in the following desired features.

— System flexibility: Nodes can be added to the LIN cluster without requiring hardware or software changes in other slave nodes.

— Message routing: The content of a message is defined by the frame identifier (similar to CAN).

— Multicast: Any number of nodes can simultaneously receive and act upon a single frame.

#### 4.2.3 Data transport

The following two types of data may be transmitted in a frame.

— Signals:

  Signals are scalar values or byte arrays that are packed into the data field of a frame. A signal is always present at the same position of the data field for all frames with the same frame identifier.

— Diagnostic messages:

  Diagnostic messages are transmitted in frames with two reserved frame identifiers. The interpretation of the data field depends on the data field itself as well as the state of the communicating nodes.

# 5 Protocol requirements

## 5.1 Signal

### 5.1.1 Management

A signal is transmitted in the data field of a frame.

### 5.1.2 Types

A signal is either a scalar value or a byte array.

A scalar signal is between 1 bit and 16 bit long. Scalar signals are treated as unsigned integers. A 1-bit scalar signal is called a Boolean signal.

A byte array is an array of one up to eight bytes.

Each signal shall have one publisher, i.e. it shall be always sent by the same node in the cluster. Zero, one or multiple nodes may subscribe to the signal.

All signals shall have initial values. The initial value for a published signal should be valid until the node writes a new value to this signal. The initial value for a subscribed signal should be valid until a new updated value is received from another node.

### 5.1.3 Consistency

Scalar signal writing or reading shall be atomic operations, i.e. it shall not be possible for an application to receive a signal value that is partly updated. This shall also apply to byte arrays. However, no consistency is guaranteed between any signals.

### 5.1.4 Packing

There is no restriction on packing scalar signals over byte boundaries. Each byte in a byte array shall map to a single frame byte starting with the lowest numbered data byte, see 5.2.2.6.

© ISO 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016

Several signals may be packed into one frame as long as they do not overlap each other.

NOTE Signal packing/unpacking is implemented more efficient in software-based nodes if signals are byte aligned and/or if they do not cross byte boundaries.

The same signal may be packed into multiple frames as long as the publisher of the signal is the same. If a node is receiving one signal packed into multiple frames, the latest received signal value is valid. Handling the same signal packed into frames on different LIN clusters is out of the scope.

### 5.1.5 Reception and transmission

The point in time when a signal is transmitted/received needs to be defined to help design tools and testing tools to analyse timing of signals. This means that all implementations behave in a predictable way.

The definitions below do not contain factors such as bit rate tolerance, jitter, buffer copy execution time, etc. These factors needs be taken into account to get a more detailed analysis. The intention for the definitions below is to have a basis for such analysis.

The timing is different for a master node and a slave node. The reason is that the master node controls the schedule and is aware of the due frame. A slave node gets this information first when the header is received.

The time base and time base tick is defined in 5.3.

A signal is considered received and available to the application as shown in Figure 4.

— Master node, at the next time base tick after the maximum frame length. The master node updates its received signals periodically at the time base start, i.e. at task level.

— Slave node, when the checksum for the received frame is validated. The slave node updates its received signals directly after the frame is finished, i.e. at interrupt level.




**Key**

1 time base tick

2 slave node – signal is available to the application

3 master node – time the signal is available to the application

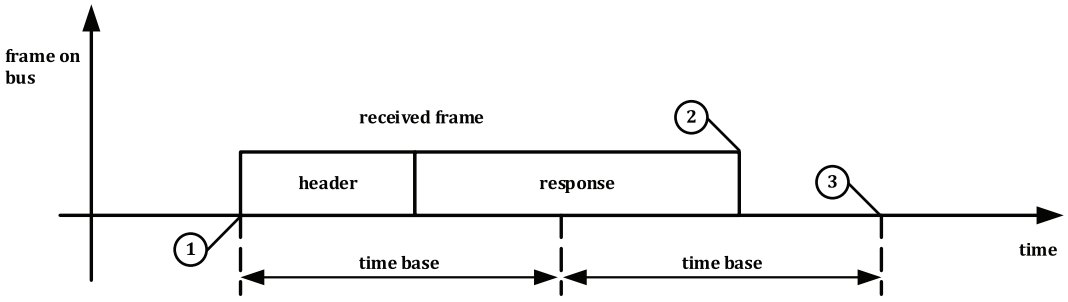**Figure 4 — Timing of signal reception**

A signal is considered transmitted (latest point in time when the application may write to the signal).

— Master node – before the frame transmission is initiated.

— Slave node – when the ID for the frame is received.

Figure 5 shows the timing of signal transmission.


© ISO 2016 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 17987-3:2016