

BS ISO 1832:2012



BSI Standards Publication

Indexable inserts for cutting tools — Designation

bsi.

...making excellence a habit.
AVA Documents™
Document Sharing Hub

National foreword

This British Standard is the UK implementation of ISO 1832:2012. It supersedes BS ISO 1832:2004 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee MTE/18, Tools tips and inserts for cutting applications.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012. Published by BSI Standards Limited 2012

ISBN 978 0 580 76128 7

ICS 25.100.01

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 December 2012.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL STANDARD

BS ISO 1832:2012

ISO
1832

Fifth edition
2012-11-15

Indexable inserts for cutting tools — Designation

Plaquettes amovibles pour outils coupants — Désignation



Reference number
ISO 1832:2012(E)
Documents
Document Sharing Hub
© ISO 2012



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Explanation of designation code	1
4 Symbols	3
4.1 Symbol for insert shape — Reference ①	3
4.2 Symbol for normal clearance — Reference ②	3
4.3 Symbol for tolerance class — Reference ③	4
4.4 Symbol for fixing and/or chip breakers — Reference ④	7
4.5 Symbol for insert size — Reference ⑤	9
4.6 Symbol for insert thickness — Reference ⑥	10
4.7 Symbol for insert corner configuration — Reference ⑦	11
5 Optional symbols for indexable inserts	12
5.1 General	12
5.2 Symbol for cutting edge condition — Reference ⑧	12
5.3 Symbol for the corner type and the application of the insert (direction of feed motion) — Reference ⑨	13
6 Additional symbols for tipped inserts	13
6.1 General	13
6.2 Size of cutting edge condition	13
6.3 Style of tipped or solid cutting edge and number of tipped corners — Reference ⑪	17
6.4 Length of tipped cutting edge — Reference ⑫	19
Annex A (informative) Symbols for insert size (reference ⑤) according to standardized inscribed circles for equilateral and round inserts	20
Annex B (informative) Symbols for standardized insert thicknesses (reference ⑥)	23
Annex C (informative) Relationship between designations in this International Standard and ISO 13399 (all parts)	24
Bibliography	25

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 1832 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 9, *Tools with cutting edges made of hard cutting materials*.

This fifth edition cancels and replaces the fourth edition (ISO 1832:2004), which has been technically revised.

Indexable inserts for cutting tools — Designation

1 Scope

This International Standard establishes a code for the designation of the usual types of indexable inserts for cutting tools in hard cutting materials or any other cutting materials, in order to simplify orders and specifications for such inserts.

It also specifies the designations for cubic boron nitride (BL, BH, BC) inserts, tipped and solid, as well as polycrystalline diamond (DP) inserts, tipped.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 513, *Classification and application of hard cutting materials for metal removal with defined cutting edges — Designation of the main groups and groups of application*

ISO 3002-1, *Basic quantities in cutting and grinding — Part 1: Geometry of the active part of cutting tools — General terms, reference systems, tool and working angles, chip breakers*

ISO 16462, *Cubic boron nitride inserts, tipped or solid — Dimensions, types*

ISO 16463, *Polycrystalline diamond inserts, tipped — Dimensions, types*

3 Explanation of designation code

For indexable inserts, the designation code comprises nine symbols for designating the dimensions and other characteristics; the first seven symbols (symbols ① to ⑦) shall be used in every designation. Symbols ⑧ and ⑨ may be used when necessary.

For tipped inserts in accordance with ISO 16462 and ISO 16463, the designation code comprises 12 symbols for designating the dimensions and other characteristics; symbols ① to ⑦ as well as ⑪ and ⑫ shall be used in every designation. Symbols ⑧, ⑨ and ⑩ may be used when necessary. Symbols ⑪ and ⑫ shall be separated by a dash as shown in Clause 3, Example 2.

In addition to the standardized designation for indexable inserts and tipped inserts, a supplementary symbol ⑬ consisting of one or two characters may be added by the manufacturer for a better description of his/her product (for example different chip breakers), provided this symbol is separated from the standardized designation by a dash and that it does not contain letters specific to references ⑧, ⑨ and ⑩.

No addition to or extension of the designations specified in this International Standard shall be made without consultation with ISO/TC 29 and without its agreement. Rather than adding symbols not provided for in this system, it is preferable to add all necessary explanations in the form of detailed sketches or specifications to the designation in accordance with this International Standard.

However, if the letter symbol “X” is used in position 4 of the designation, it is possible to use, in positions 5, 6 and 7, symbols representing values not appearing in this International Standard, but which shall be described explicitly using the sketch or the detailed specifications given in 4.4.

The significance of the symbols constituting the designation code is as follows:

① Letter symbol identifying	insert shape (see 4.1)	Compulsory symbols for indexable inserts	Compulsory symbols for tipped inserts in accordance with ISO 16462 and ISO 16463, except as noted
② Letter symbol identifying	normal clearance (see 4.2)		
③ Letter symbol identifying	tolerance class (see 4.3)		
④ Letter symbol indicating	fixing and/or chip breakers (see 4.4)		
⑤ Number symbol identifying	insert size (see 4.5)		
⑥ Number symbol identifying	insert thickness (see 4.6)		
⑦ Letter or number symbol identifying	insert corner configuration (see 4.7)		
⑧ Letter symbol indicating (optional symbol for indexable and tipped inserts)	cutting edge condition (see 5.2)	(see 6.2)	
⑨ Letter symbol indicating (optional symbol for indexable and tipped inserts)	cutting direction (see 5.3)	(see 6.3)	
		(see 6.4)	
⑩ Number symbol identifying (optional symbol for tipped inserts)	size of cutting edge condition		
⑪ Letter symbol identifying	style of tipped or solid cutting edge and number of tipped corners		
⑫ Letter or number symbol identifying	length of tipped cutting edge		
⑬ Manufacturer's symbol or cutting material designation in accordance with ISO 513 (optional symbol for indexable and tipped inserts)			

EXAMPLE 1 General designation

	①	②	③	④	⑤	⑥	⑦	⑧	⑨		⑬
Metric dimensions:	T	P	G	N	16	03	08	E	N	-	...
Inch dimensions:	T	P	G	N	3	2	2	E	N	-	...

EXAMPLE 2 Designation of inserts in accordance with ISO 16462 and ISO 16463

	①	②	③	④	⑤	⑥	⑦	⑧	⑩	⑨		⑪	⑫	⑬
Designation of insert for turning	S	N	M	A	15	06	08	E		(N)	-	B	L	- ...
Designation of insert for milling	T	P	G	T	16	T3	AP	S	01520	R	-	M	028	- ...

The designations and symbols of the different angles allowing geometrical definition of the indexable inserts are in conformity with ISO 3002-1, with the following conventions:

- the insert is considered in the tool-in-hand system;
- the reference plane, P_r , is parallel to the base of the insert;
- the assumed working plane, P_f , is perpendicular to the reference plane, P_r , and is parallel to the assumed direction of feed motion. This plane is defined only in the case of inserts having one or more wiper edges.


The assumed direction of feed motion is taken parallel to the considered wiper edge (see Note 1 to Table 9).

4 Symbols

4.1 Symbol for insert shape — Reference ①

See Table 1.


Table 1

Type		Letter symbol	Description of shape	Included angle, ε_r	Illustration
I	Equilateral and equiangular inserts	H	Hexagonal inserts	120°	
		O	Octagonal inserts	135°	
		P	Pentagonal inserts	108°	
		S	Square inserts	90°	
		T	Triangular inserts	60°	
II	Equilateral but non-equiangular inserts	C	Rhombic inserts	80° ^a	
		D		55° ^a	
		E		75° ^a	
		M		86° ^a	
		V		35° ^a	
		W	Trigon inserts	80° ^a	
III	Non-equilateral but equiangular inserts	L	Rectangular inserts	90°	
IV	Non-equilateral and non-equiangular inserts	A	Parallelogram-shaped inserts	85° ^a	
		B		82° ^a	
		K		55° ^a	
V	Round inserts	R	Round inserts	—	
^a The smaller angle is always the included angle that is considered.					

4.2 Symbol for normal clearance — Reference ②

See Table 2.

Table 2

Letter symbol	
For normal clearance, choose, from the letter symbols listed below, the one that corresponds to the major cutting edge (see the figure below).	
If (in spite of different clearances) all cutting edges have to be used as major cutting edges, the symbol to be used for the designation of the normal clearance shall be the symbol applicable to the normal clearance of the longer cutting edge, which is also considered the major cutting edge for the indication of the insert size (see reference ⑤).	
	A — 3° B — 5° C — 7° D — 15° E — 20° F — 25° G — 30° N — 0° P — 11° O — Other normal clearances requiring special specification

4.3 Symbol for tolerance class — Reference ③

See Table 3.

The dimensions concerned are d (nominal diameter of the inscribed circle of the insert), s (thickness of the insert) and m . For this last dimension, the three cases represented in Figures 1 to 3 are distinguished.




Figure 1 — Case 1: inserts with odd numbers of sides and rounded corners




Figure 2 — Case 2: inserts with even numbers of sides and rounded corners

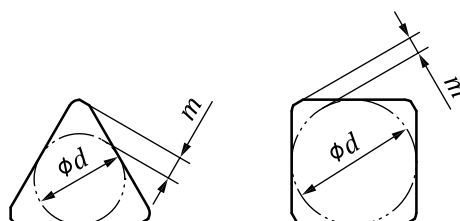


Figure 3 — Case 3: inserts with wiper edges (see Note 1 to Table 9)

Table 3

Letter	Tolerance in millimetres			Tolerance in inches		
	<i>d</i>	<i>m</i>	<i>s</i>	<i>d</i>	<i>m</i>	<i>s</i>
A^a	± 0,025	± 0,005	± 0,025	± 0,001	± 0,000 2	± 0,001
F^a	± 0,013	± 0,005	± 0,025	± 0,000 5	± 0,000 2	± 0,001
C^a	± 0,025	± 0,013	± 0,025	± 0,001	± 0,000 5	± 0,001
H	± 0,013	± 0,013	± 0,025	± 0,000 5	± 0,000 5	± 0,001
E	± 0,025	± 0,025	± 0,025	± 0,001	± 0,001	± 0,001
G	± 0,025	± 0,025	± 0,13	± 0,001	± 0,001	± 0,005
J^a	from ± 0,05 ^b to ± 0,15 ^b	± 0,005	± 0,025	from ± 0,002 ^b to ± 0,006 ^b	± 0,000 2	± 0,001
K^a	from ± 0,05 ^b to ± 0,15 ^b	± 0,013	± 0,025	from ± 0,002 ^b to ± 0,006 ^b	± 0,000 5	± 0,001
L^a	from ± 0,05 ^b to ± 0,15 ^b	± 0,025	± 0,025	from ± 0,002 ^b to ± 0,006 ^b	± 0,001	± 0,001
M	from ± 0,05 ^b to ± 0,15 ^b	from ± 0,08 ^b to ± 0,2 ^b	± 0,13	from ± 0,002 ^b to ± 0,006 ^b	from ± 0,003 ^b to ± 0,008 ^b	± 0,005
N	from ± 0,05 ^b to ± 0,15 ^b	from ± 0,08 ^b to ± 0,2 ^b	± 0,025	from ± 0,002 ^b to ± 0,006 ^b	from ± 0,003 ^b to ± 0,008 ^b	± 0,001
U	from ± 0,08 ^b to ± 0,25 ^b	from ± 0,13 ^b to ± 0,38 ^b	± 0,13	from ± 0,003 ^b to ± 0,01 ^b	from ± 0,005 ^b to ± 0,015 ^b	± 0,005
^a These tolerance classes normally apply to indexable inserts with wiper edges.						
^b The tolerance is dependent upon the insert size (see Tables 4 and 5) and should be indicated for insert according to the corresponding dimensional standards.						

Tolerances on *d* for tolerance classes J, K, L, M, N and U for inserts of shapes H, O, P, S, T, C, E, M, W and R and tolerances on *m* for tolerance classes M, N and U for inserts with an included angle of 60° or more, of shapes H, O, P, S, T, C, E, M and W, are indicated in Table 4.