BS ISO 20155:2017

BSI Standards Publication

Ships and marine technology — Test method of flow induced in-pipe noise source characteristics for a ship-used pump

Documents
Document Sharing Hub

Full document details: BS ISO 20155:2017

National foreword

This British Standard is the UK implementation of ISO 20155:2017.

The UK participation in its preparation was entrusted to Technical Committee SME/32, Ships and marine technology - Steering committee.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2017
Published by BSI Standards Limited 2017

ISBN 978 0 580 89010 9

ICS 47.020.01

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2017.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: BS ISO 20155:2017

INTERNATIONAL STANDARD

ISO 20155

First edition
2017-08

Ships and marine technology — Test method of flow induced in-pipe noise source characteristics for a ship-used pump

Navires et technologie maritime — Méthode pour déterminer les caractéristiques des sources de bruit induites par l'écoulement dans les tuyaux d'une pompe de navire

Reference number
ISO 20155:2017(E)

Documents
Document Sharing Hub
© ISO 2017

Full document details: BS ISO 20155:2017

COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

© ISO 2017 – All rights reserved

Documents
Document Sharing Hub

Full document details: BS ISO 20155:2017

Contents

Page

Foreword ... **iv**

Introduction ... **v**

1 Scope ... **1**

2 Normative references ... **1**

3 Terms and definitions ... **1**

4 Two-port source model and test method of source characteristic of pump ... **2**
4.1 Two-port source model of a pump ... 2
4.2 Test methods for source characteristic parameters of the pump ... 3

5 Test rig ... **4**
5.1 Test loop ... 4
5.2 Installation of test pump ... 5
5.3 Ground foundation and supporting structure ... 6
5.4 Test-bed pipeline ... 6
5.5 Test section ... 6
5.6 Throttling valve ... 6
5.7 Secondary acoustic exciter ... 7
5.8 Water tank ... 7

6 Instrumentation ... **7**
6.1 General ... 7
6.2 Static measurements ... 7
6.3 Dynamic measurements ... 7

7 Test preparation ... **8**

8 Test procedure ... **8**

9 Data processing ... **9**
9.1 General ... 9
9.2 Passive characteristic of noise source ... 9
9.3 Active characteristic ... 9

10 Evaluation criteria for the test result ... **9**

11 Test report ... **10**
11.1 Overview ... 10
11.2 General information ... 10
11.3 Test record ... 11
11.4 Test result ... 11

Annex A (informative) **Theoretical models of a two-port source and transformation mutually between matrix *Z*, *S*, *T*** ... **13**

Annex B (informative) **Evaluation of quantities at inlet and outlet ports** ... **15**

Annex C (informative) **Judgment of effectiveness for the test** ... **17**

Annex D (informative) **Formulae for determining passive characteristics of noise source** ... **19**

Annex E (informative) **Formulae for determining active characteristics of source** ... **20**

Annex F (informative) **Verification of test method taking a T-shaped sound excitor as a two-port acoustic source** ... **21**

Bibliography ... **24**

© ISO 2017 – All rights reserved

Documents
Document Sharing Hub

Full document details: BS ISO 20155:2017

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 8, *Ship design*.

© ISO 2017 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 20155:2017

Introduction

In hydraulic fluid power systems of ships, power is transmitted through a liquid under pressure. Pumps are components that convert rotary mechanical power into hydraulic fluid power. During the process of converting mechanical power into hydraulic power, flow and pressure fluctuations and structure-borne vibrations are generated. These fluid-borne and structure-borne vibrations, which are generated primarily by the unsteady flow produced by the pump, are transmitted through the connected piping system.

The fluid-borne vibration generated by a pump is called pressure ripple or flow induced noise. For pumps used for coolant and drainage in ships, flow induced noise can be transmitted along the piping and radiated into the surrounding water area through a pipe mouth outboard the ship, which produces noise pollution and disturbs the environment including marine mammals.

The level of flow induced noise for a pump depends upon not only the characteristics of the pump itself, but also the circuit in which the pump is installed. Thus, the determination of flow induced noise by a pump is complicated by the interaction between the pump and the circuit. The directly measured data using hydrophones inserted in pipe reaches connecting the pump cannot reflect noise source characteristics of the pump. The method adopted to measure the flow induced noise of a pump should be such as to eliminate the interaction.

ISO 10767-1 and ISO 10767-2 provide the test methods for the positive displacement pump with the precision and simplified method, respectively, where the pump is treated as a single port acoustic source and its source characteristics expressed by two parameters of source strength as well as source impedance can be obtained. For other common pumps with two ports, the sound field between the inlet and outlet of a pump is inter-coupling, source characteristics cannot be fully expressed by two parameters, but expressed by up to six parameters, i.e. source pressures at the inlet and outlet of a pump and four elements in a 2 × 2 impedance matrix. There is a need to establish a new standard about a test method for noise source characteristics of a pump, based on two-port acoustic source model.

The source characteristics of flow induced noise are used for evaluating the hydrodynamic noise feature of the pump. The measured results can be compared for pumps of different types and manufacture. This will enable the pump designer to evaluate the effects of design modifications and help hydraulic system designers to avoid selecting pumps having high noise levels.

The method is based upon the application of plane wave transmission line theory to the analysis of noise propagation in hydraulic systems. By adopting a two-port model with noise source and evaluating the impedance characteristics of the pump using a secondary-source method, it is possible to obtain the source strength of the pump, independent of the circuit that the pump locates.

© ISO 2017 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 20155:2017

Documents
Document Sharing Hub

Full document details: BS ISO 20155:2017

Ships and marine technology — Test method of flow induced in-pipe noise source characteristics for a ship-used pump

1 Scope

This document specifies a test method for determining flow induced in-pipe noise source characteristics of a ship-used pump as a two-port sound source in laboratory conditions by measuring acoustic pressures in the pipe reaches of inlet and outlet.

The test method is applicable to all types of centrifugal pumps with a diameter over 50 mm operating under steady conditions.

The suitable frequency range of the test method is about 10 Hz to 1 000 Hz, and the upper frequency is dependent on the inner diameter of the pipe, in which the plane acoustic wave propagates.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 10767-1:2015, *Hydraulic fluid power — Determination of pressure ripple levels generated in systems and components — Part 1: Method for determining source flow ripple and source impedance of pumps*

IEC 60565, *Underwater acoustics — Hydrophones — Calibration in the frequency range 0,01 Hz to 1 MHz*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— IEC Electropedia: available at http://www.electropedia.org/

— ISO Online browsing platform: available at http://www.iso.org/obp

3.1
two-port source
test object with inlet and outlet which are inter-coupling acoustically

3.2
passive characteristic
acoustic characteristic of a test object only acting as a transmission path, which can be indicated by different manners such as a transfer matrix, impedance matrix, scattering matrix, etc.

3.3
active characteristic
acoustic characteristic of a test object which provides acoustic energy into a piping system

Note 1 to entry: Depending on the adopted theoretical model, active characteristics can be represented by acoustic pressure source, volume velocity source, etc.

© ISO 2017 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 20155:2017

3.4
test section
pipe reaches which are used to fix the hydrophones, measuring the in-pipe noise from the acoustic source

3.5
static pressure in pipe
fluid pressure in pipe as fluid is in still, which is one of the parameters describing the working conditions of the test object

3.6
working flowrate
fluid volume or mass per unit time, which is one of the working parameters of the test object

3.7
pressure drop/hydraulic loss
static pressure difference between the inlet and outlet as the fluid passes through the test object, which is a reference parameter for analysis use

3.8
foundation
platform built by ferroconcrete, used to install the experimental facility and test objects, including ground basis, guide rail for convenient mount of pipeline

4 Two-port source model and test method of source characteristic of pump

4.1 Two-port source model of a pump

It is assumed that only plane wave would transmit in the pipeline, and the noise source characteristic of a pump could be described by linear superposition of active and passive characteristic. Based on the electro-acoustic analogy and acoustic transmission line theory, there are three different models to characterize a two-port source, which can be called “Transmission model”, “Impedance model” and “Scattering model”. They are illustrated in Annex A.

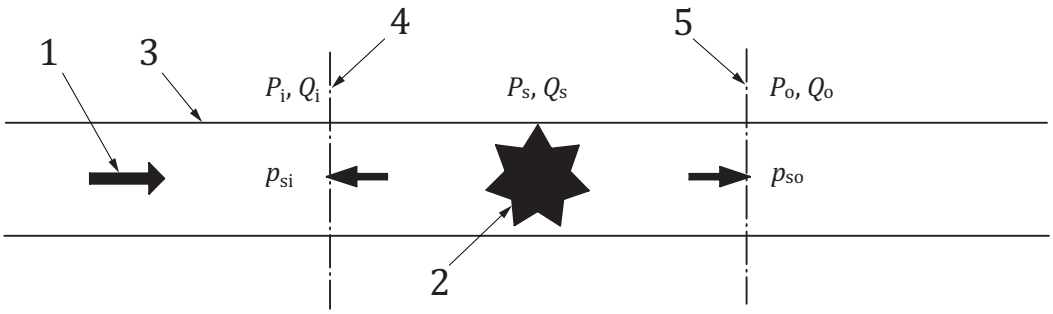

Key
1 flow
2 source
3 pipe
4 inlet
5 outlet

Figure 1 — Two-port noise source model

© ISO 2017 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO 20155:2017

Adopting the impedance model, the radiating sound from the inlet and outlet into pipe can be expressed by Formula (1):

$$\begin{pmatrix} P_o \\ P_i \end{pmatrix} = \begin{bmatrix} Z_{11} & Z_{12} \\ Z_{21} & Z_{22} \end{bmatrix} \begin{pmatrix} Q_o \\ Q_i \end{pmatrix} + \begin{pmatrix} P_{so} \\ P_{si} \end{pmatrix} = \boldsymbol{Z} \begin{pmatrix} Q_o \\ Q_i \end{pmatrix} + \begin{pmatrix} P_{so} \\ P_{si} \end{pmatrix} \tag{1}$$

where

P_s, Q_s is the real sound source of a pump providing sound pressure and volumetric velocity into the inlet and outlet of the pump, while the connected pipes are unlimited or anechoic;

P_o, Q_o is the sound pressure and volumetric velocity at the outlet of acoustic source, respectively;

P_i, Q_i is the sound pressure and volumetric velocity at the inlet of acoustic source, respectively;

P_{so}, P_{si} is the sound pressure source which indicate radiating sound from the inlet and outlet into pipe;

Z is the impedance matrix, $Z = \begin{bmatrix} Z_{11} & Z_{12} \\ Z_{21} & Z_{22} \end{bmatrix}$.

4.2 Test methods for source characteristic parameters of the pump

Using the secondary-source method, turn on the secondary acoustic source on one side (inlet or outlet), get and register signals from the four hydrophones. Then, move it to another side and turn it on, register signals of the four hydrophones again. By this procedure, matrix parameter Z can be derived. Finally, turn off the source, active characteristic parameters p_s and q_s of the pump can be obtained utilizing the result of matrix parameter Z.

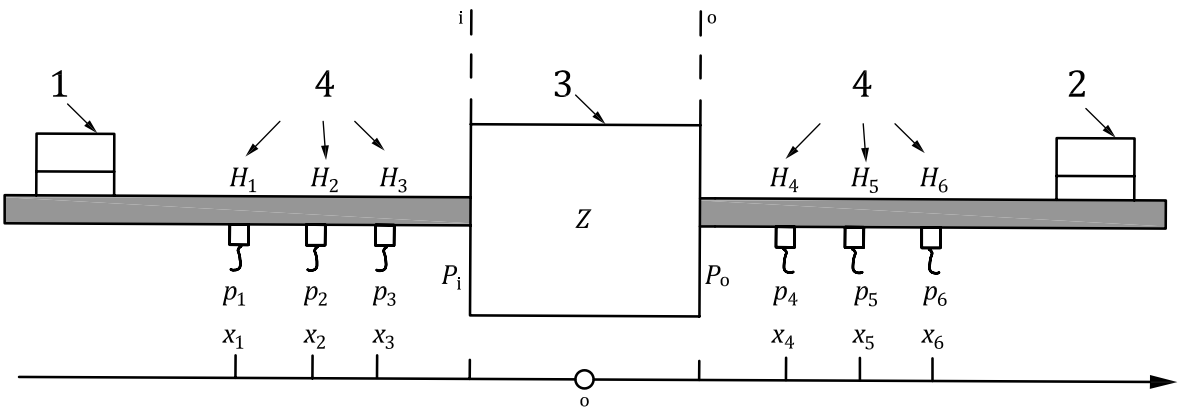

Key

1 secondary source 1

2 secondary source 2

3 test pump

4 hydrophones H_1 to H_6

Figure 2 — Sketch of dual-position acoustic source methods

In Figure 2, H_1 to H_6 are six hydrophones along the pipe mounted at positions x_1 to x_6, correspondingly.

© ISO 2017 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO 20155:2017