

Mechanical vibration — Balancing machines — Description and evaluation

ICS 21.120.40

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

BSI
Documents



Document Sharing Hub

National foreword

This British Standard reproduces verbatim ISO 2953:1999 and implements it as the UK national standard. It supersedes BS 3852-1:1979 which is withdrawn.

The UK participation in its preparation was entrusted by Technical Committee GME/21, Shock and vibration, to Subcommittee GME/21/8, Balancing and balancing terminology, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled “International Standards Correspondence Index”, or by using the “Find” facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the ISO title page, pages ii to iv, pages 1 to 55, and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

This British Standard, having been prepared under the direction of the Engineering Sector Committee, was published under the authority of the Standards Committee and comes into effect on 15 April 2000

© BSI 04-2000

ISBN 0 580 34651 X

Amendments issued since publication

Amd. No.	Date	Comments

Mechanical vibration — Balancing machines — Description and evaluation

*Vibrations mécaniques — Machines à équilibrer — Description et
évaluation*



Contents	Page
1 Scope	1
2 Normative reference	1
3 Definitions	1
4 Capacity and performance data of the machine.....	1
4.1 Data of horizontal machines.....	2
4.2 Data of vertical machines.....	6
5 Machine features.....	10
5.1 Principle of operation	10
5.2 Arrangement of the machine	10
5.3 Indicating system.....	11
5.4 Plane separation system.....	12
5.5 Setting and calibration of indication.....	12
5.6 Other devices	13
6 Minimum achievable residual unbalance	13
7 Production efficiency	13
7.1 General.....	13
7.2 Time per measuring run	14
7.3 Unbalance reduction ratio	14
8 Performance qualifying factors.....	14
9 Installation requirements	15
9.1 General.....	15
9.2 Electrical and pneumatic requirements.....	15
9.3 Foundation	15

10 Proving rotors and test masses	15
10.1 General	15
10.2 Proving rotors	15
10.3 Test masses	17
11 Verification tests	26
11.1 Requirements for performance and parameter verification	26
11.2 Duties of manufacturer and user	26
11.3 Requirement for weighing scale	27
11.4 Test and rechecks	27
11.5 Test speed	27
11.6 Test for minimum achievable residual unbalance (U_{mar} test)	27
11.7 Test for unbalance reduction ratio (URR test)	31
11.8 Test for couple unbalance interference on single-plane machines	40
11.9 Compensator test	40
11.10 Simplified tests	41
Annex A (normative) Definitions	42
Annex B (informative) Information to be supplied to the balancing machine manufacturer by the user	45
Annex C (informative) URR limit diagrams	49
Annex D (informative) Shafts of outboard proving rotors type C	52
Annex E (informative) Modification of old (ISO 2953:1985) proving rotors to this International Standard	54
Annex F (informative) Bibliography	55

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 2953 was prepared by Technical Committee ISO/TC 108, *Mechanical vibration and shock*, Subcommittee SC 1, *Balancing, including balancing machines*.

This third edition cancels and replaces the second edition (ISO 2953:1985). It contains revised and more detailed recommendations for testing the capability of balancing machines, including outboard proving rotors and overhung test planes. It replaces the previous edition of this document.

Annex A is an integral part of this International Standard. Annexes B to F are for information only.

Mechanical vibration — Balancing machines — Description and evaluation

1 Scope

This International Standard gives requirements for the evaluation of the performance and characteristics of machines for balancing rotating components. It stresses the importance attached to the form in which the balancing machine characteristics should be specified by the manufacturers and also outlines criteria and tests for evaluating balancing machines. Adoption of the format suggested in 4.1 and 4.2 makes it easier for the user to compare products of the different manufacturers. Guidance as to the manner in which users should state their requirements is given in annex B.

Details of proving rotors, test masses and performance tests to be employed to ensure compliance with specified unbalance indicating capability are given. Tests for other machine capacities and performance parameters are not contained in this International Standard.

Annex E describes recommended modifications of old ISO proving rotors.

This International Standard does not specify balancing criteria; these are specified in ISO 1940-1.

This International Standard is applicable to balancing machines that support and rotate workpieces which are rigid at balancing speed, and that indicate the amounts and angular locations of required unbalance corrections in one or more planes. It covers both the machines that measure out-of-balance effects on soft bearings and those that measure this on hard bearings.

Technical requirements for such balancing machines are included, however, special features, such as those associated with automatic correction, are excluded.

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1925:1990, *Mechanical vibration — Balancing — Vocabulary*.

3 Definitions

For the purposes of this International Standard, the definitions given in ISO 1925 and those given in annex A apply.

4 Capacity and performance data of the machine

The manufacturer shall specify the data listed in 4.1 for horizontal or 4.2 for vertical machines respectively, as applicable, and in a similar format.

4.1 Data of horizontal machines

4.1.1 Rotor mass and unbalance limitations

4.1.1.1 The maximum mass of rotor which can be balanced shall be stated over the range of balancing speeds.

The maximum moment of inertia [(mass (radius of gyration)²] of a rotor with respect to the shaft axis which the machine can accelerate in a stated acceleration time shall be given for the range of balancing speeds ($n_1, n_2, \dots$) together with the corresponding cycle rate (see table 1).

Table 1 — Data of horizontal machines

Manufacturer:		Model.....				
Balancing speeds or speed ranges (see also 4.1.3.1)		n_1	n_2	n_3	n_4	n_5
Rotor mass (see note 1)	kg					
	maximum					
	minimum					
Occasional overload force per support (see note 1)		N				
Maximum negative force per support (see note 1)		N				
Maximum rotor moment of inertia with respect to the shaft axis (see note 2)		kg·m ²				
Cycle rate (see note 2)						
Maximum unbalance (see note 3)	g·mm/kg or g·mm	measurable				
		permissible				
a) For inboard rotors Minimum achievable residual specific unbalance, e_{mar} , g·mm/kg (see note 4 and clause 6)		maximum mass				
		0,2 max. mass				
		minimum mass				
Corresponding deflection of analog amount-of-unbalance indicator, mm Number of digital units (see note 4)		maximum mass				
		0,2 max. mass				
		minimum mass				
b) For outboard rotors Minimum achievable residual specific unbalance, e_{mar} , g·mm/kg (see note 4 and clause 6)		maximum mass				
		0,2 max. mass				
		minimum mass				
Corresponding deflection of analog amount-of-unbalance indicator, mm Number of digital units (see note 4)		maximum mass				
		0,2 max. mass				
		minimum mass				

4.1.1.2 Production efficiency (see clause 7) shall be stated, as follows.

4.1.1.2.1 Time per measuring run:

- a) Time for mechanical adjustment: s
- b) Time for setting indicating system: s
- c) Time for preparation of rotor: s
- d) Average acceleration time: s
- e) Reading time (including time to stabilize): s
- f) Average deceleration time: s
- g) Relating readings to rotor: s
- h) Other necessary time: s
- i) Total time per measuring run [a) to h) above]: s

4.1.1.2.2 Unbalance reduction ratio for inboard rotors: %

4.1.1.2.3 Unbalance reduction ratio for outboard rotors: %

4.1.2 Rotor dimensions

4.1.2.1 Adequate envelope drawings of the pedestals and of other obstructions, such as belt-drive mechanism, shroud mounting pads, thrust arms and tie bars, shall be supplied to enable the user to determine the maximum rotor envelope that can be accommodated and the tooling and/or adaptors required.

A combination of large journal diameter and high balancing speed may result in an excessive journal peripheral speed. The maximum journal peripheral speed shall be stated.

When belt drive is supplied, balancing speeds shall be stated for both the maximum and minimum diameters over which the belt can drive, or other convenient diameter.

The manufacturer shall state if the axial position of the drive can be adjusted.


4.1.2.2 Rotor envelope limitations (see figure 1) shall be stated.

4.1.2.3 Rotor diameter:

- a) Maximum diameter over bed: mm
- b) Maximum diameter over which belt can drive: mm
- c) Minimum diameter over which belt can drive: mm

4.1.2.4 Distance between journal centrelines:

- a) Maximum: mm
- b) Minimum: mm
- c) Maximum distance from coupling flange to centreline of farthest bearing: mm
- d) Minimum distance from coupling flange to centreline of nearest bearing: mm

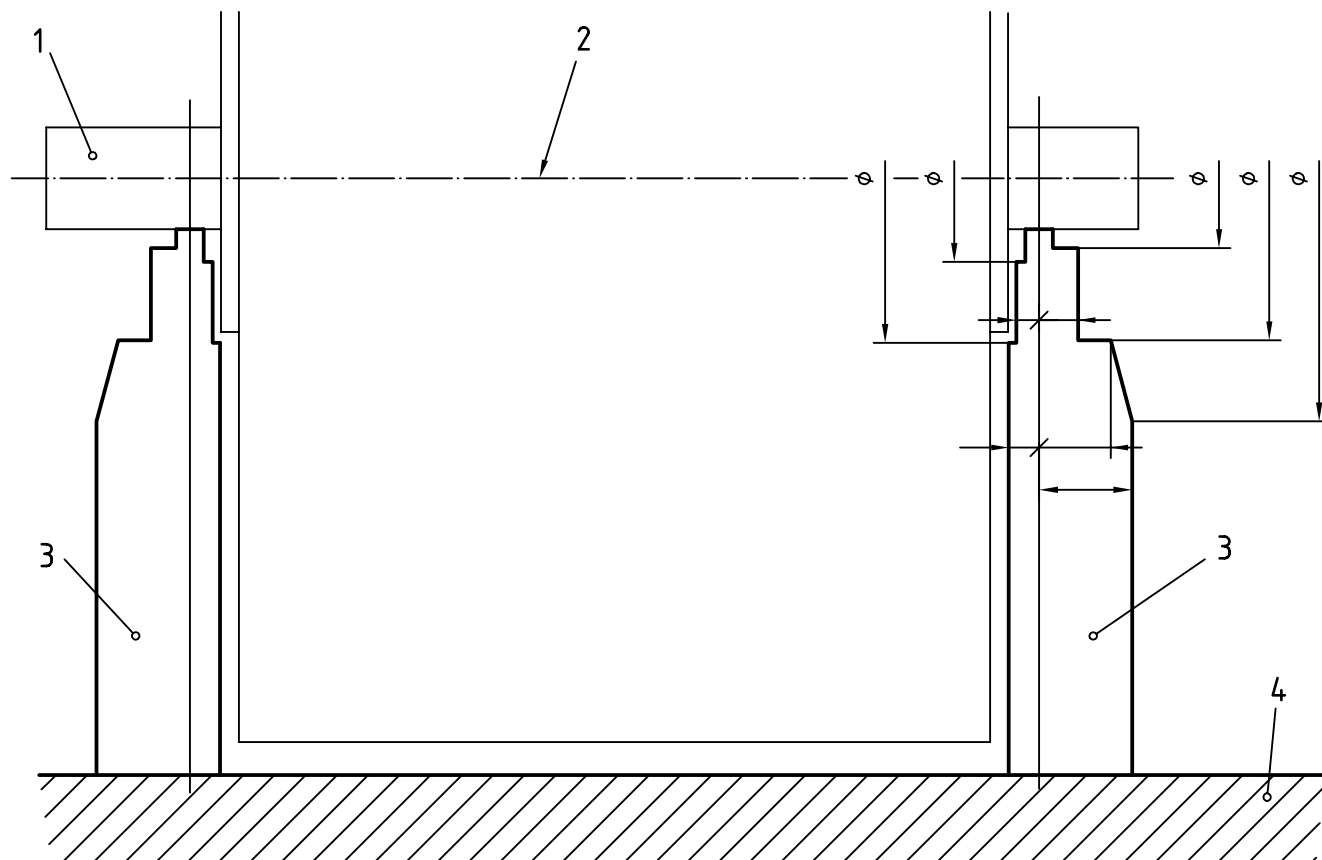

Key

- 1 Shaft
- 2 Rotor
- 3 Support
- 4 Bed

NOTE 1 If the left-hand support is not a mirror image of the right-hand support, separate dimensions shall be shown.

NOTE 2 The profile of the belt-drive equipment shall be shown, if applicable.

Figure 1 — Example of machine support drawing illustrating rotor envelope limitations

4.1.2.5 Journal diameter:

a) Maximum: mm

b) Minimum: mm

Maximum permissible peripheral journal speed m/s

4.1.2.6 Correction plane limitations (consistent with the statements in 5.4) shall be stated.**4.1.2.7** Correction plane interference ratios (consistent with the statements in 5.4 and based on the proving rotor) shall be stated.**4.1.3 Drive****4.1.3.1** Balancing speed Rated torque on workpiece

r/min

N·m

 n_1 n_2 n_3 n_4 n_5 n_6 n_7 n_8

or

or

steplessly variable

steplessly variable

from

to

4.1.3.2 Torque (see note 5):

a) Zero-speed torque: % rated torque on workpiece

b) Run-up torque adjustable from to % rated torque on workpiece

c) Peak torque % rated torque on workpiece

4.1.3.3 Type of drive to workpiece (see note 6):**4.1.3.4** Prime mover (type of motor):

a) Rated power: kW

b) Motor speed: r/min

c) Power supply, voltage / frequency / phase:

4.1.3.5 Brake

a) Type of brake:

b) Braking torque adjustable from to % of rated torque

c) Can brake be used as a holding device? Yes / No

4.1.3.6 Motor and controls in accordance with the following standard(s):

4.1.3.7 Speed regulation provided:

Accurate or constant within % of r/min, or r/min

4.1.4 Couple unbalance interference ratio (g·mm/g·mm²) % (see note 7)

4.1.5 Air pressure requirements: Pa; m³/s

NOTE 1 The occasional overload force need only be stated for the lowest balancing speed. It is the maximum force per support that can be accommodated by the machine without immediate damage.

The negative force is the static upward force resulting from a workpiece having its centre of mass outside the bearing support.

NOTE 2 Cycle rate for a given balancing speed is the number of starts and stops which the machine can perform per hour without damage to the machine when balancing a rotor of the maximum moment of inertia.

NOTE 3 In general, for rigid rotors with two correction planes, one-half of the stated value pertains to each plane; for disc-shaped rotors, the full stated value holds for one plane.

NOTE 4 Limits for soft-bearing machines are generally stated in gram millimetres per kilogram (specific unbalance), since this value represents a measure of rotor displacement and, therefore, motion of the balancing machine bearings. For hard-bearing machines, the limits are generally stated in gram millimetres, since these machines are usually factory-calibrated to indicated unbalance in such units (see clause 6). For two-plane machines, this is the result obtained when the minimum achievable residual unbalance is distributed between the two planes.

NOTE 5 In most cases, maximum torque is required for accelerating a workpiece. However, in the case of a workpiece with high windage and/or friction loss, maximum torque may be required at balancing speed. When there is axial thrust, it is necessary that provisions be made to take this into account.

NOTE 6 Examples of the type of drive to the workpiece are:

¾ end drive by universal joint driver,

¾ end drive by band,

¾ belt drive,

¾ magnetic field,

¾ driven bearing rollers,

¾ air jet, etc.

NOTE 7 This value is only applicable for single-plane balancing machines. It describes the influence of couple unbalance in the rotor on the indication of static unbalance.

4.2 Data of vertical machines

4.2.1 Rotor mass and unbalance limitations

4.2.1.1 The maximum mass of rotor which can be balanced shall be stated over the range of balancing speeds.

The maximum moment of inertia [mass (radius of gyration)²] of a rotor with respect to the shaft axis which the machine can accelerate in a stated acceleration time shall be given for the range of balancing speeds (n_1 , n_2 , ...) together with the corresponding cycle rate (see table 2).

Table 2 — Data of vertical machines

Manufacturer:		Model				
Balancing speeds or speed ranges (see also 4.2.3.1)		n_1	n_2	n_3	n_4	n_5
Rotor mass (see note 1)	kg	maximum				
		minimum				
Occasional overload force up to (see note 1)		N				
Maximum rotor moment of inertia with respect to the shaft axis (see note 2)		kg·m ²				
Cycle rate (see note 2)						
Maximum unbalance (see note 3)	g·mm/kg or g·mm	measurable				
		permissible				
Minimum achievable residual specific unbalance, e_{mar} , (see note 4 and clause 6)	g·mm/kg	maximum mass				
		0,2 max. mass				
		minimum mass				
Corresponding deflection of analog amount-of-unbalance indicator Number of digital units (see note 4)	mm	maximum mass				
		0,2 max. mass				
		minimum mass				

4.2.1.2 Production efficiency (see clause 7) shall be stated, as follows.

4.2.1.2.1 Time per measuring run:

- a) Time for mechanical adjustment: s
- b) Time for setting indicating system: s
- c) Time for preparation of rotor: s
- d) Average acceleration time: s
- e) Reading time (including time to stabilize): s
- f) Average deceleration time: s
- g) Relating readings to rotor: s
- h) Other necessary time: s
- i) Total time per measuring run [a) to h) above]: s

4.2.1.3 Unbalance reduction ratio: %

4.2.2 Rotor dimensions

4.2.2.1 If the machine is equipped with two or more speeds, this information shall be stated for each speed. If the machine is equipped with steplessly variable balancing speeds, then the information shall be given in the form of a table, formula or graph.

Adequate drawings of the support surface of the spindle or mounting plate, and of obstructions, such as drill heads, electrical control cabinets, etc. above the mounting plate, shall be supplied to enable the user to determine the maximum rotor envelope that can be accommodated and the tooling and/or adaptors required.

4.2.2.2 Maximum diameter: mm

4.2.2.3 Rotor height:

a) Maximum overall height: mm


b) Maximum height of centre of gravity: mm

at 100 % of maximum mass: mm

at 50 % of maximum mass: mm

at 25 % of maximum mass: mm

4.2.2.4 Rotor envelope limitations, including machine spindle or mounting plate interface (see figure 2) shall be stated.

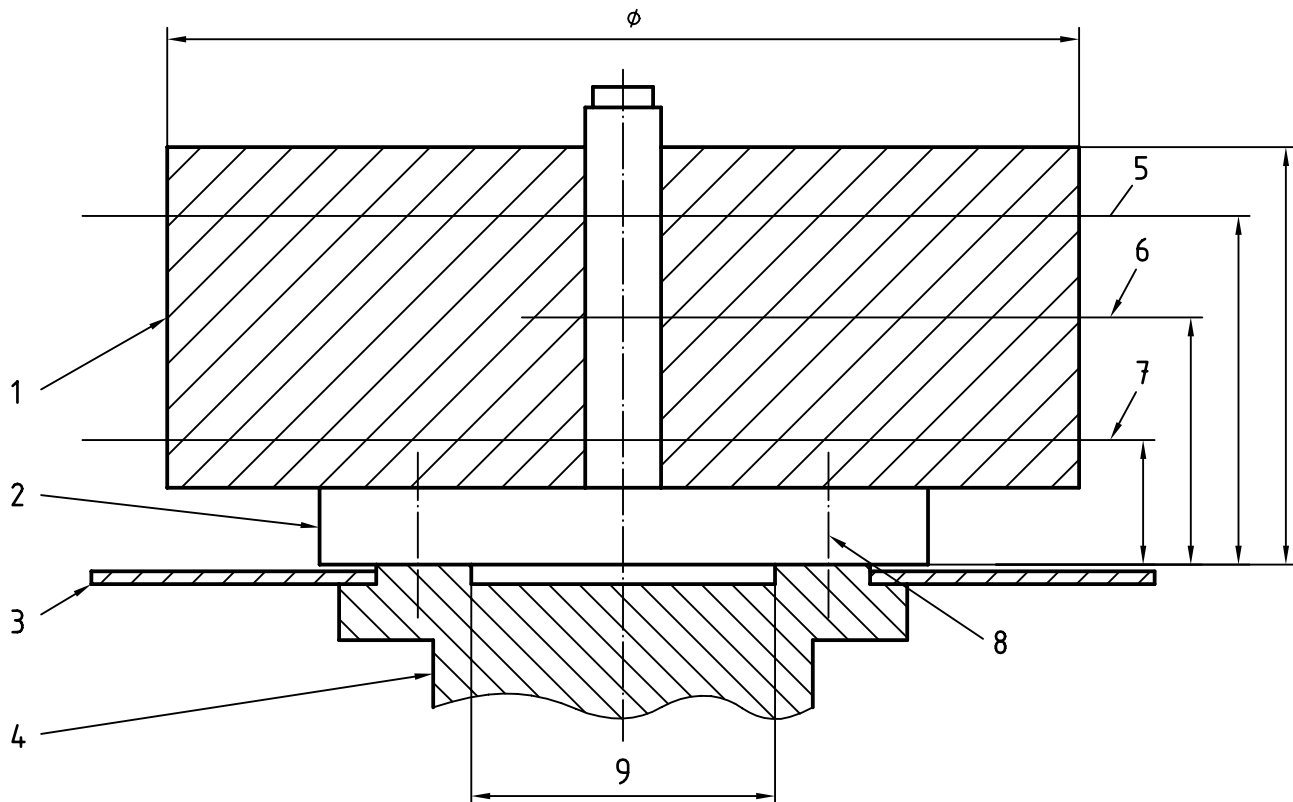

Key

- | | | | |
|---|------------------------|---|----------------------------|
| 1 | Rotor | 6 | Centre of mass plane |
| 2 | Adapter | 7 | Lower correction plane |
| 3 | Protractor | 8 | Mounting holes for adapter |
| 4 | Spindle | 9 | Pilot Ø |
| 5 | Upper correction plane | | |

Figure 2 — Example of vertical machine mounting interface illustrating rotor envelope limitations

4.2.2.5 Correction plane limitations (consistent with the statements in 5.4) shall be stated.

4.2.3 Drive

4.2.3.1 Balancing speed Rated torque on workpiece

	r/min	N·m
n_1		
n_2		
n_3		
n_4		
n_5		
n_6		
n_7		
n_8		

4.2.3.2 Torque (see note 5):

- a) Zero-speed torque: % of rated torque on workpiece
- b) Run-up torque adjustable from to % of rated torque on workpiece
- c) Peak torque: % of rated torque on workpiece

4.2.3.3 Prime mover (type of motor):

- a) Rated power: kW
- b) Motor speed: r/min
- c) Power supply, voltage / frequency / phase: / /

4.2.3.4 Brake

- a) Type of brake:
- b) Braking torque adjustable from to % of rated torque
- c) Can brake be used as a holding device ? Yes / No

4.2.3.5 Motor and controls in accordance with the following standard(s):

4.2.3.6 Speed regulation provided:

Accurate or constant within % of r/min, or r/min

4.2.4 Couple unbalance interference ratio, g·mm / g·mm² (see note 6)

4.2.5 Air pressure requirements: Pa; m³/s

NOTE 1 The occasional overload force need only be stated for the lowest balancing speed. It is the maximum force that can be accommodated by the machine without immediate damage.

NOTE 2 Cycle rate for a given balancing speed is the number of starts and stops which the machine can perform per hour without damage to the machine when balancing a rotor of the maximum moment of inertia.

NOTE 3 In general, for rigid rotors with two correction planes, one-half of the state value pertains to each plane; for disc-shaped rotors, the full stated value holds for one plane.

NOTE 4 Limits for soft-bearing machines are generally stated in gram millimetres per kilogram (specific unbalance), since this value represents a measure of rotor displacement and, therefore, motion of the balancing machine bearings. For hard-bearing machines, the limits are generally stated in gram millimetres, since these machines are usually factory-calibrated to indicate unbalance in such unit. (See also clause 6.) For two-plane-machines, this is the result obtained when the minimum achievable residual unbalance is distributed between the two planes.

NOTE 5 In most cases, maximum torque is required for accelerating a workpiece. However, in the case of workpieces with high windage and/or friction loss, maximum torque may be required at balancing speed.

NOTE 6 This value is only applicable for single-plane balancing machines. It describes the influence of couple unbalance in the rotor on the indication of static unbalance.

5 Machine features

5.1 Principle of operation

An adequate description of the principle of operation of the balancing machine shall be given; for example, motion measuring, force measuring, resonance, compensation.

5.2 Arrangement of the machine

5.2.1 The manufacturer shall describe the general configuration of this machine and the principal features of design, for example:

- $\frac{3}{4}$ horizontal or vertical axis of rotation;
- $\frac{3}{4}$ soft- or hard-bearing suspension system;
- $\frac{3}{4}$ resonance-type machine with mechanical compensator.

5.2.2 The manufacturer shall provide details of the following, as applicable.

5.2.2.1 Components designed to support the rotor, for example:

- $\frac{3}{4}$ vee blocks;
- $\frac{3}{4}$ open rollers;
- $\frac{3}{4}$ plain half-bearings;
- $\frac{3}{4}$ closed-ball, roller or plain bearings;
- $\frac{3}{4}$ devices to accommodate rotors in their service bearings;
- $\frac{3}{4}$ devices to accommodate complete units.

NOTE Details of bearing lubrication requirements shall be given, where applicable.

5.2.2.2 The mechanical adjustment and functioning of the means provided to take up axial thrust from the rotor (horizontal machines only).

5.2.2.3 Type(s) of transducers used to sense unbalance effects.

5.2.2.4 The drive and its control.

5.3 Indicating system

5.3.1 General

A balancing machine shall have means to determine the amount of unbalance and its angular location; such means shall be described, for example:

- $\frac{3}{4}$ wattmetric indicating system;
- $\frac{3}{4}$ voltmetric indicating system with phase-sensitive rectifier (including systems with frequency conversion);
- $\frac{3}{4}$ voltmetric system with stroboscope and filter;
- $\frac{3}{4}$ voltmetric indicating system with marking of angular position on the rotor itself;
- $\frac{3}{4}$ compensator with mechanical or electrical indication.

5.3.2 Amount indicators

The manufacturer shall describe the means of amount indication provided, for example:

- $\frac{3}{4}$ wattmetric or voltmetric component meters;
- $\frac{3}{4}$ wattmetric or voltmetric amount meters;
- $\frac{3}{4}$ wattmetric or voltmetric vector meters;
- $\frac{3}{4}$ mechanical or optical indicators;
- $\frac{3}{4}$ analog or digital readout.

5.3.3 Angle indicators

The manufacturer shall describe the means of angle indication provided, for example:

- $\frac{3}{4}$ wattmetric or voltmetric component meters;
- $\frac{3}{4}$ wattmetric or voltmetric vector meters;
- $\frac{3}{4}$ direct angle indication in degrees on a scale meter;
- $\frac{3}{4}$ oscilloscope, stroboscopic indicators;
- $\frac{3}{4}$ mechanical or optical indicators;
- $\frac{3}{4}$ analog or digital readout.

5.3.4 Operation of the indicating system

The manufacturer shall describe the procedure by which readings are obtained, taking into account at least the following points.

- a) How many measuring runs are required to obtain:
 - $\frac{3}{4}$ the two readings for single-plane balancing?
 - $\frac{3}{4}$ the four readings for two-plane balancing?
- b) Is an indicator provided for each reading or is it necessary to switch over for each reading?
- c) Are readings retained after the end of the measuring run?
- d) Is an individual plus-and-minus switch provided for each plane which permits the indication of a heavy or light spot?

5.4 Plane separation system

5.4.1 This subclause is not applicable to single-plane machines; see 5.4.2.

The manufacturer shall state whether plane separation is provided. If it is provided, at least the following details shall be given.

- a) How is it operated for single rotors of a type not previously balanced?
- b) How is it operated for single rotors in a series, with identical dimensions and mass?
- c) The limits of workpiece geometry over which plane separation is effective shall be defined with the effectiveness stated on the basis of the correction plane interference ratio, stating the following:
 - ¾ the ratio of bearing distance to plane distance for which plane separation is effective;
 - ¾ whether either or both correction planes can be between or outside the bearings;
 - ¾ whether the centre of mass can be between or outside the two selected correction planes and/or bearings.
- d) Whether the indicator system can also be used to measure directly static unbalance and couple unbalance.

5.4.2 On single-plane horizontal or vertical machines, the manufacturer shall state to what extent the machine is able to suppress effects of couple unbalance (see 11.8).

5.5 Setting and calibration of indication

5.5.1 General

The manufacturer shall describe the means of setting and calibration and the means provided for checking these.

The manufacturer shall state whether setting is possible for indication in any desired unit, whether practical correction units and/or standard weight or unbalance units.

The manufacturer shall state the number of runs required for calibrating the machine:

- ¾ for single-plane balancing;
- ¾ for two-plane balancing.

The manufacturer shall state the maximum permissible change, in percentage terms, in repeatability of speed during calibration and operation.

5.5.2 Soft-bearing machines

The manufacturer shall state how calibration is accomplished on the first rotor of a particular mass and configuration, for example, does the rotor have to be balanced by a trial-and-error procedure or is a compensator provided, are calibration masses required, etc., and whether total or partial re-calibration is required when changing the balancing speed.

If a compensator is provided, the limits of initial unbalance, of rotor geometry and speed for which compensation is effective shall be stated.

5.5.3 Hard-bearing machines

The manufacturer shall state whether the machine is permanently calibrated and can be set according to the workpiece or shall be calibrated by the user for different balancing speeds, rotor masses and/or dimensions.

5.6 Other devices

Special devices which influence the efficient functioning of the balancing machine shall be described in detail, for example:

- ¾ indication in components of an arbitrary coordinate system;
- ¾ indication of unbalance resolved into components located in limited sectors in more than two correction planes;
- ¾ correction devices;
- ¾ devices to correlate the measured angle and/or amount of unbalance with the rotor;
- ¾ suitable output for connection to a computer printer or other peripherals.

6 Minimum achievable residual unbalance

The minimum residual unbalance that can be achieved with a balancing machine shall be specified in terms of specific unbalance in gram millimetres per kilogram (see definition in annex A) together with the corresponding deflection of the amount-of-unbalance indicator.

This minimum achievable residual specific unbalance shall be stated for the full range of workpiece masses and balancing speeds of the machine.

In achieving the stated residual unbalance, the manufacturer shall consider whether the accuracy of the following is adequate for the purpose:

- ¾ amount indication,
- ¾ angle indication,
- ¾ plane separation,
- ¾ scale multiplier,
- ¾ drive, bearings, etc.

It should be noted that the stated minimum achievable residual unbalance value applies to the machine as delivered, but if out-of-round journals, excessively heavy or loose adaptors or other tooling are employed by the user, the minimum achievable residual unbalance may be affected.

7 Production efficiency

7.1 General

Production efficiency is the ability of the machine to assist the operator in balancing a rotor to a given residual unbalance in the shortest possible time. It shall be assessed by using a proving rotor or, alternatively, a test rotor to be specified by the user.

To find the production rate for a specific rotor (number of pieces per time unit or the reciprocal of the floor-to-floor time), the time per measuring run, the necessary number of runs, the time for loading, unbalance correction and unloading have to be taken into consideration. The necessary number of measuring runs depends on the average initial unbalance, the tolerance and the unbalance reduction ratio (URR).