

Ball screws —

Part 3: Acceptance conditions and acceptance tests

ICS 25.060.99

Confirmed April 2010

National foreword

This British Standard reproduces verbatim ISO 3408-3:2006 and implements it as the UK national standard.

The UK participation in its preparation was entrusted to Technical Committee MTE/1, Machine tools, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the ISO title page, pages ii to iv, pages 1 to 25 and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 July 2006

© BSI 2006

ISBN 0 580 48900 0

Amendments issued since publication

Amd. No.	Date	Comments

INTERNATIONAL STANDARD

ISO
3408-3

Second edition
2006-06-15

Ball screws —

Part 3:

Acceptance conditions and acceptance tests

Vis à billes —

Partie 3: Conditions et essais de réception



Reference number
ISO 3408-3:2006(E)



Documents

Document Sharing Hub

Contents		Page
Foreword.....		iv
1	Scope	1
2	Normative references	1
3	Terms and definitions.....	1
4	Test conditions and permissible deviations	2
4.1	Classification.....	2
4.2	Geometrical tests.....	2
5	Acceptance tests	6
5.1	General.....	6
5.2	Travel deviation and variation	7
5.3	Run-out and location tolerances.....	12
5.4	Functional tests	22
Annex A (normative) Complementary tables		24

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3408-3 was prepared by Technical Committee ISO/TC 39, *Machine tools*.

This second edition cancels and replaces the first edition (ISO 3408-3:1992), which has been technically revised.

ISO 3408 consists of the following parts, under the general title *Ball screws*:

- *Part 1: Vocabulary and designation*
- *Part 2: Nominal diameters and nominal leads — Metric series*
- *Part 3: Acceptance conditions and acceptance tests*
- *Part 4: Static axial rigidity*
- *Part 5: Static and dynamic axial load ratings and operational lifetime*

Ball screws —

Part 3: Acceptance conditions and acceptance tests

1 Scope

This part of ISO 3408 specifies the technical acceptance conditions for ball screws (see Figure 1) and, in particular, the respective permissible deviations for the acceptance tests.

NOTE The actual design need not necessarily correspond to that shown in Figure 1.

The respective tests required will be agreed upon between the manufacturer and user.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 230-1:1996, *Test code for machine tools — Part 1: Geometric accuracy of machines operating under no-load or finishing conditions*

ISO 286-2:1988, *ISO system of limits and fits — Part 2: Tables of standard tolerance grades and limit deviations for holes and shafts*

ISO 3408-1:2006, *Ball screws — Part 1: Vocabulary and designation*

3 Terms and definitions


For the purposes of this document, the terms and definitions given in ISO 3408-1 apply.

4 Test conditions and permissible deviations

4.1 Classification

The tests are graded in six standard tolerance grades (see Table 1) in conformance with ISO 286-2:1988, Table 1.

Table 1 — Standard tolerance grades

Standard tolerance grade 0		Increasing requirements on accuracy and function
Standard tolerance grade 1		
Standard tolerance grade 3		
Standard tolerance grade 5		
Standard tolerance grade 7		
Standard tolerance grade 10		

4.2 Geometrical tests

4.2.1 Tolerances

Tolerances on specified travel, e_p , for the useful travel, l_u (tests E 1.1 and E 1.2), are taken directly from ISO 286-2:1988, Table 1. Values of e_p for useful travel, l_u , of greater than or equal to 3 150 mm were calculated by linear extrapolation (see Table A.1).

Tolerances on travel variation, v_{up} , in micrometres, within useful travel l_u were evaluated using the following equations:

— Grade 0: $v_{up} = 0,0035 \cdot \bar{l}_u + 2,4$

— Grade 1: $v_{up} = 0,0045 \cdot \bar{l}_u + 4,6$

— Grade 3: $v_{up} = 0,009 \cdot \bar{l}_u + 9,2$

— Grade 5: $v_{up} = 0,018 \cdot \bar{l}_u + 18,4$

where $\bar{l}_u$ is the geometrical mean, in millimetres, of the extreme lengths of each step of measured travel given in Table A.1:

$$\bar{l}_u = \sqrt{l_{u \max} \cdot l_{u \min}}$$

Run-out tolerance and orientation tolerances were determined from experience.

4.2.2 Evaluation of the measuring diagrams

4.2.2.1 General

To evaluate the actual mean travel deviation within the useful travel, either a mathematical method — precise by its nature — or a graphical method — simple and quick and recommended as an approximation method suitable for everyday evaluation — may be used.

NOTE The travel variation, v_{ua} , resulting from the mathematical method may not be the minimum travel variation.

The graphical method gives the minimum travel variation.

4.2.2.2 Mathematical (least square) method

The actual mean travel deviation, e_a , is given by the formula

$$e_a = a + b\gamma$$

with

$$a = \frac{\sum \gamma_i^2 \cdot \sum e_i - \sum \gamma_i \cdot \sum \gamma_i \cdot e_i}{n \cdot \sum \gamma_i^2 - \sum \gamma_i \cdot \sum \gamma_i}$$

and

$$b = \frac{n \cdot \sum \gamma_i \cdot e_i - \sum \gamma_i \cdot \sum e_i}{n \cdot \sum \gamma_i^2 - \sum \gamma_i \cdot \sum \gamma_i}$$

where


- e_a is the actual mean travel deviation in relation to the specified or nominal travel, as appropriate;
- γ is the angle of rotation (specified or nominal travel, as appropriate);
- γ_i is the angle of rotation (specified or nominal travel, as appropriate) corresponding to the i th measuring point;
- e_i is the travel deviation (or travel) in relation to the specified or nominal travel for the angle of rotation (or travel) corresponding to the i th measuring point;
- n is the number of measuring points.

4.2.2.3 Graphical method [see Figure 3 a) and b)]

The evaluation of the actual mean travel deviation from the travel deviation diagram is carried out as follows:

- a) draw the tangents to the actual travel deviation curve at two or more upper peaks ($l_1, l_2, \dots$) and repeat this procedure for the lower peaks ($l_3, \dots$);
- b) determine the largest respective deviations ($e_1, e_2, e_3, \dots$) parallel to the ordinate, and select from these the smallest deviation (e_2 in the example);
- c) draw a straight line through this point of minimum deviation that is parallel to the corresponding peak line (l'_2 parallel to l_2 in the example).


The actual mean travel deviation, e_a , is the centreline between these parallel lines (l_2 and l'_2). The bandwidth within the useful travel, v_{ua} , is the distance between these parallel lines, e_2 , measured parallel to the ordinate.

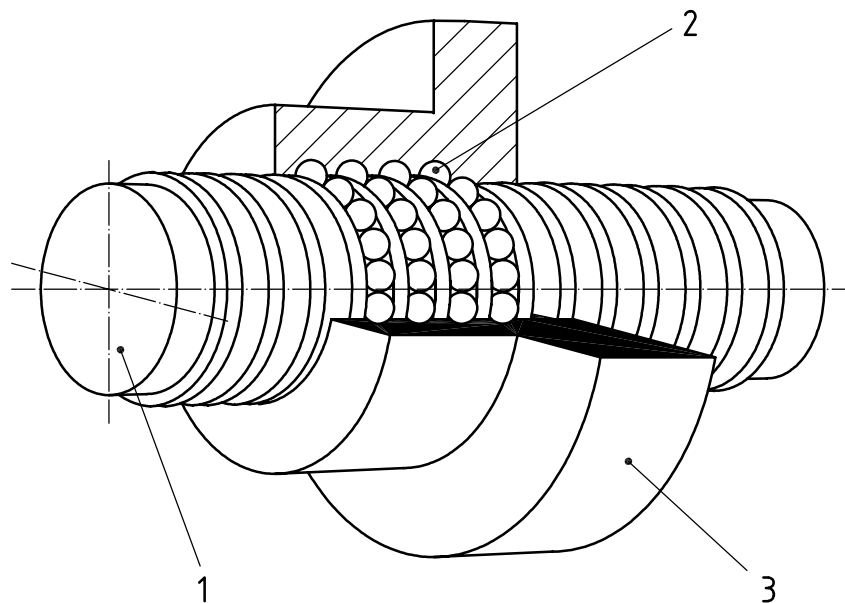

Key

- 1 ball screw shaft
- 2 ball
- 3 ball nut

Figure 1 — Ball screw

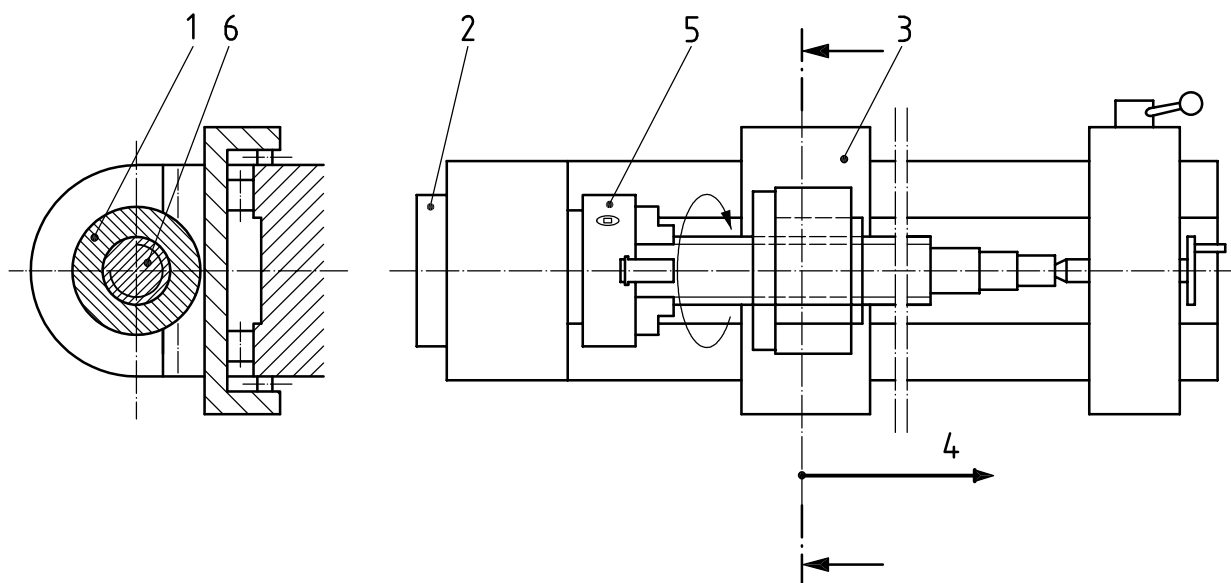

Key

- 1 ball nut
- 2 angular measuring instrument (permissible error = 10")
- 3 measuring slide
- 4 travel measuring instrument (permissible error = 1 μ m)
- 5 clamping device (e.g. chuck), drive
- 6 ball screw shaft

Figure 2 — Basic measuring principle