

**Implementation of
ISO/IEC 10021-1:1990**

**Information
technology —
Text Communication —
Message-Oriented Text
Interchange Systems
(MOTIS) —**

Part 1: System and Service Overview

UDC 681.3:621.39

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by the Information Systems Technology Standards Policy Committee (IST/-) to Technical Committee IST/18, upon which the following bodies were represented:

- British Computer Society
- British Facsimile Industry Consultative Committee
- British Photographic Association
- British Printing Industries Federation
- British Telecommunications plc
- Computing Services Association
- Department of Trade and Industry (Information Technology Division)
- EEA (The Association of Electronics, Telecommunications and Business Equipment Industries)
- HM Treasury (Central Computer and Telecommunications Agency)
- Her Majesty's Stationery Office
- Joint Network Team
- Ministry of Defence
- National Computer Users' Forum
- National Computing Centre Ltd
- SGML Users' Group
- University of London
- User Standards Forum for Information Technology (Institute of Data Processing Management)

Amendments issued since publication

Amd. No.	Date	Comments
6846	September 1991	
7139	July 1992	
7271	August 1992	
7540	December 1992	
7682	March 1993	
8390	January 1995	
8583	August 1995	
8756	August 1995	Indicated by a sideline in the margin

This British Standard, having been prepared under the direction of the Information Systems Technology Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 29 March 1991

© BSI 02-2000

The following BSI references relate to the work on this standard:
Committee reference IST/18
Draft announced in *BSI News* November 1990

ISBN 0 580 19508 2

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Foreword	v
Text of ISO/IEC 10021-1	1

National foreword

This British Standard reproduces verbatim ISO/IEC 10021-1:1990 including Technical Corrigenda 1, 2, 3, 4, 5, 6 and 7 and Amendment 1 and implements it as the UK national standard.

This British Standard is published under the direction of the Information Systems Technology Standards Policy Committee whose Technical Committee IST/18 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE International and European Standards, as well as overseas standards, are available from BSI Sales Department, BSI, Linford Wood, Milton Keynes, MK14 6LE.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the ISO/IEC title page, pages ii to vi, pages 1 to 65 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

INTERNATIONAL STANDARD

ISO/IEC
10021-1

First edition
1990-12-01

AMENDMENT 1
1994-12-01

Information technology — Text Communication — Message-Oriented Text Interchange Systems (MOTIS) —

Part 1:

System and Service Overview

AMENDMENT 1: Message Store Extensions

*Technologies de l'information — Communication de texte — Systèmes d'échange
de texte en mode message (MOTIS) —*

Partie 1: Présentation générale du système et des services

AMENDEMENT 1: Extensions de dépôt de message



Reference number
ISO/IEC 10021-1:1990/Amd.1:1994(E)

AVA Documents
Document Sharing Hub

Contents

	Page
Foreword	v
Section 1. Introduction	
Introduction	1
1 Scope	1
2 Normative references	2
3 Definitions	2
4 Abbreviations	3
5 Conventions	4
Section 2. General Description of MHS	
6 Purpose	5
7 Functional Model of MHS	5
7.1 Description of the MHS Model	5
7.2 Structure of Messages	7
7.3 Application of the MHS Model	7
7.4 The Message Store	10
8 The Message Transfer Service	13
8.1 Submission and Delivery	13
8.2 Transfer	13
8.3 Notifications	13
8.4 User Agent	13
8.5 Message Store	13
8.6 Access Unit	13
8.7 Use of the MTS in the Provision of Public Services	13
9 The IPM Service	14
9.1 IPM Service Functional Model	14
9.2 Structure of IP-messages	14
9.3 IP-notifications	16
10 Intercommunication with Physical Delivery Services	16
10.1 Introduction	16
10.2 Organizational Configurations	17
11 Specialized Access	18
11.1 Introduction	18
11.2 Teletex Access	18
11.3 Telex Access	18
Section 3. Capabilities of MHS	
12 Naming and Addressing	19
12.1 Introduction	19
12.2 Directory Names	19
12.3 O/R Names	19
12.4 O/R Addresses	19
13 MHS Use of Directory	19
13.1 Introduction	19
13.2 Functional Model	20
13.3 Physical Configurations	20
14 Distribution Lists in MHS	21
14.1 Introduction	21
14.2 Properties of a DL	21
14.3 Submission	21
14.4 DL Use of a Directory	22
14.5 DL Expansion	22
14.6 Nesting	22

		Page
14.7	Recursion Control	23
14.8	Delivery	23
14.9	Routing Loop Control	23
14.10	Notifications	23
14.11	DL Handling Policy	23
15	Security Capabilities of MHS	23
15.1	Introduction	23
15.2	MHS Security Threats	24
15.3	Security Model	24
15.4	MHS Security Features	25
15.5	Security Management	26
15.6	MHS Security dependencies	26
16	Conversion in MHS	27
17	<i>Clause 17 of the corresponding CCITT Recommendation is not part of this International Standard</i>	27
Section 4. Elements of Service		
18	Purpose	28
19	Classification	30
19.1	Purpose of Classification	30
19.2	Basic Message Transfer Service	30
19.3	MT Service Optional User Facilities	30
19.4	Base MH/PD Service Intercommunication	31
19.5	Optional User Facilities for MH/PD Service Intercommunication	32
19.6	Base Message Store	32
19.7	MS Optional User Facilities	32
19.8	Basic Interpersonal Messaging Service	33
19.9	IPM Service Optional User Facilities	33
Annex A (informative) Glossary of Terms		37
Annex B (informative) Definitions of Elements of Service		45
Annex C (informative) Element of Service Changes From CCITT Recommendation X.400(1984)		61
Annex D (informative) Differences Between ISO/IEC 10021-1 and CCITT Recommendation X.400		65
Figure 1 — MHS Functional Model		6
Figure 2 — Basic Message Structure		7
Figure 3 — Co-resident UA and MTA		7
Figure 4 — Stand-alone UA and Co-resident MS/MTA and UA/MTA		8
Figure 5 — Relationships between Management Domains		9
Figure 6 — Submission and Delivery with an MS		11
Figure 6A — Message Store Functional Model		12
Figure 7 — IPM Service Functional Model		14
Figure 8 — IP-message Structure		15
Figure 9 — IP-message Structure For a Typical Memo		16
Figure 10 — Functional Model MHS-PDS Interworking		17
Figure 11 — Configurations for MH/PD Service Intercommunication		17
Figure 12 — Functional Model of MHS-Directory Interworking		20
Figure 13 — Physical Configurations for MHS-Directory Interworking		21
Figure 14 — Distribution List Expansion		22

	Page
Figure 15 — DL Notifications	23
Figure C.1 — Mapping of Elements of Service Tables	63
Table 1 — Structure of MHS Standards	1
Table 2 — Provision and Use of Secure Messaging Elements of Service by MHS Components	26
Table 3 — MHS Elements of Service	28
Table 4 — Elements of Service Belonging To The Basic MT Service	30
Table 5 — MT Service Optional User Facilities	31
Table 6 — Elements of Service Belonging to the Base MH/PD Service Intercommunication	32
Table 7 — Optional User Facilities for MH/PD Service Intercommunication	32
Table 8 — Base Message Store	32
Table 9 — MS Optional User Facilities	33
Table 10 — Elements of Service Belonging To The Basic IPM Service	33
Table 11 — IPM Optional User Facilities Selectable on a Per-message Basis	34
Table 12 — IPM Optional User Facilities Agreed for a Contractual Period of Time	36

Descriptors: Data processing, information interchange, network interconnection, open systems interconnection, data transmission, text communication, messages, generalities.

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Amendment 1 to International Standard ISO/IEC 10021-1:1990 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee 18, *Document processing and related communication*.

International Standard ISO/IEC 10021-1 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

ISO/IEC 10021-1 consists of the following parts, under the general title: *Information technology — Text Communication — Message-Oriented Text Interchange Systems (MOTIS)* —

- *Part 1: System and Service Overview*
- *Part 2: Overall Architecture*
- *Part 3: Abstract Service Definition Conventions*
- *Part 4: Message Transfer System: Abstract Service Definition and Procedures*
- *Part 5: Message Store: Abstract Service Definition*
- *Part 6: Protocol Specifications*
- *Part 7: Interpersonal Messaging System*

Annex A, Annex B, Annex C and Annex D are for information only.

Section 1. Introduction

Introduction

This Part of ISO/IEC 10021 is one of a number of parts of ISO/IEC 10021 [the International Standard for Message-Oriented Text Interchange Systems (MOTIS)]. ISO/IEC 10021 provides a comprehensive specification for Message Handling comprising any number of cooperating open-systems.

Message Handling Systems and Services enable users to exchange messages on a store-and-forward basis. A message submitted by one user, the originator, is conveyed by the Message Transfer System (MTS), the principal component of a larger Message Handling System (MHS), and is subsequently delivered to one or more additional users, the message's recipients.

An MHS comprises a variety of interconnected functional entities. Message Transfer Agents (MTAs) cooperate to perform the store-and-forward message transfer function. Message Stores (MSs) Provide storage for messages and enable their submission, retrieval and management. User Agents (UAs) help users access MHS. Access Units (AUs) provide links to other communication systems and Services of various kinds (e.g., Telematic Services, Postal Services).

This part of ISO/IEC 10021 specifies the overall system and service description of Message Handling capabilities.

This part of ISO/IEC 10021 is technically aligned with CCITT Recommendation X.400 (1988).

1 Scope

This part of ISO/IEC 10021 defines the overall system and service of an MHS and serves as a general overview of MHS.

Other aspects of Message Handling Systems and Services are defined in other parts of ISO/IEC 10021. The layout of parts of ISO/IEC 10021 defining the Message Handling System and Services is shown in Table 1.

The technical aspects of MHS are defined in other parts of ISO/IEC 10021. The overall system architecture of MHS is defined in ISO/IEC 10021-2.

Table 1 — Structure of MHS Standards

Name of standard/Recommendation	Joint MHS		Joint support		CCITT only	
	ISO/IEC	CCITT	ISO	CCITT	System	Service
MHS: System and Service Overview	10021-1	X.400				F.400
MHS: Overall Architecture	10021-2	X.402				
MHS: Conformance Testing					X.403	
MHS: Abstract Service Definition Conventions	10021-3	X.407			X.408	
MHS: Encoded Information Type Conversion Rules						
MHS: MTS: Abstract Service Definition and Procedures	10021-4	X.411				
MHS: MS: Abstract Service Definition	10021-5	X.413				
MHS: Protocol Specifications	10021-6	X.419				
MHS: Interpersonal Messaging System	10021-7	X.420				
Telematic Access to IPMS					T.330	
MHS: Naming & Addressing for Public MH Services						F.401
MHS: The Public Message Transfer Service						F.410
MHS: Intercommunication with Public Physical Delivery Services						F.415
MHS: The Public IPM Service						F.420
MHS: Intercommunication Between IPM Service and Telex						F.421
MHS: Intercommunication Between IPM Service and Teletex						F.422

Name of standard/Recommendation	Joint MHS		Joint support		CCITT only	
	ISO/IEC	CCITT	ISO	CCITT	System	Service
OSI: Basic Reference Model			7498	X.200		
OSI: Specification of Abstract Syntax Notation One (ASN.1)			8824	X.208		
OSI: Specification of Basic Encoding Rules for Abstract Syntax Notation One (ASN.1)			8825	X.209		
OSI: Association Control: Service Definition			8649	X.217		
OSI: Association Control: Protocol Specification			8650	X.227		
OSI: Reliable Transfer: Model & Service Definition			9066-1	X.218		
OSI: Reliable Transfer: Protocol Specification			9066-2	X.228		
OSI: Remote Operations: Model, Notation & Service Definition			9072-1	X.219		
OSI: Remote Operations: Protocol Specification			9072-2	X.229		

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 10021. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO/IEC 10021 are encouraged to investigate the possibility of applying the most recent editions of the standards listed below. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 7498:1984, *Information processing systems — Open Systems Interconnection — Basic Reference Model*.

ISO 8649:1988, *Information processing systems — Open Systems Interconnection — Service definition for the Association Control Service Element*.

ISO 8824:1990, *Information processing systems — Open Systems Interconnection — Specification of Abstract Syntax Notation One (ASN.1)*.

ISO 8825:1990, *Information processing systems — Open Systems Interconnection — Specification of Basic Encoding Rules for Abstract Syntax Notation One (ASN.1)*.

ISO/IEC 9066-1:1989, *Information processing systems — Text Communication — Reliable Transfer — Part 1: Model and service definition*.

ISO/IEC 9072-1:1989, *Information processing systems — Text Communication — Remote Operations — Part 1: Model, notation and service definition*.

ISO/IEC 9594:1990, *Information technology — The Director — Part 1: Overview of concepts, models and service — Part 2: Models — Part 3: Abstract service definition — Part 4: Procedures for distributed operation — Part 5: Protocol specifications — Part 6: Selected attribute types — Part 7: Selected object classes — Part 8: Authentication framework*.

ISO/IEC 10021:1990, *Information technology — Text Communication — Message-Oriented Text Interchange Systems (MOTIS) — Part 1: System and Service Overview — Part 2: Overall Architecture — Part 3: Abstract Service Definition Conventions — Part 4: Message Transfer System: Abstract Service Definition and Procedures — Part 5: Message Store: Abstract Service Definition — Part 6: Protocol Specifications — Part 7: Interpersonal Messaging System*.

CCITT Recommendation T.330:1988, *Telematic Access to IPMS*.

CCITT Recommendation X.408:1988, *Message Handling Systems, Encoded Information Type Conversion Rules*.

3 Definitions

For the purposes of this part of ISO/IEC 10021 the definitions given in Annex A and the following definitions apply.

Definitions of the Elements of Service applicable to MHS are contained in Annex B.

3.1 Open Systems Interconnection

This part of ISO/IEC 10021 makes use of the following terms defined in ISO 7498:

- a) Application Layer
- b) application-process
- c) Open Systems Interconnection
- d) OSI Reference Model

3.2 Directory Systems

This part of ISO/IEC 10021 makes use of the following terms defined in ISO/IEC 9594-1:

- a) directory entry
- b) directory system agent
- c) Directory System
- d) directory user agent

This part of ISO/IEC 10021 makes use of the following terms defined in ISO/IEC 9594-2:

- e) attribute
- f) group
- g) member
- h) name

4 Abbreviations

A	Additional
ADMD	Administration Management Domain
AU	Access Unit
CA	Contractual Agreement
DL	Distribution List
DSA	Directory System Agent
DUA	Directory User Agent
E	Essential
EIT	Encoded Information Type
I/O	Input/Output
IP	Interpersonal
IPM	Interpersonal Messaging
IPMS	Interpersonal Messaging System
MD	Management Domain
MH	Message Handling
MHS	Message Handling System
MS	Message Store
MT	Message Transfer
MTA	Message Transfer Agent
MTS	Message Transfer System
N/A	Not Applicable
O/R	Originator/Recipient
OSI	Open System Interconnection
PD	Physical Delivery
PDAU	Physical Delivery Access Unit
PDS	Physical Delivery System
PM	Per-message

PR	Per-recipient
PRMD	Private Management Domain
PTLXAU	Public Telex Access Unit
TLMA	Telematic Agent
TLXAU	Telex Access Unit
TTX	Teletex
UA	User Agent

5 Conventions

In this Standard the expression “Administration” is used for shortness to indicate a telecommunication Administration, a recognized private operating agency, and, in the case of intercommunication with Public Delivery Service, a Postal Administration.

Section 2. General Description of MHS

6 Purpose

This part of ISO/IEC 10021 is one of a number of parts of ISO/IEC 10021 and describes the system model and Elements of Service of the Message Handling System (MHS) and Services. This part of ISO/IEC 10021 overviews the capabilities of an MHS that are used for the provision of MH Services to enable users to exchange messages on a store-and-forward basis.

The Message Handling System is designed in accordance with the principles of the Reference Model of Open Systems Interconnection (OSI Reference Model) (ISO 7498) and uses the Presentation Layer Services and Services offered by other, more general, Application Service Elements. An MHS can be constructed using any network fitting in the scope of OSI. The Message Transfer Service provided by the MTS is application independent. An example of a standardized application is the IPM Service. End systems can use the MT Service for specific applications that are defined bilaterally.


Elements of Service are the service features provided through the Application Processes. The Elements of Service are considered to be components of the services provided to users and are either elements of a basic service or they are *optional user facilities*, classified either as *essential optional user facilities*, or as *additional optional user facilities*.

7 Functional Model of MHS

The MHS functional model serves as a tool to aid in the development of International Standards for MHS, and aids in describing the basic concepts that can be depicted graphically. It comprises several different functional components that work together to provide MH Services. The model can be applied to a number of different physical and organizational configurations.

7.1 Description of the MHS Model

A functional view of the MHS model is shown in Figure 1. In this model, a user is either a person or a computer process. Users are either direct users (i.e. engage in message handling by direct use of MHS), or are indirect users {i.e. engage in message handling through another communication system (e.g. a Physical Delivery System) that is linked to MHS}. A user is referred to as either an originator (when sending a message) or a recipient (when receiving a message). Message Handling Elements of Service define the set of message types and the capabilities that enable an originator to transfer messages of those types to one or more recipients.

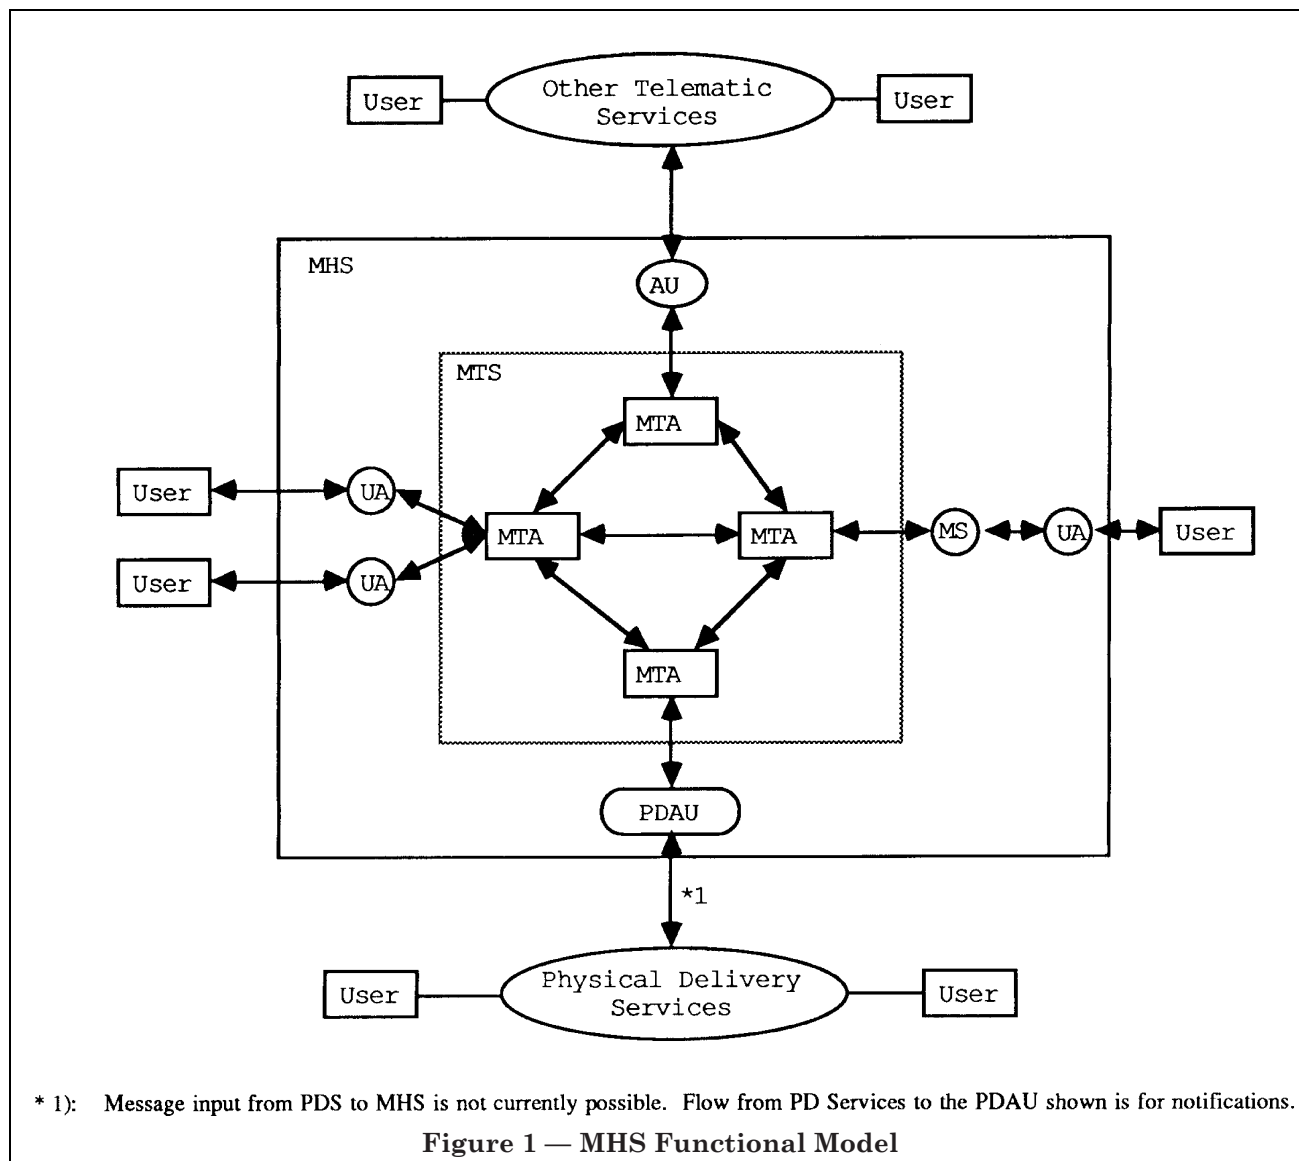

An originator prepares messages with the assistance of his User Agent. A User Agent (UA) is an application process that interacts with the Message Transfer System (MTS) or a Message Store (MS), to submit messages on behalf of a single user. The MTS delivers the messages submitted to it, to one or more recipient UAs, Access Units (AUs), or MSs, and can return notifications to the originator. Functions performed solely by the UA and not standardized as part of the message handling Elements of Service are called local functions. A UA can accept delivery of messages directly from the MTS, or it can use the capabilities of a MS to receive delivered messages for subsequent retrieval by the UA.

The MTS comprises a number of Message Transfer Agents (MTAs). Operating together, in a store and forward manner, the MTAs transfer messages and deliver them to the intended recipients.

Access by indirect users of MHS is accomplished by AUs. Delivery to indirect users of MHS is accomplished by AUs, such as in the case of physical delivery, by the Physical Delivery Access Unit (PDAU).

The message store (MS) is an optional general purpose capability of MHS that acts as an intermediary between the UA and the MTA. The MS is depicted in the MHS Functional Model as shown in Figure 1. The MS is a functional entity whose primary purpose is to store delivered, and, optionally, submitted messages and permit their retrieval by the MS-user (UA). The MS also allows for submission from, and alerting to the MS-user.

The collection of UAs, MSs, AUs and MTAs is called the Message Handling System (MHS).

7.2 Structure of Messages

The basic structure of messages conveyed by the MTS is shown in Figure 2. A message is made up of an envelope and a content. The envelope carries information that is used by the MTS when transferring the message within the MTS. The content is the piece of information that the originating UA wishes delivered to one or more recipient UAs. The MTS neither modifies or examines the content, except for conversion (see clause 16).

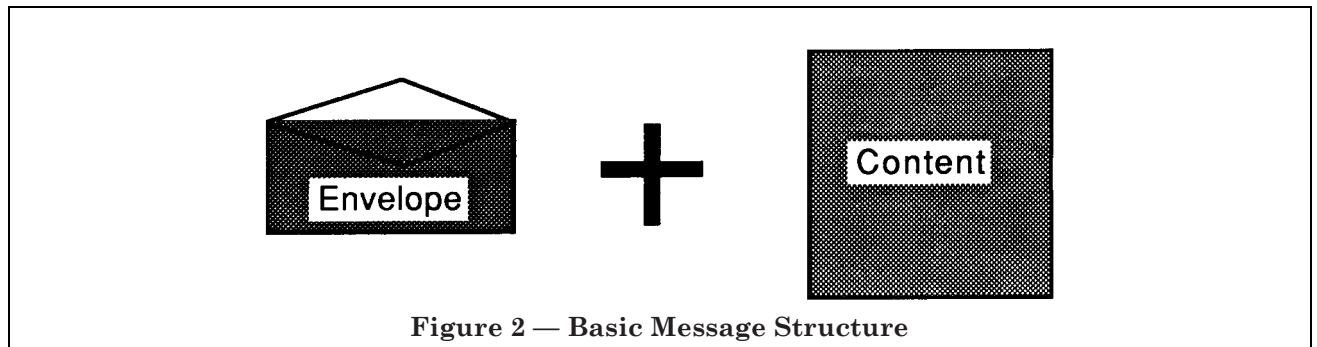


Figure 2 — Basic Message Structure

7.3 Application of the MHS Model

7.3.1 Physical Mapping

Users access UAs for message processing purposes, for example, to create, present, or file messages. A user can interact with a UA via an input/output device or process (e.g., keyboard, display, printer etc.). A UA can be implemented as a (set of) computer process(es) in an intelligent terminal.

A UA and MTA can be co-located in the same system, or a UA/MS can be implemented in physically separate systems. In the first case the UA accesses the MT Elements of Service by interacting directly with the MTA in the same system. In the second case, the UA/MS will communicate with the MTA via standardized protocols specified for MHS. It is also possible for an MTA to be implemented in a system without UAs or MSs.

Some possible physical configurations are shown in Figure 3 and Figure 4. The different physical systems can be connected by means of dedicated lines or switched network connections.


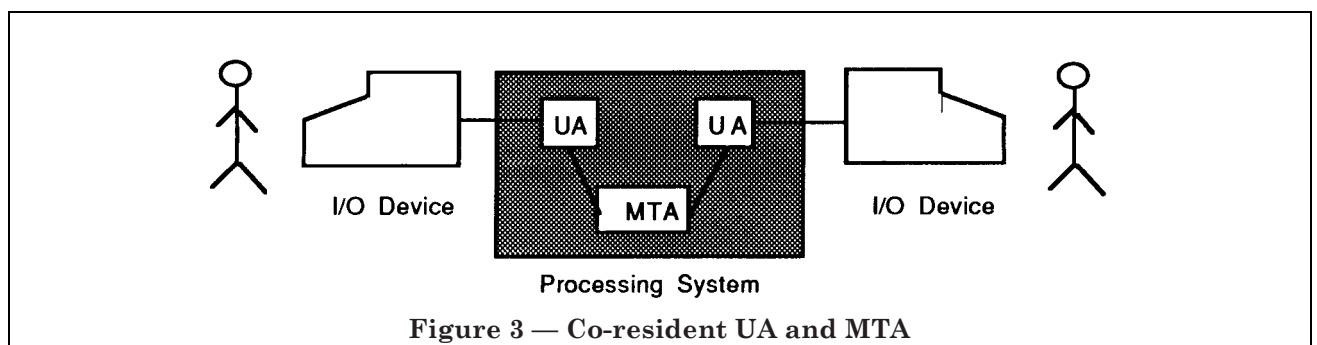


Figure 3 — Co-resident UA and MTA

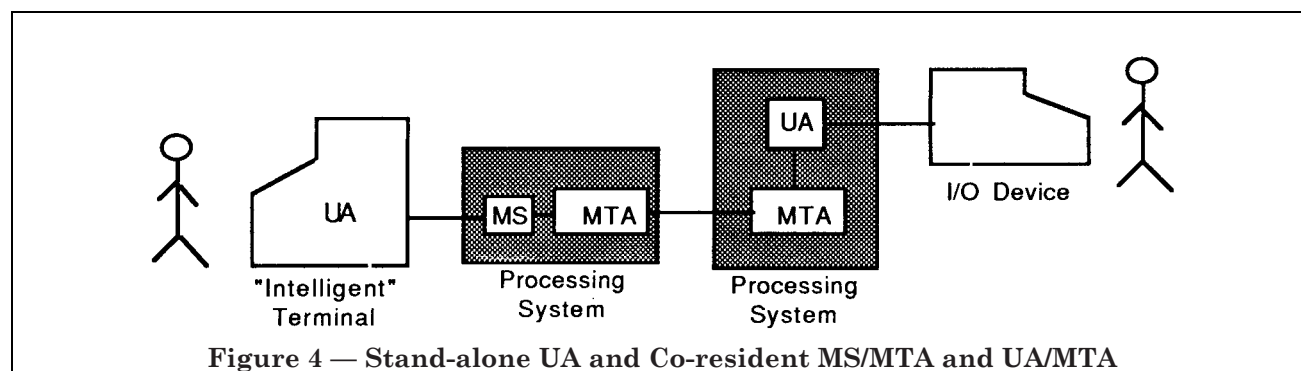

7.3.2 Organizational Mapping

An Administration or organization can play various roles in providing Message Handling Services. An organization in this context can be a company or a non-commercial enterprise.

The collection of at least one MTA, zero or more UAs, zero or more MSs, and zero or more AUs operated by an Administration or organization constitutes a Management Domain (MD). An MD managed by an Administration is called an Administration Management Domain (ADMD). An MD managed by an organization other than an Administration is called a Private Management Domain (PRMD). An MD provides Message Handling Services in accordance with the classification of Elements of Service as described in clause 19. The relationships between Management Domains is shown in Figure 5.

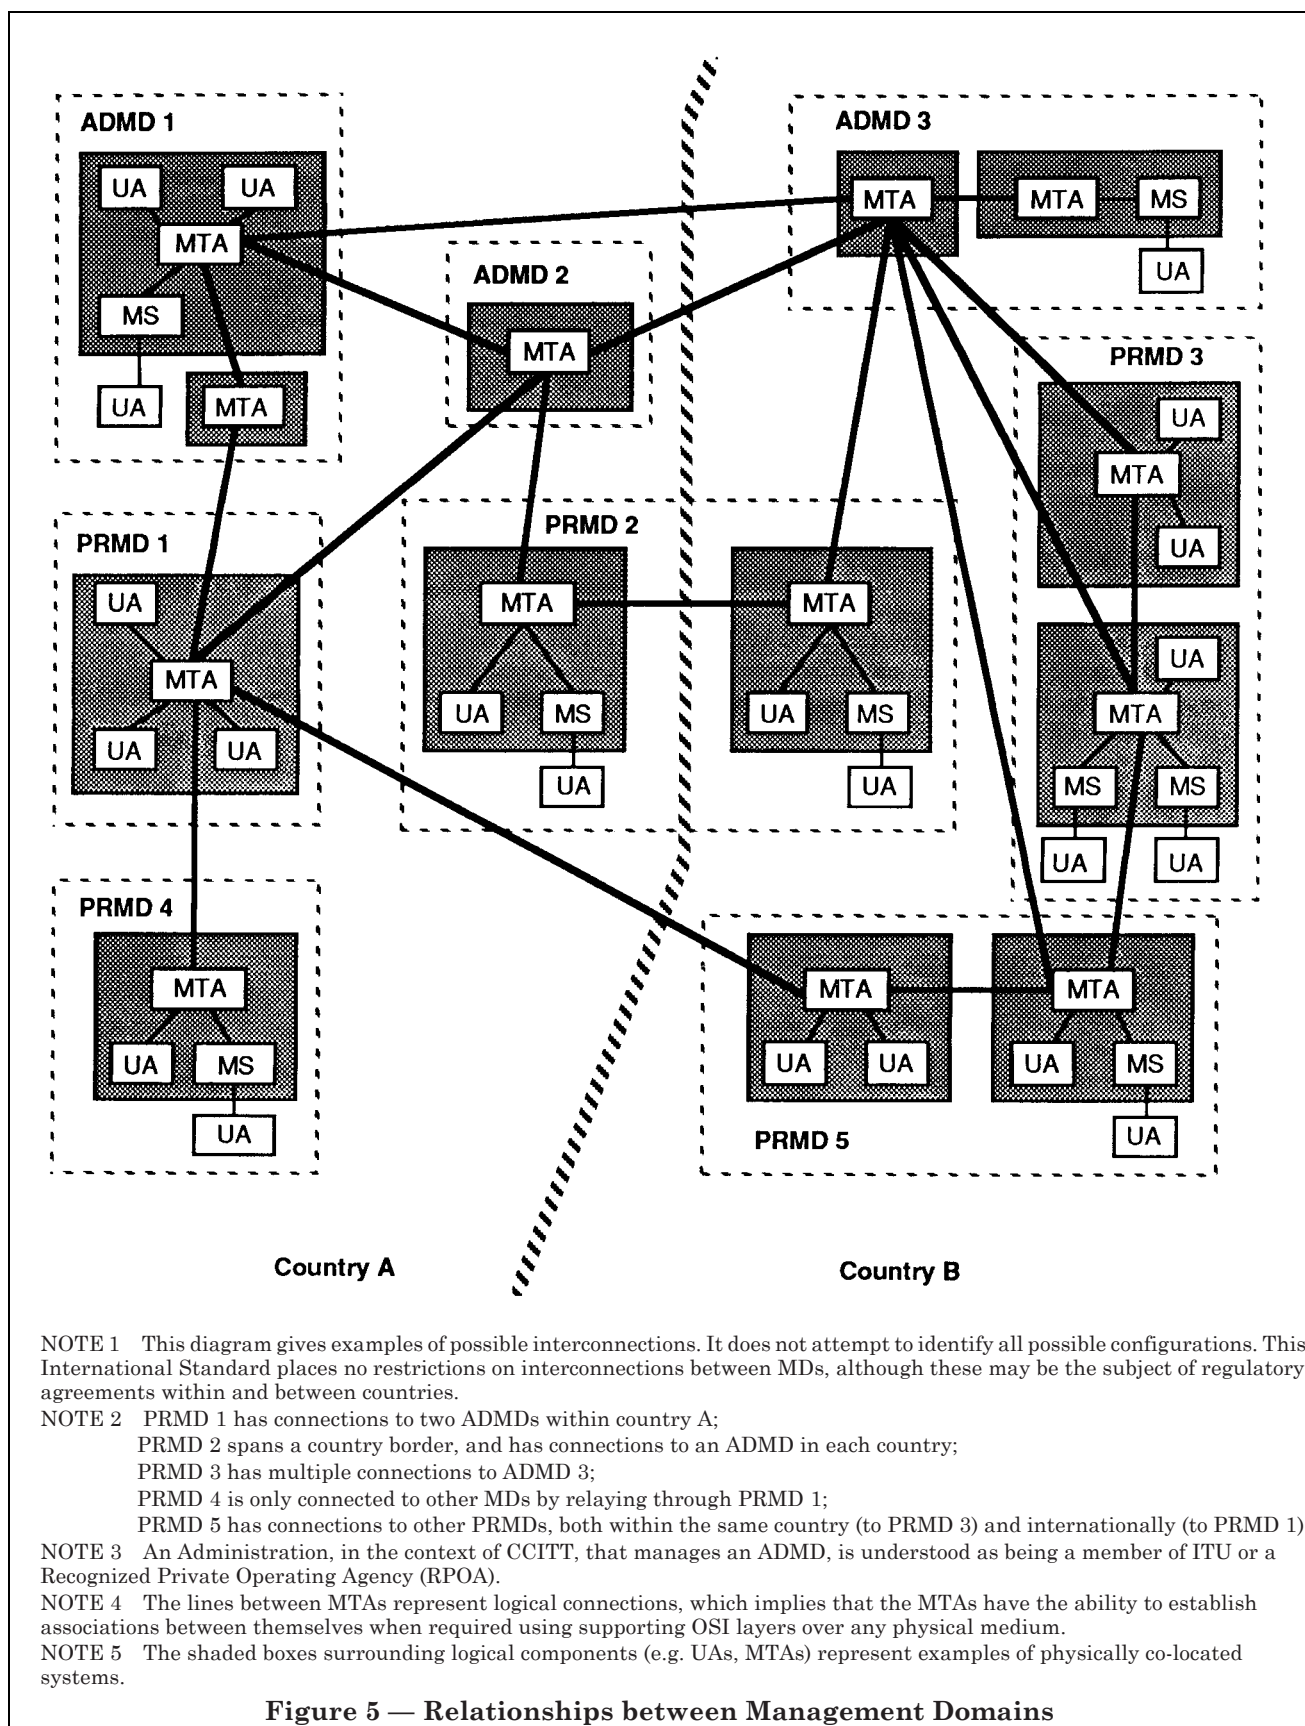


Figure 5 — Relationships between Management Domains

7.3.3 Administration Management Domain

In one country one or more ADMDs can exist. An ADMD is characterized by its provision of relaying functions between other Management Domains and the provision of Message Transfer Service for the applications provided within the ADMD.

An Administration can provide access for its users to the ADMD in one or more of the following ways:

- user to Administration provided UA
- private UA to Administration MTA
- private UA to Administration MS
- private MTA to Administration MTA
- user to Administration provided AU.

See also the examples of configurations shown in Figure 3 and Figure 4.

Administration provided UAs can exist as part of an intelligent terminal that the user can use to access MHS. They can also exist as part of Administration resident equipment being part of MHS, in which case the user obtains access to the UA via an I/O device.

In the case of a private UA, the user has a private stand-alone UA which interacts with the Administration provided MTA or MS, using submission, delivery and retrieval functions. A private, stand-alone UA can be associated with one or more MDs, provided that the required naming conventions are preserved.

A private MTA as part of an PRMD can access one or more ADMDs in a country, following national regulations.

Access can also be provided by Administration provided AUs describe in clauses 10 and 11.

7.3.4 Private Management Domain

An organization other than an Administration can have one or more MTA(s), and zero or more UAs, AUs and MSs forming a PRMD which can interact with an ADMD or other PRMD on an MD to MD (MTA to MTA) basis. A PRMD is characterized by the provision of messaging functions within that Management Domain.

A PRMD can have access to one or more ADMDs as shown in Figure 5. However, in the case of a specific interaction between a PRMD and an ADMD (such as when a message is transferred between MDs), the PRMD is considered to be associated only with that ADMD.

As a national matter, the name of a PRMD can be either nationally unique or relative to the associated ADMD. If a PRMD is associated with more than one ADMD, the PRMD can have more than one name.


7.4 The Message Store

Remote UAs can be implemented on a wide variety of equipment, including personal computers of varying capabilities. The MS service can complement a remote UA by providing continuously available storage and delivery services on behalf of a user, for example.

One MS acts on behalf of only one user, i.e. it does not provide a common or shared MS capability to several users. See also PRMD 3 of Figure 5.

The MS will store delivered messages and reports. As an option it may also store submitted messages, submitted probes, and draft messages. The MS may also keep a history of messages by storing extracts of previously and currently stored messages in logs. Messages may be grouped in a user-defined and potentially hierarchical structure.

The MS retrieval capability provides users who subscribe to an MS with basic message retrieval capabilities potentially applicable to all information held by the MS. Figure 6 shows the delivery, and subsequent retrieval of messages that are delivered to an MS, and the submission of messages via the MS.

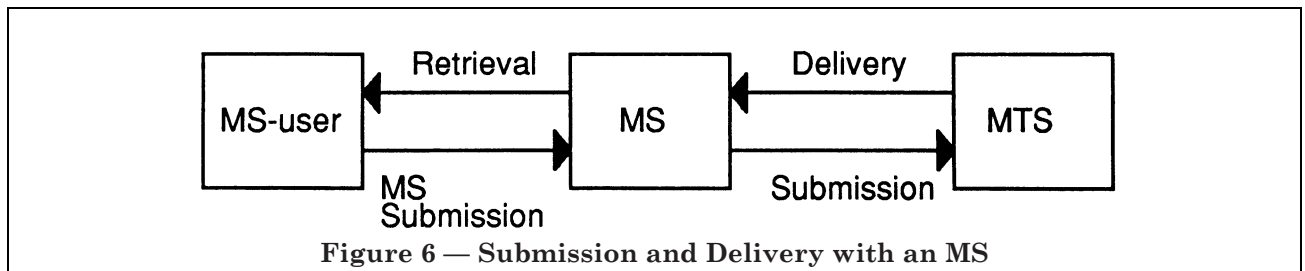

When a user subscribes to an MS, all messages destined for the user are delivered to the MS only. The MS-user, if on line, may receive Alerts that announce the delivery of certain messages to the MS. Messages delivered to an MS are considered delivered from the MTS perspective.

The basic MS is independent of application specific services (see 8.7) and may store messages with all types of content, the type of content being dependent on the type of service. However, it may provide additional capabilities depending on the type of content.

When an MS-user submits a message, the MS conveys the submission request to the MTS and reports the outcome returned by the MTS to the MS-user. If requested by the MS-user, the MS may expand the message by forwarding parts of delivered or submitted messages that are currently stored in the MS before conveying the submission to the MTS. The MS may also store a copy of the message submitted to the MTS if the submission is successful. The MS service allows the user to transfer a message to the MS for storage as a draft message. The draft message may subsequently be retrieved, or the MS may include its body-parts in a message submitted to the MTS when requested in a message submitted by the MS-user.


The MS-user may be provided with the capability to request the MS service to forward selected messages automatically upon delivery. The MS may also provide automatic deletion of messages after a user specified period of time, or when the message expires, or when the message is rendered obsolete by another message. The MS may automatically attach information to a previously submitted message concerning its delivery or non-delivery. The MS may also generate content-specific notifications, acknowledging receipt or acceptance when requested by the user or when the user has retrieved the message.

The elements of service describing the features of the MS are defined in Annex B and classified in clause 19. Users are provided with the capability based on various criteria, to get counts and lists of messages, to fetch messages, and to delete messages, currently held in the MS.

Figure 6A depicts a simplified model of the information types stored in the MS, and the functions the MS fulfils.

The scope of the MS services defined in CCITT Rec. F.400 (1988) and (1992) | ISO/IEC 10021-1:1990 was mainly limited to the storage of delivered messages and reports and their subsequent retrieval by the MS-user. The 1994 version of this part of ISO/IEC 10021 defines new extensions to provide a broader range of service facilities. These enhanced facilities particularly apply in those environments where the MS is used as a personal data base to store, retrieve, modify, and classify a user's messages, often with frequent and long-lasting interaction between the MS-user and MS. Examples of such environments might be found in local area networks, or in environments where the user employs different User Agent implementations at different locations to access one MS. In other environments where the MS is used mainly as a temporary storage system, to take delivery of messages and reports and provide for their retrieval by infrequent and short-lasting interactions, these enhanced facilities may not be required. In this latter case, some enhanced facilities may be provided locally by the MS-user itself.

Consequently, the basic and essential optional requirements defined for the MS in this part of ISO/IEC 10021 are the same as those defined in versions published prior to 1994.

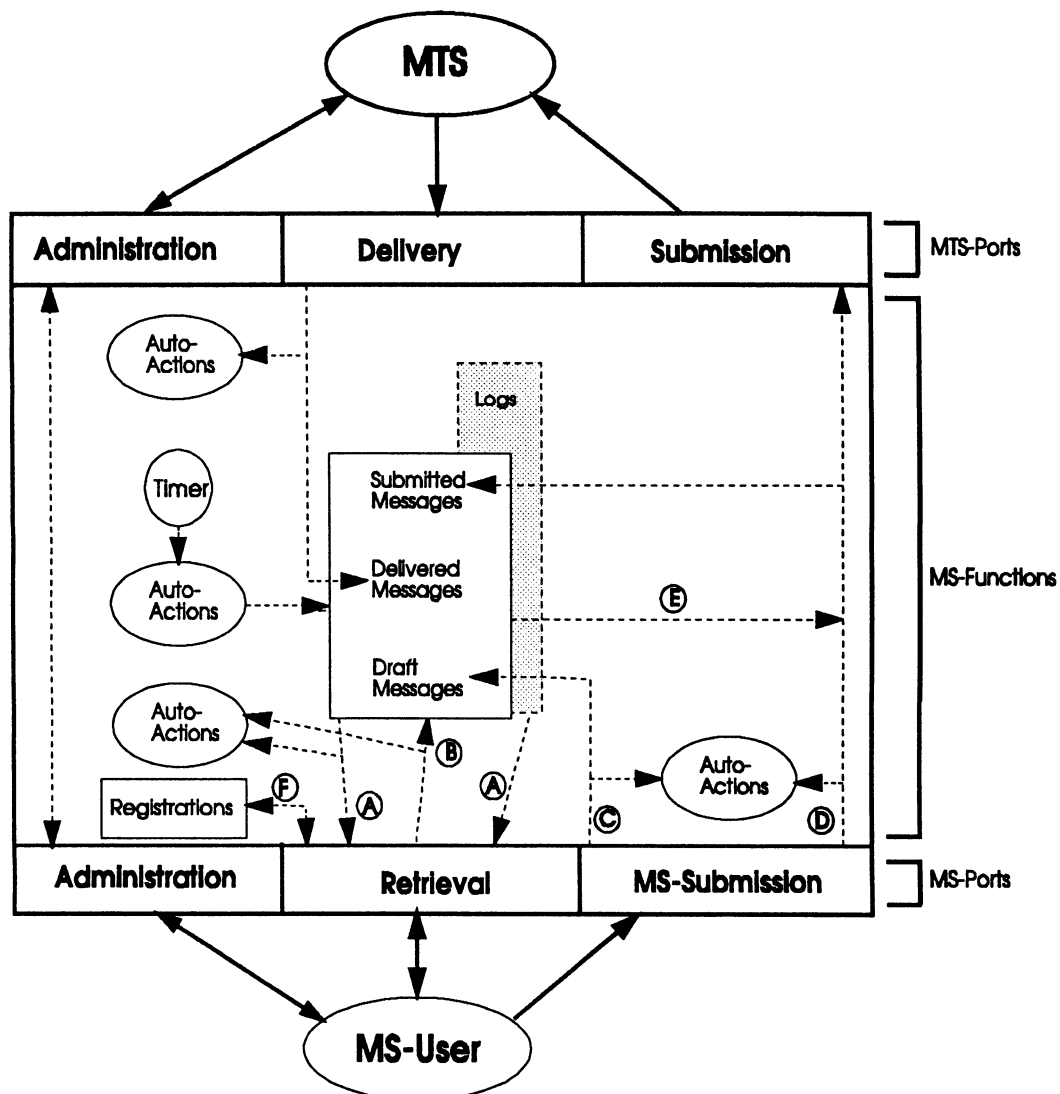

- (A) Fetch, List and Summarize
 (B) Modify message attributes and Delete
 (C) Draft storage
 (D) Submission to the MTS
 (E) Submission to the MTS with incorporation of parts of stored messages
 (F) Register-MS

Figure 6A — Message Store Functional Model

7.4.1 Physical Configurations

The MS can be physically located with respect to the MTA in a number of ways. The MS can be co-located with the UA, co-located with the MTA, or stand-alone. From an external point of view, a co-located UA and MS are indistinguishable from a stand-alone UA. Co-locating the MS with the MTA offers significant advantages which will probably make it the predominant configuration.

7.4.2 Organizational Configurations

Either ADMDs or PRMDs can operate MSs. All the subscriber's messages are delivered to the MS for subsequent retrieval.

The physical and organizational configurations described above are examples only and other equally valid cases can exist.

8 The Message Transfer Service

The MTS provides the general, application independent, store and forward Message Transfer Service. The Elements of Service describing the features of the MT Service are defined in Annex B, and classified in clause 19.

8.1 Submission and Delivery

The MTS provides the means by which UAs exchange messages. There are two basic interactions between MTAs and UAs and/or MSs:

- 1) The submission interaction is the means by which an originating UA or MS transfers to an MTA the content of a message and the submission envelope. The submission envelope contains the information that the MTS requires to provide the requested Elements of Service.
- 2) The delivery interaction is the means by which the MTA transfers to a recipient UA or MS the content of a message plus the delivery envelope. The delivery envelope contains information related to delivery of the message.

In the submission and delivery interactions, responsibility for the message is passed between the MTA and the UA or MS.

8.2 Transfer

Starting at the originator's MTA, each MTA transfers the message to another MTA until the message reaches the recipient's MTA, which then delivers it to the recipient UA or MS using the delivery interaction.

The transfer interaction is the means by which one MTA transfers to another MTA the content of a message plus the transfer envelope. The transfer envelope contains information related to the operation of the MTS plus information that the MTS requires to provide Elements of Service requested by the originating UA.

MTAs transfer messages containing any type of binary coded information. MTAs neither interpret nor alter the content of messages except when performing a conversion.

8.3 Notifications

Notifications in the MT Service comprise the Delivery and Non-delivery Notifications. When a message, or Probe, cannot be delivered by the MTS, a Non-delivery Notification is generated and returned to the originator in a Report signifying this. In addition, an originator can specifically ask for acknowledgment of successful delivery through use of the Delivery Notification Element of Service on submission.

8.4 User Agent

The UA uses the MT Service provided by the MTS. A UA is a functional entity by means of which a single direct user engages in message handling.

UAs are grouped into classes based on the type of content of messages they can handle. The MTS provides a UA with the ability to identify its class when sending messages to other UAs. UAs within a given class are referred to as cooperating UAs since they cooperate with each other to enhance the communication amongst their respective users.

NOTE A UA can support more than one type of message content, and hence belong to several UA classes.

8.5 Message Store

The Message Store (MS) uses the MT Service provided by the MTS. An MS is a functional entity associated with a user's UA. The user may submit messages through the MS, and retrieve messages that have been either delivered to the MS, or submitted by the user.

8.6 Access Unit

An Access Unit (AU) uses the MT Service provided by the MTS. An AU is a functional entity associated with an MTA to provide for intercommunication between MHS and another system or service.

8.7 Use of the MTS in the Provision of Various Services

The MTS is used by application specific services for the provision of Message Handling Services of various types. The Interpersonal Messaging Service, described in clause 9, is one example of this. Other services can be built on the foundation of the MTS, either with corresponding standards or as private applications.