

**Implementation of
ISO/IEC 11573 : 1994**

**Information technology —
Telecommunications and
information exchange between
systems —
Synchronization methods and
technical requirements for
Private Integrated Services
Networks**

Committees responsible for this British Standard

The preparation of this British Standard was entrusted to Technical Committee IST/6, Data communications, upon which the following bodies were represented:

- British Computer Society
- British Telecommunications plc
- CCTA (the Government Centre for Information Systems)
- Digital Equipment Co Ltd.
- IBM United Kingdom Ltd.
- Institution of Electrical Engineers
- International Computers Limited
- Logica UK Ltd.
- Nine Tiles Computer Systems Ltd.
- Rank Xerox UK Ltd.

This British Standard, having been prepared under the direction of the Information Systems Technology Assembly (T/-), was published under the authority of the Standards Board and comes into effect on 15 May 1995

© BSI 1995

Amendments issued since publication

Amd. No.	Date	Text affected

The following BSI references relate to the work on this standard:
Committee reference IST/6
Draft for comment 92/66853 DC

ISBN 0 580 24098 3

National foreword

This British Standard reproduces verbatim ISO/IEC 11573 : 1994 and implements it as the UK national standard.

This British Standard is published under the direction of the Information Systems Technology Assembly whose Technical Committee IST/6 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE. International and European Standards, as well as overseas standards, are available from Customer Services, BSI, 389 Chiswick High Road, London W4 4AL.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

INTERNATIONAL STANDARD

ISO/IEC
11573

First edition
1994-12-15

Information technology — Telecommunications and information exchange between systems — Synchronization methods and technical requirements for Private Integrated Services Networks

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Méthodes de synchronisation et
exigences techniques pour les réseaux privés avec intégration de services*



Reference number
ISO/IEC 11573:1994(E)

AVA **Documents**
Document Sharing Hub

Contents

	Page
Section 1 : General	
1.1 Scope	1
1.2 Definitions	1
1.3 Abbreviations and acronyms	3
1.4 Impact of slips	4
Section 2 : Technical requirements, Synchronization methods	
2.1 Technical requirements	5
2.1.1 Jitter and wander at the input	5
2.1.1.1 C0 and T0 interfaces (144 kbits/s)	5
2.1.1.2 C1 and T1 interfaces (1,544 Mbits/s)	5
2.1.1.3 C2 and T2 interfaces (2,048 Mbits/s)	6
2.1.2 Jitter and wander at the output	6
2.1.2.1 C0 and T0 interfaces (144 kbits/s)	6
2.1.2.2 C1 and T1 interfaces (1,544 Mbits/s)	6
2.1.2.3 C2 and T2 interfaces (2,048 Mbits/s)	7
2.1.3 Frequency deviation at the input	7
2.1.4 Accuracy	7
2.1.5 Lock range	7
2.1.6 Phase discontinuity of slave clocks	7
2.2 Synchronization methods for PISNs	8
2.2.1 High level concepts	8
2.2.2 Reference Clock Switching Criteria	8
2.2.3 Reference Restoral	9
2.2.4 Timing Reference Interfaces and Alarms	9
2.2.5 Buffers	9
2.2.6 Controls	9
2.2.7 Slip performance objectives	9
2.2.8 Strategies	10
Section 3 : Description of the synchronization methods	
3.1 Plesiochronous operation	11
3.2 Synchronization from one input	11
3.3 Automatic switch over with signalling	12
3.4 Automatic switch over without signalling	12
Annexes	
A Choice of clock references	
A.1 Choice of reference from public nodes	13
A.2 Choice of references between private nodes	14
A.3 Avoidance of Timing Loops	15
B Synchronization configuration	
B.1 Master Slave configurations (synchronization)	16
B.2 master–master configuration (split timing)	17

© ISO/IEC 1994

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

C Basis of strategies	
C.1 Slip rate	18
C.2 Allocation of the controlled slips	18
C.3 Unavailability of the links	19
C.4 Nodal solutions	20
C.5 Description of the five options	21
D Synchronized Private Network Examples	
D.1 Example with a small private network	22
D.2 Example with a big private network	22
D.3 Example with two different public clock sources	23
D.4 Example with a transit node	23
E Slave Clock Performance Measurement Guidelines	
E.1 Slave Clocks considerations	24
E.1.1 Ideal Operation	24
E.1.2 Stressed Operation	25
E.1.3 Holdover Operation	25
E.2 Test Configuration Guidelines	25
E.2.1 Reference Clock	25
E.2.2 Digital Reference Simulation	26
E.2.3 Output Timing Signal Recovery	26
E.3 Test categories	26
E.3.1 Ideal Testing	26
E.3.2 Stress Testing	26
E.3.3 Holdover Testing	27
F Signalling for management of synchronization	
F.1 Presentation	28
F.1.1 Configuration parameters	28
F.1.2 Reactions of the node	28
F.1.3 Reference clock switching and restoral	28
F.2 Description of the states	28
F.2.1 Initial states	28
F.2.2 Slave states	29
F.2.3 Autonomous state	29
F.2.4 Wait states	29
F.3 Description of the events	29
F.3.1 Failure of links	29
F.3.2 Signalling information	29
F.3.3 Time out	29
F.4 SDL representation of the state machine	29
G Bibliography	34

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 11573 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

During the preparation of this International Standard, information was gathered on patents upon which application of the standard might depend. Relevant patents were identified as belonging to ALCATEL Business Systems. However, ISO and IEC cannot give authoritative or comprehensive information about evidence, validity or scope of patent and like rights. The patent-holder has stated that licences will be granted under reasonable terms and conditions and communications on this subject should be addressed to

ALCATEL Business Systems
Business Products Division
54, avenue Jean Jaurès
92707 Colombes Cedex
France
Tel. : (1) 47.85.55.55
Telex: 615.531 F
Telefax: (1) 47.85.54.20

Introduction

When synchronous digital signals are being transported over a communications link, the receiving end must operate at the same average frequency as the transmitting end to prevent loss of information. This is referred to as link synchronization. When digital signals traverse a network of digital communications links, switching nodes, multiplexers, and transmission interfaces, the task of keeping all the entities operating at the same average frequency is referred to as network synchronization.

The design of a PISN requires specification of the timing sources and receivers for the synchronization network. Proper design requires that timing loops in the synchronization network be avoided. A timing loop occurs when a clock is using as its reference frequency a signal that is itself traceable to the output of that clock. The formation of such a closed timing loop leads to frequency instability and is not permitted. While it is relatively straightforward to ensure against timing loops in the primary synchronization reference network, care should be taken that timing loops do not occur during failure or error conditions when various timing references are rearranged.

When a PISN is not connected to the public digital network, synchronization can be achieved by having all PISN equipment derive timing from a single source. This source should be the highest quality clock available. Alternatively, if timing is derived from more than one class I clock, or public clock traceable source, the network is said to be operating *plesiochronously*.

If a PISN is connected to the public network at one or more nodes, the private network designer can coordinate with the public network provider to derive class I clock, or public clock traceable timing from the public digital network. More information is available in Annex A.

Information technology — Telecommunications and information exchange between systems — Synchronization methods and technical requirements for Private Integrated Services Networks

Section 1 : General

1.1 Scope

This International Standard contains requirements necessary for the synchronization of PISNs. Timing within a digital private network needs to be controlled carefully to ensure that the rate of occurrence of slips between PINXs within the PISN, and the public switched networks is sufficiently low not to affect unduly the performance of voice transmissions, or the accuracy or throughput (if errored data require re-transmission) of non-voice services.

Requirements are also based upon the interconnection of digital private telecommunication networks via digital facilities in the public (switched or not) telecommunication networks.

This International Standard is one of a series of technical standards on telecommunications networks. This International Standard with its companion standards fills a recognized need in the telecommunications industry brought about by the increasing use of digital equipment and facilities in private networks. It is useful to anyone engaged in the manufacture of digital customer premises equipment (CPE) for private network applications, and to those purchasing, operating or applying digital CPE to digital facilities for Private Integrated Services Networks (PISN).

This International Standard establishes technical criteria necessary in the design of a synchronization plan for a PISN. Compliance with these requirements would be expected to result in a quality PISN synchronization design.

1.2 Definitions

For the purposes of this International Standard, the following definitions apply:

1.2.1 Accuracy

A measure of the maximum departure from the nominal clock rate over a 24 h period, made anytime in the lifetime of the clock, during a defined period of time, within the declared environmental conditions. Frequency deviation may be constrained to the specific accuracy by clock operation in the free running or hold over modes, as defined below.

1.2.2 Asynchronous signals

Signals having not the same nominal rate.

1.2.3 Clock free running mode

In such a mode, the PINX works with its own clock source which is not locked to an external reference and is not using storage techniques to maintain its accuracy.

1.2.4 Clock hold over mode

An operating condition of a clock in which it is not locked to an external reference clock, but uses storage techniques to maintain during a limited period of time its accuracy with respects to the last known reference clock.

1.2.5 Controlled Slip

It consists of the repetition or deletion of an integer number of octets caused by the elastic buffer mechanism used at the interface of a non-synchronous bit stream (a plesiochronous or asynchronous one). Slips and controlled slips shall be considered synonymous in this International Standard.

1.2.6 Jitter

Short-term non-cumulative variations of the significant instants of a digital signal from their ideal positions in time.

1.2.7 Lock range

Maximum frequency offset from the nominal, to which a given clock is able to synchronize.

1.2.8 Master

The term "master" refers to the clock source providing the timing to the PINX.

1.2.9 Maximum time interval error (MTIE)

The maximum time interval error (TIE) for all possible measurement intervals within the measurement period. Figure 1 illustrates the definition of MTIE.

1.2.10 Phase Locked Loop (PLL)

A feedback-controlled system that locks a local clock to an incoming reference clock in both frequency and phase.

1.2.11 Plesiochronous

The essential characteristic of time-scales or signals such as their corresponding significant instants occur at nominally the same rate, any variation in rate being constrained within specified limits.

1.2.12 Primary Reference Clock

Equipment that provides a timing signal, with a long term accuracy equal or better than $\pm 10^{-11}$.

1.2.13 Pull in range

Maximum frequency offset from its own clock, to which a given clock is able to synchronize.

1.2.14 Reference Clock

Timing signal used for synchronization, without any assumption on its accuracy.

1.2.15 Slave

The term "slave" refers to the PINX receiving timing from another source.

1.2.16 Slip

Refer to controlled slip

1.2.17 Split Timing

An arrangement where equipment employs separate transmit and receive clocks on a transmission link having no particular relationship to one another.

1.2.18 Synchronous

Qualifies signals with corresponding significant instants occurring at the same mean rate; the time difference between these homologous instants is generally limited.

1.2.19 Synchronization

The process of adjusting the corresponding significant instants of signals so that a constant phase relationship exists between them.

1.2.20 Time-Interval Error (TIE)

The variation in time delay of a given timing signal with respect to an ideal timing signal over a particular time period. Figure 1 illustrates the definition of TIE.

1.2.21 Timing loop

An unstable condition in which two or more equipment clocks transfer timing to each other, forming a loop without a designated master timing source.

1.2.22 Time to repair

The time by which, with a stated probability, the link is repaired.

1.2.23 Transparent

A link or group of links is transparent if the signal carried is not re-timed from a clock associated with the link(s). The timing of a signal passing across a transparent link may however be altered due to jitter, wander, filtering, or fault conditions. Figure 2 illustrates the definition of transparent and non transparent links.

1.2.24 Wander

The long-term variations of the significant instants of a digital signal from their ideal positions in time. Long-term implies that these variations are of low frequency.

1.3 Abbreviations and acronyms

AIS :	Alarm Indication signal
BITS :	Building Integrated Timing Supply
CCITT :	International Telegraph and Telephone Consultative Committee
CPE :	Customer Premises Equipment
C0 :	Basic Rate transparent or non transparent links
C1 :	1,544 Mbits/s transparent or non transparent links
C2 :	2,048 Mbits/s transparent or non transparent links
C3 :	Non ISDN transparent or non transparent links
DCS :	Digital Cross-connect System
DSX :	Digital Signal Cross-connect
DTE :	Data Terminal Equipment
ESF :	Extended Super Frame
FM :	Frequency Modulation
GPS :	Global Positioning System
MTIE :	Maximum Time Interval Error (see figure1)
MUX :	Multiplexer
NCTE :	Network Channel Terminating Equipment
NI :	Network Interface
PISN :	Private Integrated Services Network.
PINX :	Private Integrated Services Network Exchange (PABX, Key System, ...).
ppm :	parts per million
PSTN :	Public Switched Telecommunication Network
PLL :	Phase Locked Loop
PRC :	Primary Reference Clock
PM :	Phase Modulation
SES :	Severely Errored Second
SDH :	Synchronous Digital Hierarchy
T0 :	Basic Rate Access to public ISDN
T1 :	1,544 Mbits/s Access to public ISDN
T2 :	2,048 Mbits/s Access to public ISDN
TIE :	Time Interval Error (see figure1)
UI :	Unit Interval (488 ns for T2 and C2, 648 ns for T1 and C1, 5208 ns for T0 and C0)
UTC :	Universal Coordinated Time

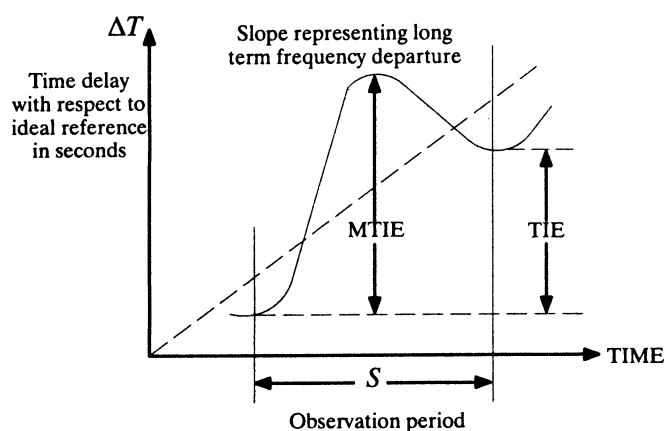


Figure 1 – Time Interval Error (TIE)

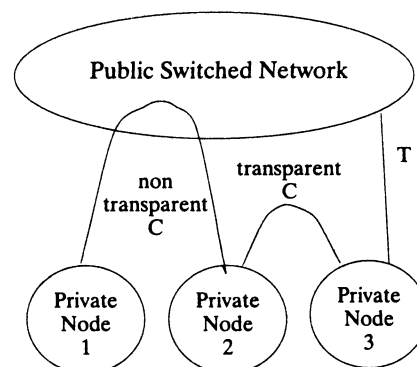


Figure 2 – Links definition

1.4 Impact of slips

When synchronous digital signals are being transported over a link, the receiving end must operate at the same average frequency as the transmitting end to prevent loss of information.

When digital signals traverse a network of digital links, switching nodes, multiplexers and transmission interfaces, the task of keeping all the entities operating at the same average frequency is referred to as synchronization. If the distant transmitter sends at a bit rate higher than the switching system clock, the receive buffer in the switching system eventually will overflow, causing one frame to be lost. If the received bit stream is at a lower bit rate, the buffer will underflow, causing a frame to be repeated. Either occurrence is called a controlled slip.

In a digital PISN, slips can be prevented by forcing all equipment to use a common reference clock. In a digital PISN, when it is not connected to the public digital network, network synchronization is achieved by having all equipments derive timing from a single source that should be the highest quality clock available.

If a PISN is connected to the public network at one or more nodes, the private network shall derive timing from the public digital network timing reference to ensure that the highest quality timing source is used.

The design of a PISN requires specification of the timing sources and receivers to achieve synchronization. Proper design requires that timing loops in the synchronization plan be eliminated.

The impact of slips on service carried on digital networks depends on the application and type of service being provided. Some examples of the effects of which are summarized in the following table.

Table 1 – Impacts of a slip

Service	Potential impact
Encrypted text	Encryption key must be retransmitted
Video	Freeze frame for several seconds Noise burst ("pop") on audio
Digital data	Deletion or repetition of data Possible misframe Reduction of throughput
Facsimile	Connection establishment may be not successful Deletion of 4–8 scan lines or lost of throughput, depending on facsimile system
Voice Band Data	Transmission errors for 0,01 to 2 s Drop call (for some modems)
Voice	Possible "Click"

In addition to slips, synchronization – related impairments caused by transmission effects on equipments such as error bursts and phase discontinuity, can also have an impact on customer service. These degradations can propagate and multiply through the network.

All of the degradations described above can be controlled by appropriate synchronization strategies and clock designs, as described in later clauses.

Section 2 : Technical requirements, Synchronization methods

2.1 Technical requirements

The phase stability of a slave clock can be described by:

- its long-term phase variations (wander and integrated frequency departure);
- its short-term phase variations (jitter);
- phase discontinuities due to transient disturbances.

NOTES

- 1 – The values given in 2.1.1, 2.1.2 and 2.1.3 are taken from ETS 300 012 [3] for C0 and T0, from ETS 300 011 [2] for T2 and C2 and from EIA/TIA-594 [8] for C1 and T1.
- 2 – It has been found necessary to limit the wander value for the T0 and C0 interfaces. The need for the additional parameters for accuracy and lock range derives from the strategies in 2.2.8.
- 3 – Requirements for phase discontinuity are taken from CCITT Recommendation G.812.

2.1.1 Jitter and wander at the input

2.1.1.1 C0 and T0 interfaces (144 kbits/s)

The C0 and T0 inputs shall tolerate at least a sinusoidal input jitter within the mask shown in figure 3 without producing bit errors:

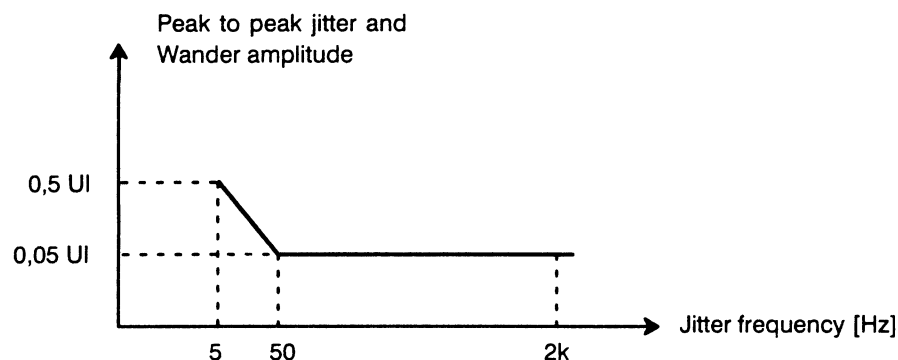


Figure 3 – Tolerable jitter and wander at PINX input for Basic Access

In order to save power, when both B channels are idle, carriers may disable T0 interfaces. Under these conditions, timing information is not available. Synchronization shall be derived from interfaces which are continuously available.

NOTE : The maximum relative wander between two or more interfaces is limited to 4 UI (except for plesiochronous operation).

2.1.1.2 C1 and T1 interfaces (1,544 Mbits/s)

The equipment shall operate with jitter of the received signal which does not exceed the following limits, in both bands simultaneously :

- (1) Band 1 [10 Hz – 40 kHz] : 5,0 UI, peak-to-peak, and
- (2) Band 2 [8 kHz – 40 kHz] : 0,1 UI, peak-to-peak.

For T1 and non transparent C1 interfaces, the equipment shall operate with wander of the received signal of up to 28 UI (18 μ s) peak-to-peak over any 24h period and up to 23 UI (15 μ s) peak-to-peak in any 1h interval.

Wander requirements for transparent C1 interfaces are for further study.