

Implementation of
ISO/IEC 12248:1993

**Information
technology —
3,81 mm wide magnetic
tape cartridge for
information
interchange —
Helical scan
recording —
DATA/DAT-DC format
using 60 m and 90 m
length tapes**

UDC 681.327.636

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

BSI
Documents

AVA

Document Sharing Hub

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by the Information Systems Technology Standards Policy Committee (IST/-) to Technical Committee IST/4, upon which the following bodies were represented:

- British Computer Society
- ICI Imagedata
- Institute of Quality Assurance
- Institution of Electrical Engineers
- International Computers Limited
- Kodak Limited

This British Standard, having been prepared under the direction of the Information Systems Technology Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 15 April 1994

© BSI 05-2000

The following BSI references relate to the work on this standard:
Committee reference IST/4
Draft for comment 92/66916 DC

ISBN 0 580 23308 1

Amendments issued since publication

Amd. No.	Date	Comments

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Foreword	ix
Text of ISO/IEC 12248	1

National foreword

This British Standard reproduces verbatim ISO/IEC 12248:1993 and implements it as the UK national standard.

This British Standard is published under the direction of the Information Systems Technology Standards Policy Committee whose Technical Committee IST/4 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE International and European Standards, as well as overseas standards, are available from Customer Services, Publications, BSI, Linford Wood, Milton Keynes, MK14 6LE.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the ISO/IEC title page, pages ii to x, pages 1 to 110 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

**Information technology — 3,81 mm wide
magnetic tape cartridge for information
interchange — Helical scan recording —
DATA/DAT-DC format using 60 m and
90 m length tapes**

*Technologies de l'information — Cartouche de bande magnétique de
3,81 mm de large pour l'échange d'information — Enregistrement par
balayage en spirale — Format DATA/DAT-DC utilisant des bandes
de 60 m et 90 m de long*



Reference number
ISO/IEC 12248:1993(E)

Contents

	Page
Foreword	ix
Introduction	1
Section 1. General	
1 Scope	1
2 Conformance	1
2.1 Magnetic tape cartridge	1
2.2 Generating system	1
2.3 Receiving system	1
3 Normative references	2
4 Definitions	2
4.1 absolute frame number (AFN)	2
4.2 algorithm	2
4.3 area ID	2
4.4 automatic track finding (ATF)	2
4.5 average signal amplitude	2
4.6 azimuth	2
4.7 back surface	2
4.8 byte	2
4.9 cartridge	2
4.10 channel bit	2
4.11 codeword	3
4.12 data format ID	3
4.13 end of data (EOD)	3
4.14 end of information (EOI)	3
4.15 end of partition (EOP)	3
4.16 entity	3
4.17 error correcting code (ECC)	3
4.18 flux transition position	3
4.19 flux transition spacing	3
4.20 frame	3
4.21 group	3
4.22 logical beginning of tape (LBOT)	3
4.23 logical end of tape (LEOT)	3
4.24 magnetic tape	3
4.25 master reference	4
4.26 master standard amplitude calibration tape	4
4.27 master standard reference tape	4
4.28 optimum recording field	4
4.29 partition	4
4.30 partition reference	4
4.31 physical beginning of tape (PBOT)	4
4.32 physical end of tape (PEOT)	4
4.33 physical recording density	4
4.34 pre-recording condition	4
4.35 processed record	4
4.36 processed record sequence	4
4.37 processing	4
4.38 record	5
4.39 reference recording field	5
4.40 secondary standard amplitude calibration tape	5

	Page
4.41 secondary standard reference tape	5
4.42 separator mark	5
4.43 standard reference amplitude	5
4.44 tape noise amplitude	5
4.45 tape reference edge	5
4.46 track	5
5 Environment and safety	5
5.1 Testing environment	5
5.2 Operating environment	6
5.3 Storage environment	6
5.4 Transportation	6
5.5 Safety	6
5.6 Flammability	6
Section 2. Requirements for the case	
6 Dimensional and mechanical characteristics of the case	6
6.1 General	6
6.2 Overall dimensions	7
6.3 Loading grip	7
6.4 Holding areas	7
6.5 Notches of the lid	8
6.6 Lid dimensions	8
6.7 Optical detection of the beginning and end of tape	8
6.8 Bottom side	9
6.8.1 Locking mechanism of the slider	9
6.8.2 Access holes	10
6.8.3 Recognition, sub-datum and write-inhibit holes	10
6.8.4 Datum holes	11
6.8.5 Access room for tape guides	11
6.8.6 Holes for accessing the hubs	12
6.8.7 Internal structure of the lower half	12
6.8.8 Light path	13
6.8.9 Support areas	13
6.8.10 Datum areas	13
6.8.11 Relationship between support and datum areas and Reference Plane Z	13
6.9 Hubs	14
6.10 Leader and trailer attachment	14
6.11 Interface between the hubs and the drive spindles	14
6.12 Opening of the lid	14
6.13 Release of the hub locking mechanism	14
6.14 Label areas	15
Section 3. Requirements for the unrecorded tape	
7 Mechanical, physical and dimensional characteristics of the tape	26
7.1 Materials	26
7.2 Tape length	26
7.2.1 Length of magnetic tape	26
7.2.2 Length of leader and trailer tapes	26

	Page
7.3 Tape width	26
7.4 Discontinuities	26
7.5 Total thickness	26
7.6 Longitudinal curvature	26
7.7 Cupping	26
7.8 Coating adhesion	26
7.9 Layer-to-layer adhesion	27
7.10 Tensile Strength	27
7.10.1 Breaking Strength	27
7.10.2 Yield Strength	27
7.11 Residual elongation	27
7.12 Electrical resistance of coated surfaces	28
7.13 Light transmittance of tape	28
8 Magnetic recording characteristics	28
8.1 Optimum recording field	29
8.2 Signal amplitude	29
8.3 Resolution	29
8.4 Overwrite	29
8.4.1 Physical recording densities of 750,6 and 3 002 ftpmm	29
8.4.2 Physical recording densities of 83,4 ftpmm and 1 001 ftpmm	30
8.5 Ease of erasure	30
8.6 Tape quality	30
8.6.1 Missing pulses	30
8.6.2 Missing pulse zone	30
8.7 Signal-to-noise ratio (S/N) characteristic	30
Section 4. Format	
9 DATA/DAT-DC format	31
9.1 General	31
9.2 Basic Groups	31
9.2.1 Basic Groups for Group Format 0	31
9.2.2 Basic Groups for Group Format 1	32
9.3 Sub-groups	33
9.3.1 G1 Sub-group	33
9.3.2 G2 Sub-group	34
9.3.3 G3 Sub-group	34
9.3.4 G4 Sub-group	35
9.3.5 Main Data Block	39
9.4 Sub-Data area	40
9.4.1 Pack Item No. 1	41
9.4.2 Pack Item No. 2	41
9.4.3 Pack Item No. 3	43
9.4.4 Pack Item No. 4	43
9.4.5 Pack Item No. 5	44
9.4.6 Pack Item No. 6	44
9.4.7 Pack Item No. 7	45
9.4.8 Sub Data Block	45
9.5 Basic Group structure	47
9.5.1 User Data	47
9.5.2 System Data	49

		Page
9.5.3	Record ID list	51
9.5.4	Heuristic Recovery Data Area	55
10	Method of recording	55
10.1	Physical recording density	55
10.2	Long-Term average bit cell length	55
10.3	Short-Term average bit cell length	55
10.4	Rate of change	55
10.5	Bit shift	55
10.6	Read signal amplitude	56
10.7	Maximum recorded levels	56
11	Track geometry	56
11.1	Track configuration	56
11.2	Average track pitch	57
11.3	Variations of the track pitch	57
11.4	Track width	57
11.5	Track angle	57
11.6	Track edge linearity	57
11.7	Track length	57
11.8	Ideal tape centreline	57
11.9	Azimuth angles	57
12	Recording of blocks on the tape	57
12.1	Recorded Main Data Block	57
12.2	Recorded Sub Data Block	57
12.3	Margin Blocks, Preamble Blocks and Postamble Blocks	57
12.4	Spacer Blocks	57
13	Format of a track	58
13.1	Track capacity	58
13.2	Positioning accuracy	58
13.3	Tracking scheme	58
14	Group Formats	61
14.1	Group Format 0	61
14.2	Group Format 1	61
14.3	Extended Gap Frames	62
14.3.1	Extended Leading Gap Frames	62
14.3.2	Extended Trailing Gap Frames	62
14.4	Types of Groups	62
14.4.1	Normal Groups	62
14.4.2	Spare Groups	62
14.4.3	Amble Groups	63
14.4.4	Header Groups	63
15	Magnetic tape layout	63
15.1	Load/Unload Area	63
15.2	Lead-in Area	64
15.2.1	Preamble	64
15.2.2	Header	64
15.2.3	Format Parameter Set	65
15.2.4	Master Reference	70
15.2.5	Postamble	75
15.3	Partition	75

	Page
15.3.1 Partition Preamble	75
15.3.2 Partition Reference	75
15.3.3 Partition Postamble	86
15.3.4 Partition Data	86
15.3.5 End of Partition (EOP)	86
15.3.6 Unused Area	86
15.4 EOI	87
15.5 Repeated Groups	87
15.6 Repeated Frames within a Normal Group	87
15.7 Relocation of Defective Groups	87
15.8 Appending	88
15.8.1 Seamless appending	88
15.8.2 Non-seamless appending	89
15.9 Overwrite	90
15.9.1 Overlapped track width	91
15.9.2 Non-overlapped track width	91
15.9.3 Rules for overwrite	91
Annex A (normative) Measurement of the light transmittance of the prisms	92
Annex B (informative) Recognition holes	93
Annex C (informative) Means for opening the lid	94
Annex D (normative) Measurement of light transmittance of tape and leaders	95
Annex E (normative) Measurement of Signal-to-Noise Ratio	97
Annex F (normative) Method for determining the nominal and the maximum allowable recorded levels	97
Annex G (normative) Representation of 8-bit bytes by 10-bit pattern	98
Annex H (normative) Measurement of bit shift	104
Annex J (informative) Recommendations for transportation	106
Annex K (normative) Method of measuring track edge linearity	106
Annex L (informative) Read-After-Write	107
Annex M (normative) Data allocation and C3 parity	107
Figure 1 — Top view	15
Figure 2 — Bottom view	15
Figure 3 — Partial view of the rear side	16
Figure 4 — Reference Planes X, Y, Z	16
Figure 5 — Front side, lid closed	17
Figure 6 — Top side, lid closed	17
Figure 7 — Left side, lid closed	17
Figure 8 — Top side, lid open	18
Figure 9 — Left side, lid open	18
Figure 10 — Bottom side, lid closed	19
Figure 11 — Bottom side, lid open	20
Figure 12 — Inside view of the lower half	21
Figure 13 — Bottom side, lid and slider in open position	22
Figure 14 — Left side, lid open	22
Figure 15 — Top view of a hub	23
Figure 16 — Side view of a hub	23
Figure 17 — Interface with the drive spindle	23

	Page
Figure 18 — Lid in completely open position	24
Figure 19 — Extreme position of the lid for which the hubs are still locked	24
Figure 20 — Minimum position of the lid for which the hubs are completely unlocked	25
Figure 21 — Top side, label area	25
Figure 22 — Rear side, label area	25
Figure 23 — Setup for measuring coating adhesion	27
Figure 24 — Setup for measuring the electrical resistance	28
Figure 25 — Data allocation for Group Format 0	31
Figure 26 — Sub-group allocation Group Format 0	32
Figure 27 — Data allocation for Group Format 1	32
Figure 28 — Sub-group allocation for Group Format 1	33
Figure 29 — G1 Sub-groups for Group Format 0	33
Figure 30 — G1 Sub-groups for Group Format 1	34
Figure 31 — G3 Sub-group	34
Figure 32 — Twin arrays of a G4 Sub-group before C1 and C2 computation	36
Figure 33 — W1 byte	39
Figure 34 — W2— byte	39
Figure 35 — Main data block	40
Figure 36 — Area Codes	42
Figure 37 — SW1 Byte	45
Figure 38 — SW2 Byte	46
Figure 39 — Sub Data Block	46
Figure 40 — Pack Item location	47
Figure 41 — Basic Group Layout	47
Figure 42 — Record layout in User Data	47
Figure 43 — Group Status Byte	50
Figure 44 — Record ID Format	52
Figure 45 — Control Byte for Data Records	52
Figure 46 — Control Byte for Continuation Marks	53
Figure 47 — Control Byte for Separators 1, 2 and 3	54
Figure 48 — Control Byte for entities	54
Figure 49 — Track Configuration (view on the recording surface)	56
Figure 50 — ATF Signals allocation	60
Figure 51 — Group Format 0	61
Figure 52 — Group Format 1	61
Figure 53 — Tape Format	63
Figure 54 — Load/Unload Area	64
Figure 55 — Lead-in Area	64
Figure 56 — Checksum procedure	69
Figure 57 — Checksum summary	69
Figure 58 — Tape Protection Byte	71
Figure 59 — Tape Flag	72
Figure 60 — Partition Protection Byte	73
Figure 61 — Partition Flags	74
Figure 62 — Partition organization	75
Figure 63 — Spare Group Sets and Normal Group Sets	78

	Page
Figure 64 — Type A Group Entry	79
Figure 65 — First Flag Byte for Type A	79
Figure 66 — Second Flag Byte for Type A	80
Figure 67 — Type B Group Entry	80
Figure 68 — First Flag Byte for Type B	81
Figure 69 — Second Flag Byte for Type B	82
Figure 70 — Consecutive Separator 2's Count	83
Figure 71 — Type C Group Entry	84
Figure 72 — First Flags Byte for Type C	84
Figure 73 — Second Flag Byte for Type C	85
Figure 74 — Seamless appending rules	88
Figure 75 — Tolerance for seamless appending	89
Figure 76 — Non-seamless appending	90
Figure 77 — Track configuration after overwrite	90
Figure A.1 — Reference prism	92
Figure A.2 — Cartridge prism	92
Figure A.3 — Perspective view of the reference prism	93
Figure C.1 — Bottom side of the case	94
Figure C.2 — Intermediate position within the drive	94
Figure C.3 — Final position within the drive	95
Figure D.1 — Optical arrangement	96
Figure D.2 — Measuring circuitry	97
Figure K.1 — Track edge linearity	107
Table 1 — Pack Item No. 1	41
Table 2 — Pack Item No. 2	41
Table 3 — Pack Item No. 3	43
Table 4 — Pack Item No. 4	43
Table 5 — Pack Item No. 5	44
Table 6 — Pack Item No. 6	44
Table 7 — Pack Item No. 7	45
Table 8 — Group ID	48
Table 9 — Record length code	49
Table 10 — New Group Number	50
Table 11 — Record ID list	51
Table 12 — Format of a Track	58
Table 13 — Data of a Header Group	65
Table 14 — Data of a Header Group — Example 1	65
Table 15 — Data of a Header Group — Example 2	65
Table 16 — Format Parameter Set (first part)	66
Table 17 — Information Data of the Master Reference Group	70
Table 18 — Tape ID	70
Table 19 — Partition Entry List	72
Table 20 — Partition Entry	73
Table 21 — Partition Reference	75
Table 22 — Partition ID	76
Table 23 — Group Entry List Descriptor	77
Table 24 — Record Type	77
Table 25 — Group Entry List	78
Table B.1 — Recognition holes	93

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 12248 was prepared by the European Computer Manufacturers Association (ECMA) (as Standard ECMA-171) and was adopted, under a special “fast-track procedure”, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

Annex A, Annex D, Annex E, Annex F, Annex G, Annex H, Annex K and Annex M form an integral part of this International Standard. Annex B, Annex C, Annex J and Annex L are for information only.

Introduction

ISO/IEC have produced a series of International Standards for cassettes and cartridges containing magnetic tapes of different width and characteristics. Of these, the following relate to helical scan recording.

ISO/IEC 10777:1991, *3,81 mm wide magnetic tape cartridge for information interchange — Helical scan recording — DDS format.*

ISO/IEC 11319:1993, *8 mm wide magnetic tape cartridge for information interchange — Helical scan recording.*

ISO/IEC 11321:1992, *3,81 mm wide magnetic tape cartridge for information interchange — Helical scan Recording — DATA/DAT format.*

ISO/IEC 11557:1992, *3,81 mm wide magnetic tape cartridge for information interchange — Helical scan recording — DDS-DC format using 60 m and 90 m length tapes, 2nd edition.*

ISO/IEC 12246:1993, *8 mm wide magnetic tape cartridge, dual azimuth format for information interchange — Helical scan recording.*

ISO/IEC 12247:1993, *3,81 mm wide magnetic tape cartridge for information interchange — Helical scan recording — DDS format using 60 m and 90 m length tapes.*

Section 1. General

1 Scope

This International Standard specifies the physical and magnetic characteristics of a 3,81 mm wide magnetic tape cartridge to enable interchangeability of such cartridges. It also specifies the quality of the recorded signals, the recorded format and the recording method, thereby allowing data interchange between drives by means of such magnetic tape cartridges. The format used is known as DATA/DAT-DC. This International Standard specifies two types of cartridges which, for the purpose of this International Standard, are referred to as Type A and Type B.

For Type A, the magnetic tape has a nominal thickness of 13 μm and a nominal length of up to 60,5 m.

For Type B, the magnetic tape has a nominal thickness of 9 μm a length of up to 92,0 m.

Information interchange between systems by means of this International Standard also requires the use, at a minimum, of a labelling and file structure and an interchange code which are agreed upon by the interchange parties. It is not within the scope of this International Standard to specify the labelling and file structure, or the interchange code.

2 Conformance

2.1 Magnetic tape cartridge

A tape cartridge shall be in conformance with this International Standard if it meets all mandatory requirements specified herein for either Type A or Type B. The tape requirements shall be satisfied throughout the extent of the tape.

2.2 Generating system

A system generating a magnetic tape cartridge for interchange shall be entitled to claim conformance to this International Standard if all recordings on the tape meet the mandatory requirements of this International Standard. A claim of conformance shall state whether cartridges of Type A or Type B or both are supported.

2.3 Receiving system

A system receiving a magnetic tape cartridge for interchange shall be entitled to claim conformance with this International Standard if it is able to handle any recording made on the tape according to this International Standard. A claim of conformance shall state whether cartridges of Type A or Type B or both are supported.

3 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO/R 527:1966, *Plastics — Determination of tensile properties*.

ISO/IEC 646:1991, *Information technology — ISO 7-bit coded character set for information interchange*.

ISO 1302:1992, *Technical drawings — Method of indicating surface texture*.

ISO/IEC 11576:1993, *Information technology — Procedure for the registration of algorithms for the lossless compression of data*.

IEC 950:1991, *Safety of information technology equipment, including electrical business equipment*.

4 Definitions

For the purposes of this International Standard, the following definitions apply.

4.1

absolute frame number (AFN)

a sequence number allocated to, and recorded in, each frame

4.2

algorithm

a set of rules for transforming the logical representation of data

4.3

area ID

an identifier for each area of the tape specifying the types of frame written therein

4.4

automatic track finding (ATF)

a method by which tracking is achieved

4.5

average signal amplitude

the average peak-to-peak value of the output signal from the read head at the fundamental frequency of the specified physical recording density, over a minimum of 7,8 mm of track, exclusive of missing pulses

4.6

azimuth

the angular deviation, in degrees, minutes and seconds of arc, made by the mean flux transition line with the line normal to the centreline of the recorded track

4.7

back surface

the surface of the tape opposite to the magnetic coating which is used to record data

4.8

byte

an ordered set of bits acted upon as a unit

4.9

cartridge

a case containing magnetic tape stored on twin hubs

4.10

channel bit

a bit after 8-to-10 transformation

4.11**codeword**

a word which is generated by a processing algorithm. The number of bits in a Codeword is variable, and is not specified in this International Standard

4.12**data format ID**

an identifier specifying which data format is being used on the tape

4.13**end of data (EOD)**

the point where the host stopped writing data on the tape

4.14**end of information (EOI)**

a group which indicates the end of partition area in a tape

4.15**end of partition (EOP)**

a group which indicates the end of data area in a partition

4.16**entity**

a unit of recorded data, comprising a processed record sequence resulting from the application of a common processing algorithm

4.17**error correcting code (ECC)**

a mathematical algorithm yielding check bytes used for the detection and correction of errors

4.18**flux transition position**

that point which exhibits maximum free-space flux density normal to the tape surface

4.19**flux transition spacing**

the distance along a track between successive flux transitions

4.20**frame**

a pair of adjacent tracks with azimuth of opposite polarity, in which the track with the positive azimuth precedes that with the negative azimuth

4.21**group**

a number of frames constituting a recorded unit

4.22**logical beginning of tape (LBOT)**

the point along the length of the tape where the recording of data for interchange commences

4.23**logical end of tape (LEOT)**

a point along the length of the tape which indicates the approach, in the direction of tape motion, of the partition boundary or physical end of tape

4.24**magnetic tape**

a tape which will accept and retain magnetic signals intended for input, output, and storage purposes on computers and associated equipment

4.25

master reference

the area which contains partition information in the tape

4.26

master standard amplitude calibration tape

a pre-recorded tape on which the standard signal amplitudes have been recorded in the tracks of positive azimuth, 23,0 µm wide, at nominal track pitch, on an AC-erased tape

NOTE 1 The tape includes recordings made at 83,4 ftpmm, 333,6 ftpmm, 500,4 ftpmm, 1 001 ftpmm and 1 501 ftpmm.

NOTE 2 The Master Standard Amplitude Calibration Tape has been established by the Sony Corporation.

4.27

master standard reference tape

a tape selected as the standard for Reference Recording Field, Signal Amplitude, Resolution Overwrite and Signal-to-Noise Ratio

NOTE 3 The Master Standard Reference Tape has been established by the Sony Corporation.

4.28

optimum recording field

in the plot of Average Signal Amplitude against the recording field at the physical recording density of 3 002 ftpmm, the field that causes the maximum Average Signal Amplitude

4.29

partition

partition of a tape in which user data is recorded

4.30

partition reference

the area which contains group information in the partition

4.31

physical beginning of tape (PBOT)

the point where the leader tape is joined to the magnetic tape

4.32

physical end of tape (PEOT)

the point where the trailer tape is joined to the magnetic tape

4.33

physical recording density

the number of flux transitions per unit length of track, expressed in flux transitions per millimetre (ftpmm)

4.34

pre-recording condition (maximum recorded levels)

the recording levels above which a tape intended for interchange shall not previously have been recorded

4.35

processed record

a sequence of Codewords which result from the application of processing to data

4.36

processed record sequence

a sequence of one or more processed records which start on an 8-bit boundary and end on a subsequent 8-bit boundary

4.37

processing

the use of an algorithm to transform host data into Codewords

4.38**record**

related data treated as a unit of information

4.39**reference recording field**

the optimum recording field of the Master Standard Reference Tape

4.40**secondary standard amplitude calibration tape**

a tape pre-recorded as defined for the Master Standard Amplitude Calibration Tape; the outputs of which are known and stated in relation to that of the Master Standard Amplitude Calibration Tape

NOTE 4 The Secondary Standard Amplitude Calibration Tape can be ordered from the Sony Corporation, Audio Device Business Department, Component Marketing Group 4-10-18, Takanawa, Minato-ku, Tokyo 108, Japan, under Part Number TY-7000 G until the year 2000. It is intended that these be used for calibrating tertiary tapes for use in routine calibration.

4.41**secondary standard reference tape**

a tape the performance of which is known and stated in relation to that of the Master Standard Reference Tape

NOTE 5 A Secondary Standard Reference Tape can be ordered from the Sony Corporation, Audio Device Business Department, Component Marketing Group 4-10-18, Takanawa, Minato-ku, Tokyo 108, Japan, under Part Number RSD 1079 until the year 2000. It is intended that these be used for calibrating tertiary tapes for use in routine calibration.

4.42**separator mark**

a record containing no user data, which is used to separate data

4.43**standard reference amplitude**

the Average Signal Amplitude from the tracks of positive azimuth of the Master Standard Amplitude Calibration Tape at a specified physical recording density

4.44**tape noise amplitude**

the tape noise amplitude is the subtractive value of amplifier noise from total noise in rms

4.45**tape reference edge**

the bottom edge of the tape when viewing the recording side of the tape with the PEOT of the tape to the observer's right

4.46**track**

a diagonally positioned area on the tape along which a series of magnetic signals may be recorded

5 Environment and safety

Unless otherwise stated, the conditions specified below refer to ambient conditions in the air immediately surrounding the cartridge.

5.1 Testing environment

Unless otherwise stated, tests and measurements made on the tape cartridge to check the requirements of this International Standard shall be carried out under the following conditions:

temperature	: 23 °C ± 2 °C
relative humidity	: 40 % to 60 %
conditioning period before testing	: 24 h

5.2 Operating environment

Cartridges used for data interchange shall be capable of operating under the following conditions:

temperature	: 5 °C to 45 °C
relative humidity	: 20 % to 80 %
wet bulb temperature	: 26 °C max.

There shall be no deposit of moisture on or in the cartridge.

Conditioning before operating:

If a cartridge has been exposed during storage and/or transportation to a condition outside the above values, before use the cartridge shall be conditioned in the operating environment for a time at least equal to the period during which it has been out of the operating environment, up to a maximum of 24 h.

NOTE 6 Rapid variations of temperature should be avoided.

5.3 Storage environment

For long term or archived storage of cartridges the following conditions shall be observed:

temperature	: 5 °C to 32 °C
relative humidity	: 20 % to 60 %
maximum wet bulb temperature	: 26 °C max.

The stray magnetic field at any point on the tape shall not exceed 4 000 A/m. There shall be no deposit of moisture on or in the cartridge.

5.4 Transportation

Recommended limits for the environment to which a cartridge may be subjected during transportation, and the precautions to be taken to minimize the possibility of damage, are provided in Annex J.

5.5 Safety

The cartridge and its components shall satisfy the requirements of IEC 950.

5.6 Flammability

The cartridge and its components shall be made from material which, if ignited from a match flame, do not continue to burn in a still carbon dioxide atmosphere.

Section 2. Requirements for the case

6 Dimensional and mechanical characteristics of the case

6.1 General

The case of the cartridge shall comprise:

- an upper half- a lower half,
- a slider movably mounted on the lower half,
- a lid pivotally mounted on the upper half.

In the drawings, using third angle projection, an embodiment of the cartridge is shown as an example.

- | | |
|----------|---|
| Figure 1 | is a perspective view of the cartridge seen from the top. |
| Figure 2 | is a perspective view of the cartridge seen from the bottom. |
| Figure 3 | is a partial view of the rear side. |
| Figure 4 | is a schematic view showing the Reference Planes X, Y, and Z. |
| Figure 5 | shows the front side. |
| Figure 6 | shows the top side with the lid in closed position. |
| Figure 7 | shows the left side. |
| Figure 8 | shows the top side with the lid in open position. |

- Figure 9 shows the left side with the lid in open position.
- Figure 10 shows the bottom side with the lid and the slide in closed position.
- Figure 11 shows the bottom side with the lid and the slider in open position.
- Figure 12 is a view from the top of the inside of the lower half with the upper half removed.
- Figure 13 is a view of the bottom half with the lid and the slider in open position.
- Figure 14 is a view of the left side with the lid and the slider in open position.
- Figure 15 is a top view of a hub.
- Figure 16 is a side view of a hub with partial cross section.
- Figure 17 is a partial cross-section through a hub and both halves of the case showing the interface with the drive spindle.
- Figure 18 shows at a larger scale the lid in the open position.
- Figure 19, show at a larger scale the functional relationship between the lid and the locking
Figure 20 mechanism of the hubs.
- Figure 21, show the label areas on the top and the rear side.
Figure 22

The dimensions are referred to three orthogonal Reference Planes X, Y, and Z (Figure 4).

6.2 Overall dimensions (Figure 6 and Figure 7)

The overall dimensions of the case with the lid in the closed position shall be:

$$L_1 = 73,0 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_2 = 54,0 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_3 = 10,5 \text{ mm} \pm 0,2 \text{ mm}$$

The edges formed by the rear side and left and right sides shall be rounded off with a radius

$$R_1 = 1,5 \text{ mm max.}$$

The two edges of the lid shall be rounded off with a radius

$$R_2 = 0,5 \text{ mm max.}$$

6.3 Loading grip (Figure 6)

The top side shall have a loading grip for loading and positioning the cartridge into the drive. The position and dimensions of the loading grip shall be

$$L_4 = 25,5 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_5 = 10 \text{ mm min.}$$

$$L_6 = 5,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_7 = 2,0 \text{ mm min.}$$

The depth of the loading grip below surface of the top side shall be

$$0,5 \text{ mm} \begin{matrix} +0,2 \\ -0,0 \end{matrix} \text{ mm}$$

6.4 Holding areas (Figure 6)

The two areas shown shaded in Figure 6 shall be the areas along which the cartridge shall be held down when inserted in the drive. Their positions and dimensions shall be

$$L_8 = 6,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_9 = 5,0 \text{ mm} \pm 0,1 \text{ mm}$$

6.5 Notches of the lid (Figure 5 and Figure 8)

The lid shall have two pairs of notches.

The first pair of notches, the slider lock release notches, allows elements of the drive to release the locking mechanism of the slider. The positions and dimensions of these notches shall be

$$L_{10} = 0,4 \text{ mm max.}$$

$$L_{11} = 3,0 \text{ mm min.}$$

$$L_{12} = 1,2 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{13} = 49,8 \text{ mm} \pm 0,2 \text{ mm}$$

The second pair of notches, the slider movement notches, allows elements of the drive to move the slider from closed to open position (see also 6.8.1). The positions and dimensions of these notches shall be

$$L_{11} = 3,0 \text{ mm min.}$$

$$L_{14} = 0,9 \text{ mm min.}$$

$$L_{15} = 7,5 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{16} = 36,00 \text{ mm} \pm 0,15 \text{ mm}$$

6.6 Lid dimensions (Figure 6 to Figure 8)

The lid is shown in closed position in Figure 6 and Figure 7. Its dimensions shall be

$$L_{17} = 1,2 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{18} = 6,8 \text{ mm} \pm 0,4 \text{ mm}$$

$$L_{19} = 1,1 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{20} = 2,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{21} = 6,4 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{22} = 1,5 \text{ mm} \pm 0,1 \text{ mm}$$

$$R_3 = 6,8 \text{ mm} \pm 0,4 \text{ mm}$$

The lid shall have a chamfer of 45° with a length of

$$L_{23} = 1,5 \text{ mm} \pm 0,1 \text{ mm}$$

There shall be a dimensional relationship between the height L_{24} shown in Figure 7, which includes the slider and the upper half, and the height L_{25} of the lid. When a vertical force of 1 N is exerted on the upper half the following conditions shall be met

$$L_{24} = 10,5 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{25} \leq L_{24}$$

When no force is exerted

$$L_{24} = 10,9 \text{ mm max.}$$

In Figure 8 the lid is shown in open position. The distance from the front edge of the lid to the rear side shall be

$$L_{26} = 55,5 \text{ mm} \pm 0,3 \text{ mm}$$

6.7 Optical detection of the beginning and end of tape (Figure 9 and Figure 12)

Means for the optical detection of the beginning and end of tape shall be provided. These shall consist of a pair of windows on the left and right sides of the case (see also Figure 18). The design of these windows allows this detection for two different drive designs:

— either a light source and a detector are provided in the drive on each side of the cartridge, in which case the light enters the case through the upper windows, falls on a prism (see section A-A) mounted inside the case which reflects this light so that it goes through the tape and falls on the detector through the lower window; the light transmittance of the prism shall be greater than 50 % of that of a reference prism when measured as specified in Annex A,

— or, the light of a light source within the drive passes through the tape from inside the cartridge and falls through the lower windows on to the detectors placed on each side of the case.

The positions and dimensions of these windows allow the cartridge to be used with drives implementing either system, they shall be

$$L_{27} = 6,20 \text{ mm} \pm 0,10 \text{ mm}$$

$$L_{28} = 7,65 \text{ mm} \pm 0,10 \text{ mm}$$

$$L_{29} = 1,50 \text{ mm} \begin{matrix} +0,20 \\ -0,00 \end{matrix} \text{ mm}$$

$$L_{30} = 3,9 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{31} = 1,8 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{32} = 7,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{33} = 2,5 \text{ mm min.}$$

Dimension L_{32} specifies the position of the rear edge of the windows relative to Reference Plane Y.

Dimension L_{33} shall be measured relative to this rear edge.

6.8 Bottom side (Figure 10 and Figure 11)

The bottom side is shown in Figure 10 with the lid and the slider in closed position and in Figure 11 with both in the open position.

The dimension L_{34} of the bottom half, L_{35} of the slider and L_{36} of the lid shall satisfy the following conditions

$$L_{34} = 73,0 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_{35} \leq L_{34}$$

$$L_{36} \leq L_{34}$$

6.8.1 Locking mechanism of the slider

The cartridge shall have a locking mechanism for the slider which locks it in the closed and open positions. The design of this mechanism is not specified by this International Standard, except for the different forces acting on the slider, and for its detent.

The slider shall be spring-loaded by a spring holding it in closed position when it is unlocked. The force required to operate the slider shall not exceed 2 N.

The slider shall have two grooves with an opening at both ends. The detent of the locking mechanism shall protrude through these openings so as to hold the slider in both open and closed positions. The detent shown in cross section C-C is only an example of implementation.

The grooves are parallel to Reference Plane Z and aligned with the slider lock release notches of the lid. The positions and dimensions of the grooves and of the openings for the detent of the locking mechanism when the slider is in the closed position shall be

$$L_{37} = 1,2 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{38} = 49,8 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{39} = 10,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{40} = 2,0 \text{ mm} \begin{matrix} +0,5 \\ -0,1 \end{matrix} \text{ mm}$$

$$L_{41} = 3,0 \text{ mm min.}$$

$$L_{42} = 1,5 \text{ mm min.}$$

$$L_{43} = 0,8 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{44} = 0,8 \text{ mm} \begin{matrix} +0,5 \\ -0,1 \end{matrix} \text{ mm}$$

$$\lambda = 45^\circ \text{ min.}$$

$$L_{45} = 0,65 \text{ mm} \pm 0,05 \text{ mm}$$

The position and dimensions of the openings for the detent when the slider is held in the open position are determined by L_{39} , L_{40} , L_{43} , and L_{44} .

In the closed position of the slider, the maximum force to be exerted on the detent in a direction perpendicular to Reference Plane Z and over a stroke of 0,65 mm shall be 0,5 N max.

In the open position of the slider the holding force shall be 0,3 N min.

6.8.2 Access holes

The slider shall have two circular access holes (see section B-B) which, in the open position of the slider, allow penetration of the drive spindles into the hubs. The diameters of these access holes shall be

$$d_1 = 10,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$d_2 = 12,0 \text{ mm max.}$$

6.8.3 Recognition, sub-datum and write-inhibit holes

The bottom half shall have a number of holes on an edge at its rear. This edge shall be defined by

$$L_{46} = 45,2 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{47} = 49,2 \text{ mm} \pm 0,2 \text{ mm}$$

The centres of these holes lie on a line perpendicular to Reference Plane Y at a distance from Reference Plane X of

$$L_{48} = 47,2 \pm 0,2 \text{ mm}$$

6.8.3.1 Recognition holes

There shall be four recognition holes numbered from 1 to 4 as shown in Figure 10. Their position and dimensions shall be

$$d_3 = 2,5 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{49} = 1,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{50} = 56,0 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_{51} = 4,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{52} = 1,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{53} = 3,0 \text{ mm min.}$$

All recognition holes shall have the cross-section shown in cross-section F-F in Figure 11 for recognition hole No. 1

One of the two cross-sections F-F shows a recognition hole closed by means of a plug, the other shows it with the plug punched out. These plugs shall withstand an applied force of 0,5 N max. without being punched out.

This International Standard prescribes the following states of these holes:

Recognition holes No. 1 and No. 3 shall be closed

Recognition hole No. 2 shall be closed for Type A cartridges

Recognition hole No. 2 shall be open for Type B cartridges

Recognition hole No. 4 may be open or closed

Other combinations of the recognition holes 1, 2, and 3 are reserved for future applications (see Annex B).

6.8.3.2 Write-inhibit hole

The position and dimensions of the write-inhibit hole shall be

$$d_4 = 2,5 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{50} = 56,0 \text{ mm} \pm 0,3 \text{ mm}$$

When the write-inhibit hole is open, recording on the tape is inhibited, when it is closed recording is enabled.

The write-inhibit hole shall have the cross-section shown in cross-section F-F in Figure 11 for recognition hole No. 1. One of the two cross-sections F-F shows the hole closed by means of a plug, the other shows it with the hole punched out. These plugs shall withstand an applied force of 0,5 N max without being punched out.

The case may have a movable element allowing to open and close the write-inhibit hole. If present, this element shall be such that the state of write-inhibit hole is visible (see Figure 3 as an example). Such an element shall be neither broken nor moved by a force smaller than 0,5 N.

Regardless of whether a plug or a movable element is used to select the open and closed states of the write-inhibit hole, the following dimensions from cross-section F-F shall define the closed and open states, respectively.

$$L_{52} = 1,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{53} = 3,0 \text{ mm min.}$$

6.8.3.3 Sub-datum holes

These holes are used to position the cartridge in the drive. Their position and dimensions shall be as follows:

— The hole seen below the write-inhibit hole in Figure 11 shall have an elongated form and the same cross-section E-E as shown for the other hole.

$$L_{54} = 45,5 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{55} = 3,5 \text{ mm} \begin{matrix} +0,1 \\ -0,0 \end{matrix} \text{ mm}$$

$$L_{56} = 2,50 \text{ mm} \begin{matrix} +0,05 \\ -0,00 \end{matrix} \text{ mm}$$

— The position and dimensions of the other sub-datum hole shall be

$$d_5 = 2,50 \text{ mm} \begin{matrix} +0,05 \\ -0,00 \end{matrix} \text{ mm}$$

$$d_6 = 1,0 \text{ mm min.}$$

$$L_{57} = 5,5 \text{ mm} \pm 0,1 \text{ mm.}$$

$$L_{58} = 2,0 \text{ mm min.}$$

$$L_{59} = 1,2 \text{ mm min.}$$

The edge of both sub-datum holes shall have a chamfer of

$$0,2 \text{ mm} \pm 0,1 \text{ mm.}$$

6.8.4 Datum holes

The lower half has two datum holes also used to position the cartridge within the drive. One of them has an elongated form, the other is circular. Cross-section AD-D shown for the latter also applies to the former. Their position and dimensions shall be

$$L_{60} = 51,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{61} = 2,80 \text{ mm} \begin{matrix} +0,05 \\ -0,00 \end{matrix} \text{ mm}$$

$$L_{62} = 3,5 \text{ mm} \begin{matrix} +0,1 \\ -0,0 \end{matrix} \text{ mm}$$

$$L_{63} = 3,0 \text{ mm min.}$$

$$d_7 = 2,80 \text{ mm} \begin{matrix} +0,05 \\ -0,00 \end{matrix} \text{ mm}$$

The upper edge of both datum holes shall have a chamfer of $0,2 \text{ mm} \pm 0,1 \text{ mm}$.

6.8.5 Access room for tape guides

When the cartridge is inserted into the drive, tape guides in the drive are pulling out the tape toward the heads of the drive. The shape and dimensions of the access room provided by the cartridge for these tape guides shall be (see also 6.8.7.5):

$$L_{64} = 3,1 \text{ mm max.}$$

$$L_{65} = 5,6 \text{ mm min.}$$

$$L_{66} = 11,0 \text{ mm max.}$$

$$L_{67} = 7,0 \text{ mm} \begin{matrix} +0,7 \\ -0,0 \end{matrix} \text{ mm}$$

$$L_{68} = 6,7 \text{ mm min.}$$

$$\alpha = 45^\circ \pm 1^\circ$$

$$L_{69} = 47,9 \text{ mm min.}$$

$$L_{70} = 3,30 \text{ mm } \begin{matrix} +0,00 \\ -0,15 \end{matrix} \text{ mm}$$

6.8.6 Holes for accessing the hubs

The lower half has two holes through which the spindles of the drive can access the hubs when the slider is in the open position. The positions and dimensions of these holes shall be

$$d_8 = 9,0 \text{ mm } \pm 0,1 \text{ mm}$$

$$L_{71} = 29,00 \text{ mm } \pm 0,15 \text{ mm}$$

$$L_{72} = 10,5 \text{ mm } \pm 0,1 \text{ mm}$$

$$L_{73} = 30,0 \text{ mm } \pm 0,1 \text{ mm}$$

6.8.7 Internal structure of the lower half (Figure 12)

In Figure 12 the different elements of the inside of the lower half are shown. There shall be a locking mechanism for the hobs to prevent them from rotating when the lid is in the closed position. The design of this locking mechanism is not specified by this International Standard, thus it is not shown in Figure 12. Locking and unlocking of the hubs shall depend upon the position of the lid as specified in 6.13.

6.8.7.1 Diameter of the wound tape

The diameter of the tape wound on a hub shall be

$$d_9 = 36,5 \text{ mm max.}$$

6.8.7.2 Tape wind

The magnetic surface of the tape shall face outwards.

6.8.7.3 Tape motion

The forward direction of tape motion is from the left side of the cartridge to its right side (see Figure 1 and Figure 2).

6.8.7.4 Guide posts

The tape shall pass around two guide posts in the cartridge, the axes of which are perpendicular to Reference Plane Z and passes through the centres of the datum holes. The position and dimensions of these guide posts shall be:

- their positions are determined by that of the centres of the datum holes,
- their cross-section shall be circular with a radius

$$R_4 = 3,0 \text{ mm } \pm 0,1 \text{ mm}$$

over an angle of 180° in clockwise sense starting at angle

$$\rho = 45^\circ \pm 1^\circ$$

- their cross-section over the other half of 180° is not specified by this International Standard.

6.8.7.5 Position of the tape in the case (view A)

When the tape runs from one guide post to the other it shall remain between two planes parallel to Reference Plane Z. The distance of these planes to Reference Plane Z shall be

$$L_{74} = 1,4 \text{ mm min.}$$

$$L_{75} = 6,4 \text{ mm max.}$$

The design centre for the position of the tape centreline is

$$L_{76} = 3,9 \text{ mm}$$

The height of the access room specified in 6.8.5 for the tape guides shall be

$$L_{77} = 8,0 \text{ mm } \begin{matrix} +0,6 \\ -0,0 \end{matrix} \text{ mm}$$

6.8.7.6 Tape path zone

When the cartridge is inserted into the drive, the tape is pulled outside the case by tape guides as mentioned above. It is then no longer in contact with the guide posts. The tape path zone of the case is the zone in which the tape must be able to move freely. This zone is defined by

$$L_{78} = 5,5 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{79} = 56,5 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_{80} = 8,0 \text{ mm} \pm 0,2 \text{ mm}$$

6.8.8 Light path (Figure 12)

As specified in 6.7 there is a lower window in the right and left sides of the case through which light having passed through the tape can pass and fall on a detector of the drive. In order to ensure that the corresponding light path is not obstructed by inner elements of the case, its configuration in this zone shall be as follows:

The position and dimension of the lower window are specified by L_{30} and L_{31} (see Figure 9). The dimensions

$$L_{81} = 1,5 \text{ mm max.}$$

$$L_{82} = 5,0 \text{ mm min.}$$

ensure that no elements of the case obstruct the light path.

6.8.9 Support areas (Figure 13)

When the cartridge is inserted into the drive and held in position by forces perpendicular to Reference Plane Z acting on the holding areas (see 6.4), it shall be supported by three supporting areas A', B', C' on its bottom side, shown shaded in Figure 13. The position and dimensions of these areas shall be as follows:

— Areas A' and B' are not specified by this International Standard because they depend on parts of the lower half for which this International Standard does not specify requirements.

— Area C' shall be defined by

$$L_{83} = 1,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{84} = 49,0 \text{ mm} \pm 0,3 \text{ mm}$$

6.8.10 Datum areas (Figure 13)

There shall be two annular datum surfaces A and B and one circular such surface C. All three datum areas shall lie in Reference Plane Z. Their position and dimensions shall be:

— Datum area A shall be centred on the intersection of Reference Planes X, Y, and Z, its inner diameter shall be d_7 (see 6.8.4 and Figure 11), its outer diameter shall be

$$d_{10} = 5,0 \text{ mm} \pm 0,1 \text{ mm}$$

— Datum area B shall be centred on the intersection of Reference Planes X and Z at a distance L_{60} (see 6.8.4 and Figure 11) from the centre of datum area A. Its inner dimensions shall be L_{61} and L_{62} , its outer diameter shall be d_{10} .

— Datum area C shall be centred on a point defined by

$$L_{85} = 42,0 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_{86} = 25,5 \text{ mm} \pm 0,3 \text{ mm}$$

Its diameter shall be d_{10} .

6.8.11 Relationship between support and datum areas and Reference Plane Z (Figure 14)

Support area A' shall be coplanar with datum area A within 0,1 mm.

Support area B' shall be coplanar with datum area B within 0,1 mm.

Support area C' shall be parallel to Reference Plane Z within 0,1 mm. It shall be at a distance

$$L_{87} = 1,10 \text{ mm} \pm 0,05 \text{ mm}$$

from Reference Plane Z.

6.9 Hubs (Figure 15, Figure 16)

The dimensions of the hub shall be

$$d_{11} = 6,60 \text{ mm } \begin{matrix} +0,08 \\ -0,00 \end{matrix} \text{ mm}$$

$$d_{12} = 8,8 \text{ mm } \begin{matrix} +0,0 \\ -0,1 \end{matrix} \text{ mm}$$

$$d_{13} = 15,00 \text{ mm } \pm 0,05 \text{ mm}$$

$$\beta = 60^\circ \pm 1^\circ$$

$$\gamma = 45^\circ \pm 1^\circ$$

$$L_{88} = 2,5 \text{ mm } \begin{matrix} +0,1 \\ -0,0 \end{matrix} \text{ mm}$$

$$L_{89} = 2,60 \text{ mm } \begin{matrix} +0,20 \\ -0,00 \end{matrix} \text{ mm}$$

The two cylindrical surfaces with diameters d_{11} and d_{13} shall be co-axial within 0,05 mm.

The torque necessary to rotate the hub with a partially or fully wound tape shall be 0,0002 N·m max.

6.10 Leader and trailer attachment

The material of the leader and trailer and their attachment to the hubs and to the tape shall be such that when subjected to a force of 5 N max. they will neither break nor be detached from the hubs or the tape.

6.11 Interface between the hubs and the drive spindles (Figure 17)

The interface between the hubs and the spindles shown in Figure 17 in cross-section is specified in terms of the following relationships:

$$d_{15} - d_{14} = \begin{matrix} 1,2 \text{ mm max.} \\ 1,0 \text{ mm min.} \end{matrix}$$

$$L_{91} - L_{90} = 1,3 \text{ mm max.}$$

NOTE 7 It is expected that the top of the drive spindle will not penetrate within the hub beyond a distance $L_d = 7,65 \text{ mm}$ max above Reference Plane Z.

6.12 Opening of the lid (Figure 18)

When the lid is opened its lower front edge moves along an arc of a circle with radius

$$R_5 = 9,6 \text{ mm } \pm 0,2 \text{ mm}$$

The centre of rotation is defined by L_{17} and L_{21} . The end position of the lid, i.e. when it is fully open, is defined by

$$L_{92} = 10,9 \text{ mm } \pm 0,2 \text{ mm}$$

$$L_{93} = 0,3 \text{ mm } \pm 0,1 \text{ mm}$$

$$L_{94} = 6,3 \text{ mm } \pm 0,2 \text{ mm}$$

The force F required to open the lid shall not exceed 1,2 N. It shall be applied at a distance

$$L_{95} = 5,0 \text{ mm } \pm 0,1 \text{ mm}$$

measured parallel to Reference Plane Z from centre of rotation of radius R_5 (see also Annex C).

6.13 Release of the hub locking mechanism (Figure 19, Figure 20)

As mentioned in 6.8.7 the design of the locking mechanism for the hubs is not specified by this International Standard, except that it shall be connected to the lid so that the hubs are locked or unlocked as a function of the angular position of the lid.

When the lid rotates from the closed to the open position (clockwise as seen in Figure 19, Figure 20) the hubs shall remain locked as long as the lid has not reached the position defined by

$$L_{96} = 7,0 \text{ mm}$$

$$L_{97} = 7,5 \text{ mm } \pm 0,2 \text{ mm}$$

The hubs shall be completely released as soon as the lid has reached the position defined by

$$L_{98} = 10,3 \text{ mm}$$

$$L_{99} = 6,6 \text{ mm} \pm 0,2 \text{ mm}$$

6.14 Label areas (Figure 21, Figure 22)

On top and rear sides of the case there shall be an area on which adhesive labels can be placed. The dimensions of these areas shall be

$$L_{100} = 28,9 \text{ mm max.}$$

$$L_{101} = 5,2 \text{ mm min.}$$

$$L_{102} = 43,4 \text{ mm max.}$$

$$L_{103} = 39,4 \text{ mm max.}$$

$$L_{104} = 8,8 \text{ mm max.}$$

$$R_6 = 0,5 \text{ mm min.}$$

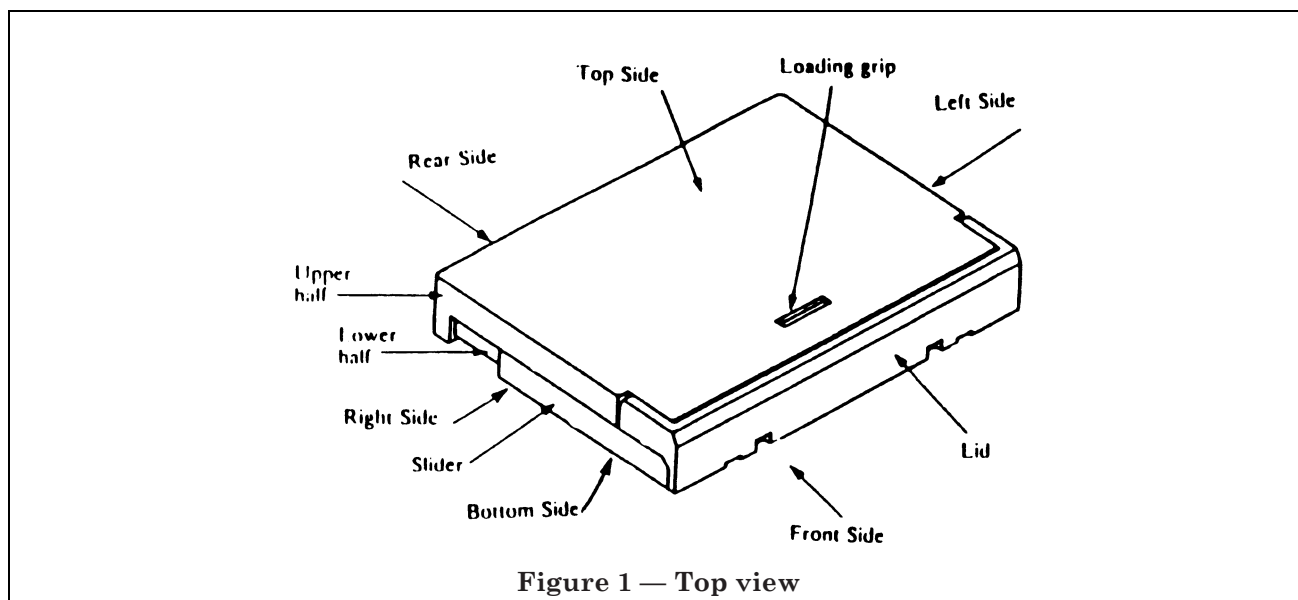


Figure 1 — Top view

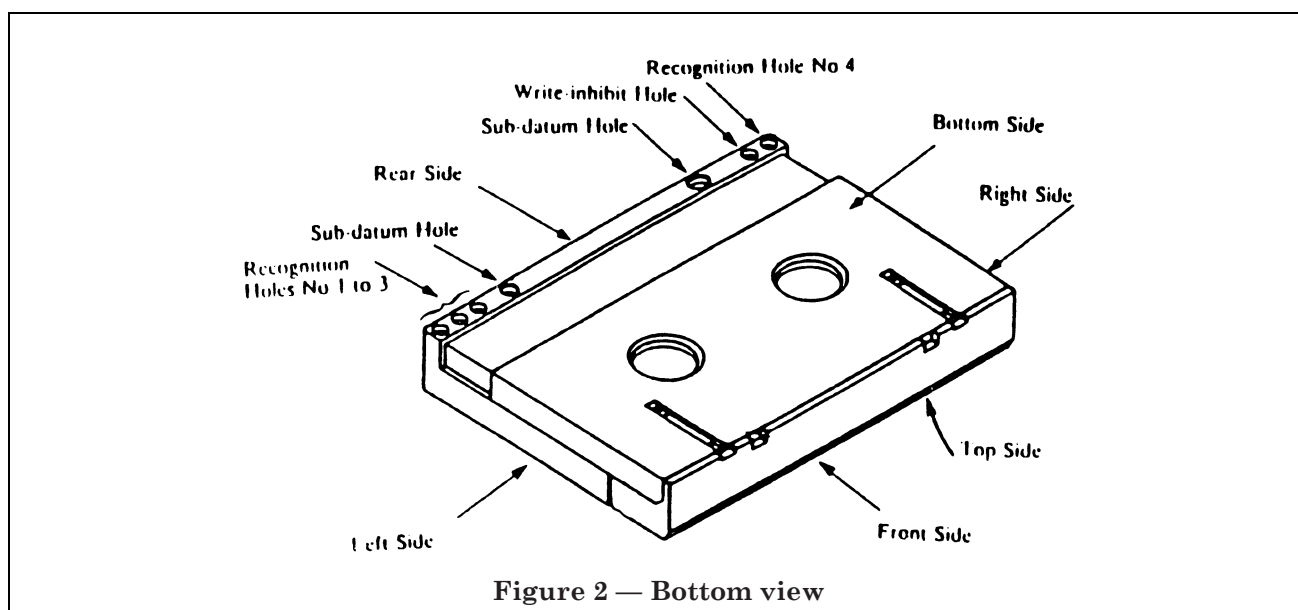


Figure 2 — Bottom view

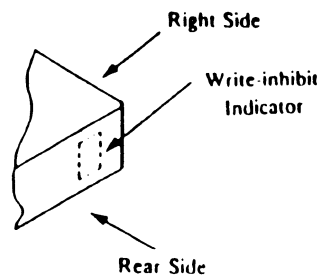


Figure 3 — Partial view of the rear side

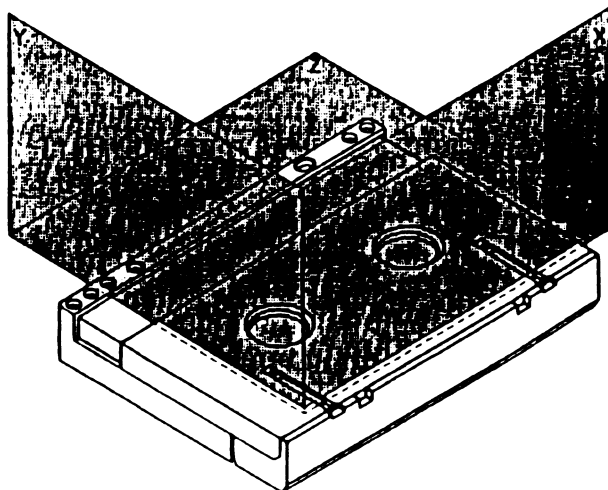


Figure 4 — Reference Planes X, Y, Z

Figure 7 — Left side, lid closed

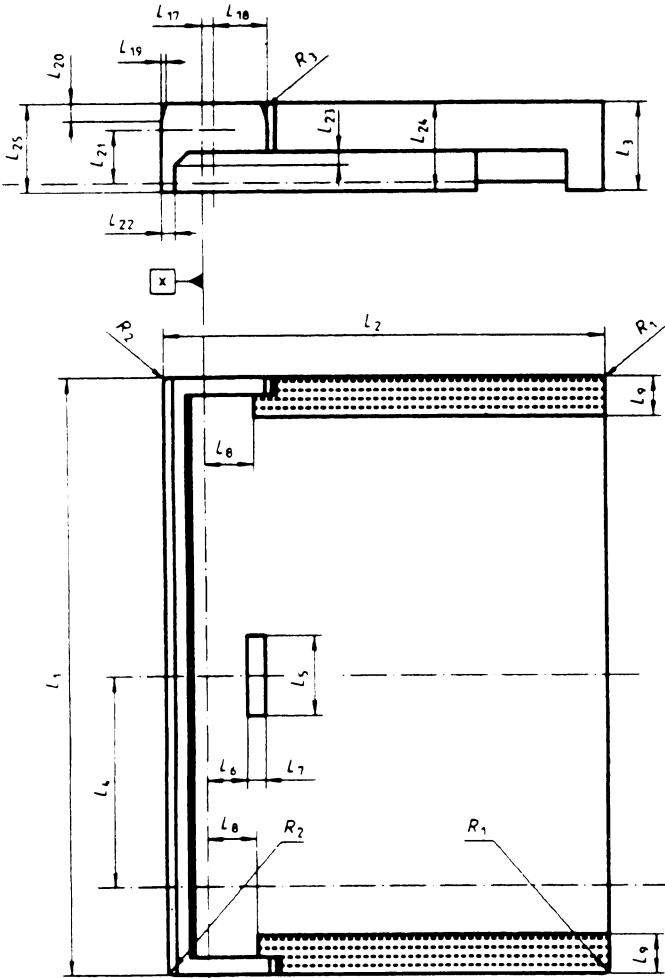


Figure 6 — Top side, lid closed

Figure 5 — Front side, lid closed

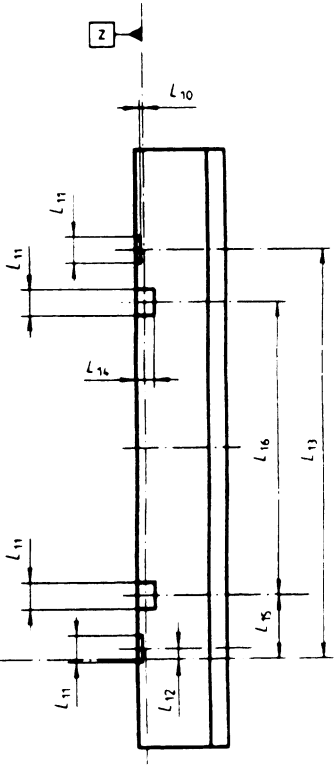


Figure 9 — Left side, lid open

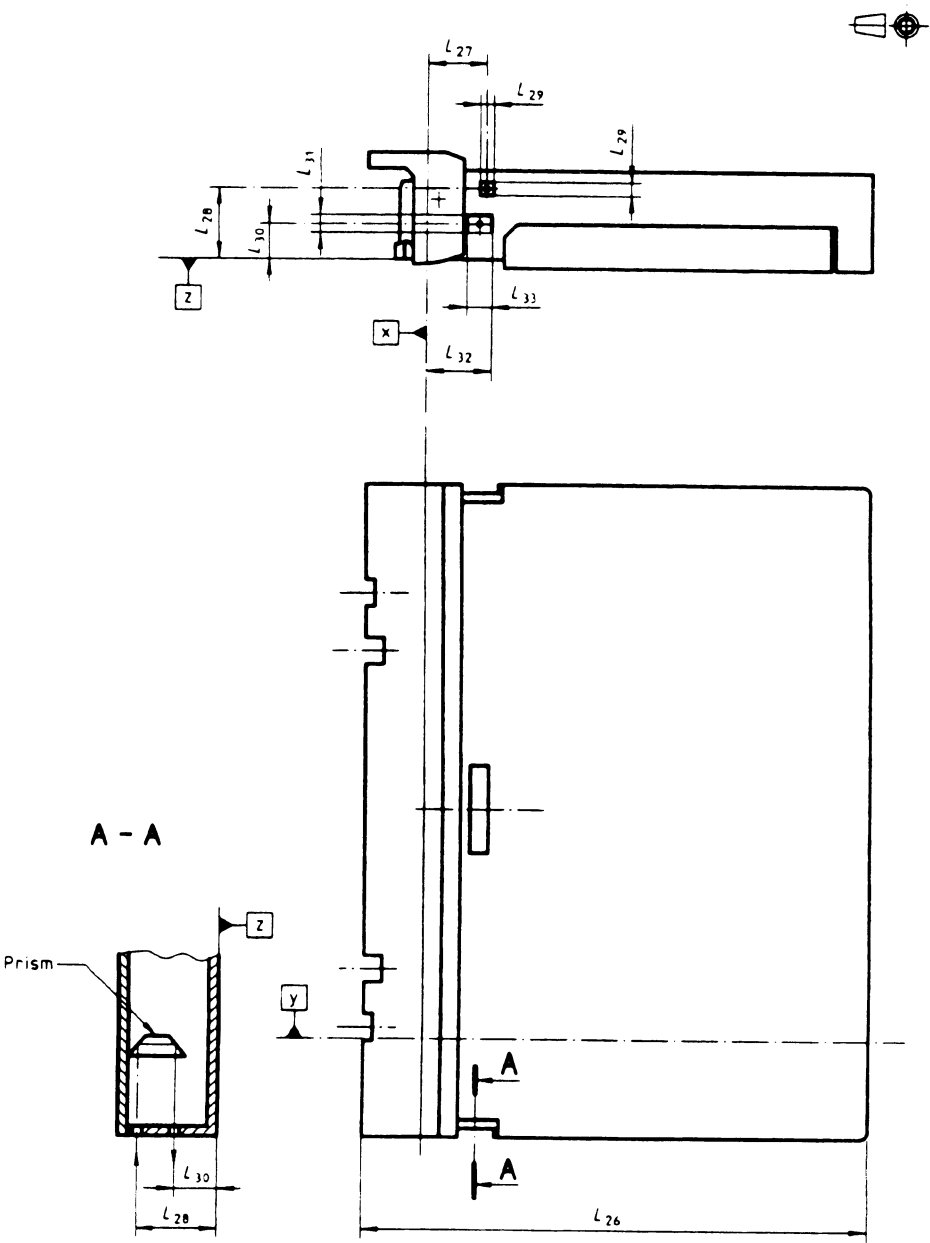
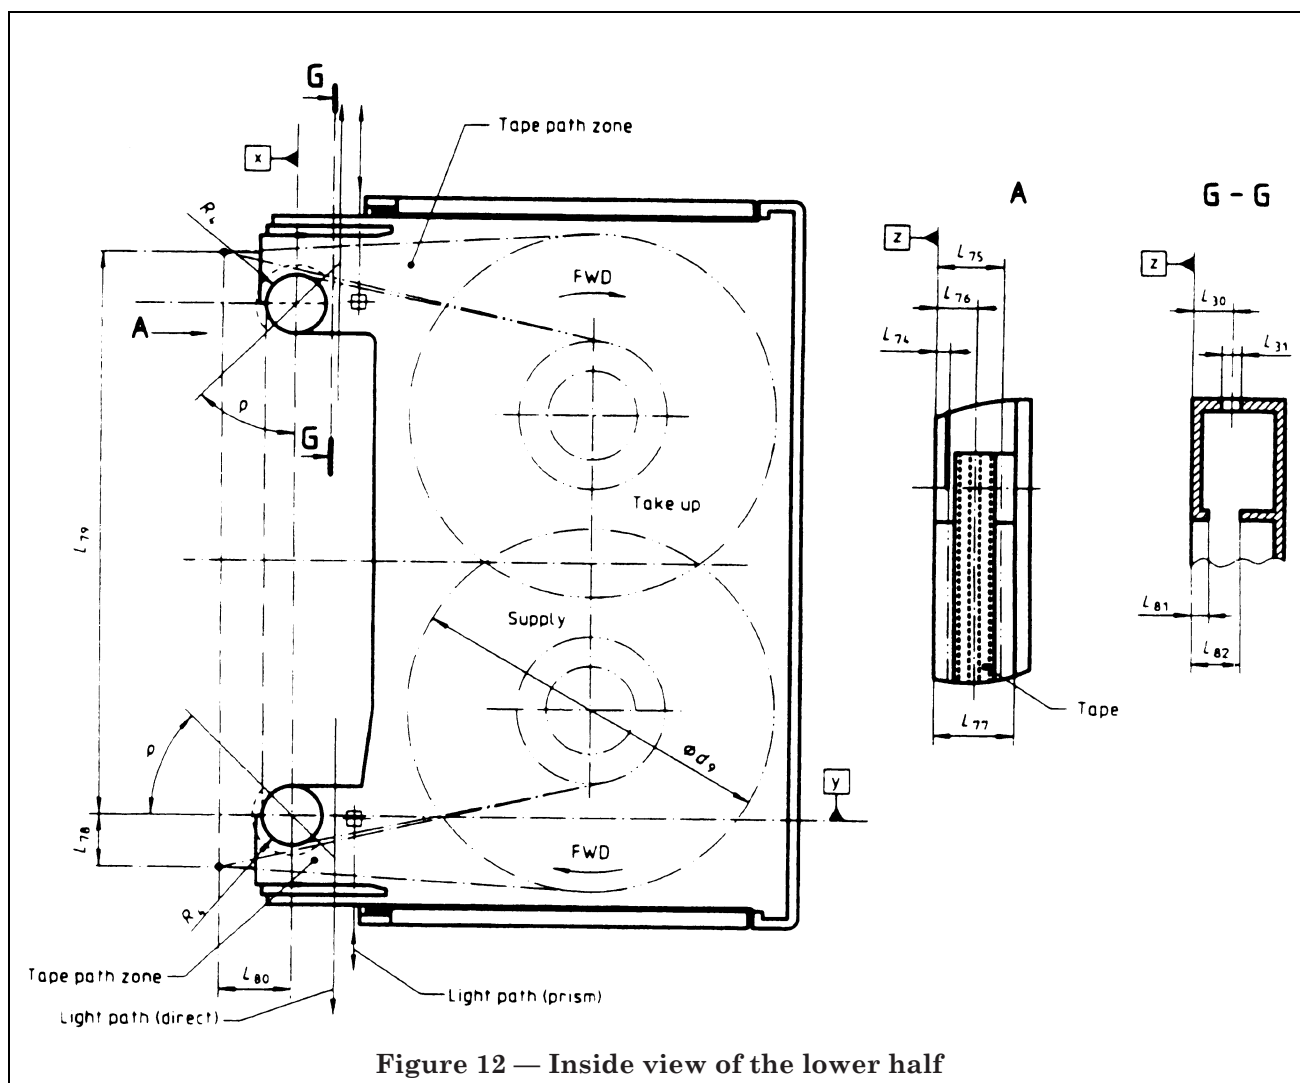


Figure 8 — Top side, lid open







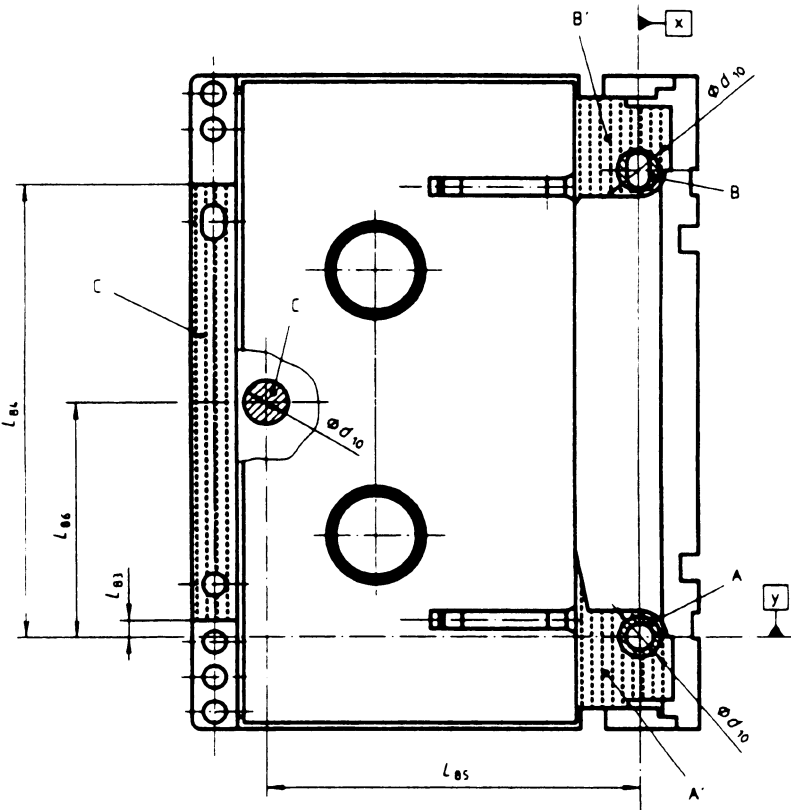


Figure 13 — Bottom side, lid and slider in open position

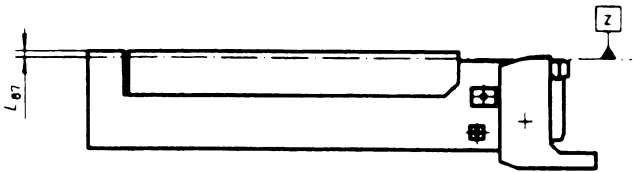


Figure 14 — Left side, lid open

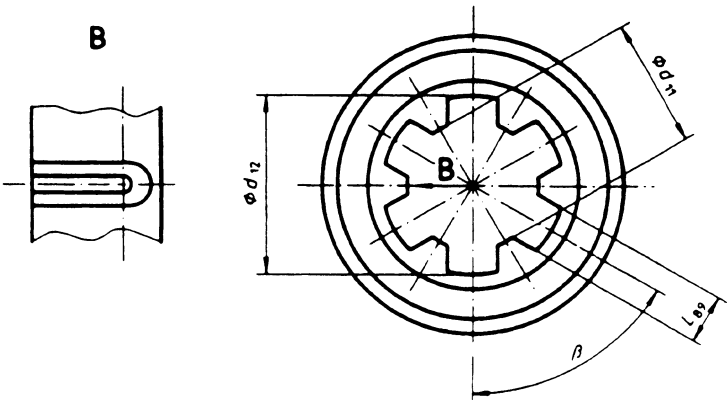


Figure 15 — Top view of a hub

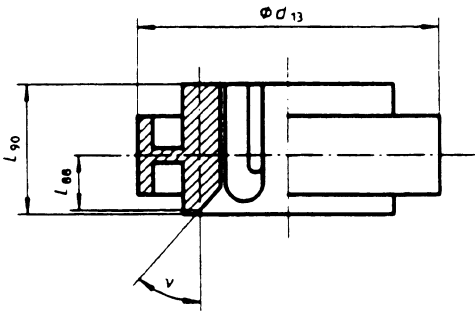


Figure 16 — Side view of a hub

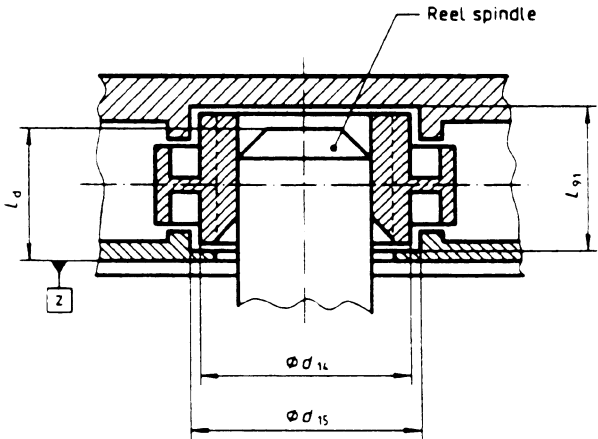


Figure 17 — Interface with the drive spindle

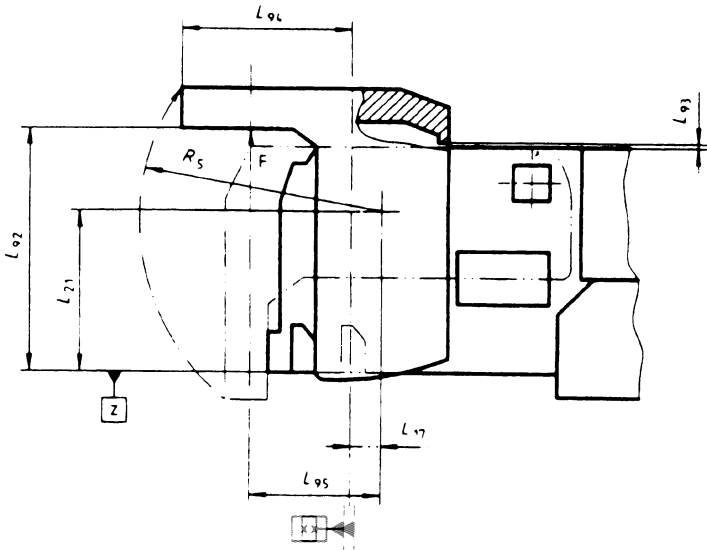


Figure 18 — Lid in completely open position

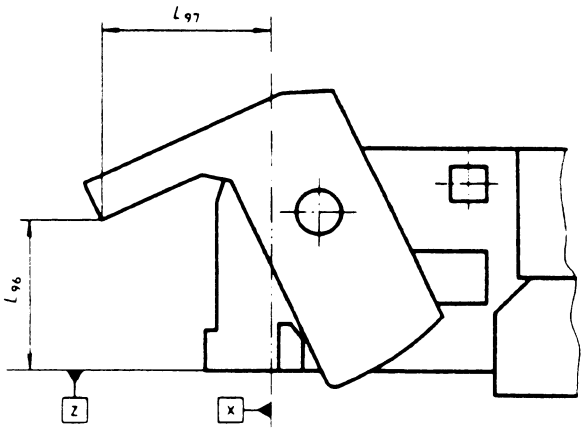


Figure 19 — Extreme position of the lid for which the hubs are still locked