BS ISO/IEC 19637:2016

BSI Standards Publication

Information technology — Sensor network testing framework

Documents
Document Sharing Hub

Full document details: BS ISO/IEC 19637:2016

National foreword

This British Standard is the UK implementation of ISO/IEC 19637:2016.

The UK participation in its preparation was entrusted to Technical Committee IOT/1/-/2, Sensor networks.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.
Published by BSI Standards Limited 2016

ISBN 978 0 580 92224 4

ICS 35.110

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 December 2016.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: BS ISO/IEC 19637:2016

INTERNATIONAL STANDARD

ISO/IEC 19637

First edition
2016-12-01

Information technology — Sensor network testing framework

Technologies de l'information — Cadre général pour les essais de réseaux de capteurs

Reference number
ISO/IEC 19637:2016(E)

Documents
Document Sharing Hub
© ISO/IEC 2016

Full document details: BS ISO/IEC 19637:2016

COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

© ISO/IEC 2016 – All rights reserved

Documents
Document Sharing Hub

Full document details: BS ISO/IEC 19637:2016

Contents

Page

Foreword ... **iv**

Introduction ... **v**

1 Scope ... **1**

2 Normative references ... **1**

3 Terms and definitions ... **1**

4 Abbreviated terms ... **2**

5 Overview of a sensor network testing framework (SNTF) ... **2**
- 5.1 Testing requirements of sensor networks ... 2
- 5.2 Conceptual model of SNTF ... 3
- 5.3 Description of test manager (TMR) ... 4
- 5.4 Description of test agent (TA) ... 5

6 Testing services ... **5**
- 6.1 General ... 5
- 6.2 Module interactions through unified services ... 7
- 6.3 Test data services (TDSs) ... 8
  - 6.3.1 General ... 8
  - 6.3.2 EventReport service ... 9
  - 6.3.3 EventAck service ... 10
  - 6.3.4 Read service ... 11
  - 6.3.5 Write service ... 13
  - 6.3.6 StartTest service ... 15
  - 6.3.7 StopTest service ... 17
  - 6.3.8 StartDownAndUploading service ... 18
  - 6.3.9 StopDownAndUploading service ... 20
  - 6.3.10 DataUploading service ... 21
  - 6.3.11 DataDownloading service ... 23
  - 6.3.12 ExecuteTesting service ... 25
- 6.4 Testing management services ... 27
  - 6.4.1 Overview ... 27
  - 6.4.2 Associate service ... 27
  - 6.4.3 Abort service ... 29
  - 6.4.4 AddressAllocation service ... 30
  - 6.4.5 Sync Service ... 32
  - 6.4.6 DeviceStatus service ... 32

Annex A (informative) **Example of the testing platform for hybrid sensor networks based on IPv6** ... **34**

Bibliography ... **36**

© ISO/IEC 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 19637:2016

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/IEC JTC 1, *Information technology*.

© ISO/IEC 2016 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 19637:2016

Introduction

Sensor network is widely used around the world in multiple fields such as industrial automation, environment monitoring, smart home, intelligent health-care and smart grid. The applications can involve different devices supplied by different manufacturers, e.g. sensors, actuators, controllers, routers and gateways, etc. Data can be collected and processed by use of different wired/wireless communication technologies. Thus, various test systems should be employed to satisfy some specific requirements. The operations of test systems is a challenge to users, if without a uniform test platform.

When designing and developing a sensor network test system, the characteristics regarding the following aspects should be considered:

a) Sensor network heterogeneity. It is necessary to verify the interoperability of sensor networks based on different protocols prior to system application;

b) Diversity of sensor network applications.

However, an international test standard for sensor networks which can provide guidance to design and develop a uniform platform integrating different tests for sensor networks is still unavailable.

© ISO/IEC 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 19637:2016

Documents
Document Sharing Hub

INTERNATIONAL STANDARD ISO/IEC 19637:2016(E)

Information technology — Sensor network testing framework

1 Scope

This document specifies:

— testing framework for conformance test for heterogeneous sensor networks,

— generic services between test manager (TMR) and test agent (TA) in the testing framework, and

— guidance for creating testing platform and enabling the test of different sensor network protocols.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— IEC Electropedia: available at http://www.electropedia.org/

— ISO Online browsing platform: available at http://www.iso.org/obp

3.1
analysis module
logical unit within a testing application process which is used to analyse the information from test agent and module-based test depending on a particular strategy

3.2
test agent
device designed for different sensor network protocols or various kinds of hardware that can communicate directly with the test manager and the systems under test

3.3
testing application process
software functional entity that performs the processing by combining test modules, analysis modules and report modules to fulfil test purposes

Note 1 to entry: It is an application platform that supervises various operational aspects of testing activities and entities, usually through interaction with test agents.

3.4
test module
logical unit within a testing application process that performs operations depending on a specified testing requirements

3.5
testing platform
testing entity that could integrate different test systems for different protocols and technologies

EXAMPLE A platform can provide IPv4 and IPv6 conformance testing systems.

Documents
Document Sharing Hub

© ISO/IEC 2016 – All rights reserved

Full document details: BS ISO/IEC 19637:2016

3.6
test report
logical unit of software within a testing application process that produces documents at the end of test assessment

3.7
view object
logical element provided to support efficient access to data within a testing or analysis module

Note 1 to entry: It is visible on graphic user interfaces.

4 Abbreviated terms

TE	auxiliary testing equipment
DUT	device under test
ICS	implementation conformance statement
IUT	implementation under test
MIB	management information base
OD	object dictionary
SAPs	service access points
SNTF	sensor network testing framework
SUT	system under test
TA	test agent
TAP	testing application process
TDSs	testing data services
TM	test module
TMR	test manager
TMSs	testing management services
TP	test purpose
VO	view object

5 Overview of a sensor network testing framework (SNTF)

5.1 Testing requirements of sensor networks

Varied with applications, sensor networks are likely employ different communication technologies and protocols. To ensure their interconnection and operation, it is required to deploy a great number of test systems, which are designed to test individual technologies and protocols with regard to protocol conformance. Therefore, it is a challenging task to integrate the variety of the test systems for sensor networks.

It is difficult to manage different test systems, make them work together and execute test cross various technologies and protocols for specific user requirements. Various application systems need different communication interfaces and protocols, which can't interact directly with each other.

With changing testing requirements, test system for sensor networks should be scalable and adaptable on demand. For example, when new sensor networks are added into the application, the corresponding test systems should be integrated into the test platform with low costs.

Annex A describes an example of a testing platform for hybrid sensor networks based on IPv6.

© ISO/IEC 2016 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 19637:2016

5.2 Conceptual model of SNTF

Figure 1 shows the concept model of SNTF. The framework consists of three parts: test manager (TMR), test agent (TA) and system under test (SUT). As an actual management controller, the TMR conducts a test indirectly by controlling the TA. The test activities of the TMR should be converted into unified services and transferred to the TA. After having processed the testing services from TMR, TA conducts test interactions directly with SUT. Therefore, TA bridges TMR and SUT while TA needs to be equipped with the specific physical communication interface and protocol stack as in SUT.

The SUT is a system that can include only one device under test (DUT), or a DUT and some other devices used to activate the behaviours of the specific protocol residing in DUT, which is named auxiliary testing equipment (ATE). DUT needs to be verified for having certain required protocol implementations. SUT contains points of control and observation at the upper or lower service boundary of the protocol implementations that resides in DUT to execute tests. The protocol implementations during testing is called implementations under test (IUT). Before starting performing the conformance tests, IUT should be configured by instructions from TMR. In a complicated environment, ATE can be used to stimulate the DUTs to ensure TAs observe the expected responses from DUT if the IUT can't activate some particular behaviours of protocol by itself.

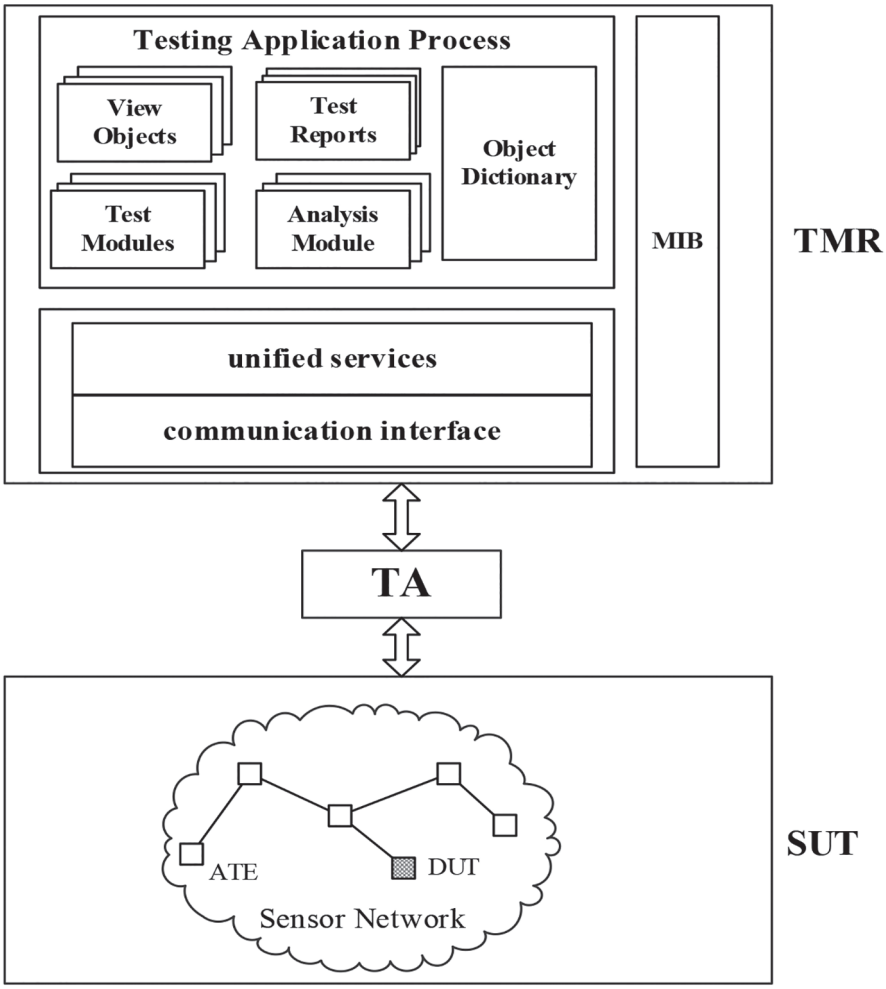

Figure 1 — Conceptual model of SNTF

© ISO/IEC 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 19637:2016

5.3 Description of test manager (TMR)

The TMR can support several testing application processes (TAP). Each TAP has a specific test task to be performed. For example, it can create an application process for conformance testing of a particular protocol, and simultaneously another application process for a different protocol.

The testing application process is designed on a component basis. There are five types of components in a TAP:

— view object,

— test report,

— test module,

— analysis module, and

— object dictionary (OD).

Figure 2 shows the relationship of the five components.

The test module (TM) is the performer of test cases. Before executing a test, TM should be parameterized to configure the test type for a specific protocol. If the corresponding testing requirements and testing suits are inputted into a TM, it is instantiated. After the TM is started, the steps defined by test cases is executed.

The analysis module (AM) shall connect test modules to collect data to analysis test activities. It is needed to configure the corresponding report format in the AM before producing test reports. Moreover, AM can also collect the information of the operating conditions of the TM.

The view object (VO) has parameter sets from the TMs and AMs. VO can be selected for graphical user interfaces, which allows monitoring the real-time throughput during a certain period. VOs also can be grouped to monitor the parameters in the relevant TMs and AMs; its visual parameters can also be derived from different TMs or AMs.

Management information base (MIB) stores all object values of test module, view object and test report in TMR, including the management objects for TA. The values of the objects in testing application process can be indexed quickly from object dictionary (OD).

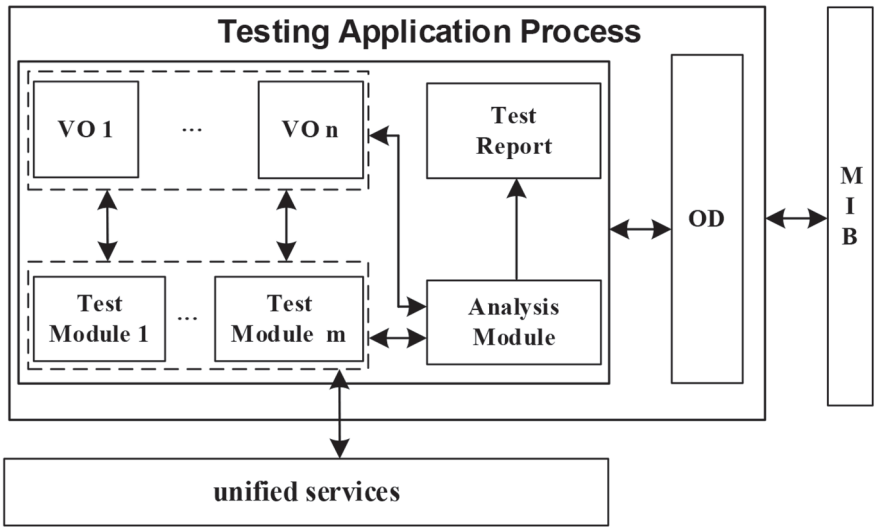

Figure 2 — Relationship of components in TAP

© ISO/IEC 2016 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 19637:2016

5.4 Description of test agent (TA)

A test agent (TA) is designed for individual protocol, and it can support multiple implementations of the same protocol. The TA handles any direct communications with the SUT with the same protocol through the test driver. Platform independence can be achieved by the test driver. The configuration parameters of test driver are defined in the TA description.

Before performing the corresponding test operations, TA shall establish communication connection with TM in TMR when receiving the start command from a TM. TA receives services from TM and translates them into the appropriate messages in conformance with the protocol of SUT. Structure model of TA is shown in Figure 3.

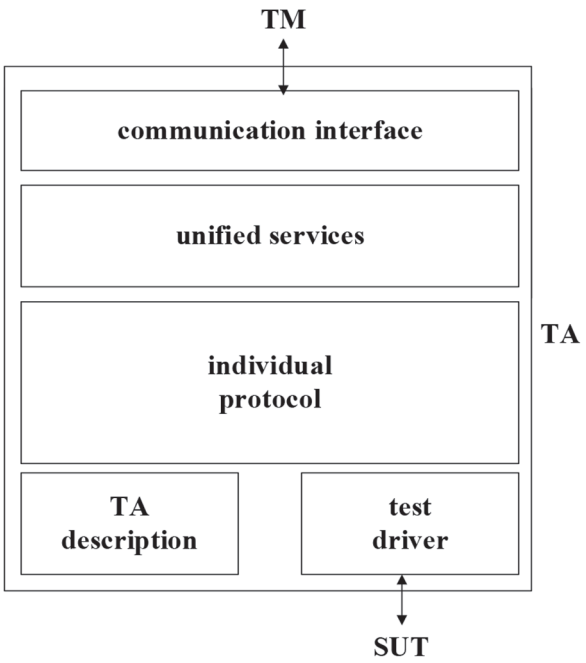

Figure 3 — Structure of TA

6 Testing services

6.1 General

Testing services are conceptually divided into two classes: testing data services (TDSs) and testing management services (TMSs) as shown in Figure 4. TMSs could be used to create application communication relationships or set the parameters of TA via Management Entry-Service Access Points (ME-SAPs). TDSs should be used to implement testing procedures between TMR and TA via Data Entry-Service Access Points (DE-SAPs). TMR can transfer testing data to TA and control TA testing behaviours.

© ISO/IEC 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 19637:2016

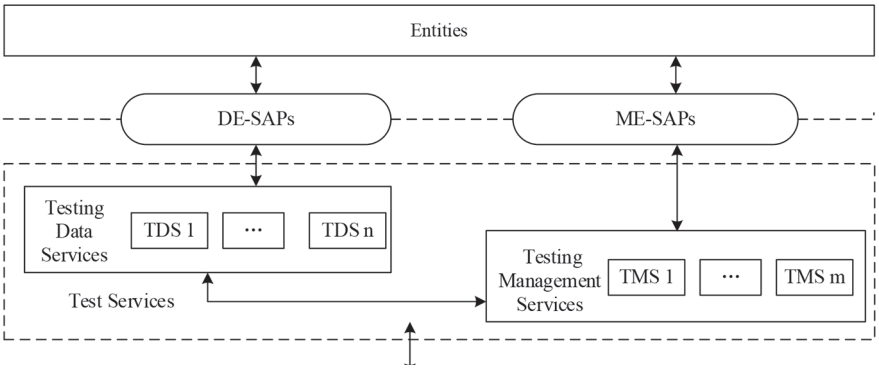

Figure 4 — Overview of test services for sensor networks

TDSs includes:

— EventReport service: This service is used to report one or more failures or exceptions from TAs. The content of the report can be generated dependent on changes of the test condition. EventReport service can be retried until an EventAck service for the EventReport received.

— EventAck service: EventAck is used to acknowledge an individual EventReport service has been received. An EventAck should result in the ceasing of the EventReport retry requests for the corresponding individual event.

— Read service: This service is used to read value of an object from TM in TMR or TA.

— Write service: This service is used to write value of an object from TM in TMR or TA.

— StartTest service: This service is used to start a test task between TM in TMA and TA. Test cases are executed after this service is called.

— StopTest service: This service is used to stop a test task between TM in TMR and TA. All test activities in test system is stopped after this service is called.

— DataUploading service: This service is used to transfer a block of data from TA to TM in TMA. It supports fragmentation to transmit a large amount of data. The destination device can reassemble the received messages.

— DataDownloading service: This service is the same way as the DataUploading service. The difference is that TM sends a block of data to TA.

— StartDownAndUploading service: This service is used to begin downloading or uploading of data.

— StopDownAndUploading service: This service is used to end downloading or uploading of data.

— ExecuteTesting service: This service is used to execute a test case.

TMSs includes:

— Associate service: This service provides mechanisms to create a logical connection between TA and TM in TMR. The connection is the prerequisite for the execution of the other services between TM and TAs.

— Abort service: This service permits to release a logic connection between TM and TAs. Communication activities including should be stopped until a new connection has been established.

— Sync service: The service enables setting of the time for a TA associated with a TM in TMR. This is useful for time synchronization in a test system with time constraints.

© ISO/IEC 2016 – All rights reserved
Documents
Document Sharing Hub
Full document details: BS ISO/IEC 19637:2016

— AddressAllocation service: This service provides functions to allocate addresses for TAs. TM can allocate a unique identification for each TA through this service.

— DeviceStatus service: This service is used for a spontaneous transmission of device status.

6.2 Module interactions through unified services

Before testing the SUT, a TM in TMR should create a communication connection with TA and SUT. As shown in Figure 5, the TM sends an associate request message to open a connection for a specific protocol conformance testing. The messages between TM and TA should use the same protocol. Then, TA loads a specific individual protocol and test driver for a specific protocol used in SUT. TA acts as a protocol translator between TM and SUT. When TM intends to terminate the communication activities, it should initiate an Abort service request to TA. If it receives an Abort response from TA, the connection is released successfully.

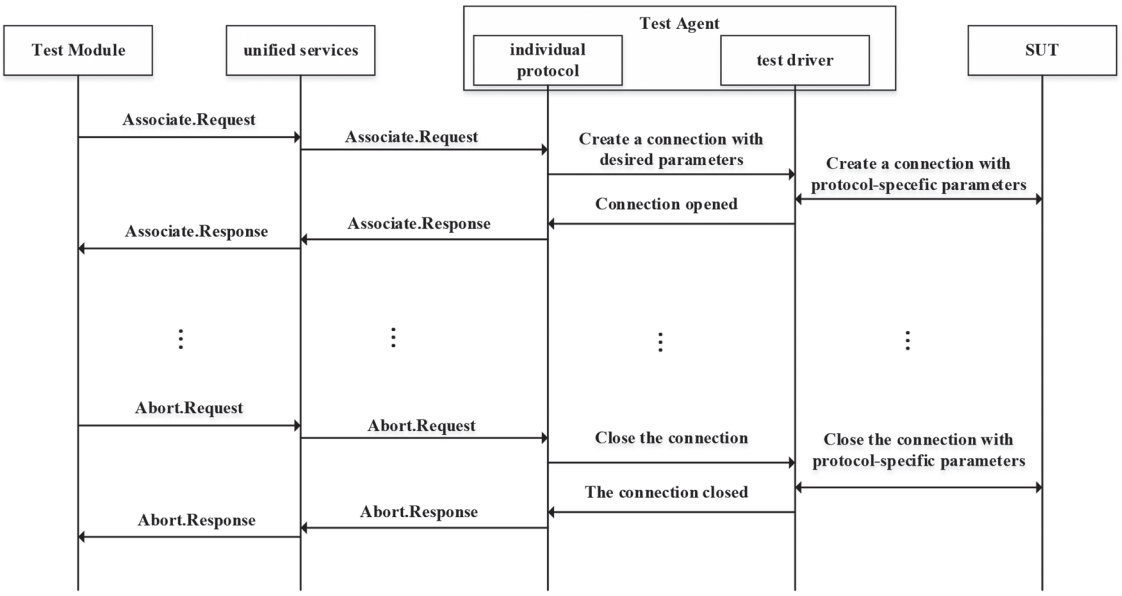

Figure 5 — Sequence diagram of creating and releasing a connection

StartTest service is used to launch a test task after a connection is opened. TA and SUT should allocate the testing resources and provide necessary testing configurations to prepare for testing activities. Test cases in a test suit shall be performed when TA receives ExceuteTesting request. The test results are transmitted to TM. If an analysis module (AM) is configured by the test application process to associate a TA, it should also receive the test results for analysis. When a test task is completed, TM sends a StopTest to end a task. A typed sequence diagram of the messages among modules is shown in Figure 6.

© ISO/IEC 2016 – All rights reserved

Documents
Document Sharing Hub
Full document details: BS ISO/IEC 19637:2016