

Information technology — Open Systems Interconnection — The Directory: Protocol specifications

(ITU-T Rec. X.519 (1993) | ISO/IEC 9594-5 : 1995)

ICS 35.100.70

National foreword

This British Standard reproduces verbatim ISO/IEC 9594-5 : 1995 and implements it as the UK national standard. BS ISO/IEC 9594-5 : 1990 remains current because it applies to existing products that are still being manufactured and which are not covered in this standard. It is envisaged that BS ISO/IEC 9594-5 : 1990 will be withdrawn in due course.

Customer Services will respond to orders for BS ISO/IEC 9594-5 by supplying the latest edition. If copies of BS ISO/IEC 9594-5 : 1990 are required, orders should state clearly that BS ISO/IEC 9594-5 : 1990 is required.

The UK participation in its preparation was entrusted to Technical Committee IST/21, Open Systems Interconnection, Data Management and Open Distributed Processing, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled 'International Standards Correspondence Index', or using the 'Find' facility of the BSI Standards Electronic Catalogue.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the ISO/IEC title page, pages ii to iv, pages 1 to 37 and a back cover.

This British Standard, having been prepared under the direction of the DISC Board, was published under the authority of the Standards Board and comes into effect on 15 February 1997

© BSI 1997

ISBN 0 580 26557 9

Amendments issued since publication

Amd. No.	Date	Text affected

INTERNATIONAL
STANDARD

ISO/IEC
9594-5

Second edition
1995-09-15

**Information technology — Open Systems
Interconnection — The Directory: Protocol
specifications**

*Technologies de l'information — Interconnexion de systèmes ouverts
(OSI) — L'Annuaire: Spécifications du protocole*



Reference number
ISO/IEC 9594-5:1995(E)

AVA **Documents**
Document Sharing Hub

CONTENTS

	<i>Page</i>
1 Scope	1
2 Normative references	1
2.1 Identical Recommendations International Standards	1
2.2 Paired Recommendations International Standards equivalent in technical content	2
3 Definitions	2
3.1 OSI Reference Model Definitions	2
3.2 Remote Operations Definitions	2
3.3 Basic Directory Definitions	3
3.4 Distributed Operation Definitions	3
4 Abbreviations	3
5 Conventions	3
6 Protocol overview	4
6.1 Remote Operations – Specification and OSI Realization	4
6.2 Directory ROS-Objects and Contracts	5
6.3 DAP Contract and Packages	6
6.4 DSP Contract and Packages	7
6.5 DISP Contracts and Packages	7
6.6 DOP Contract and Packages	8
6.7 Use of underlying services	9
7 Directory protocol abstract syntax	10
7.1 Abstract syntaxes	10
7.2 Directory application contexts	12
7.3 Operation Codes	14
7.4 Error Codes	14
7.5 Versions and the rules for extensibility	15
8 Mapping onto used services	17
8.1 Application contexts omitting RTSE	17
8.2 Application contexts including RTSE	18
9 Conformance	20
9.1 Conformance by DUAs	20
9.2 Conformance by DSAs	20
9.3 Conformance by a shadow supplier	22
9.4 Conformance by a shadow consumer	23
Annex A – DAP in ASN.1	24
Annex B – DSP in ASN.1	27
Annex C – DISP in ASN.1	29
Annex D – DOP in ASN.1	32
Annex E – Reference definition of protocol object identifiers	34
Annex F – Directory operational binding types	36
Annex G – Amendments and corrigenda	37

Descriptors: data processing, information interchange, network interconnection, open systems interconnection, application layer, directories, protocols.

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 9594-5 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 21, *Open systems interconnection, data management and open distributed processing*, in collaboration with ITU-T. The identical text is published as ITU-T Recommendation X.519.

Implementors should note that a defect resolution process exists and that corrections may be applied to this part of ISO/IEC 9594 in the form of technical corrigenda. A list of approved technical corrigenda for this part of ISO/IEC 9594 can be obtained from the subcommittee secretariat. Published technical corrigenda are available from your national standards organization.

This second edition technically revises and enhances ISO/IEC 9594-5:1990. It also incorporates technical corrigendum 1:1992. Implementations may still claim conformance to the first edition of this part of ISO/IEC 9594. However, at some point, the first edition will no longer be supported (i.e. reported defects will no longer be resolved). It is recommended that implementations conform to this second edition as soon as possible.

ISO/IEC 9594 consists of the following parts, under the general title *Information technology — Open Systems Interconnection — The Directory*:

- *Part 1: Overview of concepts, models and services*
- *Part 2: Models*
- *Part 3: Abstract service definition*
- *Part 4: Procedures for distributed operation*
- *Part 5: Protocol specifications*
- *Part 6: Selected attribute types*
- *Part 7: Selected object classes*
- *Part 8: Authentication framework*
- *Part 9: Replication*

Annexes A to F form an integral part of this part of ISO/IEC 9594. Annex G is for information only.

Introduction

This Recommendation | International Standard, together with the other Recommendations | International Standards, has been produced to facilitate the interconnection of information processing systems to provide directory services. A set of such systems, together with the directory information which they hold, can be viewed as an integrated whole, called the *Directory*. The information held by the Directory, collectively known as the Directory Information Base (DIB), is typically used to facilitate communication between, with or about objects such as application entities, people, terminals and distribution lists.

The Directory plays a significant role in Open Systems Interconnection, whose aim is to allow, with a minimum of technical agreement outside of the interconnection standards themselves, the interconnection of information processing systems:

- from different manufacturers;
- under different managements;
- of different levels of complexity; and
- of different ages.

This Recommendation | International Standard specifies the application service elements and application contexts for two protocols - the Directory Access Protocol (DAP) and the Directory System Protocol (DSP). The DAP provides for access to the Directory to retrieve or modify Directory information. The DSP provides for the chaining of requests to retrieve or modify Directory information to other parts of the distributed Directory System where the information may be held.

In addition this Recommendation | International Standard specifies the application service elements and application contexts for the Directory Information Shadowing Protocol (DISP) and the Directory Operational Binding Management Protocol (DOP). The DISP provides for the shadowing of information held in one DSA to another DSA. The DOP provides for the establishment, modification and termination of bindings between pairs of DSAs for the administration of relationships between the DSAs (such as for shadowing or hierarchical relationships).

This second edition technically revises and enhances, but does not replace, the first edition of this Recommendation | International Standard. Implementations may still claim conformance to the first edition.

This second edition specifies version 1 of the Directory service and protocols. The first edition also specifies version 1. Differences between the services and between the protocols defined in the two editions are accommodated using the rules of extensibility defined in this edition of this Recommendation | International Standard.

Annex A, which is an integral part of this Recommendation | International Standard, provides the ASN.1 module for the directory access protocol.

Annex B, which is an integral part of this Recommendation | International Standard, provides the ASN.1 module for the directory system protocol.

Annex C, which is an integral part of this Recommendation | International Standard, provides the ASN.1 module for the directory information shadowing protocol.

Annex D, which is an integral part of this Recommendation | International Standard, provides the ASN.1 module for the directory operational binding management protocol.

Annex E, which is an integral part of this Recommendation | International Standard, provides the ASN.1 module which contains all the ASN.1 object identifiers assigned in this Recommendation | International Standard.

Annex F, which is an integral part of this Recommendation | International Standard, provides the ASN.1 module which contains all the ASN.1 object identifiers assigned to identify operational binding types in this series of Recommendations | International Standards.

Annex G, which is not an integral part of this Recommendation | International Standard, lists the amendments and defect reports that have been incorporated to form this edition of this Recommendation | International Standard.

INFORMATION TECHNOLOGY – OPEN SYSTEMS INTERCONNECTION – THE DIRECTORY: PROTOCOL SPECIFICATIONS

1 Scope

This Recommendation | International Standard specifies the Directory Access Protocol, the Directory System Protocol, the Directory Information Shadowing Protocol, and the Directory Operational Binding Management Protocol fulfilling the abstract services specified in ITU-T Rec. X.511 | ISO/IEC 9594-3, ITU-T Rec. X.518 | ISO/IEC 9594-4, and CCITT Rec. X.525 | ISO/IEC 9594-9.

2 Normative references

The following Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent editions of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards. The Telecommunication Standardization Bureau of the ITU maintains a list of currently valid ITU-T Recommendations.

2.1 Identical Recommendations | International Standards

- ITU-T Recommendation X.500 (1993) | ISO/IEC 9594-1:1995, *Information technology – Open Systems Interconnection – The Directory: Overview of concepts, models and services.*
- ITU-T Recommendation X.501 (1993) | ISO/IEC 9594-2:1995, *Information technology – Open Systems Interconnection – The Directory: Models.*
- ITU-T Recommendation X.511 (1993) | ISO/IEC 9594-3:1995, *Information technology – Open Systems Interconnection – The Directory: Abstract service definition.*
- ITU-T Recommendation X.518 (1993) | ISO/IEC 9594-4:1995, *Information technology – Open Systems Interconnection – The Directory: Procedures for distributed operation.*
- ITU-T Recommendation X.520 (1993) | ISO/IEC 9594-6:1995, *Information technology – Open Systems Interconnection – The Directory: Selected attribute types.*
- ITU-T Recommendation X.521 (1993) | ISO/IEC 9594-7:1995, *Information technology – Open Systems Interconnection – The Directory: Selected object classes.*
- ITU-T Recommendation X.509 (1993) | ISO/IEC 9594-8:1995, *Information technology – Open Systems Interconnection – The Directory: Authentication framework.*
- ITU-T Recommendation X.525 (1993) | ISO/IEC 9594-9:1995, *Information technology – Open Systems Interconnection – The Directory: Replication*
- ITU-T Recommendation X.680 (1994) | ISO/IEC 8824-1:1995, *Information technology – Abstract Syntax Notation One (ASN.1): Specification of basic notation.*
- ITU-T Recommendation X.681 (1994) | ISO/IEC 8824-2:1995, *Information technology – Abstract Syntax Notation One (ASN.1): Information object specification.*
- ITU-T Recommendation X.682 (1994) | ISO/IEC 8824-3:1995, *Information technology – Abstract Syntax Notation One (ASN.1): Constraint specification.*
- ITU-T Recommendation X.683 (1994) | ISO/IEC 8824-4:1995, *Information technology – Abstract Syntax Notation One (ASN.1): Parametrization of ASN.1 specifications.*

- ITU-T Recommendation X.690 (1994) | ISO/IEC 8825-1:1995, *Information technology – ASN.1 encoding rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)*.
- ITU-T Recommendation X.880 (1994) | ISO/IEC 13712-1:1995, *Information technology – Remote Operations: Concepts, model and notation*.
- ITU-T Recommendation X.881 (1994) | ISO/IEC 13712-2:1995, *Information technology – Remote Operations: OSI realizations – Remote Operations Service Element (ROSE) service definition*.
- ITU-T Recommendation X.882 (1994) | ISO/IEC 13712-3:1995, *Information technology – Remote Operations: OSI realizations – Remote Operations Service Element (ROSE) protocol specification*.

2.2 Paired Recommendations | International Standards equivalent in technical content

- CCITT Recommendation X.200 (1988), *Reference Model of Open Systems Interconnection for CCITT Applications*.
ISO 7498:1984, *Information processing systems — Open Systems Interconnection — Basic Reference Model*.
- CCITT Recommendation X.216 (1988), *Presentation Service Definition for Open Systems Interconnection for CCITT Applications*.
ISO 8822:1988, *Information processing systems – Open Systems Interconnection – Presentation service definition*.
- CCITT Recommendation X.217 (1988), *Service Definition for the Association Control Service Element*.
ISO 8649:1988, *Information processing systems – Open Systems Interconnection – Service Definition for the Association Control Service Element*.
- CCITT Recommendation X.218 (1988) *Reliable Transfer: Model and Service Definition*.
ISO/IEC 9066-1:1989, *Information processing systems – Text communication – Reliable Transfer: Model and service definition*.
- CCITT Recommendation X.227 (1988), *Protocol Specification for the Association Control Service Element*.
ISO 8650:1988, *Information processing systems – Open Systems Interconnection – Protocol specification for the Association Control Service Element*.

3 Definitions

For the purposes of this Recommendation | International Standard, the following definitions apply;

3.1 OSI Reference Model Definitions

The following terms are defined in CCITT Rec. X.200 | ISO 7498:

- a) *abstract-syntax*;
- b) *application-context*;
- c) *application-entity*;
- d) *application process*;
- e) *application-protocol-control-information*;
- f) *application-protocol-data-unit*;
- g) *application-service-element*.

3.2 Remote Operations Definitions

The following terms are defined in ITU-T Rec. X.880 | ISO/IEC 9072-1:

- a) *connection package*;
- b) *contract, association contract*;

- c) *error*;
- d) *operation*;
- e) *operation package*;
- f) *ROS-object*.

3.3 Basic Directory Definitions

The following terms are defined in ITU-T Rec. X.501 | ISO/IEC 9594-2:

- a) *the Directory*;
- b) *(Directory) user*;
- c) *Directory System Agent (DSA)*;
- d) *Directory User Agent (DUA)*.

3.4 Distributed Operation Definitions

The following terms are defined in ITU-T Rec. X.518 | ISO/IEC 9594-4:

- a) *chaining*;
- b) *referral*.

4 Abbreviations

For the purposes of this Recommendation | International Standard, the following abbreviations apply:

AC	Application Context
ACSE	Association Control Service Element
AE	Application Entity
APCI	Application Protocol Control Information
APDU	Application Protocol Data Unit
ASE	Application Service Element
DAP	Directory Access Protocol
DISP	Directory Information Shadowing Protocol
DOP	Directory Operational Binding Management Protocol
DSA	Directory System Agent
DSP	Directory System Protocol
DUA	Directory User Agent
ROS	Remote Operations Service
ROSE	Remote Operations Service Element

5 Conventions

With minor exceptions this Directory Specification has been prepared according to the “Presentation of ITU-TS/ISO/IEC common text” guidelines in the Guide for ITU-TS and ISO/IEC JTC 1 Cooperation, March 1993.

The term “Directory Specification” (as in “this Directory Specification”) shall be taken to mean ITU-T Rec. X.519 | ISO/IEC 9594-5. The term “Directory Specifications” shall be taken to mean the X.500-Series Recommendations and all parts of ISO/IEC 9594.

This Directory Specification uses the term “1988 edition systems” to refer to systems conforming to the previous (1988) edition of the Directory Specifications, i.e. the 1988 edition of the series of CCITT X.500 Recommendations and the ISO/IEC 9594:1990 edition. Systems conforming to the current Directory Specifications are referred to as “1993 edition systems”.

If the items in a list are numbered (as opposed to using “–” or letters), then the items shall be considered steps in a procedure.

This Directory Specification defines directory operations using the Remote Operation notation defined in ITU-T Rec. X.880 | ISO/IEC 9072-1.

6 Protocol overview

6.1 Remote Operations – Specification and OSI Realization

ITU-T Rec. X.880 | ISO/IEC 9072-1 defines several information object classes that are useful in the specification of ROS-based application protocols such as the various Directory protocols defined in this Directory Specification. A number of these classes are used in this and subsequent clauses. The specification techniques provided in ITU-T Rec. X.880 | ISO/IEC 9072-1 are used to define a generic protocol between objects. When realized as an OSI application layer protocol, the concepts of ITU-T Rec. X.880 | ISO/IEC 9072-1 are mapped to OSI concepts in ITU-T Rec. X.881 | ISO/IEC 9072-2 and ITU-T Rec. X.882 | ISO/IEC 9072-3.

The **ROS-OBJECT-CLASS** class is used to define a set of common capabilities of a set of ROS-objects in terms of the (association) contracts they support as initiators and/or responders. When realized using the communication services of OSI, a ROS-object maps to an application process and a contract to an application context. In these Directory Specifications the term abstract service is used to refer to a ROS association contract and OSI application layer protocol to refer to the realization of a contract between two open systems using OSI communication services.

The **OPERATION-PACKAGE** class is used to define a set of operations which may be invoked by a ROS-object assuming the role of “consumer”, the operations which may be invoked by a ROS-object assuming the role of “supplier”, and the operations which may be invoked by both ROS-objects. When using the communication services of OSI, an operation package is realized as an application service element (ASE).

The **CONNECTION-PACKAGE** class is used to define the bind and unbind operations used to establish and release an association. When realized using the communication services of OSI, a connection package is realized as the procedures that use the services of the Association Control Service Element.

The **CONTRACT** class is used to define an association contract in terms of a connection package and one or more operation packages. When specifying the contract, the packages in which the association initiator assumes the role of consumer, the association responder assumes the role of consumer, and either may assume the role of consumer are identified. When using the communication services of OSI, a contract is realized as an application context.

The **APPLICATION-CONTEXT** class is used to define the static aspects of an application context. These include the contract that is realized via the application context, the OSI service that establishes and releases the association, the OSI service that provides information transfer for the interactions of the contract, and the abstract syntaxes used.

The **ABSTRACT-SYNTAX** class, which is built in to ASN.1, is used to define and assign an object identifier to an ASN.1 type whose values comprise an abstract syntax.

The OSI application layer protocols defined in the Directory Specifications, the DAP, DSP, DISP and DOP, are protocols to provide communication between a pair of application processes. In the OSI environment this is represented as communication between a pair of application-entities (AEs) using the presentation service. The function of an AE is provided by a set of application-service-elements (ASEs). The interaction between AEs is described in terms of their use of the services provided by the ASEs. All the services provided by the Directory ASEs are contained in a single AE.

The Remote Operations Service Element (ROSE) supports the request/reply paradigm of the operation. The Directory ASEs provide the mapping function of the abstract-syntax notation of the directory operation packages onto the services provided by the ROSE.

The Association Control Service Element (ACSE) supports the establishment and release of an application-association between a pair of AEs. Associations between a DUA and a DSA may be established only by the DUA. Only the initiator of an established association can release it.

Optionally, the Reliable Transfer Service Element (RTSE) may be used to reliably transfer the Application Protocol Data Units (APDUs) of the DISP.

6.2 Directory ROS-Objects and Contracts

ITU-T Rec. X.511 | ISO/IEC 9594-3 defines the abstract service between a DUA and the Directory which provides an access point to support a user accessing Directory services.

The **dua** class of ROS-object describes a DUA, being an instance of this class, as the initiator of the contract **dapContract**. This contract is referred to in these Directory Specifications as the Directory Abstract Service. It is specified as a ROS-based information object in 6.3.

```

dua          ROS-OBJECT-CLASS::={
  INITIATES    { dapContract }
  ID           id-rosObject-dua }

```

The **directory** class of ROS-object describes the provider of the Directory Abstract Service. This provider is the responder of the **dapContract**.

```

directory    ROS-OBJECT-CLASS::={
  RESPONDS     { dapContract }
  ID           id-rosObject-directory }

```

The Directory is further modeled, as depicted in Figure 1, as being represented to a DUA by a DSA which supports the particular access point concerned. ITU-T Rec. X.518 | ISO/IEC 9594-4 defines the interactions between a pair of DSAs within the Directory to support user requests which are chained.

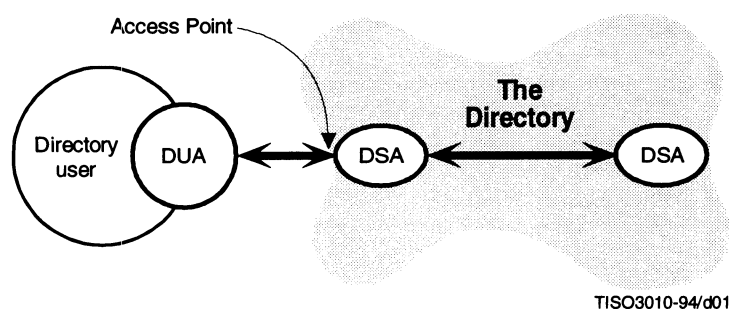


Figure 1 – Directory Interactions

The **directory** object is therefore manifested as a set interacting DSAs. Each DSA comprising the **directory** is an instance of the **dap-dsa** class. A **dap-dsa** object assumes the role of responder in the **dapContract**.

```

dap-dsa      ROS-OBJECT-CLASS::={
  RESPONDS     { dapContract }
  ID           id-rosObject-dapDSA }

```

In addition to interacting with DUAs, DSAs interact with one another to achieve various objectives. In what follows, a number of contracts and ROS-objects expressing how DSAs participate in these contracts are defined. Any real DSA may instantiate one or more of these DSA ROS-objects.

The interactions between DSAs generally required to provide the Directory Abstract Service in the presence of a distributed DIB are defined as a **dspContract**. A DSA that participates in this contract is defined as a ROS-object of class **dsp-dsa**. The contract is referred to in these Directory Specifications as the DSA Abstract Service. It is specified as a ROS-based information object in 6.4.

```

dsp-dsa      ROS-OBJECT-CLASS::={
  BOTH         { dspContract }
  ID           id-rosObject-dspDSA }

```

The Shadow Abstract Service specifies the shadowing of information between a shadow supplier and a shadow consumer DSA. This service is manifested in two forms and therefore is defined as two distinct contracts. They are specified as a ROS-based information objects in 6.5.

The **shadowConsumerContract** expresses the form of the service in which the shadow consumer, a ROS-object of class **initiating-consumer-dsa**, initiates the contract. A ROS-object of class **responding-supplier-dsa**, responds in this contract.

```

initiating-consumer-dsa      ROS-OBJECT-CLASS::= {
  INITIATES                   { shadowConsumerContract }
  ID                          id-rosObject-initiatingConsumerDSA }

responding-supplier-dsa      ROS-OBJECT-CLASS::= {
  RESPONDS                    { shadowConsumerContract }
  ID                          id-rosObject-respondingSupplierDSA }

```

The **shadowSupplierContract** expresses the form of the service in which the shadow supplier, a ROS-object of class **initiating-supplier-dsa**, initiates the contract. A ROS-object of class **responding-consumer-dsa**, responds in this contract.

```

initiating-supplier-dsa      ROS-OBJECT-CLASS::= {
  INITIATES                   { shadowSupplierContract }
  ID                          id-rosObject-initiatingSupplierDSA }

responding-consumer-dsa      ROS-OBJECT-CLASS::= {
  RESPONDS                    { shadowSupplierContract }
  ID                          id-rosObject-respondingConsumerDSA }

```

The interactions between two DSAs to manage a set of operational bindings are defined as a **dopContract**.

```

dop-dsa                      ROS-OBJECT-CLASS::= {
  BOTH                        { dopContract }
  ID                          id-rosObject-dopDSA }

```

A DSA that participates in this contract is defined as a ROS-object of class **dop-dsa**. This contract is specified as a ROS-based information object in 6.6.

6.3 DAP Contract and Packages

The **dapContract** is defined as an information object of class **CONTRACT**.

```

dapContract                  CONTRACT ::= {
  CONNECTION                  dapConnectionPackage
  INITIATOR CONSUMER OF { readPackage | searchPackage | modifyPackage }
  ID                          id-contract-dap }

```

When a DUA and DSA from different open systems interact, this association contract may be realized as an OSI application layer protocol, referred to in these Directory Specifications as the Directory Access Protocol (DAP). The definition of this protocol in terms of an OSI application context is provided in 7.2 of this Directory Specification.

The **dapContract** is composed of a connection package, **dapConnectionPackage**, and three operation packages, **readPackage**, **searchPackage** and **modifyPackage**.

The connection package, **dapConnectionPackage**, is defined as an information object of class **CONNECTION-PACKAGE**. The bind and unbind operations of this connection package, **directoryBind** and **directoryUnbind**, are defined in ITU-T Rec. X.511 | ISO/IEC 9594-3.

```

dapConnectionPackage         CONNECTION-PACKAGE ::= {
  BIND                        directoryBind
  UNBIND                      directoryUnbind
  ID                          id-package-dapConnection }

```

The operation packages, **readPackage**, **searchPackage** and **modifyPackage**, are defined as information objects of class **OPERATION-PACKAGE**. The operations of these operation packages are defined in ITU-T Rec. X.511 | ISO/IEC 9594-3.

```

readPackage                  OPERATION-PACKAGE ::= {
  CONSUMER INVOKES           { read | compare | abandon }
  ID                          id-package-read }

```

```

searchPackage      OPERATION-PACKAGE ::= {
  CONSUMER INVOKES { list | search }
  ID               id-package-search }

modifyPackage      OPERATION-PACKAGE ::= {
  CONSUMER INVOKES { addEntry | removeEntry | modifyEntry | modifyDN }
  ID               id-package-modify }

```

NOTE – These packages, when realized as ASEs, are used for the construction of application contexts defined in this Specification. They are not intended to allow for claims of conformance to individual, or other combinations of, ASEs.

Since the DUA is the initiator of the **dapContract**, it assumes the role of consumer of the operation packages of the contract. This means that only the DUA can invoke operations in this contract and its OSI realization.

6.4 DSP Contract and Packages

The **dspContract** is defined as an information object of class **CONTRACT**.

```

dspContract        CONTRACT ::= {
  CONNECTION        dspConnectionPackage
  OPERATIONS OF     { chainedReadPackage | chainedSearchPackage | chainedModifyPackage }
  ID                id-contract-dsp }

```

When a pair of DSAs from different open systems interact, this association contract is realized as an OSI application layer protocol, referred to in these Directory Specifications as the Directory System Protocol (DSP). The definition of this protocol in terms of an OSI application context is provided in 7.2.

The **dspContract** is composed of a connection package, **dspConnectionPackage**, and three operation packages, **chainedReadPackage**, **chainedSearchPackage** and **chainedModifyPackage**.

The connection package, **dspConnectionPackage**, is defined as an information object of class **CONNECTION-PACKAGE**. It is identical to the connection package, **dapConnectionPackage**.

```

dspConnectionPackage CONNECTION-PACKAGE ::= {
  BIND                dSABind
  UNBIND              dSAUnbind
  ID                  id-package-dspConnection }

```

The operation packages, **chainedReadPackage**, **chainedSearchPackage** and **chainedModifyPackage**, are defined as information objects of class **OPERATION-PACKAGE**. The operations of these operation packages are defined in TU-T Rec. X.518 | ISO/IEC 9594-4.

```

chainedReadPackage OPERATION-PACKAGE ::= {
  OPERATIONS          { chainedRead | chainedCompare | chainedAbandon }
  ID                  id-package-chainedRead }

chainedSearchPackage OPERATION-PACKAGE ::= {
  OPERATIONS          { chainedList | chainedSearch }
  ID                  id-package-chainedSearch }

chainedModifyPackage OPERATION-PACKAGE ::= {
  OPERATIONS          { chainedAddEntry | chainedRemoveEntry
                      | chainedModifyEntry | chainedModifyDN }
  ID                  id-package-chainedModify }

```

NOTE – These packages, when realized as ASEs, are used for the construction of application contexts defined in this Specification. They are not intended to allow for claims of conformance to individual, or other combinations of, ASEs.

In the **dspContract** either DSA may assume the role of initiator and either the initiating or responding DSA may invoke the operations of the contract.

6.5 DISP Contracts and Packages

The **shadowConsumerContract** and **shadowSupplierContract** are defined as information objects of class **CONTRACT**.

```

shadowConsumerContract CONTRACT ::= {
  CONNECTION          dspConnectionPackage
  INITIATOR CONSUMER OF { shadowConsumerPackage }
  ID                  id-contract-shadowConsumer }

```

shadowSupplierContract	CONTRACT	::=	{
CONNECTION			dispConnectionPackage
RESPONDER CONSUMER OF			{ shadowSupplierPackage }
ID			id-contract-shadowSupplier }

NOTE – The term consumer and supplier are employed in the notation for the **CONTRACT** and **OPERATION-PACKAGE** classes are used to designate two roles. These roles correspond to the two terms shadow consumer and shadow supplier, respectively, used in ITU-T Rec. X.525 | ISO/IEC 9594-9.

The OSI realizations of the two forms of the Shadow Abstract Service, referred to collectively as the Directory Information Shadowing Protocol (DISP), are defined in terms of several OSI application contexts, provided in 7.2.

The **shadowConsumerContract** and **shadowSupplierContract** are composed of a common connection package, **dispConnectionPackage**, and one operation package, either **shadowConsumerPackage** in the first case or **shadowSupplierPackage** in the second.

The connection package, **dispConnectionPackage**, is defined as an information object of class **CONNECTION-PACKAGE**. It is identical to the connection package, **dapConnectionPackage**.

dispConnectionPackage	CONNECTION-PACKAGE	::=	{
BIND			dSAShadowBind
UNBIND			dSAShadowUnbind
ID			id-package-dispConnection }

The operation packages, **shadowConsumerPackage** and **shadowSupplierPackage**, are defined as information objects of class **OPERATION-PACKAGE**. The operations of these operation packages are defined in ITU-T Rec. X.525 | ISO/IEC 9594-9.

shadowConsumerPackage	OPERATION-PACKAGE	::=	{
CONSUMER INVOKES			{ requestShadowUpdate }
SUPPLIER INVOKES			{ updateShadow }
ID			id-package-shadowConsumer }

shadowSupplierPackage	OPERATION-PACKAGE	::=	{
SUPPLIER INVOKES			{ coordinateShadowUpdate
			 updateShadow }
ID			id-package-shadowSupplier }

Since the shadow consumer is the initiator of the **shadowConsumerContract**, it assumes the role of consumer of the **shadowConsumerPackage**. This means that the shadow consumer invokes the **requestShadowUpdate** operation and that the shadow supplier invokes the **updateShadow** operation.

Since the shadow supplier is the initiator of the **shadowSupplierContract**, it assumes the role of supplier of the **shadowSupplierPackage**. This means that the shadow supplier invokes the operations of the contract.

6.6 DOP Contract and Packages

The **dopContract** is defined as an information object of class **CONTRACT**.

dopContract	CONTRACT	::=	{
CONNECTION			dopConnectionPackage
OPERATIONS OF			{ dopPackage }
ID			id-contract-dop }

When a pair of DSAs from different open systems interact, this association contract is realized as an OSI application layer protocol, referred to in these Directory Specifications as the Directory Operational Binding Management Protocol (DOP). The definition of this protocol in terms of an OSI application context is provided in 7.2.

The connection package, **dopConnectionPackage**, is defined as an information object of class **CONNECTION-PACKAGE**. It is identical to the connection package, **dapConnectionPackage**.

dopConnectionPackage	CONNECTION-PACKAGE	::=	{
BIND			dSAOperationalBindingManagementBind
UNBIND			dSAOperationalBindingManagementUnbind
ID			id-package-dopConnection }