

Implementation of
ISO/IEC 9636-2:1991

**Information
technology —
Computer graphics —
Interfacing techniques
for dialogues with
graphical devices
(CGI) —
Functional
specification —**

Part 2: Control

UDC 681.3.04(084):681.3.01

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

BSI
Documents

AVA

Document Sharing Hub

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by the Information Systems Technology Standards Policy Committee (IST/-) to Technical Committee IST/31, upon which the following bodies were represented:

- Department of Trade and Industry (IT Standards Unit)
- Information Systems Committee of the Universities Funding Council
- Rutherford Appleton Laboratory

This British Standard, having been prepared under the direction of the Information Systems Technology Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 15 June 1992

© BSI 02-2000

The following BSI references relate to the work on this standard:
Committee reference IST/31
Draft for comment 90/62655 DC

ISBN 0 580 20736 6

Amendments issued since publication

Amd. No.	Date	Comments

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Foreword	v
Text of ISO/IEC 9636-2	1

National foreword

This British Standard reproduces verbatim ISO/IEC 9636-2:1991 and implements it as the UK national standard.

This British Standard is published under the direction of the Information Systems Technology Standards Policy Committee whose Technical Committee IST/31 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE International and European Standards, as well as overseas standards, are available from BSI Sales Department, BSI, Linford Wood, Milton Keynes, MK14 6LE.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the ISO/IEC title page, pages ii to vi, pages 1 to 36 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

INTERNATIONAL STANDARD

ISO/IEC
9636-2

First edition
1991-12-15

Information technology — Computer graphics — Interfacing techniques for dialogues with graphical devices (CGI) — Functional specification —

Part 2: Control

*Technologies de l'information — Infographie — Interfaces pour
l'infographie — Spécifications fonctionnelles —
Partie 2: Contrôle*



Reference number
ISO/IEC 9636-2:1991(E)

Contents

	Page
Foreword	v
Introduction	1
1 Scope	1
2 Normative references	1
3 Concepts	2
3.1 Introduction	2
3.2 Virtual Device management	2
3.2.1 Device control	2
3.2.2 Drawing surface	2
3.2.3 Deferral mode	3
3.2.4 Serial synchronous interface	3
3.3 Coordinate space concepts	3
3.3.1 The Virtual Device coordinate system	3
3.3.2 Device coordinates	3
3.3.3 Device viewport	4
3.3.4 VDC space and range	4
3.3.5 VDC extent	4
3.3.6 VDC tailoring	5
3.3.7 Drawing surface clipping	7
3.4 Error control	7
3.5 Miscellaneous control	7
3.5.1 Numerical precision requirement specifications	7
3.5.2 Escape concepts	8
3.5.3 External functions	8
3.6 Inquiry concepts	8
4 Interactions with other parts of ISO/IEC 9636	8
4.1 Interactions with more than one part of ISO/IEC 9636	8
4.1.1 Virtual Device management	9
4.1.2 Coordinate space control	9
4.1.3 Error	9
4.1.4 Miscellaneous	9
5 Abstract specification of functions	9
5.1 Introduction	9
5.1.1 Control functions	9
5.1.2 Validity of returned information	10
5.1.3 Data types employed	10
5.2 Virtual Device management functions	10
5.2.1 INITIALIZE	10
5.2.2 Terminate	10
5.2.3 EXECUTE DEFERRED ACTIONS	10
5.2.4 Deferral Mode	10
5.2.5 Prepare Drawing Surface	11
5.2.6 END PAGE	11
5.3 Coordinate space control functions	11
5.3.1 VDC Type	11
5.3.2 VDC Integer Precision Requirement	11
5.3.3 VDC Real Precision Requirements	12
5.3.4 VDC Extent	12
5.3.5 Device Viewport	12
5.3.6 Device Viewport Specification Mode	13

	Page
5.3.7 Device Viewport Mapping	13
5.3.8 Drawing Surface Clip Rectangle	14
5.3.9 Drawing Surface Clip Indicator	14
5.4 Error functions	14
5.4.1 Dequeue Error Reports	14
5.4.2 Error Handling Control	14
5.5 Miscellaneous control functions	15
5.5.1 Integer Precision Requirement	15
5.5.2 Real Precision Requirements	15
5.5.3 Index Precision Requirement	16
5.5.4 Colour Precision Requirement	16
5.5.5 Colour Index Precision Requirement	16
5.5.6 Client Specified Name Precision Requirement	17
5.5.7 MESSAGE	17
5.5.8 ESCAPE	17
5.5.9 GET ESCAPE	18
5.5.10 State List Inquiry Source	18
6 Control inquiry functions	19
6.1 Introduction	19
6.1.1 Control inquiry functions	19
6.1.2 Data types employed	20
6.1.3 Validity of returned information	20
6.2 Device Identity Description Table	20
6.2.1 Inquire Device Identification	20
6.3 Output Device Description Table	20
6.3.1 Inquire Device Description	20
6.4 Function and Profile Support Description Table	20
6.4.1 Lookup Function Support	20
6.4.2 Lookup Profile Support	21
6.4.3 Inquire List of Profile Support Indicators	21
6.5 Control Description Table	21
6.5.1 Inquire Supported VDC Types	21
6.5.2 Inquire Device Control Capability	21
6.5.3 Lookup Escape Support	22
6.5.4 Lookup Get Escape Support	22
6.6 Control State List	22
6.6.1 Inquire Control State	22
6.6.2 Inquire Current Precision Requirements	22
6.6.3 Inquire VDC to Device Mapping	23
6.6.4 Inquire Error Handling	23
6.6.5 Inquire Miscellaneous Control State	24
7 CGI description tables and state lists	24
7.1 Description tables	24
7.2 State lists	25
Annex A (normative) Formal Grammar of the Functional Specification	28
Annex B (normative) Control errors	36
Annex C (informative) Guidelines for CGI implementors	36

	Page
Figure 1 — An example VDC-to-Device Mapping	5
Figure 2 — VDC extent establishes the reference directions relative to the drawing surface	6
Table 1 — Precision functions	7
Table 2 — Device Identification Description Table	24
Table 3 — Output Device Description Table	24
Table 4 — Function and Profile Support Description Table	25
Table 5 — Control Description Table	25
Table 6 — Control State List	26

Descriptors: Information processing, information interchange, graphic data processing, data handling, data transfer, interfaces, computer interfaces, specifications.

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 9636-2 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

ISO/IEC 9636 consists of the following parts, under the general title *Information technology — Computer graphics — Interfacing techniques for dialogues with graphical devices (CGI) — Functional specification*:

- *Part 1: Overview, profiles, and conformance*;
- *Part 2: Control*;
- *Part 3: Output*;
- *Part 4: Segments*;
- *Part 5: Input and echoing*;
- *Part 6: Raster*.

Annex A and Annex B form an integral part of this part of ISO/IEC 9636. Annex C is for information only.

Introduction

This part of ISO/IEC 9636 describes the functions of the Computer Graphics Interface concerned with Virtual Device management, coordinate space control, and error control.

The functionality incorporated in this part of ISO/IEC 9636 is concerned with the management of the graphics image and the interrelationship of the graphical and non-graphical parts of the interface.

The functionality described in this part of ISO/IEC 9636 pertains to all classes of CGI Virtual Device (i.e. INPUT, OUTPUT, or OUTIN).

1 Scope

This part of ISO/IEC 9636 establishes those functions of the Computer Graphics Interface concerned with Virtual Device management, coordinate space control, and error control.

The functionality incorporated in this part of ISO/IEC 9636 is concerned with the management of the graphics image and the interrelationship of the graphical and non-graphical parts of the interface.

This part of ISO/IEC 9636 is part 2 of ISO/IEC 9636, and should be read in conjunction with ISO/IEC 9636-1 and other parts. The relationship of this part of ISO/IEC 9636 to the other parts of ISO/IEC 9636 is described in ISO/IEC 9636-1 and in clause 4.

The functionality described in this part of ISO/IEC 9636 pertains to all classes of CGI Virtual Device (i.e. INPUT, OUTPUT, and OUTIN).

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 9636. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO/IEC 9636 are encouraged to investigate the possibility of applying the most recent editions of the standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 2382-13:1984, *Data processing — Vocabulary — Part 13: Computer graphics*.

ISO/IEC 9636-1:1991, *Information technology — Computer graphics — Interfacing techniques for dialogues with graphical devices (CGI) — Functional specification — Part 1: Overview, profiles, and conformance*.

ISO/IEC 9636-3:1991, *Information technology — Computer graphics — Interfacing techniques for dialogues with graphical devices (CGI) — Functional specification — Part 3: Output*.

ISO/IEC 9636-4:1991, *Information technology — Computer graphics — Interfacing techniques for dialogues with graphical devices (CGI) — Functional specification — Part 4: Segments*.

ISO/IEC 9636-5:1991, *Information technology — Computer graphics — Interfacing techniques for dialogues with graphical devices (CGI) — Functional specification — Part 5: Input and echoing*.

ISO/IEC 9636-6:1991, *Information technology — Computer graphics — Interfacing techniques for dialogues with graphical devices (CGI) — Functional specification — Part 6: Raster*.

ISO/IEC 9637-1:—, *Information technology — Computer graphics — Interfacing techniques for dialogues with graphical devices (CGI) — Data stream binding — Part 1: Character encoding¹⁾*.

ISO/IEC 9637-2:—, *Information technology — Computer graphics — Interfacing techniques for dialogues with graphical devices (CGI) — Data stream binding — Part 2: Binary encoding¹⁾*.

ISO/IEC TR 9973:1988, *Information processing — Procedures for registration of graphical items*.

¹⁾ To be published.

3 Concepts

3.1 Introduction

This part of ISO/IEC 9636 defines those functions of the Computer Graphics Interface concerned with Virtual Device management, coordinate space control, and error control. The functionality incorporated in this part of ISO/IEC 9636 is concerned with the management of the graphics image and the interrelationship of the graphical and non-graphical parts of the interface. This functionality is divided into the following areas:

- *Virtual Device management functions*, which allows the CGI client to initiate and terminate sessions of dialogue and to manage the graphics image on the Virtual Device.
- *Coordinate space control functions*, for the establishment of coordinate information, placement of the picture on the drawing surface, and for the management of drawing surface clipping.
- *Error control functions*, which involves the detection of errors both at and subsequent to the transmission of parameters through the CGI.
- *Miscellaneous control functions*, for the establishment of data stream numeric precisions, the accessing of implementation specific functionality, and the accessing of CGI external functions.
- *Control inquiry functions*, which provide access to the description tables and state lists concerned with function and Profile support, device description, and CGI control information.

3.2 Virtual Device management

3.2.1 Device control

The CGI Virtual Device is initialized by the function INITIALIZE. The function TERMINATE sets the CGI Virtual Device in a state in which further CGI commands, other than INITIALIZE, will be ignored. It is not required that any other action take place. There are no state restrictions on the use of INITIALIZE and TERMINATE, i.e. INITIALIZE and TERMINATE may be used at any time.

The Virtual Device is required to perform in conformance with ISO/IEC 9636 from when the INITIALIZE function is invoked until the first TERMINATE.

3.2.2 Drawing surface

Graphical output through the CGI is to a conceptual drawing surface. Physical implementations of a drawing surface may vary, but the functional capability offered by the CGI to control the drawing surface shall be the same for any implementation.

Drawing surfaces are classified as being either hard-copy or soft-copy, on the basis of the medium that implements the display surface. A drawing surface that is hard-copy is implemented by means of a medium that has to be replaced for each new image. A soft-copy drawing surface is implemented by means of a medium that may be cleared for each new image.

Examples of hard-copy drawing surfaces are found in plotter media and film for projection displays. Examples of soft-copy drawing surfaces are found in storage cathode ray tubes, cursively or raster refreshed cathode ray tubes, and in liquid crystal cells.

The PREPARE DRAWING SURFACE function is used to ensure that the Virtual Device is ready to accept graphics at the start of a page or frame.

The END PAGE function ensures that all output is visible and, for a hard-copy device, advances the medium if it has been marked upon. This permits the CGI client to protect the page from being overwritten by the next client to use the device, which is of particular value in a shared peripheral environment.

In some environments, the display surface is subject to spontaneous change in size or shape, for example, in window-managed environments. Whether or not such spontaneous change in display surface size or shape can occur in a given implementation is indicated by an entry in the Output Device Description Table. If such spontaneous change in size or shape information can occur in a given implementation, the device coordinate and size information in the Output Device Description Table may be modified to reflect the change. There is no standardized mechanism to inform the client of a spontaneous change of size or shape. The client can occasionally inquire the Output Device Description Table to discover such a change.

3.2.3 Deferral mode

The CGI permits an implementation to buffer the actions requested by the client in order to provide for efficient use of the resources of physical devices. During this buffering period, the state of the drawing surface may be undefined.

The CGI client has control over this buffering by means of the Deferral Mode entry in the Control State List. The Deferral Mode may have one of three values:

- ASTI: requires only that the Virtual Device complete the display of an image “At Some Time”, that is, at its own convenience;
- BNI: requires that the Virtual Device complete the display of an image “Before the Next Interaction”, that is, before the next interaction with a Logical Input Device gets underway; If an interaction is already underway (i.e. some LID is initialized for events) then BNI is equivalent to ASAP;
- ASAP: requires that the Virtual Device complete the display of an image “As Soon As Possible”.

Note that none of these values requires an implementation to delay the display of an image. On the other hand, for hard-copy devices, the CGI does not require a page to be printed per function.

Explicit control of deferral is provided by the EXECUTE DEFERRED ACTIONS function which ensures that any pending actions are completed (such as rendering any buffered output so that the operator can see it). The CGI requires that any soliciting function immediately following EXECUTE DEFERRED ACTIONS will not return data until all pending actions are performed and the drawing surface is up to date.

NOTE Some implementations, such as buffered one-way output devices, may be unable to support Deferral Mode ASAP.

3.2.4 Serial synchronous interface

The CGI is a serial synchronous interface. There are no asynchronous signals over the interface to report events (whether from input interactions or from environmental changes) or the occurrence of errors. The CGI is therefore able to guarantee synchronization of its soliciting functions, including DEQUEUE ERROR REPORTS, with preceding function executions. Invocation of DEQUEUE ERROR REPORTS will return all errors detected as a result of the execution of the preceding functions provided the error queue has not overflowed.

This synchronous interface does not preclude implementations that have many parallel processes within them. Deferral allows for this potential parallelism within the implementation and the function EXECUTE DEFERRED ACTIONS provides a client with some degree of control of this parallelism.

3.3 Coordinate space concepts

3.3.1 The Virtual Device coordinate system

Coordinate data across the CGI is specified in Virtual Device Coordinates (VDCs), except where a direct reference is made to the drawing or display surface. VDC space is an abstract space described in more detail below. The subset of VDC space specified by the finite VDC extent is mapped to a portion of the physical device drawing surface specified by the device viewport.

There are two ways for a CGI client to ensure isotropic mapping from VDC space to the display surface: by asking the CGI to enforce it, or by using a VDC extent whose aspect ratio matches the visual aspect ratio of the selected device viewport. Entries in the Output Device Description Table provide the information that enables the client to ensure isotropy without resorting to implicit CGI mechanisms.

Furthermore, the CGI allows viewport specifications to cause the entire image to be mirrored relative to the normal orientation, in either axes. The Device Viewport Mirroring entry in the Control Description Table provides information on the support of this mirroring capability.

3.3.2 Device coordinates

The drawing surface and display surface are addressed by means of a Cartesian coordinate system. The Display Surface Bottom-Left Corner and Display Surface Upper-Right corner entries in the Output Device Description Table specify this physical device coordinate system. Although the graphic object pipeline model recognizes an abstract DC space with real coordinates, the only form in which device coordinates are passed across the CGI is as integers. If the implementation uses raster techniques, then the units of DCs correspond to single pixel displacements.

3.3.3 Device viewport

The device viewport specifies the region of the device drawing surface onto which the VDC extent is to be mapped.

The position of the device viewport is specified in one of three coordinate systems determined by the Device Viewport Specification Mode entry in the Control State List:

- by fraction $[0.0 \dots 1.0] \times [0.0 \dots 1.0]$ of the available display surface, which allows reasonable placement and relative sizing of the viewport, even without inquiry;
- in millimetres times a metric scale factor, which allows absolute sizing of images without inquiry, but which requires inquiry or prior knowledge of the device for assurance that the image will fit on the display surface;
- in physical device coordinates, which requires either inquiry or prior knowledge of the device.

The device viewport is specified in terms of two points (on the display surface) at diagonally opposite corners of the rectangle. The order in which the points are specified is significant.

The VDC-to-Device Mapping entry in the Control State List may force isotropic mapping. If the current VDC extent, device viewport, and device viewport mapping would not lead to an isotropic mapping, the VDC extent is mapped onto a subset of the specified device viewport. This subset is defined by shrinking either the vertical or horizontal dimension of the current device viewport, as needed, to reach the required aspect ratio. This smaller effective device viewport is used to define the coordinate mapping from VDC to the device's coordinates. The placement of the effective viewport rectangle within the original one can be specified. This placement can be one of LEFT, RIGHT, or CENTRED when the shrinking is horizontal, and TOP, BOTTOM or CENTRED when the shrinking is vertical. These meanings are relative to the display surface. (See Figure 1.)


3.3.4 VDC space and range

Graphics output functions are used to define virtual images. The coordinate data given as parameters to these functions (that is, points in the virtual image) are specified as absolute two-dimensional Virtual Device Coordinates (VDCs). VDC space is a two-dimensional Cartesian coordinate space of infinite precision and infinite extent. Only a subset of VDC space, the VDC range, is realizable by the CGI client. The VDC range comprises all coordinates representable in the format specified by the declared VDC type and limited by any applicable precision; thus, the VDC range is not directly set by the client. The VDC range is a finite discrete subset of VDC space (i.e. it does not provide a continuous range of values).

VDC space can be addressed with either integer or real coordinate data, determined by the VDC Type entry in the Control State List and controlled by the VDC TYPE function. The granularity and realizable extent of the VDC range is affected by either the VDC INTEGER PRECISION REQUIREMENT function or the VDC REAL PRECISION REQUIREMENTS function, depending on the VDC Type. The Control Description Table indicates which of integer and real types are supported for VDCs. Refer to 3.5.1 for further information on precision control.

3.3.5 VDC extent

The VDC extent is the portion of VDC space that is to be mapped onto the effective device viewport on the drawing surface of the Virtual Device. The extent is set by specifying the addresses (in VDC space) of two opposite corners of a rectangular region. Values outside the VDC extent are permitted in CGI functions.

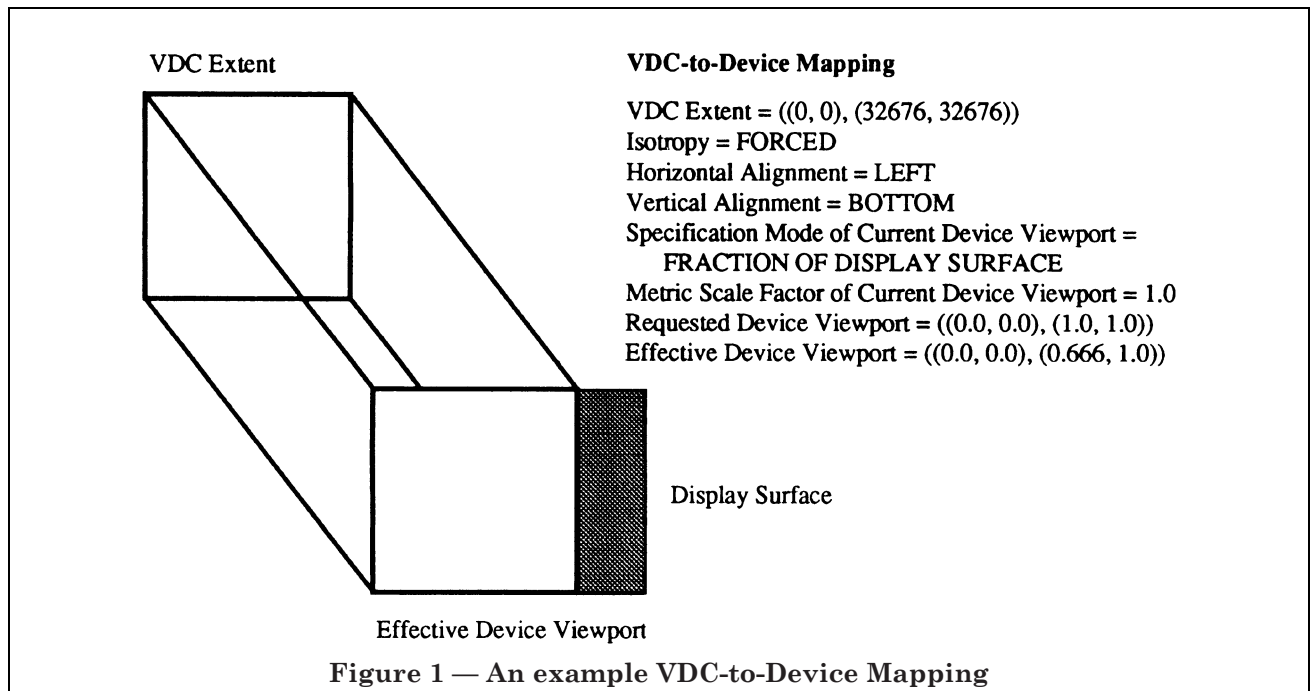

The values of the coordinates for either dimension may be either increasing or decreasing from the first to the second corner. In this way, the sense of the coordinate system of VDC space relative to the drawing surface is established (see Figure 2).

The transformation which maps VDC points to the drawing surface is called the VDC-to-Device Mapping. The VDC-to-Device Mapping maps the first point specifying the VDC extent onto the corner of the effective device viewport corresponding to the first point specifying the device viewport, and similarly for the second point. The mapping is linear in each dimension, but is not necessarily isotropic (e.g. a circle in VDC may not appear round to the viewer). If the values of the device viewport mapping entries do not force isotropy, an isotropic transformation can still be assured if the numerical aspect ratio of VDC extent matches the physical (not necessarily numerical) aspect ratio of the device viewport.

Angular directions are defined as follows: positive 90-degrees is defined to be the right angle from the positive x-axis to the positive y-axis (see Figure 2).

Whether changes to the VDC-to-Device Mapping take place immediately, can be simulated, or lead to an implicit regeneration, is determined by the Dynamic Modification Accepted For VDC-to-Device Mapping entry in the Output Device Description Table.

The terminology used in the description of primitives and attributes refers to increasing coordinates from the first to the second corner relative to the device viewport. If a coordinate system is chosen with decreasing coordinates from the first to the second corner in one of x or y, the rendered objects shall be mirrored. If decreasing in both x and y, the rendered objects shall be rotated by an angle of 180°.

3.3.6 VDC tailoring

The ability to specify the VDC range and the VDC extent provides the flexibility to configure the Virtual Device coordinate space to match various needs. It may be configured as an abstract, normalized coordinate range for maximum device independence. It may also be configured to match the address range and resolution of some target device (e.g. in order to avoid aliasing problems or increase performance).

If the Virtual Device coordinate space is configured to match the address range and resolution of a raster device, it may be necessary to know whether or not the pixels lie on or between the coordinates. Where pixels lie relative to the coordinates is indicated by an entry in the Output Device Description Table. The preferred behaviour is that coordinates lie between pixels.