

This Specification contains a small amount of data which may not be legible. It has been acquired directly from the manufacturer or standards organization and Technical Indexes/IHS have not been able to obtain a better copy.

If the quality of this Specification is not fit for your intended purpose, please contact the relevant manufacturer or standards organization to clarify the details you require.

CECC

HOCHFREQUENZ- KOAXIAL-STECKVERBINDER Serie SMA



1 Edition
Issue
Ausgabe

CECC 2211-801

1984

AVA Documents
Document Sharing Hub

Cette page bleue doit être insérée après la page de garde de la CECC 22 111-801 Edition 1 (1984)

MODIFICATION 2 A LA CECC 22 111-801 (Edition 1):

SPECIFICATION PARTICULIERE:

CONNECTEURS COAXIAUX POUR FREQUENCE RADIO-ELECTRIQUE Série SMA

This blue page shall be inserted after the title page of CECC 22 111-801 Issue 1 (1984)

AMENDMENT 2 TO CECC 22 111-801 (Issue 1):

DETAIL SPECIFICATION:

RADIO FREQUENCY COAXIAL CONNECTORS Series SMA

Dieses blaue Blatt ist nach dem Titelblatt der CECC 22 111-801 Ausgabe 1 (1984) einzufügen

ÄNDERUNG 2 ZU CECC 22 111-801 (Ausgabe 1):

BAUARTSPEZIFIKATION:

HOCHFREQUENZ-KOAXIAL-STECKERVERBINDER Serie SMA

Supprimer les pages 1/2 et insérer les nouvelles pages 1/2, qui contiennent, sur la page 1, la modification.

PAGE 1 [6] Catégorie climatique

55/155/21 a été modifié pour lire 55/115/21

Remove pages 1/2 and insert new pages 1/2 which include change on page 1.

PAGE 1 [6] Climatic category

55/155/21 has been amended to read 55/115/21

Enregistrer la modification sur la feuille jaune "Enregistrement de modifications".

Enter this amendment on the yellow "Record of Amendments" sheet.

Diese Änderung ist auf dem gelben Blatt "Verzeichnis der Änderung" einzutragen.

CECC 22 111-801 Edition 1 Modification 2 1987

CECC 22 111-801 Issue 1 Amendment 2 1987

CECC 22 111-801 Ausgabe 1 Änderung 2 1987

Cette page bleue doit être insérée après la page de garde de la CECC 22 111-801 Edition 1 (1984)

MODIFICATION 1 A LA CECC 22 111-801 (Edition 1):

SPECIFICATION PARTICULIERE:

CONNECTEURS COAXIAUX POUR FREQUENCE RADIO-ELECTRIQUE Série SMA

La modification suivante doit être effectuée à la main:

Page 4: [10] Information supplémentaire

sous

information pour la commande i):

Supprimer le numéro CECC 22 111-001-xx et insérer CECC 22 111-801-xx.

This blue page should be inserted after the title page of CECC 22 111-801 Issue 1 (1984)

AMENDMENT 1 TO CECC 22 111-801 (Issue 1):

DETAIL SPECIFICATION:

RADIO FREQUENCY COAXIAL CONNECTORS Series SMA

The following amendment shall be made in manuscript:

Page 4: [10] Supplementary Information

under

i) of ordering information:

Amend CECC 22 111-001-xx to read 22 111-801-xx.

Dieses blaue Blatt ist nach dem Titelblatt CECC 22 111-801 Ausgabe 1 (1984) einzusetzen

ÄNDERUNG 1 ZU CECC 22 111-801 (Ausgabe 1):

BAUARTSPEZIFIKATION:

HOCHFREQUENZ-KOAXIAL-STECKVERBINDER Serie SMA

Die folgende Änderung ist handschriftlich vorzunehmen:

Seite 4: [10] Zusatzangaben

unter

i) der Bestellangaben:

CECC 22 111-001-xx ist durch CECC 22 111-801-xx zu ersetzen.

CECC 22 111-801 Edition 1 Modification 1 1985

CECC 22 111-801 Issue 1 Amendment 1 1985

CECC 22 111-801 Ausgabe 1 Änderung 1 1985

ERRATUM

Cette page bleue doit être insérée après la page de garde de la CECC 22 111-801 Edition 1 (1984)

This blue sheet shall be inserted after the title page of CECC 22 111-801 Issue 1 (1984)

Dieses blaue Blatt ist nach dem Titelblatt der CECC 22 111-801 Ausgabe 1 (1984) einzufügen

La modification suivante doit être effectuée à la main à l'Edition 1 (1984) de la CECC 22 111-801:

Page 2 [9] ELECTRIQUES, colonne 2

- Tension de tenue à 20 km d'altitude:
Modifier 4.4.5 pour lire 4.6.5

The following amendment to Issue 1 (1984) of CECC 22 111-801 should be made in manuscript:

Page 2 [9] ELECTRICAL, column 2

- Proof voltage at 20 km altitude:
Amend 4.4.5 to read 4.6.5

In Ausgabe 1 (1984) der CECC 22 111-801 ist folgende Änderung handschriftlich vorzunehmen:

Seite 2 [9] ELEKTRISCH, Spalte 2

- Spannungsfestigkeit in 20 km Höhe:
4.4.5 ist durch 4.6.5 zu ersetzen

CECC 22 111-801	Edition 1	
	Issue 1	ERRATUM
	Ausgabe 1	

**Copyright – all rights reserved**

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

Droits de reproduction réservés

Aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'éditeur.

Alle Rechte vorbehalten

Insbesondere darf kein Teil dieser Veröffentlichung in irgendeiner Form oder nach irgendeinem Verfahren, elektronisch oder mechanisch, einschließlich Fotokopieren und Mikrofilm, ohne schriftliche Einwilligung des Herausgebers vervielfältigt oder verwertet werden.

PREFACE

This detail specification (DS) was prepared by CECC Working Group 22: 'RF Connectors'.

It relates to Series SMA connectors covered by sectional specification CECC 22 110 and by blank detail specification CECC 22 111. These in turn are related to the generic specification CECC 22 000.

The text of this DS was circulated to the CECC for voting in the documents detailed below and was ratified by the President of the CECC for printing as a CECC specification.

<u>Document</u>	<u>Voting date</u>	<u>Report on the voting</u>
CECC(Secretariat)1289	May 1983	CECC(Secretariat)1416

CECC 22 111-801 Issue 1



[1]	Page 1 of 6 (2) CECC 22 111 - 801 
ELECTRONIC COMPONENT OF ASSESSED QUALITY IN ACCORDANCE WITH GENERIC SPECIFICATION 22 000 SECTIONAL SPECIFICATION 22 110	[4]

[5] DETAIL SPECIFICATION for
RADIO FREQUENCY COAXIAL CONNECTOR OF ASSESSED QUALITY :

SERIES

SMA

Style: .Straight plug for semi-rigid cable.....

Special Features + Markings:

Method of cable/wire attachment:

.without contact.....

centre conductor - ~~solder/crimp~~

.without insulation.....

outer conductor - solder/~~clamp/crimp~~



.....

Mass: 3.9..... (Max.) ,

[6] Assessment level .. H .. Characteristic impedance 50 Ω Climatic category: 55 / 115 / 21

[7] Outline and maximum dimensions

Panel piercing and mounting details

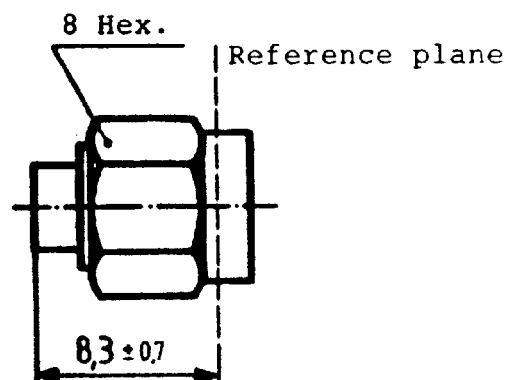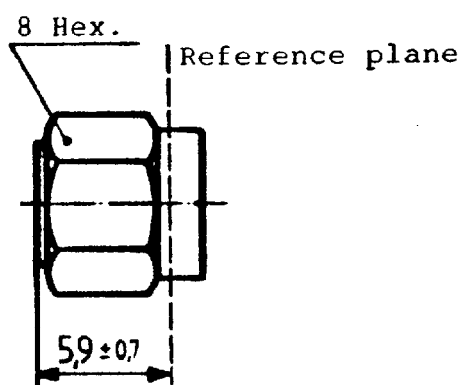

Variants: 01, 02

Variants: 03, 04

For mating interface and position of reference plane see CECC 22 110

Maximum panel thickness: for front mounting na..... mm
for rear mounting na..... mm

The outline dimensions meet the requirements of

[8] Variants

Variant No.	Description of Variant	IEC 96-2	Relevant Cables RG	National Cables
-01...	Connector, Short, Gold....		..RG 402/U.....	..(F).. KS 2
{3} -02...	Connector, Short.....		..RG 402/U.....	 KS 2
-03...	Passivated, Stainless Steel		..RG 402/U.....	 KS 2
{3} -04...	Connector, Gold.....		..RG 402/U.....	 KS 2
.....	Connector, Passivated		..RG 402/U.....	 KS 2
.....	Stainless Steel.....			
.....				

Note: (3) The surface to be soldered shall be prepared in a suitable manner so as to accept the solder correctly.

Information about manufacturers who have components qualified to this detail specification is available in the current CECC 00 200: Qualified Products List.

RATINGS + CHARACTERISTICS	CECC 22 110 Clause	VALUE	REMARKS
ELECTRICAL			
Variant No./ Designation			Measurement freq. range
*Reflection factor-01) 4.4.1			
.....-02)			
.....-03)		$\leq 0,034 \pm 0,004 f.$	2-18 GHz
.....-04)			VSWR $\leq 1,07 \pm 0,009 f.$
.....			
.....			
Centre contact 4.4.2 .. na.....mΩ Initial		na.....mΩ After conditioning	
resistance 4.4.3 .. na.....mΩ Initial		na.....mΩ After conditioning	
Outer conductor 4.4.4 .. na.....GΩ Initial		na.....MΩ After conditioning	
continuity 4.4.4 .. na.....GΩ Initial		na.....MΩ After conditioning	
Insulation resistance 4.4.4 .. na.....MΩ After conditioning		na.....MΩ After conditioning	
+Proof voltage-01) 4.4.5 na.....kV 860 to 1060 mbar			(86 to 106 kPa)
at sea level-02)			
.....-03)			
.....-04)			
.....			
.....			
.....			
+Proof voltage-01) 4.6.5 na.....V 44 mbar			(4,4 kPa)
at 20 km altitude-02)			
.....-03)			
.....-04)			
.....			
.....			
.....			
+Working voltage-01) na.....V 860 to 1060 mbar			(86 to 106 kPa)
at sea level-02)			
.....-03)			
.....-04)			
.....			
.....			
.....			
+Working voltage-01) na.....V 44 mbar			(4,4 kPa)
at 20 km altitude-02)			
.....-03)			
.....-04)			
.....			
.....			
Screening effec--01) 4.4.8 z _t $\leq 1,6 \times 10^{-3} \Omega$ Equivalent to .90. dB			
tiveness-02)			
.....-03)			
.....-04)			
.....			
.....			
.....			
ADDITIONAL ELECTRICAL CHARACTERISTICS			

The connector insulator and centre contact are formed from the preparation of the semi-rigid cables. The performance is dependent upon the interface dimensions being correctly achieved after assembly.

-2-

AVA Documents
Document Sharing Hub

RATINGS + CHARACTERISTICS		CECC 22 110 Clause	VALUE	REMARKS
MECHANICAL				
Contact captivation - axial force - torque		4.5.2	na.....N na.....Nm	CECC 22 000 method (or as specified)
Engagement + separation - torque		4.5.4	...0,25....Nm max.	
	Variant No./ Designation			
Effectiveness of clamping device	-01	4.5.5	500.....N	(to overcome friction of coupling nut)
against cable pulling	-02	(1)		
	-03	)		
	-04	)		
				
				
				
				
				
				
Effectiveness of clamping device	-01	4.5.5	na.....Nm	
against cable torsion	-02	(2)		
	-03	)		
	-04	)		
				
				
				
				
				
				
Tensile strength of coupling mechanism		4.5.6	180.....N	
Coupling torque - normal - proof			...0,8 to 1,1...Nm ...1,7.....Nm	
Bending moment		4.5.9	na.....Nm	Relative to reference plane
ADDITIONAL MECHANICAL CHARACTERISTICS				
ENVIRONMENTAL				
Bump		4.6.2	390...m/s ² 4000...bumps	(.40.g acceleration)
Vibration		4.6.3	98...m/s ² 10 to 2000 Hz	(.10.g acceleration)
Shock		4.6.4	490...m/s ² 1/2 sine 11 ms	(.50.g acceleration)
Climatic category		4.6.5	.55./115/.21.	
Sealing (panel + barrier sealed connectors)		4.6.8	na....	100 to 110 kPa pressure differential (1000 to 1100 mbar)
Sealing (hermetically sealed connectors)		4.6.9	na....	100 to 110 kPa pressure differential (1000 to 1100 mbar)
ADDITIONAL ENVIRONMENTAL CHARACTERISTICS				
ENDURANCE				
Mechanical		4.7.1	...na...operat.	
High temperature		4.7.2	...na...h at°C	
ADDITIONAL ENDURANCE CHARACTERISTICS				

[10] Supplementary Information

- marking of the component : in accordance with 2.4 of CECC 22 000, in the following order or precedence :

i) Component identification	Variant No./ Designation	Identification
	-01	.22-111-801-01..
	-02	-02..
	-03	-03..
	-04	-04..
		
		
		
		
ii) Identity of manufacturer		
iii) Manufacturing date code, year/week		

- marking and contents of package : in accordance with 2.5 and 2.5.1 of CECC 22 000 as follows :

- Information prescribed in 2.4 of CECC 22 000 detailed above
- Nominal characteristic impedance 50 Ω
- Assessment level code letter H.....
- Any additional marking required

- ordering information : in accordance with 2.6 of CECC 22 000 as follows :

- Number of the detail specification CECC 22 111- 801-xx (no. of variant)
- Assessment level code letter H.....
- Body finish (if more than one listed) see variant numbers in [8]
- Any additional information or special requirements

- related documents :

CECC 22 000	Generic specification for radio frequency connectors of assessed quality (and related documents, see 2.1 of CECC 22 000)
CECC 22 110	Sectional specification for r.f. connectors Series SMA

- certified test records (RCE) :
(when applicable)
- [n accordance with 3.7 of CECC 22 000
(requirements to be included later)

- structural similarity : [n accordance with 3.2 and 3.4 of CECC 22 000.

CECC 22 111-801 Issue 1

[11] TEST SCHEDULE AND INSPECTION REQUIREMENTS - SERIES SMA

Details of tests and quality assessment inspection requirements for levels H and U are given in 5.1 of CECC 22 110.

ACCEPTANCE TESTS

GROUP A1

Visual examination

CECC
22 110
Clause

4.2

GROUP B1

Outline dimensions

Compatibility mechanical

Engagement +, separation

Gauge retention force
(resilient contacts)

Sealing (panel + barrier seal)

Sealing (hermetic)

Voltage proof

4.3.1
4.5.7
4.5.4
4.5.1
4.6.8
4.6.9
4.4.5

LEVEL H			
Test Requir.	I.L.	AQL	Period
a	S 3	1,5 %	Lot by Lot
a	S 3	4 %	
a	S 3	1,5 %	
a	S 3	1,5 %	
na			
na			

PERIODIC TESTS

GROUP C1 (d)

Soldering

Insulation resistance

CECC
22 110
Clause4.6.1
4.4.4

Test	I.L.	AQL	Period
na			
na	S 3	4 %	1 yearly

GROUP D1 (d)

Mechanical tests on cable
clamping device

Bending moment

Tensile strength of
coupling mechanismCECC
22 110
Clause4.5.5
4.5.9
4.5.6

Test Requir.	Specimens (May be from C1)	Permitted Failures † per Group	Period
a	3 mated pairs or sets min.	1	3 yearly
na			
a			

GROUP D2 (d)

Contact resistance

Outer conductor continuity

Bump

Vibration

Shock

Damp heat, steady state

Salt mist

4.4.2
4.4.3
4.6.2
4.6.3
4.6.4
4.6.6
4.6.10

na	3 mated pairs or sets min.	1	3 yearly
na			
a			
a			
a			
a			

GROUP D3

Dimensions and materials
(piece parts)

Mass

4.3.2
4.3.1

a	1 set of piece parts each style	1	3 yearly
a			

GROUP D4 (d)

Mechanical endurance

High temperature endurance

4.7.1
4.7.2

a	3 mated pairs or sets min.	1	3 yearly
a			

GROUP D5 (d)

Reflection factor

Screening effectiveness

4.4.1
4.4.8

a	3 mated pairs or sets min.	1	3 yearly
a			

GROUP D6 (d)

Contact captivation

Rapid change of temperature

Climatic sequence

4.5.2
4.6.7
4.6.5

na	3 mated pairs or sets min.	1	3 yearly
a			
a			