
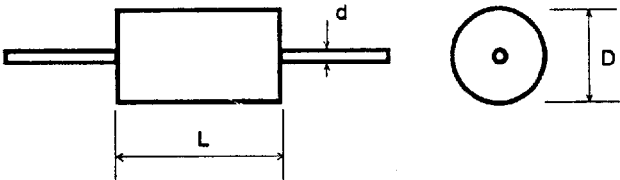


This Specification contains a small amount of data which may not be legible. It has been acquired directly from the manufacturer or standards organization and Technical Indexes/IHS have not been able to obtain a better copy.

If the quality of this Specification is not fit for your intended purpose, please contact the relevant manufacturer or standards organization to clarify the details you require.

BRITISH STANDARDS INSTITUTION 2 PARK STREET, LONDON	BS CECC 30 401-061 
Specification available from: AS SHOWN IN PD 9002 and Ashcroft Electronics Limited 1, Wilkinson Road, Cirencester, Glos GL7 1YT	ISSUE 1 NOVEMBER 1990
ELECTRONIC COMPONENTS OF ASSESSED QUALITY DETAIL SPECIFICATION IN ACCORDANCE WITH BS CECC 30 000: 1984 BS CECC 30 400: 1984	MANUFACTURER'S TYPE NUMBER PECA
Outline and dimensions First angle projection   Minimum lead length 30	SEE PD 9002 AND CECC 00 200 For ordering information see clause 1.6 FIXED METALLIZED POLYETHYLENE-TEREPHTHALATE FILM DIELECTRIC D.C. CAPACITOR TYPICAL CONSTRUCTION: CYLINDRICAL NON METALLIC CASE AXIAL TERMINATIONS
All dimensions in mm Marking information: see clause 1.5	ASSESSMENT LEVEL E

QUICK REFERENCE DATA

Capacitance range	10 nF to 10 μ F
Capacitance tolerance	$\pm 5\%$, $\pm 10\%$, $\pm 20\%$
Rated voltage ranges	63 V d.c. to 400 V d.c.
Climatic category	55/100/56
Performance grade	1 (Long life)

Refer to Qualified Products List PD 9002 and/or CECC 00 200 for details of manufacturers approved to this specification

1 General data

1.1 Recommended method of mounting

Each capacitor shall be mounted on a printed circuit board, the body being pressed firmly against the mounting surface and fixed by soldering the leads, which shall be bent through 90° at a point 6 mm to 6.5 mm from the point of emergence of the termination. Units of mass of 3g or greater shall also have their bodies clamped.

1.2 Dimensions

Table 1

Case size reference	D max	L max	d min	d nom	d max
	Dimensions (in mm)				
A	8.0	15.3	0.55	0.6	0.65
B	9.6	19.8	0.55	0.6	0.65
C	12.5	22.0	0.75	0.8	0.88
D	12.5	29.0	0.75	0.8	0.88
E	14.0	32.0	0.75	0.8	0.88
F	17.5	32.0	0.75	0.8	0.88

1.3 Ratings and characteristics

Capacitance range	10 nF to 10 µF		
	The preferred values of rated capacitance conform to the E6 values of IEC 63 (See Table 2). Where the use of other values is essential they shall be chosen from that document		
Tolerance on rated capacitance	±5%, ±10%, ±20%		
Rated voltage	63 Vd.c., 160 Vd.c., 250 Vd.c., 400 Vd.c. (See Table 2)		
Category voltage	50 Vd.c., 128 Vd.c., 200 Vd.c., 320 Vd.c. (See Table 2)		
Climatic category	55/100/56		
Rated temperature	85 °C		
Tangent of the loss angle	$C_R \leq 1 \mu F$	$\leq 80 \times 10^{-4}$	
	$C_R > 1 \mu F$	$\leq 100 \times 10^{-4}$	
Insulation resistance:			
Measuring point 1a	$C_R \leq 330 \text{ nF}$	$U_R \leq 100 \text{ V}$	$\geq 15 \text{ G}\Omega$
		$U_R > 100 \text{ V}$	$\geq 30 \text{ G}\Omega$
(between terminations)	$C_R > 330 \text{ nF}$	$U_R \leq 100 \text{ V}$	$\geq 5 \text{ ks}$
		$U_R > 100 \text{ V}$	$\geq 10 \text{ ks}$
Measuring point 1c (between terminations connected together and foil or V-block)	$\geq 30 \text{ G}\Omega$		

Table 2
Values of capacitance related to voltages and case sizes

Rated voltage (V @ 85 °C)	63	160	250	400
Category voltage (V @ 100 °C)	50	128	200	320
Rated capacitance	Case size reference			
10 nF				A
15 nF				A
22 nF				A
33 nF				A
47 nF			A	B
68 nF		A	B	B
100 nF		A	B	B
150 nF		A	B	B
220 nF	A	B	C	C
330 nF	B	B	C	C
470 nF	B	C	D	D
680 nF	B	C	D	E
1.0 µF	B	C	E	F
1.5 µF	C	D	F	
2.2 µF	C	D	F	
3.3 µF	D	F		
4.7 µF	E	F		
6.8 µF	F			
10 µF	F			

Note: The preferred case size reference for values of rated capacitance lying between those given above is that corresponding to the next higher value. That corresponding to the next lower value is permitted.

1.4 Related documents

IEC 63 (BS 2488)	Schedule of preferred numbers for the resistance of resistors and the capacitance of capacitors for telecommunication equipment
IEC 68 (BS 2011)	Basic environmental testing procedures
IEC 410 (BS 6001)	Sampling procedures and tables for inspection by attributes
BS CECC 30 000	Generic specification for fixed capacitors
BS CECC 30 400	Sectional specification: Fixed metallized polyethylene-terephthalate film dielectric capacitors for direct current
PD 9002	BS 9000 component selection guide
CECC 00 200	Qualified products list

1.5 Marking

The following information will be marked on the capacitor:

- 1) Rated capacitance
- 2) Rated voltage
- 3) Tolerance on rated capacitance (%)
- 4) Week and year of manufacture
- 5) Type number

The package containing the capacitor(s) shall be clearly marked with all the information listed in 1) to 5) above, together with the following:

- 6) Manufacturer's name
- 7) Climatic category
- 8) Category voltage
- 9) Reference to this detail specification

1.6 Ordering information

Orders for components to this specification shall contain the following minimum information:

- 1) Quantity
- 2) Manufacturer's type number
- 3) Rated capacitance
- 4) Tolerance on rated capacitance
- 5) Rated d.c voltage
- 6) This specification number, issue and date
- 7) Case size reference, if not the preferred size, see Table 2

Example: 100 off PECA 680 nF $\pm$ 10% 250 V d.c. to BS CECC 30 401-061, Issue E
November 1989

1.7 Certified test records

Not required

1.8 Additional information (not for inspection purposes)

1.8.1 Case size and mass

Case size reference	A	B	C	D	E	F
Mass (g)	1.0	1.7	3.4	4.3	5.7	11.0

1.8.2 This specification is intended to replace: BS 9076 F0035, BS 9076 F0038